JVC

SERVICE MANUAL

D-ILA PROJECTION TELEVISION

HD-52G787, HD-52G887, HD-56G787, HD-56G887, HD-61G787, HD-61G887

BASIC CHASSIS
RA2

HD-ILA™ Powered by D-ILA
GENESSA
HDTV
HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE
MaxxBass®
DCR
DOLBY DIGITAL

[HD-52G887]

TABLE OF CONTENTS

1 PRECAUTION 1-3
2 SPECIFIC SERVICE INSTRUCTIONS 1-7
3 DISASSEMBLY 1-10
4 ADJUSTMENT 1-26
5 TROUBLESHOOTING 1-34

COPYRIGHT © 2006 Victor Company of Japan, Limited

No.YA397
2006/4

SPECIFICATION

Items		Contents		
		HD-52G787 **HD-52G887**	**HD-56G787** **HD-56G887**	**HD-61G787** **HD-61G887**
Dimensions (W × H × D)		122.9 cm × 91.1 cm × 41.5 cm (48-1/2" × 35-7/8" × 16-3/8")	131.8 cm × 96.8 cm × 43.9 cm (52" × 38-1/8" × 17-3/8")	145.6 cm × 104.2 cm × 47.0 cm (57-3/8" × 41-1/8" × 18-5/8")
Mass		38.0 kg (84 lbs)	41.0 kg (90 lbs)	43 kg (95 lbs)
TV RF System (Analog / Digital)	Analog	CCIR (M)		
	Digital	ATSC terrestrial / Digital cable		
Color System (Analog)		NTSC		
Stereo System (Analog)		BTSC (Multi Channel Sound)		
Teletext System (Analog)		Closed caption (T1-T4 / CC1-CC4)		
TV Receiving Channels and Frequency (Analog)	VHF Low	02 ch - 06 ch : 54 MHz - 88 MHz		
	VHF High	07 ch - 13 ch : 174 MHz - 216 MHz		
	UHF	14 ch - 69 ch : 470 MHz - 806 MHz		
	CATV	54 MHz - 804 MHz Low Band : 02 - 06 High Band : 07 - 13 Mid Band : 14 - 22 Super Band : 23 - 36 Hyper Band : 37 - 64 Ultra Band : 65 - 94, 100 - 135 Sub Mid Band : 01, 96 - 99		
TV / CATV Total Channel		191 Channels		
Intermediate Frequency (Analog)	Video IF	45.75 MHz		
	Sound IF	41.25 MHz (4.5 MHz)		
Color Sub Carrier Frequency (Analog)		3.58 MHz		
Power Input		AC120 V, 60 Hz		
Power Consumption		205 W		
Projection Source		110 W High-pressure mercury lamp		
Projection Device		D-ILA device (Reflection active matrix type LCD) x 3(R / G /B)		
Resolution		Total=H:1312 × V:800 [Effective =H:1280 × V:720]		
Screen		Transparent screen (unitized fresnel lens / lenticular lens), aspect ratio 16:9		
Screen Size		52" (132 cm) Measured diagonally H:115.1 cm × V:64.8 cm	56" (142 cm) Measured diagonally H:124.0 cm × V:69.7cm	61" (155 cm) Measured diagonally H:135.0 cm × V:76.0cm
Audio Power Output		10 W + 10 W		
Speaker		10 cm round type × 2 (Oblique corn)		
Antenna Terminal (VHF/UHF, ATSC / DIGITAL CABLE IN)		F-type connector, 75 Ω unbalanced, coaxial × 1		
Video / Audio Input [INPUT-1/2/3/4]	Component Video [INPUT-1/2]	RCA pin jack × 6		
	1125i / 750p	Y : 1 V (p-p) (Sync signal: 0.35V(p-p), 3-value sync.), 75 Ω Pb/Pr : ±0.35V(p-p), 75 Ω		
	525p / 525i	Y : 1 V (p-p), positive (Negative sync provided), 75 Ω Pb/Pr : 0.7V(p-p), 75 Ω		
	S-Video [INPUT-1/3]	Mini-DIN 4 pin × 2 Y: 1V (p-p), positive (Negative sync provided), 75 Ω C: 0.286 V (p-p) (Burst signal), 75 Ω		
	Video	1 V (p-p), positive (Negative sync provided), 75 Ω, RCA pin jack × 4		
	Audio	500 mV (rms), high impedance, RCA pin jack × 8		
Digital Input [DIGITAL-IN 1/2]	Video	HDMI 2-row 19 pin connector × 2 (Digital-input terminal is not compatible with picture signals of personal computer)		
	Audio	Digital: HDMI 2-row 19 pin connector × 2 Anarog: 500 mV(rms) (-4dBs), high impedance, RCA pin jack × 2		
PC (RGB) Input [INPUT-3]		D-sub 3-row 15pin × 1 R/G/B : 0.7V (p-p), 75 Ω HD / VD : 1V (p-p) to 5V (p-p), high impedance < Available signal > VGA : 640 pixels × 480 pixels (Horizontal : 31.5 kHz / Vertical : 60 Hz) XGA : 1024 pixels × 768 pixels (Horizontal : 48.4 kHz / Vertical : 60 Hz)		
Audio Output		RCA pin jack × 2		
	Fix	500 mV(rms) (-4 dBs), low impedance (1000 Hz when modulated 100 %)		
Digital Audio Optical Output		Digital SPDIF × 1		
Remote Control Unit		RM-C18G (AA/R6 / UM-3 battery × 2)		

Design & specifications are subject to change without notice.

SECTION 1
PRECAUTION

1.1 SAFETY PRECAUTIONS

(1) The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.

(2) Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.

(3) Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (⚠) on the parts list in Service manual**. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.

(4) **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**

Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (⊥) side GND, the ISOLATED (NEUTRAL) : (⏚) side GND and EARTH : (⊜) side GND.

Don't short between the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND and never measure the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND at the same time with a measuring apparatus (oscilloscope etc.). If above note will not be kept, a fuse or any parts will be broken.

(5) When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

(6) **Isolation Check (Safety for Electrical Shock Hazard)**

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

a) **Dielectric Strength Test**

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 3000V AC (r.m.s.) for a period of one second. (. . . . Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.)

This method of test requires a test equipment not generally found in the service trade.

b) **Leakage Current Check**

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000Ω per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a 0.15μF AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

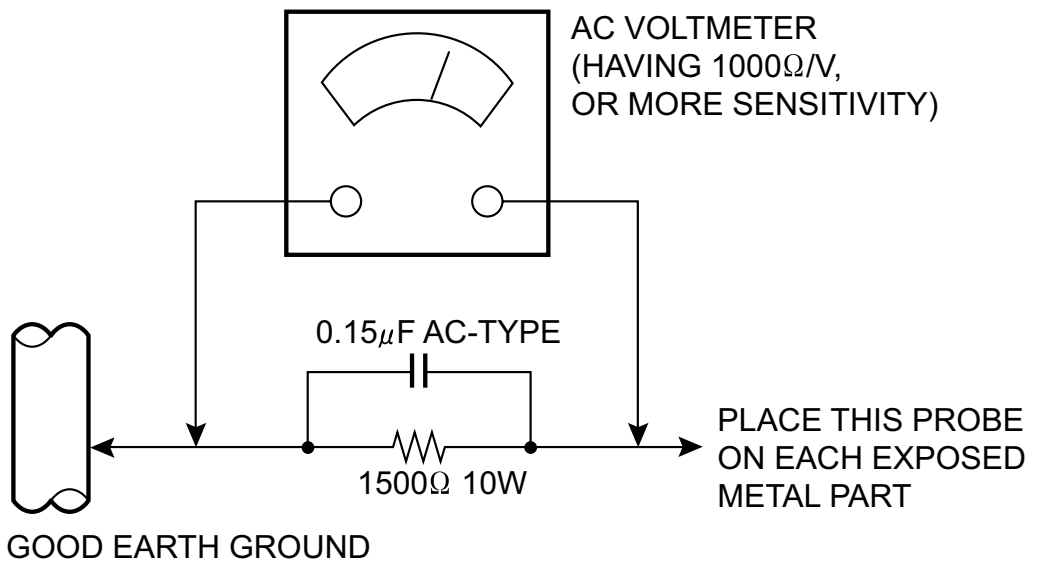

1.2 INSTALLATION

1.2.1 HEAT DISSIPATION

If the heat dissipation vent behind this unit is blocked, cooling efficiency may deteriorate and temperature inside the unit will rise. The temperature sensor that protects the unit will be activated when internal temperature exceeds the predetermined level and power will be turned off automatically.

Therefore, please make sure pay attention not to block the heat dissipation vent as well as the ventilation outlet behind the unit and ensure that there is room for ventilation around it.

Do not put foreign objects near the ventilation holes as this can result in fire or electrical hazards.

Do not block the ventilation holes as this may cause the internal temperature to rise and possibly result fire.

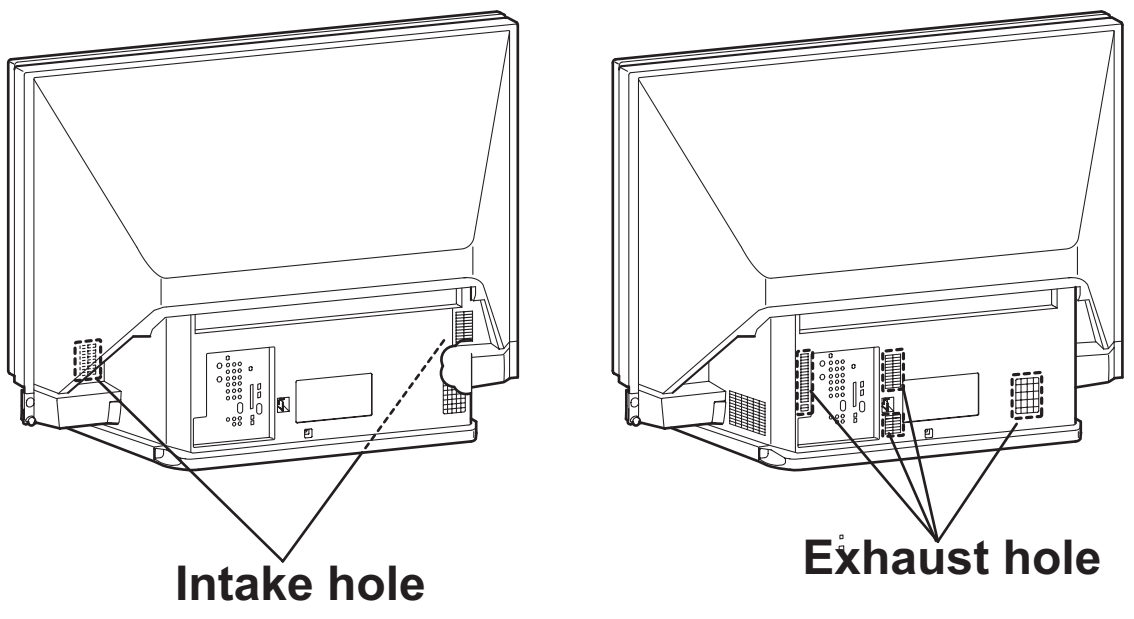

*Diagram differs from actual appearance.

1.2.2 INSTALLATION REQUIREMENTS

Ensure that the minimal distance is maintained, as specified fingure, between the unit with and the surrounding walls, as well as the floor etc.

Install the unit on stable flooring.

Take precautionary measures to prevent the unit from tipping in order to protect against accidents and earthquakes.

CAUTION FOR INSTALLATION

- Do not tilt the TV towards the left or right, or toward the back.
- Install the TV in a corner on the floor so as to keep cords out of the way.
- The TV will generate a slight amount of heat during operation. Ensure that sufficient space is available around the TV to allow satisfactory cooling.

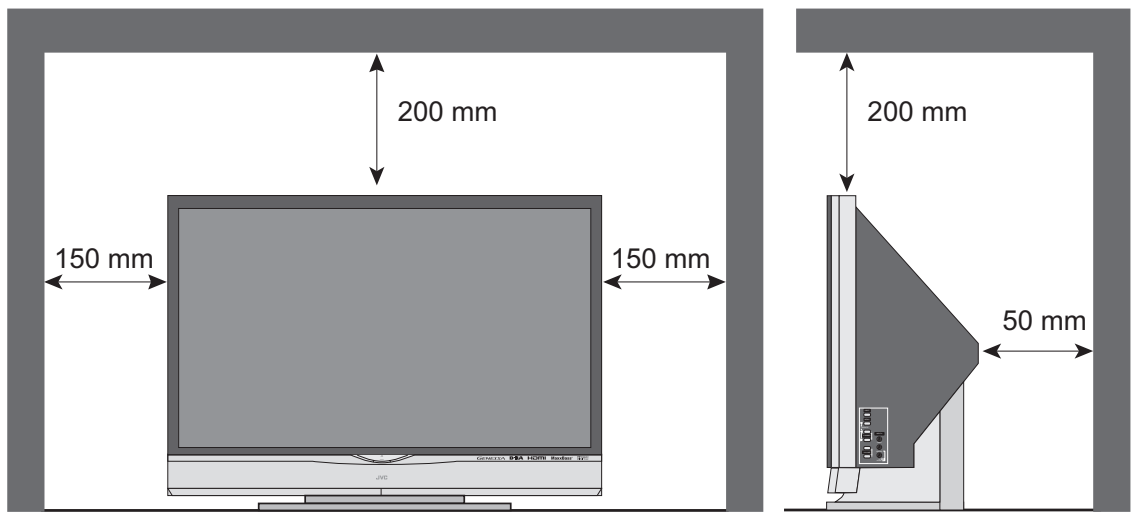

*Diagram differs from actual appearance.

1.3 LAMP UNIT HANDLING CAUTION

LAMP UNIT : TS-CL110UAA



1.3.1 PRECAUTION FOR LAMP UNIT

The lamp emits high intensity white, ultraviolet and infrared light. Do not look directly at the light during service.

Also, do not touch the lamp directly as it presents a burn hazard.

Handle with extra care. This lamp emits high heat and contains high-pressure during use.

Do not give any impact as this may cause the broken lamp.

1.3.2 HOW TO CONFIRM LAMP OPERATING TIME

- MAXIMUM COUNT TIME= **65535 hours**
  (1) Set to **"0 minutes"** using the **[SLEEP TIMER]** key.
  (2) Press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, then enter the SERVICE MODE.
  (3) When the SERVICE MENU SCREEN is displayed, press **[2]** key to enter the SELF CHECK MODE.
  (4) The use time of a lamp is displayed on middle of the screen by the hexadecimal number of 4 figures.

SERVICE MENU SCREEN

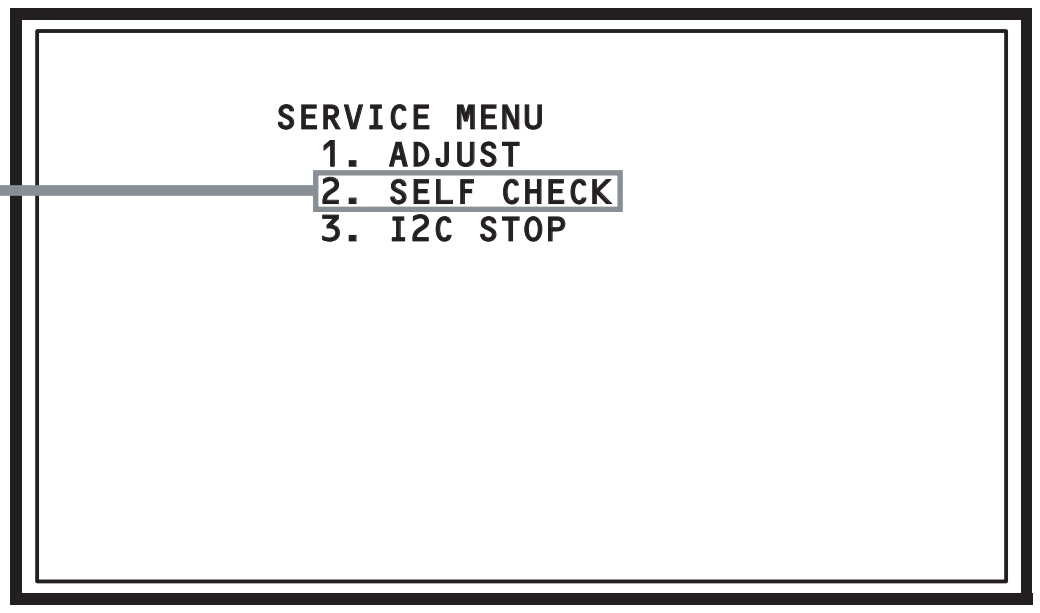

```
SERVICE MENU
  1. ADJUST
  2. SELF CHECK
  3. I2C STOP
```

SELF CHECK MODE SCREEN (Page 1)

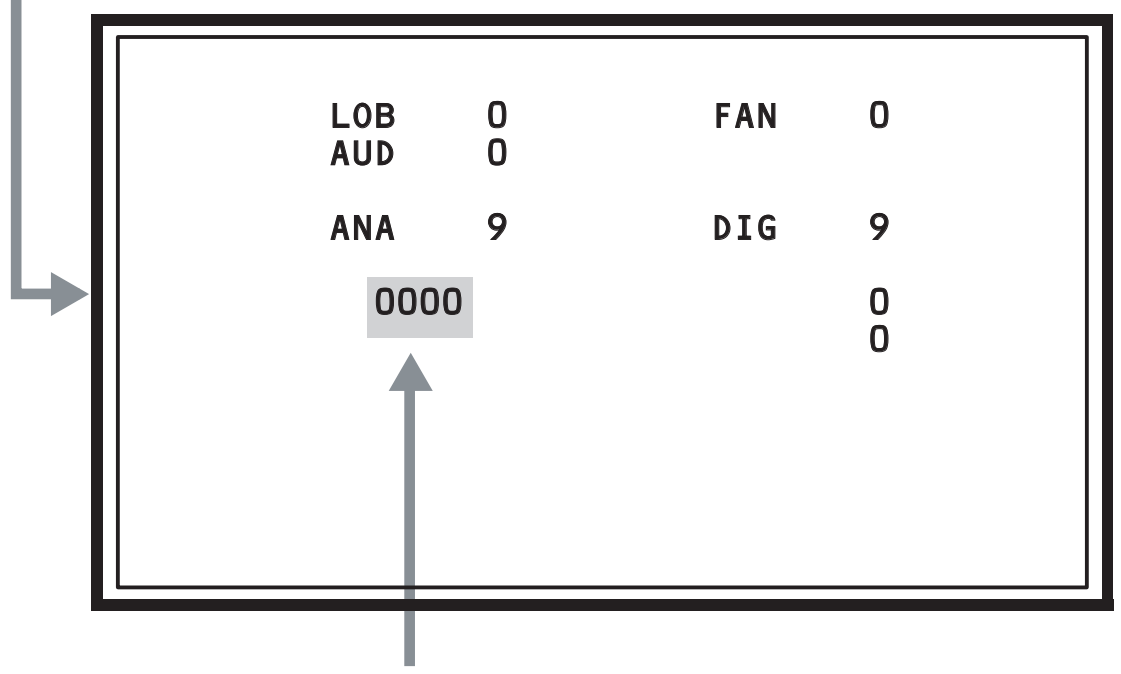

```
LOB    0          FAN    0
AUD    0

ANA    9          DIG    9

  0000                   0
                         0
```

Lamp operation time (Hexadecimal)

CALCULATION EXAMPLE OF LAMP USE TIME

Ex. Display number=12EF

$1 \times 16^3 + 2 \times 16^2 + E \times 16 + F \times 1 = 1 \times 4096 + 2 \times 256 + 14 \times 16 + 15 = 4847$ hours

1.3.3 LAMP UNIT REPLACEMENT

(1) The lamp replacement message will appear when need to change the lamp. After replace the lamp, need to reset the timer which is built into TV.
(2) Lamp use time can be check at the lamp message MENU. If lamp use time exceeds **5000 hours**, the message of Fig.1 will be displayed on a screen.
(3) If Fig.1 message appears when turn the TV on, need to replace the lamp.
(4) Use the lamp timer reset only after replacing the lamp.

NOTE:

- This message will appear every time turn on the TV, when the lamp needs to be replaced. Press the **[OK]** key to make the message disappear, or replace the lamp.

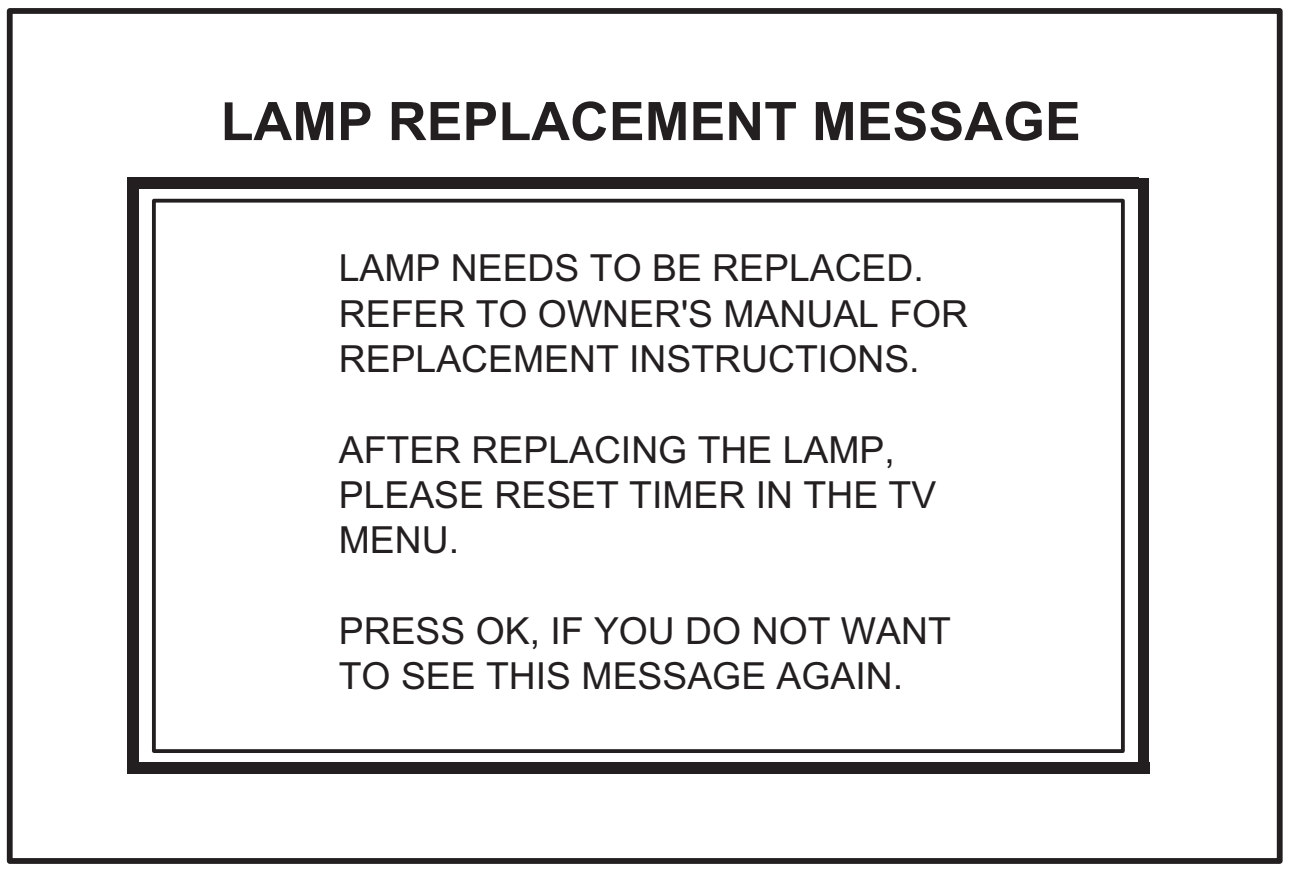

LAMP REPLACEMENT MESSAGE

LAMP NEEDS TO BE REPLACED.
REFER TO OWNER'S MANUAL FOR
REPLACEMENT INSTRUCTIONS.

AFTER REPLACING THE LAMP,
PLEASE RESET TIMER IN THE TV
MENU.

PRESS OK, IF YOU DO NOT WANT
TO SEE THIS MESSAGE AGAIN.

Fig.1

1.3.4 HOW TO REPLACE THE LAMP UNIT

- Refer to the "**USERS GUIDE**" for a detailed operating description.

(1) Turn off the TV power.
(2) After the LAMP LED light has stopped blinking, disconnect the power cord from the AC outlet.
(3) Loosen 1 screw then take out the lamp cover below the left side of the TV.
(4) Loosen 2 screws then take out the lamp unit.
(5) Install the new lamp unit.
(6) Re-install the lamp cover.

NOTE:

- After installing the new lamp unit, do not forget to reset the lamp timer.

1.3.5 HOW TO RESET THE LAMP TIMER

- Refer to the "**USERS GUIDE**" for a detailed operating description.

(1) Press the **[MENU]** key to select CLOCK / TIMERS.
(2) Select the <LAMP TIMER RESET> with **[▲]** / **[▼]** keys.
(3) Enter the <LAMP TIMER RESET> mode, the following message will appears.

PRESS OK TO RESET THE LAMP TIMER

(4) Press the **[OK]** key while the above message appears on the screen.
(5) The lamp timer has now been reset, and the following message will appear.

THE LAMP TIMER IS RESET SUCCESSFULLY

1.3.6 PRECAUTION FOR REPLACEMENT

- Do not replace the LAMP UNIT immediately after the projector has been used.
- The temperature of the LAMP UNIT is still high and could cause a burn.
- Allow a cooling period of 1 hour or more before performing replacement.
- Before starting LAMP UNIT replacement work, turn off the MAIN POWER switch, and disconnect the AC power cord plug from the wall outlet.
- If touched, the lamp glass surface may rupture and burns may result. Do not touch the glass portion or metal portion. Handle only plastic handle.
- The replaced old lamp can be discarded in the same manner as a fluorescent lamp. Check local ordinances and dispose of the used lamp as prescribed.

1.4 SERVICE PARTS KIT INSTRUCTIONS

Due to the character of this product, these OPTICAL /DRIVE ASS'Y are prepared.
Please note these OPTICAL/DRIVE ASS'Y when replacing or ordering the parts.

OPTICAL/DRIVE ASS'Y

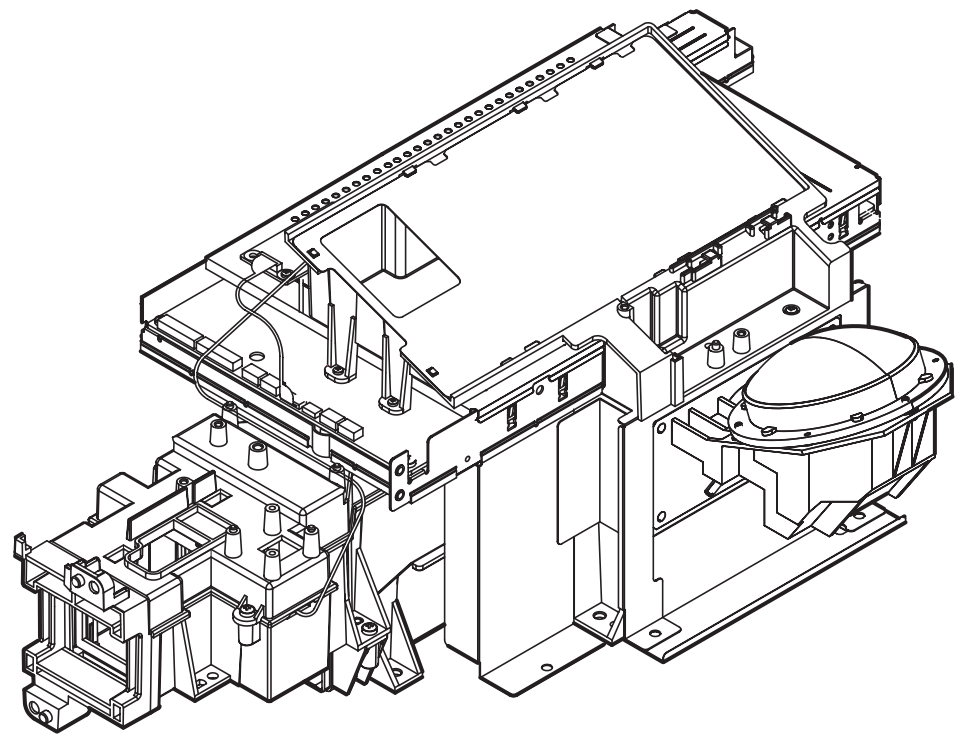

1.4.1 PART NUMBER AND CONSTRUCTION

Kit parts number	Kit part name
TS-COP9A-SAA	OPTICAL / DRIVE ASS'Y

1.4.2 OPTICAL / DRIVE ASS'Y CONSTRUCTION

(1) OPTICAL BLOCK
(Included D-ILA DEVICE, PROJECTION LENS)
(2) OPTICAL BASE
(3) DRIVE PWB ASS'Y
This PWB is mounted with 1 memory IC saved with adjustment, setting data of the drive circuit.
(4) SHIELD COVER

*The following parts without the kits part.

- REMOTE SENSOR PWB ASS'Y
- LAMP UNIT
- LAMP FAN DUCT
- THERMOSTAT

1.4.3 PRECAUTION FOR USING

(1) In the case of the following defects/problems, replace this kit (OPTICAL/DRIVE ASS'Y)
  a) Picture defect caused by optical system/D-ILA device related parts.
  b) Picture defect caused by drive circuit.

(2) The DRIVE PWB ASS'Y is mounted with a memory IC [IC3741/IC3742] saved with adjustment/setting data(GAMMA, SHADING, etc.) of the drive circuit.
The data of this memory IC is in the optimal state according to individual D-ILA devices and each section of the OPTICAL BLOCK.

(3) When replace the DRIVE PWB ASS'Y, take off the 1 memory IC from the original board and replace with new one. When replace the DRIVE PWB ASS'Y, do same manner. Replace 1 memory IC.

(4) After the replacement of the OPTICAL BLOCK, projection lens focus adjustment and drive convergence / projection adjustment are required.

1.5 SCREEN HANDLING CAUTIONS

1.5.1 SCREEN STORAGE

Store the SCREEN ASS'Y in a standing position in order to avoid deformation. If the screen is stored horizontally, there is risk of deforming the screen face.

When necessary to place the SCREEN ASS'Y horizontally, position the screen side upwards and sure to place spacers between the screen and resting site (floor or stand etc.) to prevent the screen from sagging.

1.5.2 SCREEN SURFACE

Since the screen surface is easily scratched or soiled, use ample care when handling.

1.5.3 PRECAUTIONS FOR CLEANING AND REPLACEMENT

- The SCREEN ASS'Y is made from the lenticular lens and fresnel lens. The anti static proceeding and the surface of the lenticular lens. Rubbing the surface with something hard, the coating may peel off.
- When the screen is dirty, gently wipe it with a soft cloth.
  If the screen is very dirty, wipe it down with a cloth dipped in a diluted kitchen cleaner (neutrality detergent) and thoroughly wrung-out. Then wipe immediately after with clean, dry cloth.
  Never use the organic solvent such as the alcohol or benzine.
- The SCREEN ASS'Y replacement is required if the coating was peel off. Alkaline detergent or acidity detergent can not be be used.
- The notched side of the lenticular lens and the fresnel lens are faced each other.
- Do not rub the screen when cleaning it or replaceing it. Rubbing the screen may cause of the scratch of the screen by its notch.

SECTION 2
SPECIFIC SERVICE INSTRUCTIONS

2.1 SYSTEM SETTEING

Be sure to carry out the following operation at the end of the procedure.

(1) Set to **"0 minutes"** using the **[SLEEP TIMER]** key.
(2) While **"0 minutes"** is displayed, press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, then enter the SERVICE MODE.
(3) When the SERVICE MENU SCREEN is displayed, press **[2]** key to enter the self check mode.
(4) Turn off the power by pressing the **[POWER]** key on the remote control unit.

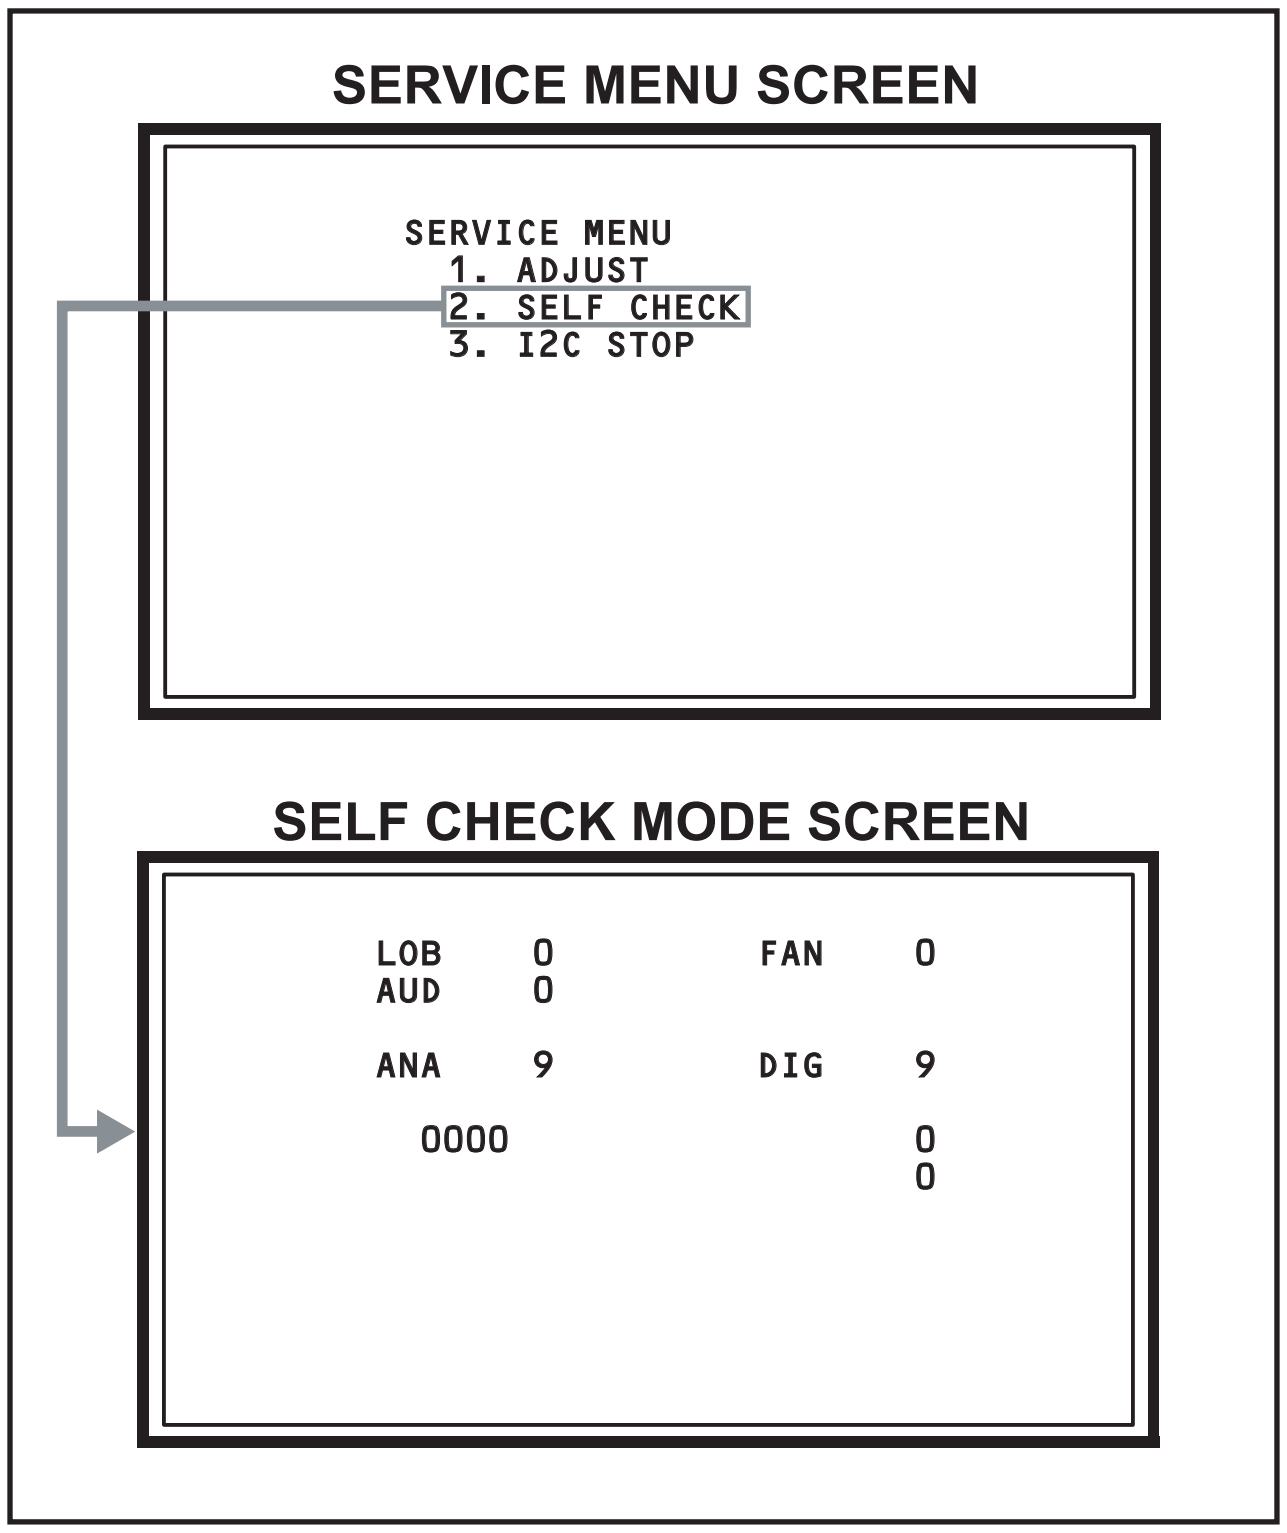

2.2 FEATURES

Built in ATSC (Advanced Television Systems Committee) TUNER

This TV can receive both Digital broadcasting (ATSC) and Analogue broadcasting.

D.I.S.T. (Digital Image Scaling Technology)

This system uses line interpolation to double the number of scanning lines and achieve high resolution, flicker-free picture.

SMART CAPTION

Smart caption will appear when you press the MUTING button, only on channels where the broadcast contains CLOSED CAPTION information.

VIDEO STATUS

Expression of a favorite screen can be chosen by the VIDEO STATUS function.

DIGITAL INPUT

Digital-in will display when any picture signal in Digital-in is displayed.

V-CHIP

Since the V-CHIP is built in, it can choose, view and listen to a healthy program.

MTS STEREO

The voice multiplex function of the MTS system is built in. (MTS = Multi channel Television Sound system)

MPEG Noise Reduction

This function effects the block noise removal and mosquito NR simultaneously.

MaxxBass

This function emphasizes the bass sound.

NATURAL CINEMA

Watching the movie or animation, press the Natural Cinema to adjust the out line of the images to make thin more sharp.

VIDEO INPUT LABEL

This function is used to label video input connections for the onscreen displays.

2.3 MAIN DIFFRENCE LIST

Item	HD-52G787	HD-52G887	HD-56G787	HD-56G887	HD-61G787	HD-61G887
FRONT PANEL COLOR	Black	Silver & Black	Black	Silver & Silver	Black	Silver & Black
DIGITAL PWB	SRA0D016A-M2	SRA0D013A-M2	SRA0D015A-M2	SRA0D012A-M2	SRA0D014A-M2	SRA0D011A-M2

2.4 TECHNICAL INFORMATION

2.4.1 D-ILA DEVICE SPECIFICATION

Item	Content
Resolution	H: 1312 × V:800
Pixel number	about 2123776
Pixel size	H : 12.0μm × V :12.0μm
Aspect ratio	16 : 9
Contrast ratio	1000 : 1
Aperture ratio	93% or more
Effective pixel measurement	0.7 inch

2.4.2 PROJECTION UNIT

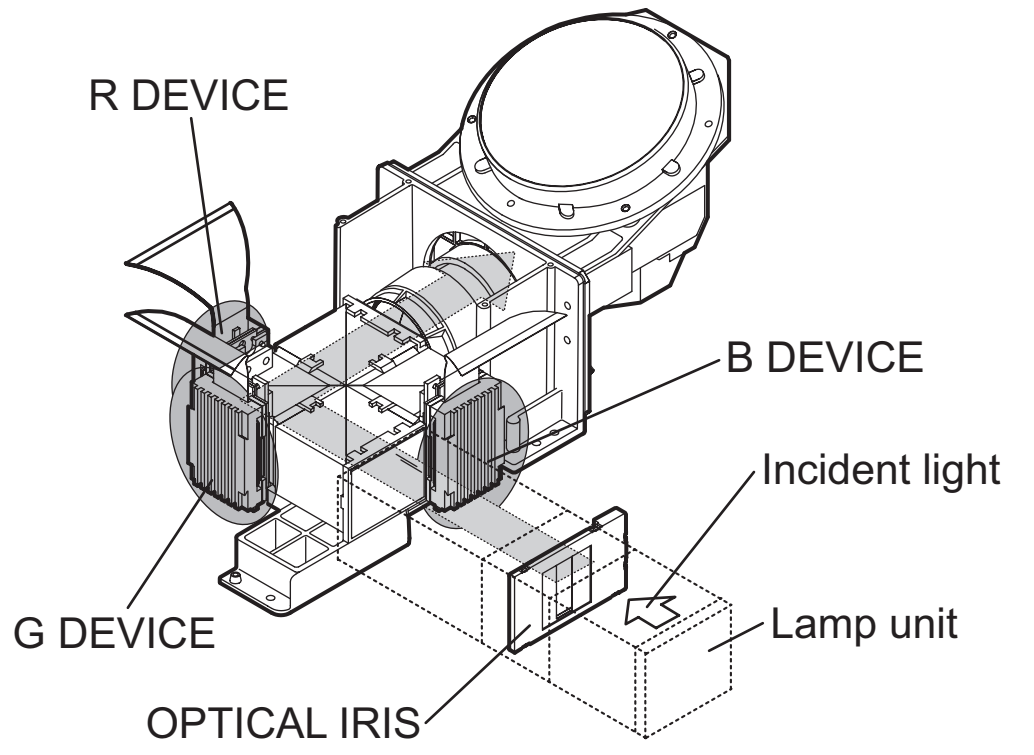
R DEVICE
B DEVICE
Incident light
G DEVICE
Lamp unit
OPTICAL IRIS

2.4.3 IMAGE LIGHT FLOW

DEVICE UNIT SECTION (TOP VIEW)

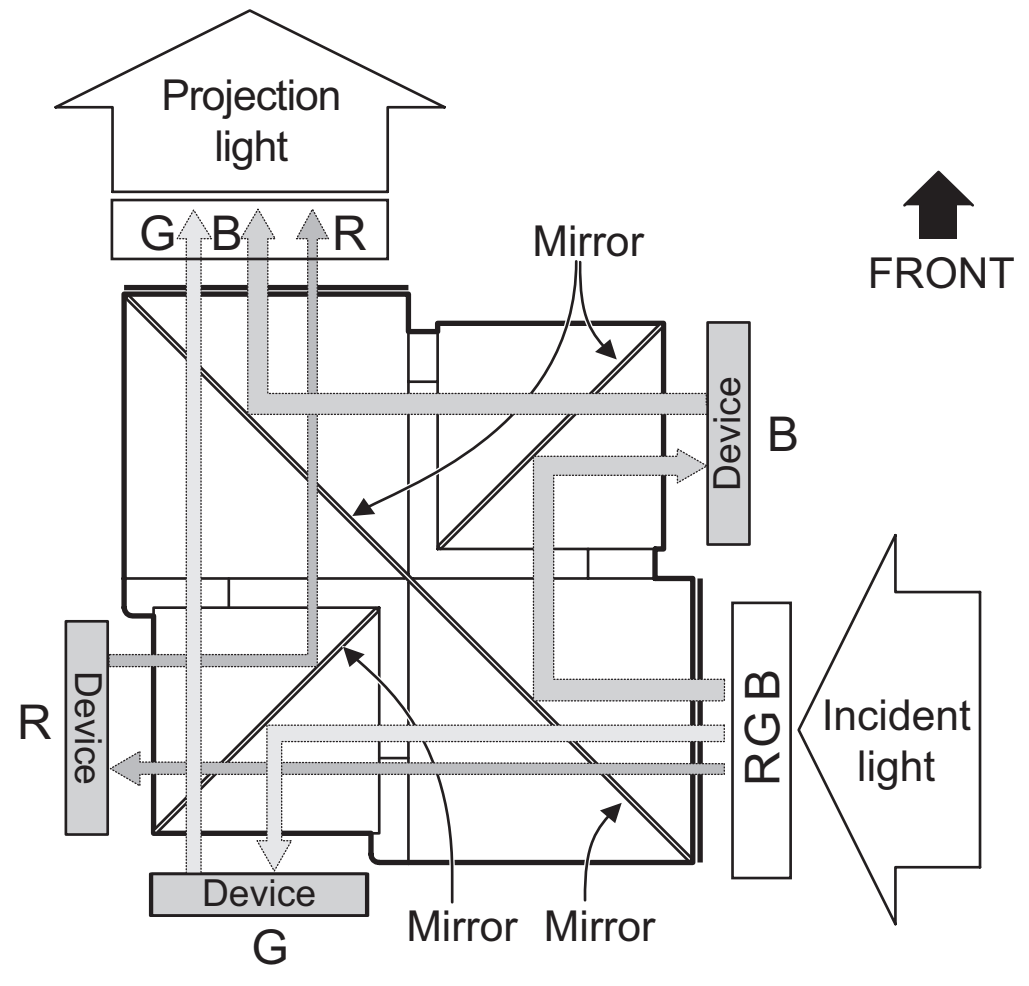
Projection light
G B R
Mirror
FRONT
Device
B
R
Device
RGB
Incident light
Device
G
Mirror
Mirror

2.4.4 D-ILA DEVICE STRUCTURE

R / G / B DEVICE (SIDE VIEW)

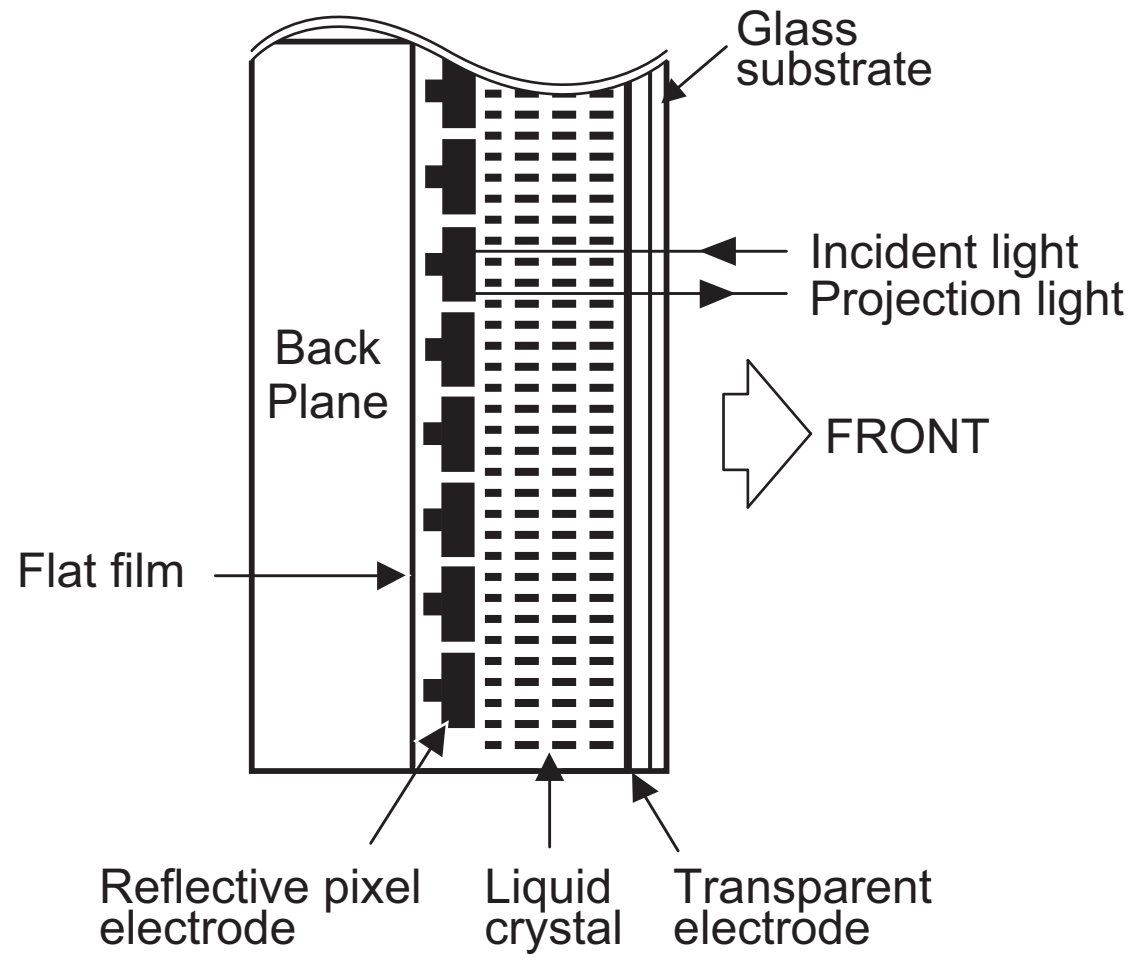
Glass substrate
Incident light
Projection light
Back Plane
FRONT
Flat film
Reflective pixel electrode
Liquid crystal
Transparent electrode

PIXEL VIEW (FRONT VIEW)

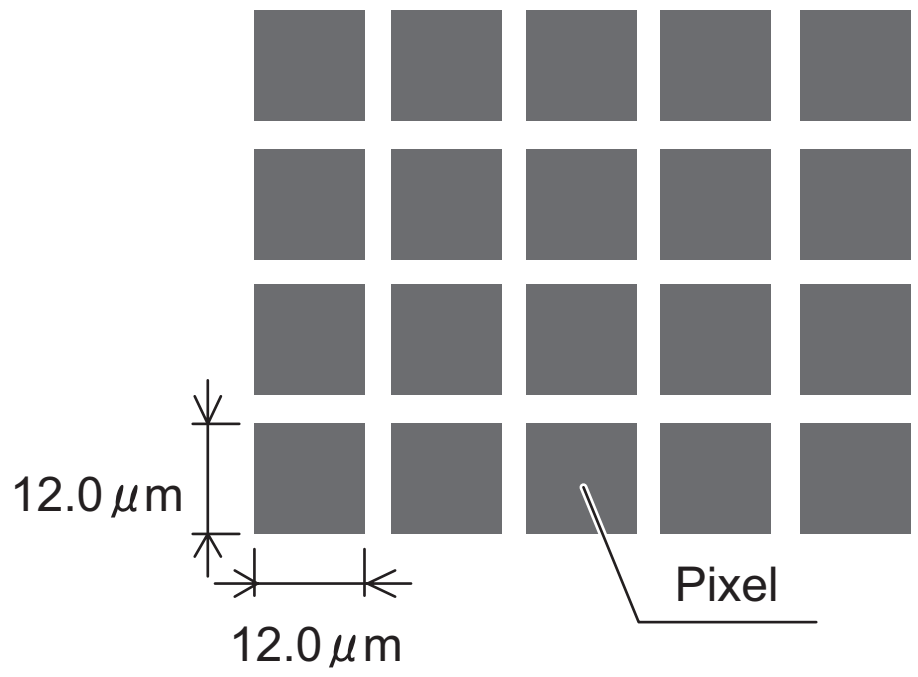
12.0μm
12.0μm
Pixel

2.4.5 MAIN CPU PIN FUNCTION [IC7601 : DIGITAL PWB ASS'Y]

Pin	Pin name	I/O	Function	Pin	Pin name	I/O	Function
1	VHOLD1	I	Data slice for main screen closed caption	51	NC	O	Not used
2	HFLT1	I/O	LPF for main screen closed caption video input	52	NC	O	Not used
3	NC	O	Not used	53	NC	O	Not used
4	NC	O	Not used	54	NC	O	Not used
5	DIGR0	O	R [0] for OSD	55	NC	O	Not used
6	TB1in	I	AC power for timer clock	56	NC	O	Not used
7	REMO	I	Remote control	57	NC	O	Not used
8	BYTE	I	Data bus width select [L = 16bit (fixed)]	58	NC	O	Not used
9	CNVss	I	CPU programming mode select [Normal = L]	59	NC	O	Not used
10	DIGG0	O	G [0] for OSD	60	NC	O	Not used
11	DIGB0	O	B [0] for OSD	61	NC	O	Not used
12	RESET	I	Reset for main CPU [Reset = L]	62	HSYNC	I	H. sync for OSD
13	Xout	O	System clock osillation (crystal) : 16MHz	63	NC	O	Not used
14	Vss	-	GND	64	VSYNC	I	V. sync for OSD
15	Xin	I	System clock osillation (crystal) : 16MHz	65	NC	O	Not used
16	Vccl	I	3.3V stand-by power supply	66	NC	O	Not used
17	OSC1	I	Clock for OSD	67	NC	O	Not used
18	OSC2	O	Not used : Clock for OSD	68	NC	O	Not used
19	INT1	I	AV COMPULINK control	69	NC	O	Not used
20	INT0	I	Request for sub(chassis) CPU communication (serial data)	70	NC	O	Not used
21	OUT1	O	Ys (blanking) for OSD	71	P2.1	O	Clock for Inter IC (serial) bus control
22	OUT2	O	YM (transparence) for OSD	72	P2.0	I/O	Data for Inter IC (serial) bus control
23	NC	O	Not used	73	NC	O	Not used
24	NC	O	Not used	74	NC	O	Not used
25	NC	O	Not used	75	NC	O	Not used
26	NC	O	Not used	76	NC	O	Not used
27	CTA2/RTS2	O	Not used	77	NC	O	Not used
28	CLK2	O	Not used	78	NC	O	Not used
29	RxD2	I	Digital tuner control	79	NC	O	Not used
30	TxD2	O	Digital tuner control	80	P1.0	O	Function LED lighting
31	SDA2	I/O	Not used	81	P0.7	O	Communication LED lighting
32	DIGR1	O	R [1] for OSD	82	P0.6	O	Test point
33	DIGG1	O	G [1] for OSD	83	NC	O	Not used
34	DIGB1	O	B [1] for OSD	84	WAKE	O	Reset for sub(chassis) CPU
35	TxD0	I	Data receive (serial) for external programming	85	CARD_DET	I	Not used
36	RxD0	O	Data transmission (serial) for external programming	86	POWER_SW	I	Power switch (mechanical) detection
37	CLK0	I	Clock for external programming	87	SDA	I/O	Data for Inter IC (serial) bus control : memory
38	RTS0	O	Busy for external programming [Operation = H]	88	SLC	O	Clock for Inter IC (serial) bus control : memory
39	P5.7	I	Not used	89	DIGR2	O	R [2] for OSD
40	P5.6	O	Not used	90	DIGG2	O	G [2] for OSD
41	HOLD	I	CPU programming mode select [Normal = H]	91	DIGB2	O	B [2] for OSD
42	P5.4	O	Not used	92	NC	O	Not used
43	P5.3	O	Not used	93	KEY2	I	Key scan data for front control button (MENU/CH+/CH-) KEY2
44	P5.2	O	Not used	94	KEY1	I	Key scan data for front control button (INPUT/VOL+/VOL-) KEY1
45	P5.1	O	Not used	95	VHOLD2	I	Data slice for sub screen closed caption
46	WR	O	CPU programming mode select [Normal = L]	96	HLF2	I/O	LPF for sub screen closed caption video input
47	P4.7	O	Data transmission for sub(chassis) CPU communication (serial)	97	CVIN2	I	Video(Y) for sub screen closed caption
48	P4.6	I	Data receive for sub(chassis) CPU communication (serial)	98	TVSETB	I	Test terminal [L Fixed]
49	P4.5	I	Clock for sub(chassis) CPU communication (serial)	99	VCCE	I	5V stand-by power supply
50	P4.4	O	Not used	100	CVIN1	I	Video(Y) for main screen closed caption

SECTION 3
DISASSEMBLY

3.1 DISASSEMBLY PROCEDURE

CAUTION AT DISASSEMBLY:

- **Be sure to perform the SYSTEM SETTEING, at the end of the procedure.**
- Make sure that the power cord is disconnected from the outlet.
- Pay special attention not to break or damage the parts.
- When removing each board, remove the connectors as required. Taking notes of the connecting points (connector numbers) makes service procedure manageable.
- Make sure that there is no bent or stain on the connectors before inserting, and firmly insert the connectors.
- Wait until the LAMP UNIT has cool down is completely.
- While not in repair service, place the chassis back its original position.

3.1.1 FRONT SIDE DISASSEMBLY [HD-52G787, HD-52G887, HD-56G787, HD-56G887]

3.1.1.1 REMOVING THE SPEAKER GRILL (Fig.1)

(1) Remove the 2 screws **[A]**.
(2) Remove the SPEAKER GRILL by pressing it downward.

3.1.1.2 REMOVING THE FRONT LED PWB (Fig.1)

- Remove the SPEAKER GRILL.

(1) Remove the 1 screw **[B]**.
(2) Remove the FRONT LED PWB.

3.1.1.3 REMOVING THE CENTER COVER (Fig.1)

- Remove the SPEAKER GRILL.

(1) Remove the 2 screws **[C]**.
(2) Remove the CENTER COVER.

3.1.1.4 REMOVING THE FRONT PANEL (Fig.1)

- Remove the SPEAKER GRILL.

(1) Remove the 10 screws **[D]**.
(2) Remove the 12 screws **[E]**.
(3) Remove the FRONT PANEL.

3.1.1.5 REMOVING THE SPEAKER (Fig.1)

- Remove the SPEAKER GRILL.

(1) Remove the 4 screws **[F]**.
(2) Remove the SPEAKER.
(3) Remove the opposite SPEAKER same steps.

3.1.1.6 REMOVING THE SCREEN BLOCK(Fig.1)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.

[HD-52G787, HD-52G887]

(1) Remove the 6 screws **[G]**.
(2) Remove the 2 screws **[H]**.
(3) Remove the SCREEN BLOCK.

[HD-56G787, HD-56G887]

(1) Remove the 6 screws **[G]**.
(2) Remove the 2 screws **[J]**.
(3) Remove the SCREEN BLOCK.

CAUTION:

- Place the SCREEN BLOCK on a flat table without fail.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.
- Use care not to scratch the screen during work.
- During assembly, be sure to engage the left and right tabs with the cabinet mounting positions.
- When supporting the SCREEN BLOCK, avoid grasping the top of the screen panel, instead grasp the left and right areas.
- Do not leave the SCREEN BLOCK removed for long time to prevent soiling from dust.

3.1.1.7 REMOVING THE SCREEN ASS'Y (Fig.1)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.

(1) Remove the 12 screws **[K]**.
(2) Remove the SCREEN ASS'Y.

NOTE:

- Do not touch the front of the SCREEN ASS'Y.
- Do not shock the SCREEN ASS'Y.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.

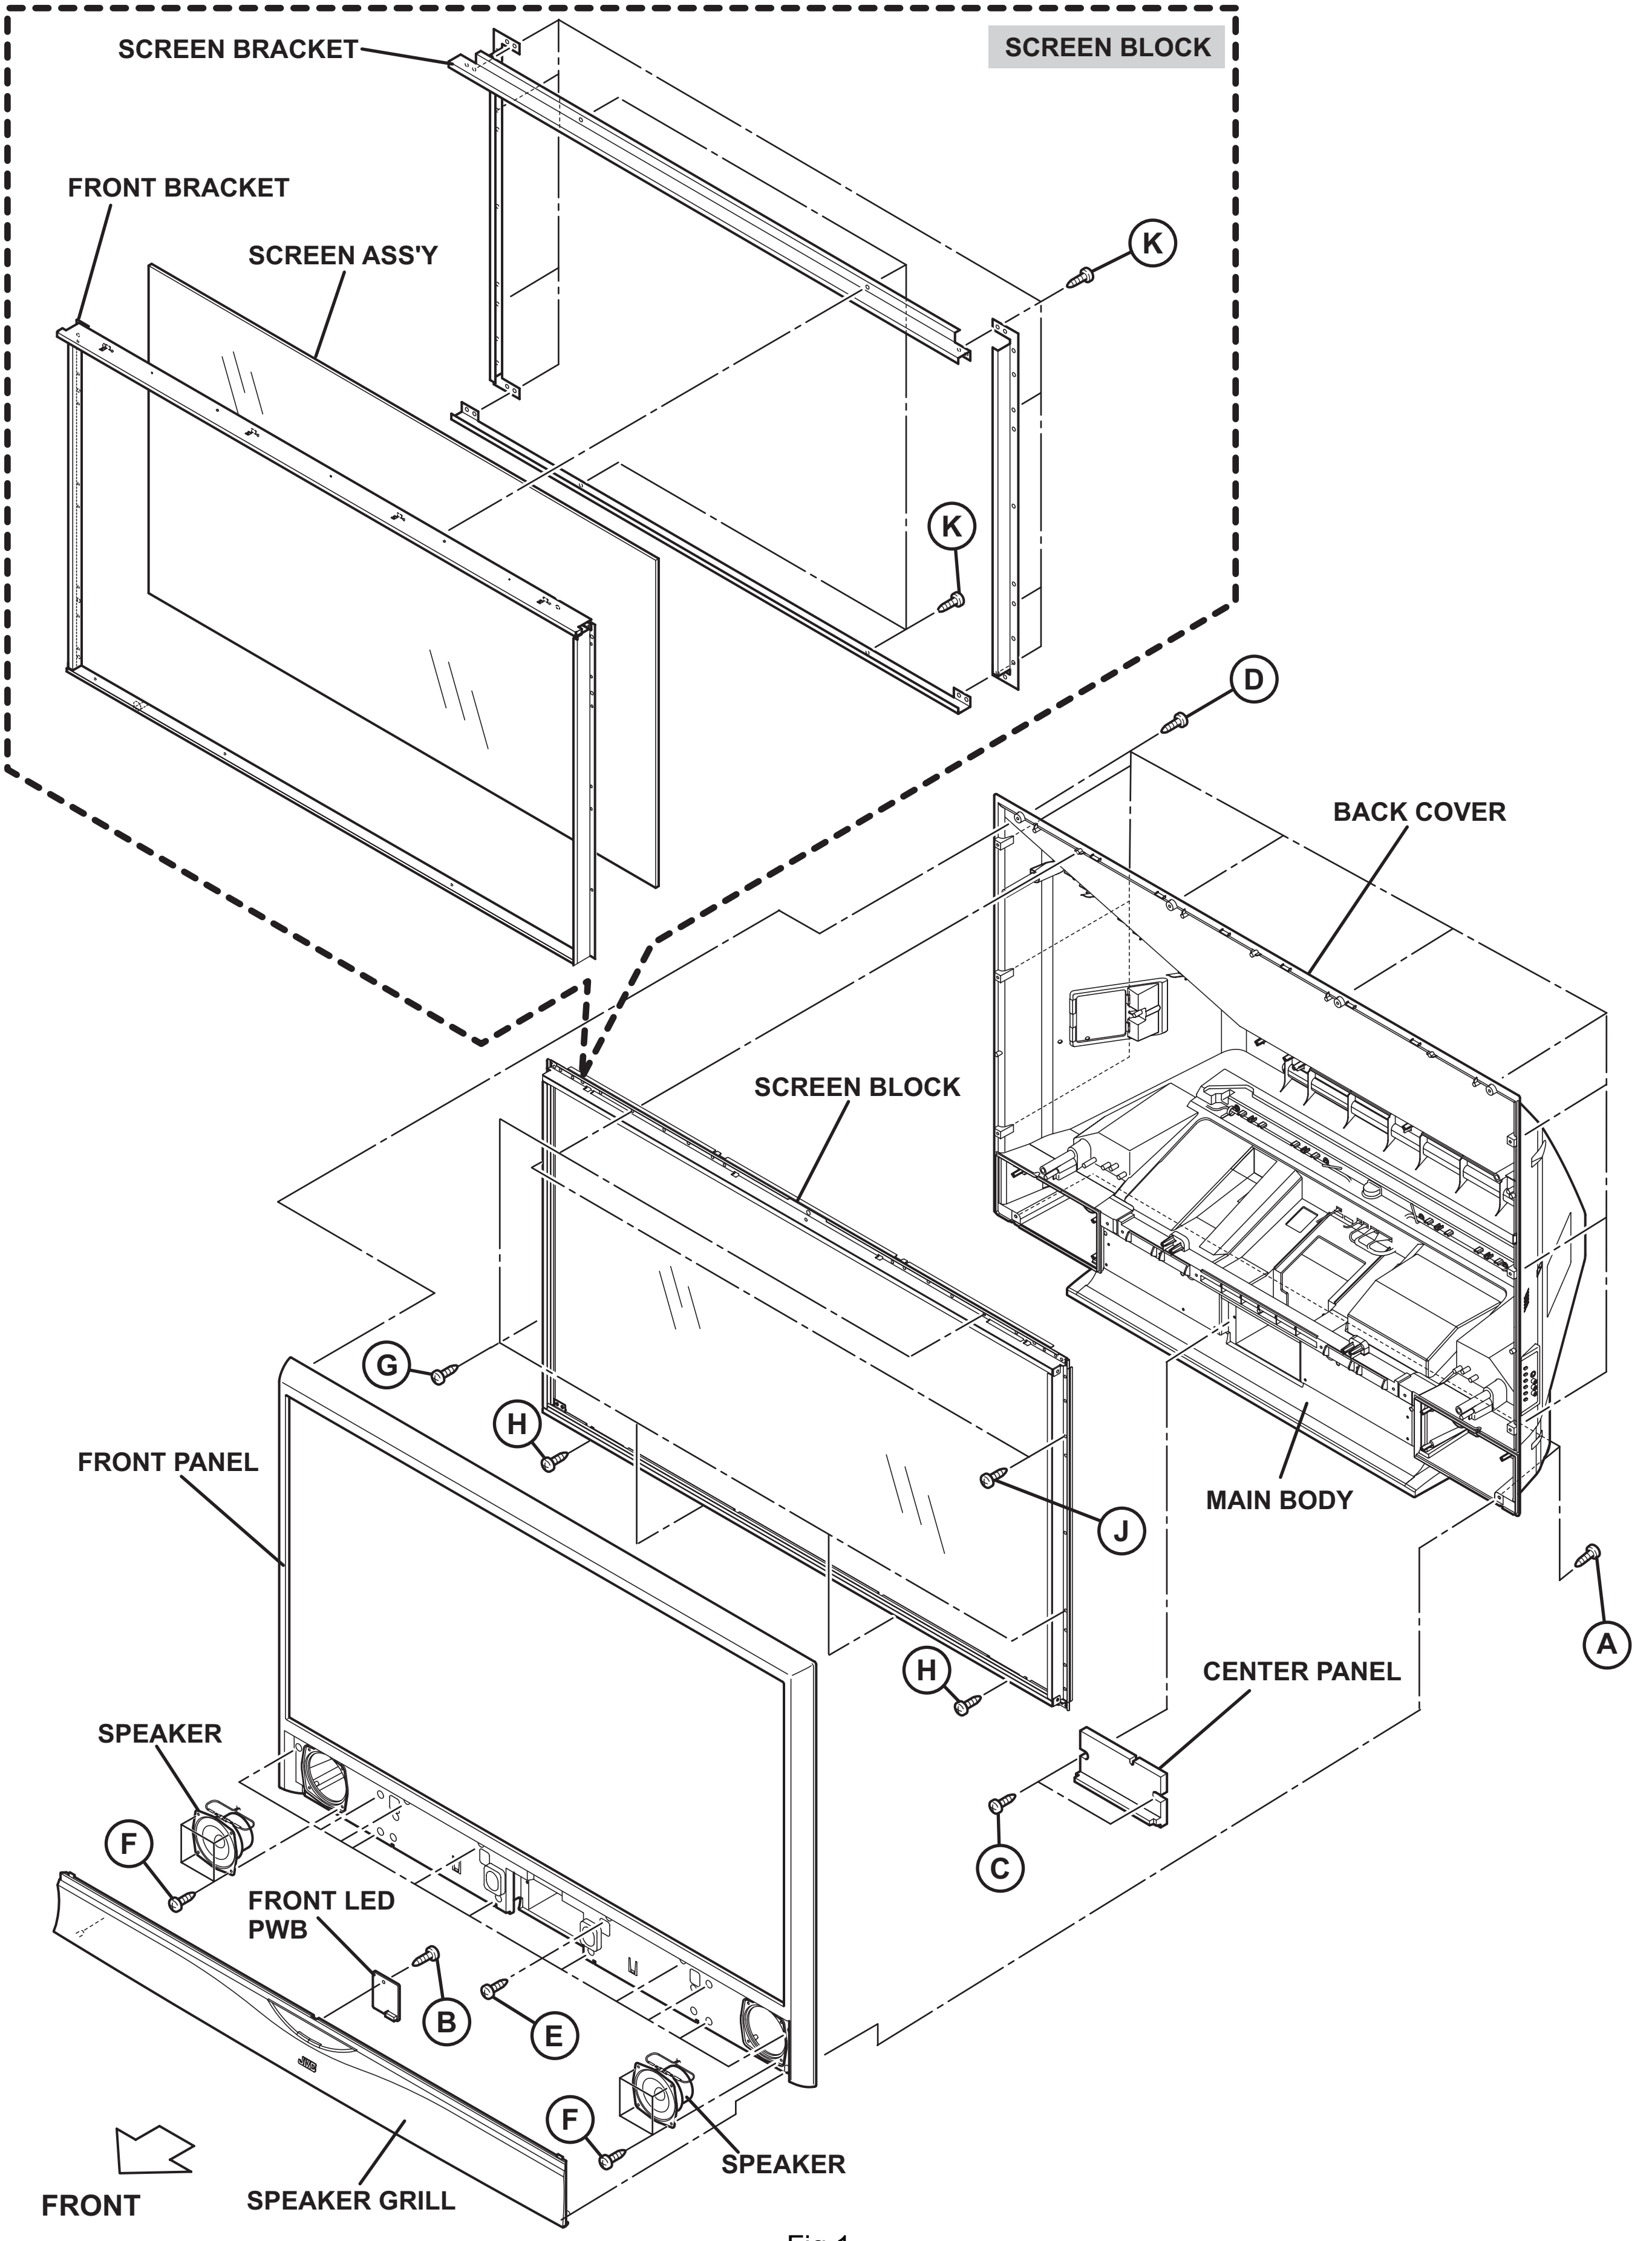
SCREEN BRACKET
SCREEN BLOCK
FRONT BRACKET
SCREEN ASS'Y
K
K
D
BACK COVER
SCREEN BLOCK
G
H
FRONT PANEL
J
MAIN BODY
A
H
CENTER PANEL
SPEAKER
F
FRONT LED
PWB
B
E
C
F
SPEAKER
FRONT
SPEAKER GRILL

Fig.1

3.1.1.8 REMOVING THE MIRROR (Fig.2)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.
  (1) Remove the 4 screws **[A]** attaching the MIRROR HOLDER of the upper side.
  (2) Remove the 6 screws **[B]** attaching the MIRROR HOLDER of left and right side.
  (3) Raise slightly to disengage of the MIRROR from the bottom MIRROR HOLDER
  (4) Remove the MIRROR.

NOTE :

- Do not touch the front of the MIRROR.
- Do not shock the the MIRROR.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.

3.1.1.9 REMOVING THE SIDE CONTROL PWB (Fig.2)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.
  (1) Remove the 2 screws **[C]**.
  (2) Remove the SIDE CONTROL BASE.
  (3) Remove the 2 screws **[D]**.
  (4) Remove the SIDE CONTROL PWB.

3.1.1.10 REMOVING THE SUPPORT HOLDER (Fig.2)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.
  (1) Remove the 2 screws **[E]**.
  (2) Remove the SUPPORT HOLDER.

3.1.1.11 REMOVING THE BACK COVER (Fig.2)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.
- Remove the SUPPORT HOLDER.
  (1) Remove the 6 screws **[F]**.
  (2) Remove the 2 screws **[G]** from rear side.
  (3) Remove the 2 screws **[H]** attach the SPEAKER BOX.
  (4) Remove the BACK COVER with the SPEAKER BOX

CAUTION :

- Because of the large size, at least 2 persons are recommended for removal and reassemble.

3.1.1.12 REMOVING THE SPEAKER BOX (Fig.2)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL.
- Remove the SCREEN BLOCK.
- Remove the SUPPORT HOLDER.
- Remove the BACK COVER with the SPEAKER BOX.
  (1) Remove the 1 screw **[J]**.
  (2) Remove the SPEAKER BOX.
  (3) Remove the opposite SPEAKER BOX same steps.

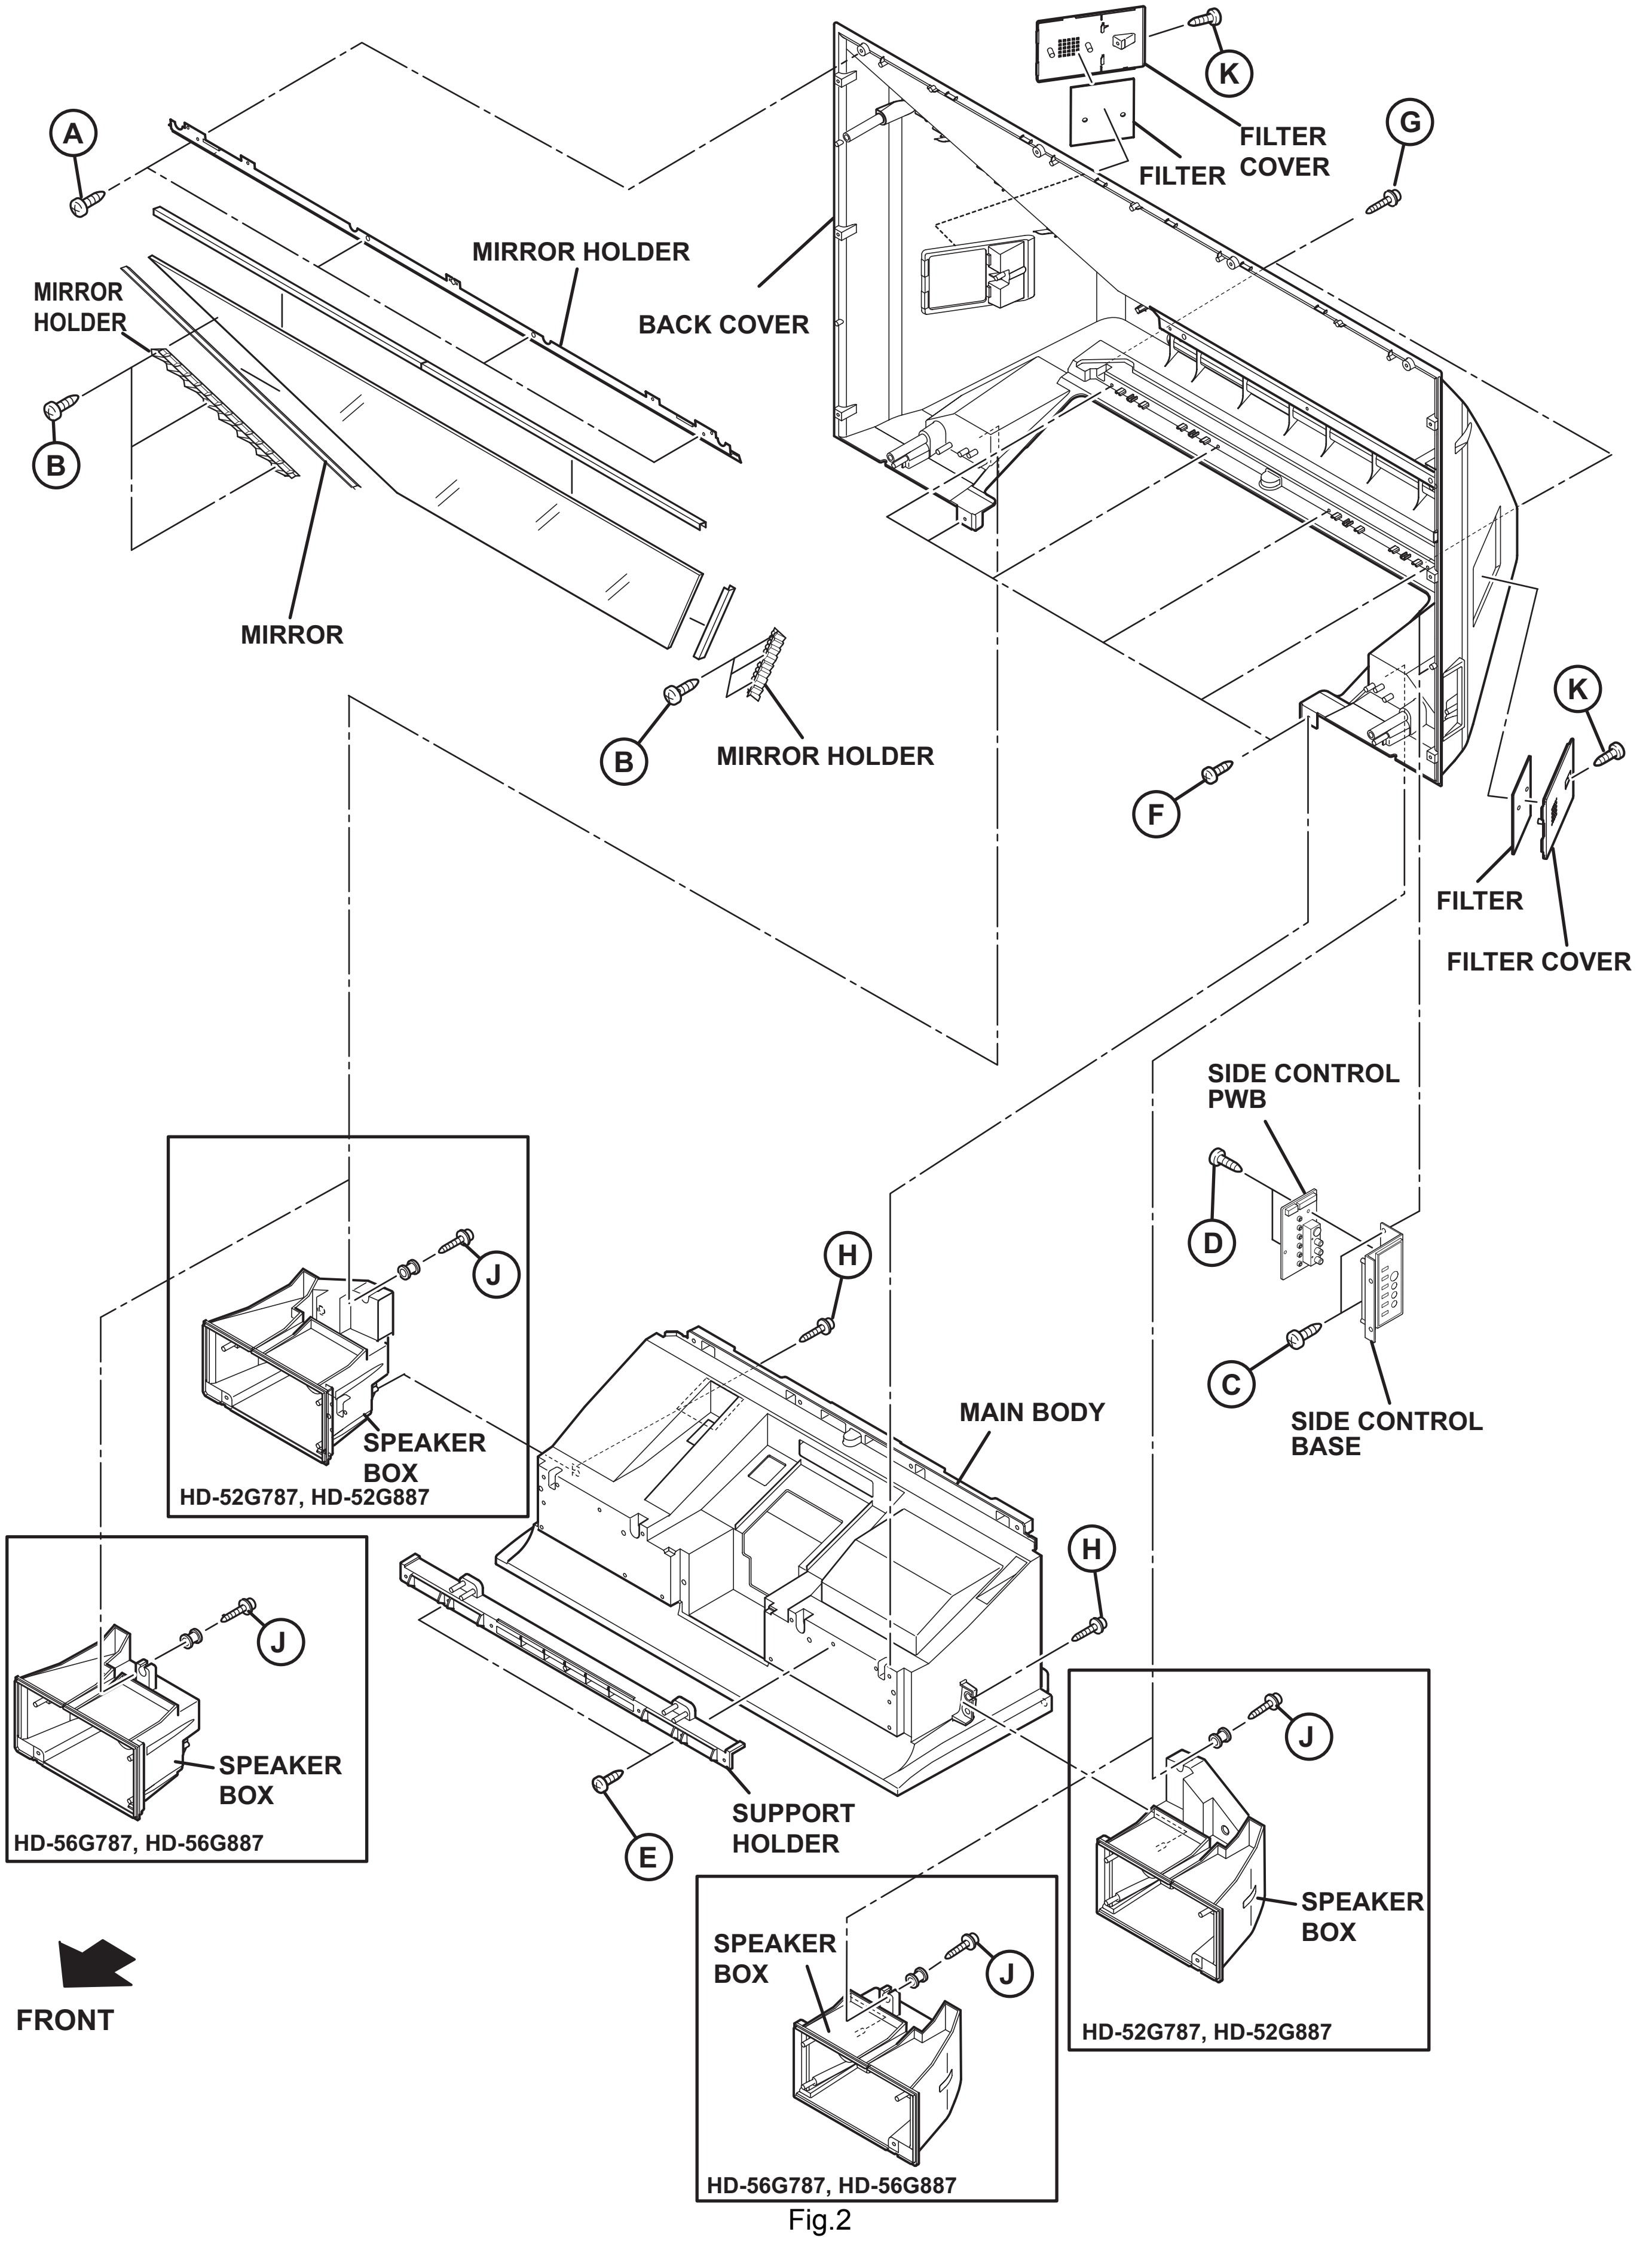
A
MIRROR HOLDER
MIRROR HOLDER
B
MIRROR
B
MIRROR HOLDER
K
FILTER COVER
FILTER
G
BACK COVER
K
F
FILTER
FILTER COVER
SIDE CONTROL PWB
D
C
SIDE CONTROL BASE
J
SPEAKER BOX
HD-52G787, HD-52G887
H
MAIN BODY
H
J
SPEAKER BOX
HD-56G787, HD-56G887
SUPPORT HOLDER
E
J
SPEAKER BOX
HD-52G787, HD-52G887
SPEAKER BOX
J
HD-56G787, HD-56G887
FRONT

Fig.2

3.1.2 FRONT SIDE DISASSEMBLY [HD-61G787, HD-61G887]

3.1.2.1 REMOVING THE SPEAKER GRILL (Fig.3)

(1) Remove the 2 screws **[A]**.
(2) Remove the SPEAKER GRILL by pressing it downward.

3.1.2.2 REMOVING THE FRONT LED PWB (Fig.3)

- Remove the SPEAKER GRILL.

(1) Remove the 1 screw **[B]**.
(2) Remove the FRONT LED PWB.

3.1.2.3 REMOVING THE CENTER COVER (Fig.3)

- Remove the SPEAKER GRILL.

(1) Remove the 2 screws **[C]**.
(2) Remove the CENTER COVER.

3.1.2.4 REMOVING THE FRONT PANEL WITH SCREEN ASS'Y (Fig.3)

- Remove the SPEAKER GRILL.

(1) Remove the 8 screws **[D]**.
(2) Remove the 10 screws **[E]**.
(3) Remove the FRONT PANEL with SCREEN ASS'Y.

CAUTION:

- Place the FRONT PANEL with SCREEN ASS'Y on a flat table without fail.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.
- Use care not to scratch the screen during work.
- Do not leave the FRONT PANEL with SCREEN ASS'Y removed for long time to prevent soiling from dust.

3.1.2.5 REMOVING THE SCREEN ASS'Y (Fig.3)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.

(1) Remove the 20 screws **[F]**.
(2) Remove the 4 screws **[G]**.
(3) Remove the SCREEN BRACKET.
(4) Remove the SCREEN ASS'Y from the FRONT PANEL

NOTE:

- Do not touch the front of the SCREEN ASS'Y.
- Do not shock the SCREEN ASS'Y.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.

3.1.2.6 REMOVING THE SPEAKER (Fig.3)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.

(1) Remove the 4 screws **[H]**.
(2) Remove the SPEAKER.
(3) Remove the opposite SPEAKER by the same method.

3.1.2.7 REMOVING THE SPEAKER PLATE (Fig.3)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.

(1) Remove the 4 screws **[J]**.
(2) Remove the SPEAKER PLATE.
(3) Remove the opposite SPEAKER PLATE by the same method.

3.1.2.8 REMOVING THE FILTER (Fig.3)

(1) Remove the 4 screws **[K]**.
(2) Remove the FILTER COVER with the FILTER.
(3) Remove the FILTER.

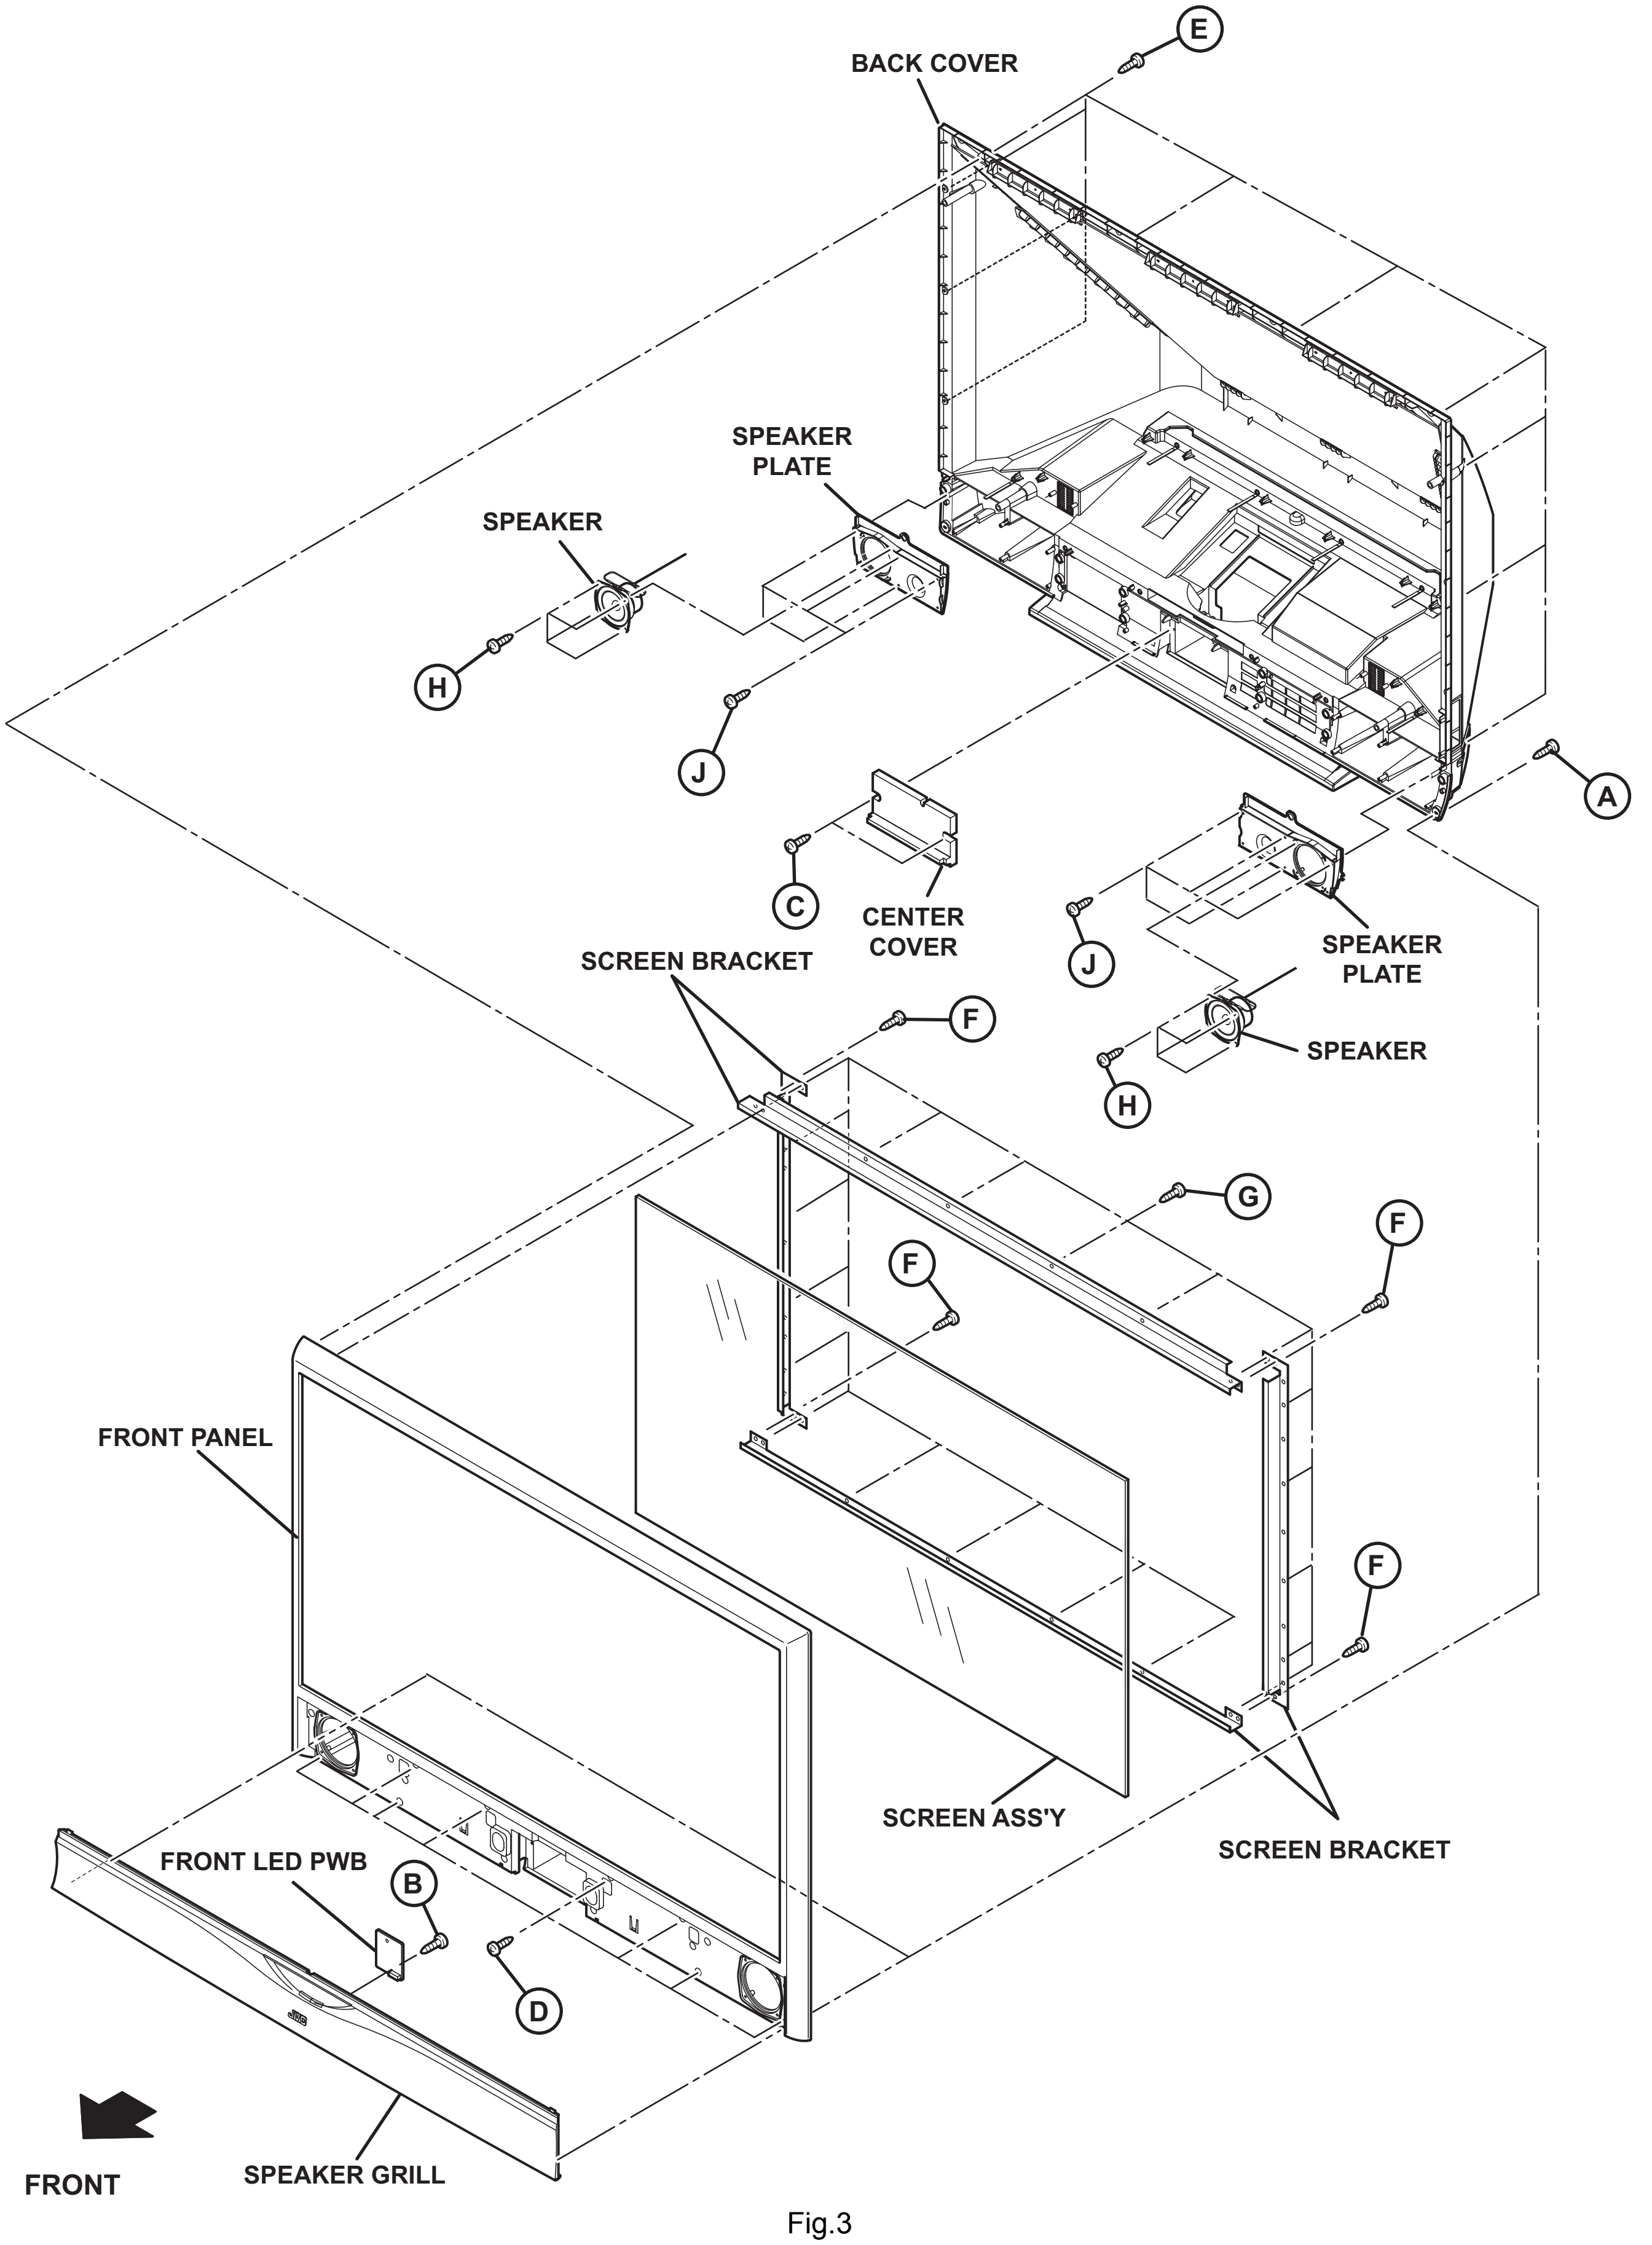
E
BACK COVER
SPEAKER PLATE
SPEAKER
H
J
A
C
CENTER COVER
J
SPEAKER PLATE
SCREEN BRACKET
F
SPEAKER
H
G
F
F
FRONT PANEL
F
SCREEN ASS'Y
SCREEN BRACKET
FRONT LED PWB
B
D
FRONT
SPEAKER GRILL

Fig.3

3.1.2.9 REMOVING THE MIRROR (Fig.4)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.
  - (1) Remove the 6 screws **[A]**.
  - (2) Remove the MIRROR HOLDER of the upper side.
  - (3) Remove the 6 screws **[B]**.
  - (4) Remove the MIRROR HOLDER of left and right side.
  - (5) Raise slightly to disengage of the MIRROR from the bottom MIRROR HOLDER.
  - (6) Remove the MIRROR.

NOTE:

- Do not touch the front of the MIRROR.
- Do not shock the MIRROR.
- Because of the large size, at least 2 persons are recommended for removal and reassemble.

3.1.2.10 REMOVING THE BACK COVER FILTER (Fig.4)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.
  - (1) Remove the double-sided tape attached BACK COVER FILTER.
  - (2) Remove the BACK COVER FILTER(L/R).

3.1.2.11 REMOVING THE SIDE CONTROL PWB (Fig.4)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.
  - (1) Remove the 2 screws **[C]**.
  - (2) Remove the SIDE CONTROL BASE.
  - (3) Remove the 2 screws **[D]**.
  - (4) Remove the SIDE CONTROL PWB.

3.1.2.12 REMOVING THE BACK COVER (Fig.4)

- Remove the SPEAKER GRILL.
- Remove the FRONT PANEL with SCREEN ASS'Y.
  - (1) Remove the 9 screws **[E]**.
  - (2) Remove the 4 screws **[F]**.
  - (3) Remove the 2 screws **[G]** from rear side.
  - (4) Remove the BACK COVER.

CAUTION:

- Because of the large size, at least 2 persons are recommended for removal and reassemble.

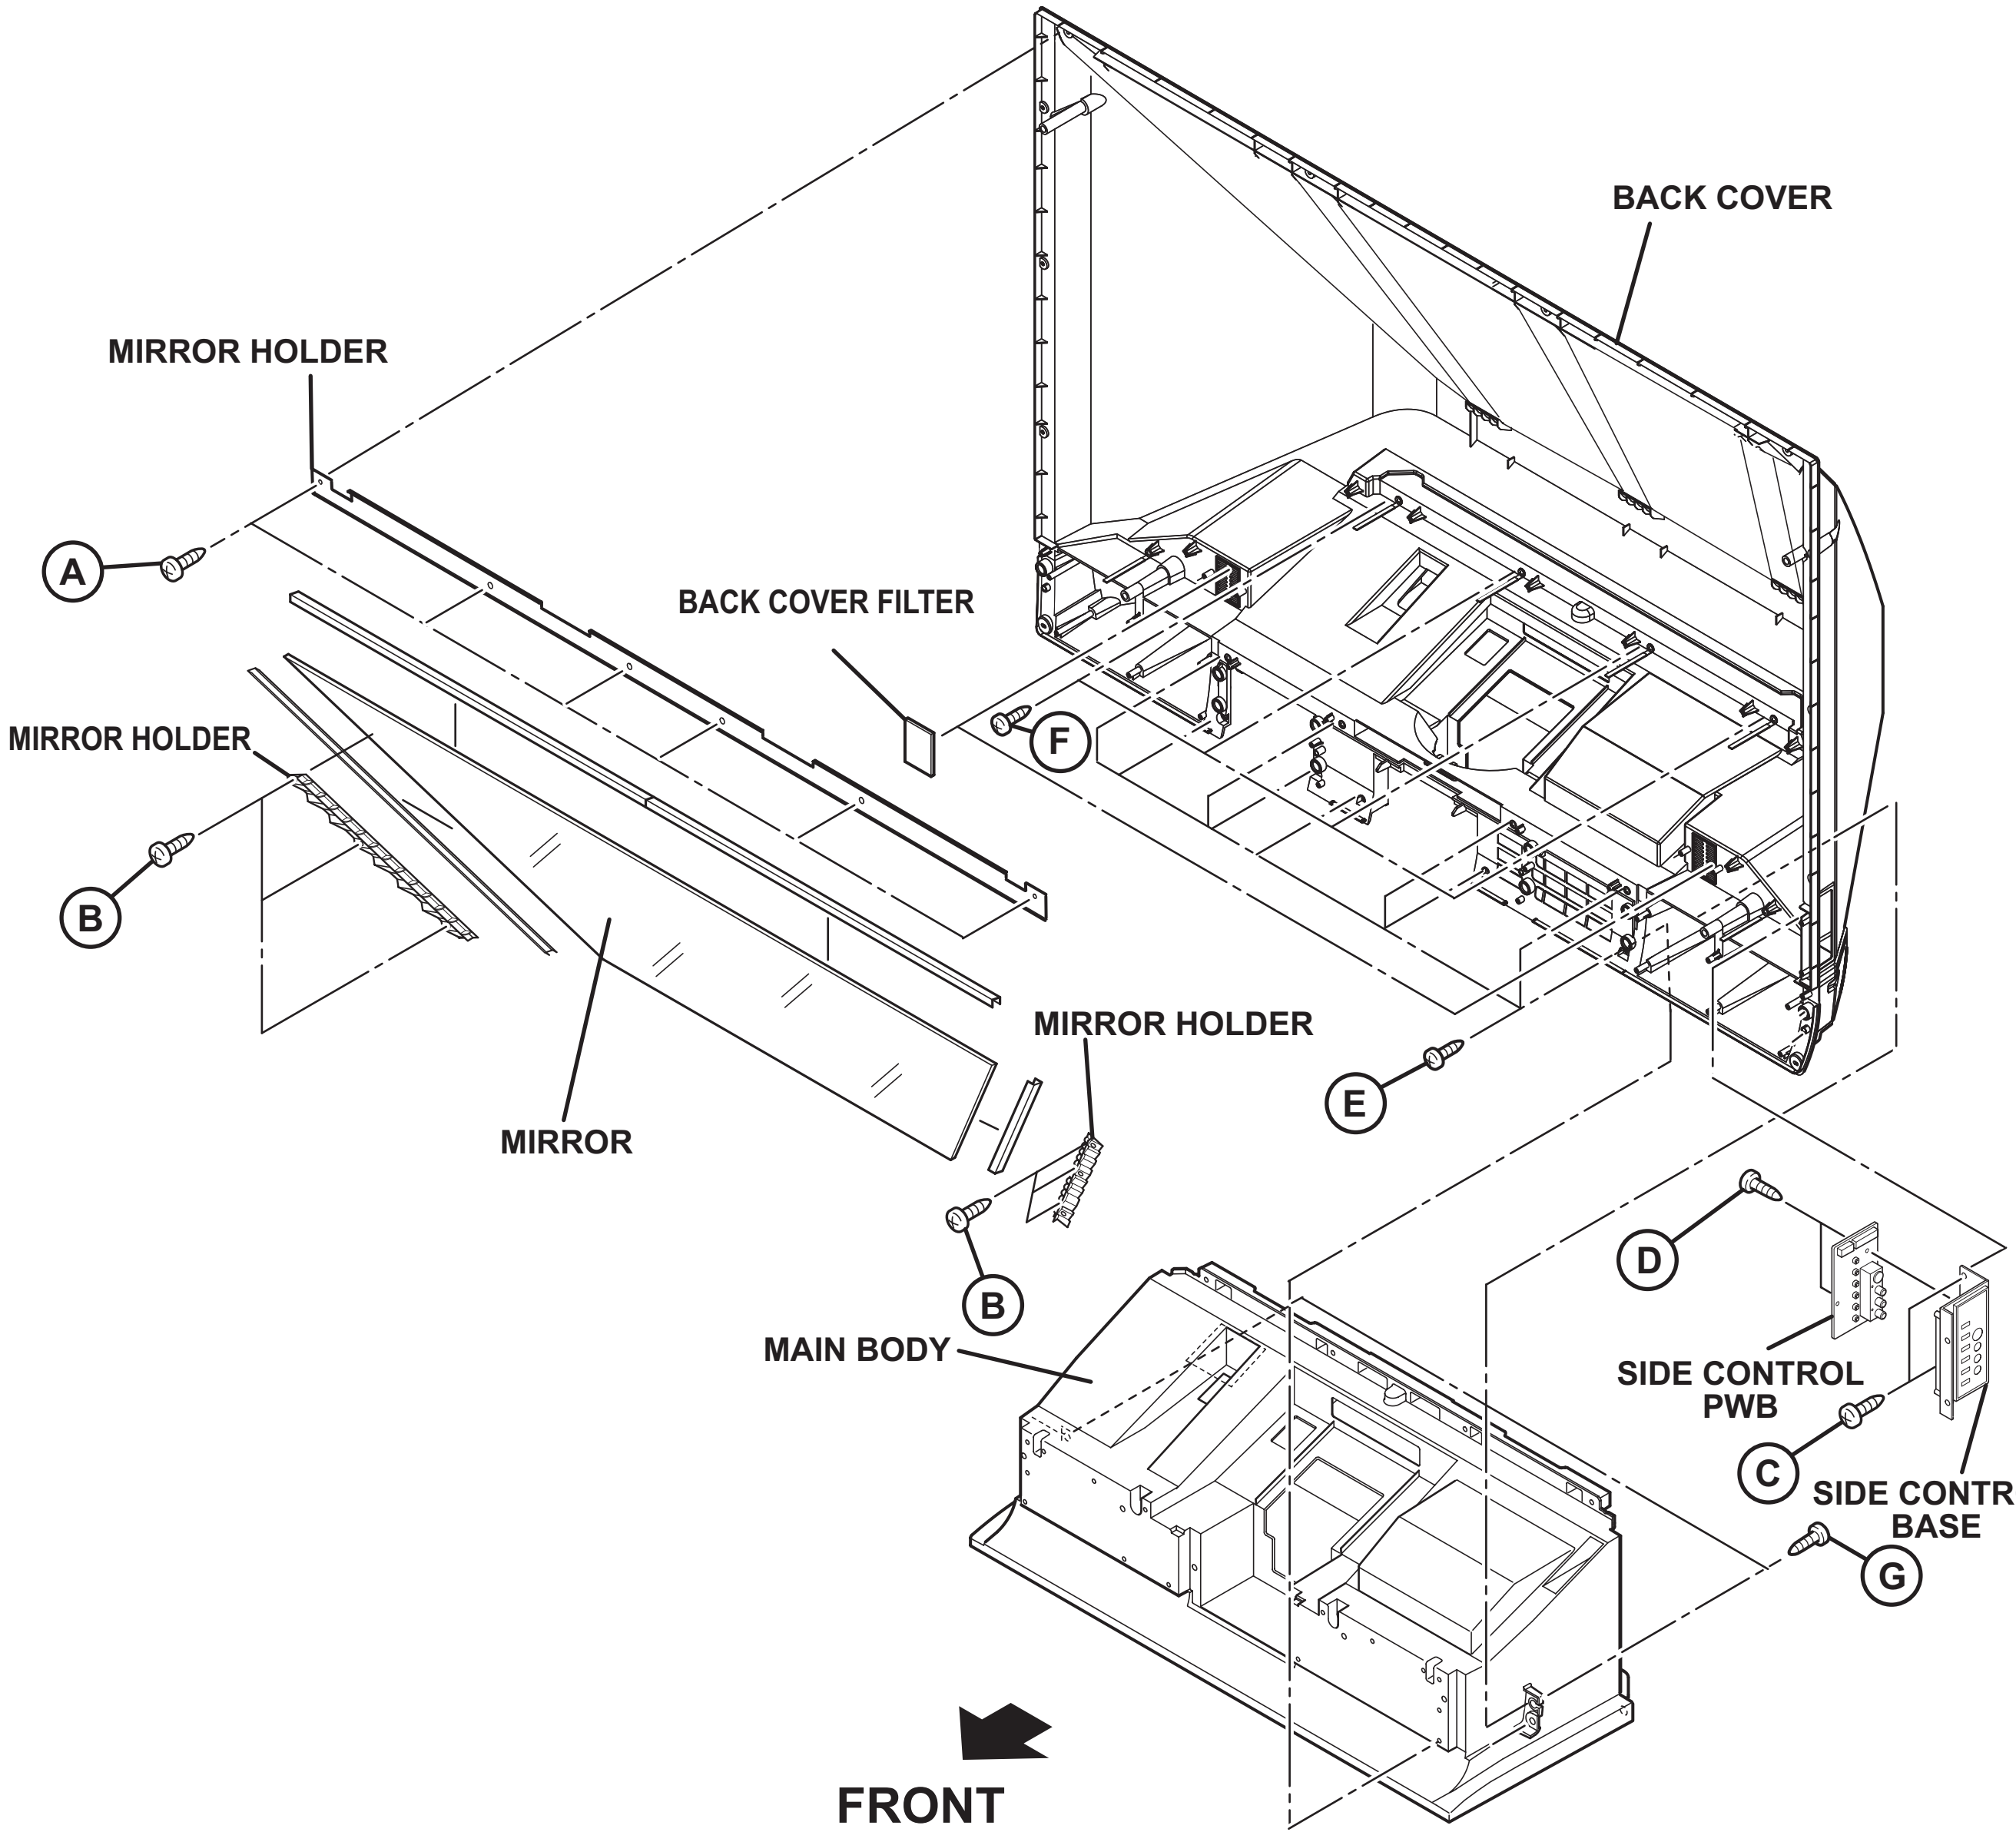
BACK COVER
MIRROR HOLDER
A
BACK COVER FILTER
MIRROR HOLDER
F
B
MIRROR HOLDER
E
MIRROR
D
B
MAIN BODY
SIDE CONTROL PWB
C
SIDE CONTROL BASE
G
FRONT

Fig.4

3.1.3 REAR SIDE DISASSEMBLY

3.1.3.1 REMOVING THE LAMP UNIT (Fig.5)

(1) Remove the 1 screw **[A]**.
(2) Remove the LAMP COVER.
(3) Remove the 2 screws **[B]**
(4) Pull out the LAMP UNIT.

NOTE :

- Do not leave the LAMP COVER removed for long time to prevent dirt and dust form covering the lens.
- Make sure that the LAMP COVER is completely installed.

3.1.3.2 REMOVING THE BODY COVER (Fig.5)

(1) Remove the 9 screws **[C]**.
(2) Remove the 2 screws **[D]** (Only HD-52G787/HD-52G887/HD-56G787/HD-G887).
(3) Remove the 5 screws **[E]**.
(4) Remove the BODY COVER.

NOTE :

- Do not leave the BODY COVER removed for long time to prevent soiling from dust.

3.1.3.3 REMOVING THE MAIN UNIT (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.

(1) Remove the 4 screws **[F]**
(2) Remove the BODY BRACKET.
(3) Remove the 2 screws **[G]**
(4) The MAIN UNIT is pulled out to the back side.

CAUTION :

- **Except for confirmation of projection images on the screen and audio output through the speakers, the removed MAIN UNIT is still workable in the same state as if it is still built-in the TV set. Therefore, the MAIN UNIT can be removed, if necessary, for board diagnosis, electric testing, etc. apart from confirmation of screen images and audio output. Do not leave the MAIN UNIT removed for long time to prevent soiling from dust.**
- **Because of the large size, at least 2 persons are recommended for removal and reassemble.**
- **When carrying the MAIN UNIT, use care not to drop, shock or shake it.**
- **Do not stain or damage the projection lens.**
- **Do not look directly at the light during service.**
- **Do not touch the lamp directly as it presents a burn hazard.**

NOTE :

- When not performing repair work, attach the cap on the lens to preventing dust from covering.
- When mounting to the set, make sure the front of the lens is in contact with the cushion on the set (body) side.
- Make sure that FRONT LED PWB connector is completely connect to the ANALOG PWB connector.
- When wire clamps are removed during work, use care to restore them precisely to their original positions. Performance can be affected if these are not returned to the original positions.

3.1.3.4 REMOVING THE AV TERMINAL BOARD (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 3 screws **[H]**, 7 screws **[J]** and the 5 screws **[K]**.
(2) Remove the 2 hex screws **[L]**.
(3) Remove the nut attaching the ANTENNA TERMINAL.
(4) Remove the AV TERMINAL BOARD.

3.1.3.5 REMOVING THE POWER PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the POWER CORD.
(2) Remove the 7 screws **[M]**.
(3) Remove the POWER PWB.

3.1.3.6 REMOVING THE TUNER PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 1 screw **[N]**.
(2) Remove the HANGER BRACKET with TUNER PWB.
(3) Remove the 3 screws **[P]**.
(4) Remove the TUNER PWB.

3.1.3.7 REMOVING THE ANALOG PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the AV TERMINAL BOARD.
- Remove the POWER PWB and TUNER PWB.

(1) Remove the 4 screws **[Q]**.
(2) Remove the ANALOG PWB.

3.1.3.8 REMOVING THE DIGITAL PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the AV TERMINAL BOARD.
- Remove the POWER PWB and TUNER PWB.
- Remove the ANALOG PWB.

(1) Remove the 1 screw **[R]**.
(2) Remove the DIGITAL PWB BRACKET with DIGITAL PWB and ATSC TUNER MODULE.
(3) Remove the 8 screws **[S]**.
(4) Remove the DIGITAL PWB SHIELD COVER.
(5) Remove the 9 screws **[T]**.
(6) Remove the DIGITAL PWB.

CAUTION :

- **Make sure to perform the "SYSTEM SETTEING" , when DIGITAL SIGNAL PWB is replaced.**
- **Especially, because the value of F001 (DD) might been changed, go through next steps to confirm the setting value with the remote control unit.**

(1) Set to "0 minutes" using the [SLEEP TIMER] key.
(2) While "0 minutes" is displayed, press the [VIDEO STATUS] key and [DISPLAY] key simultaneously, then enter the SERVICE MODE.
(3) Press [1] key to enter the ADJUSTMENT MODE.
(4) Select < F001 >.
(5) Confirm the value to "000", and set it to "000" when not "000".
(6) Press [MUTING] key, to memorize the data.
(7) Press [BACK] key twice to exit the SERVICE MODE.

3.1.3.9 REMOVING THE ATSC TUNER COOLING FAN (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the AV TERMINAL BOARD.
- Remove the POWER PWB and TUNER PWB.
- Remove the ANALOG PWB.

(1) Remove the 1 screw **[R]**.
(2) Remove the DIGITAL PWB BRACKET with ATSC TUNER MODULE PWB.
(3) Remove the 4 screws **[U]**.
(4) Remove the ATSC TUNER COOLING FAN.

3.1.3.10 REMOVING THE ATSC TUNER MODULE PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the AV TERMINAL BOARD.
- Remove the POWER PWB and TUNER PWB.
- Remove the ANALOG PWB.
- Remove the ATSC TUNER COOLING FAN.

(1) Remove the 6 screws **[V]**.
(2) Remove the ATSC TUNER SHIELD COVER.
(3) Remove the 5 screws **[W]**.
(4) Remove the ATSC TUNER MODULE PWB.

3.1.3.11 REMOVING THE SD CARD PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the AV TERMINAL BOARD.
- Remove the POWER PWB and TUNER PWB.
- Remove the ANALOG PWB.
- Remove the ATSC TUNER COOLING FAN.

(1) Remove the 6 screws **[V]**.
(2) Remove the ATSC TUNER UNIT SHIELD COVER.
(3) Remove the 3 screws **[X]** and the 1 screw **[Y]**.
(4) Remove the SD CARD PWB.

3.1.3.12 REMOVING THE FAN PWB (Fig.5)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the POWER PWB and TUNER PWB.

(1) Remove the 1 screw **[Z]**.
(2) Remove the FAN PWB.

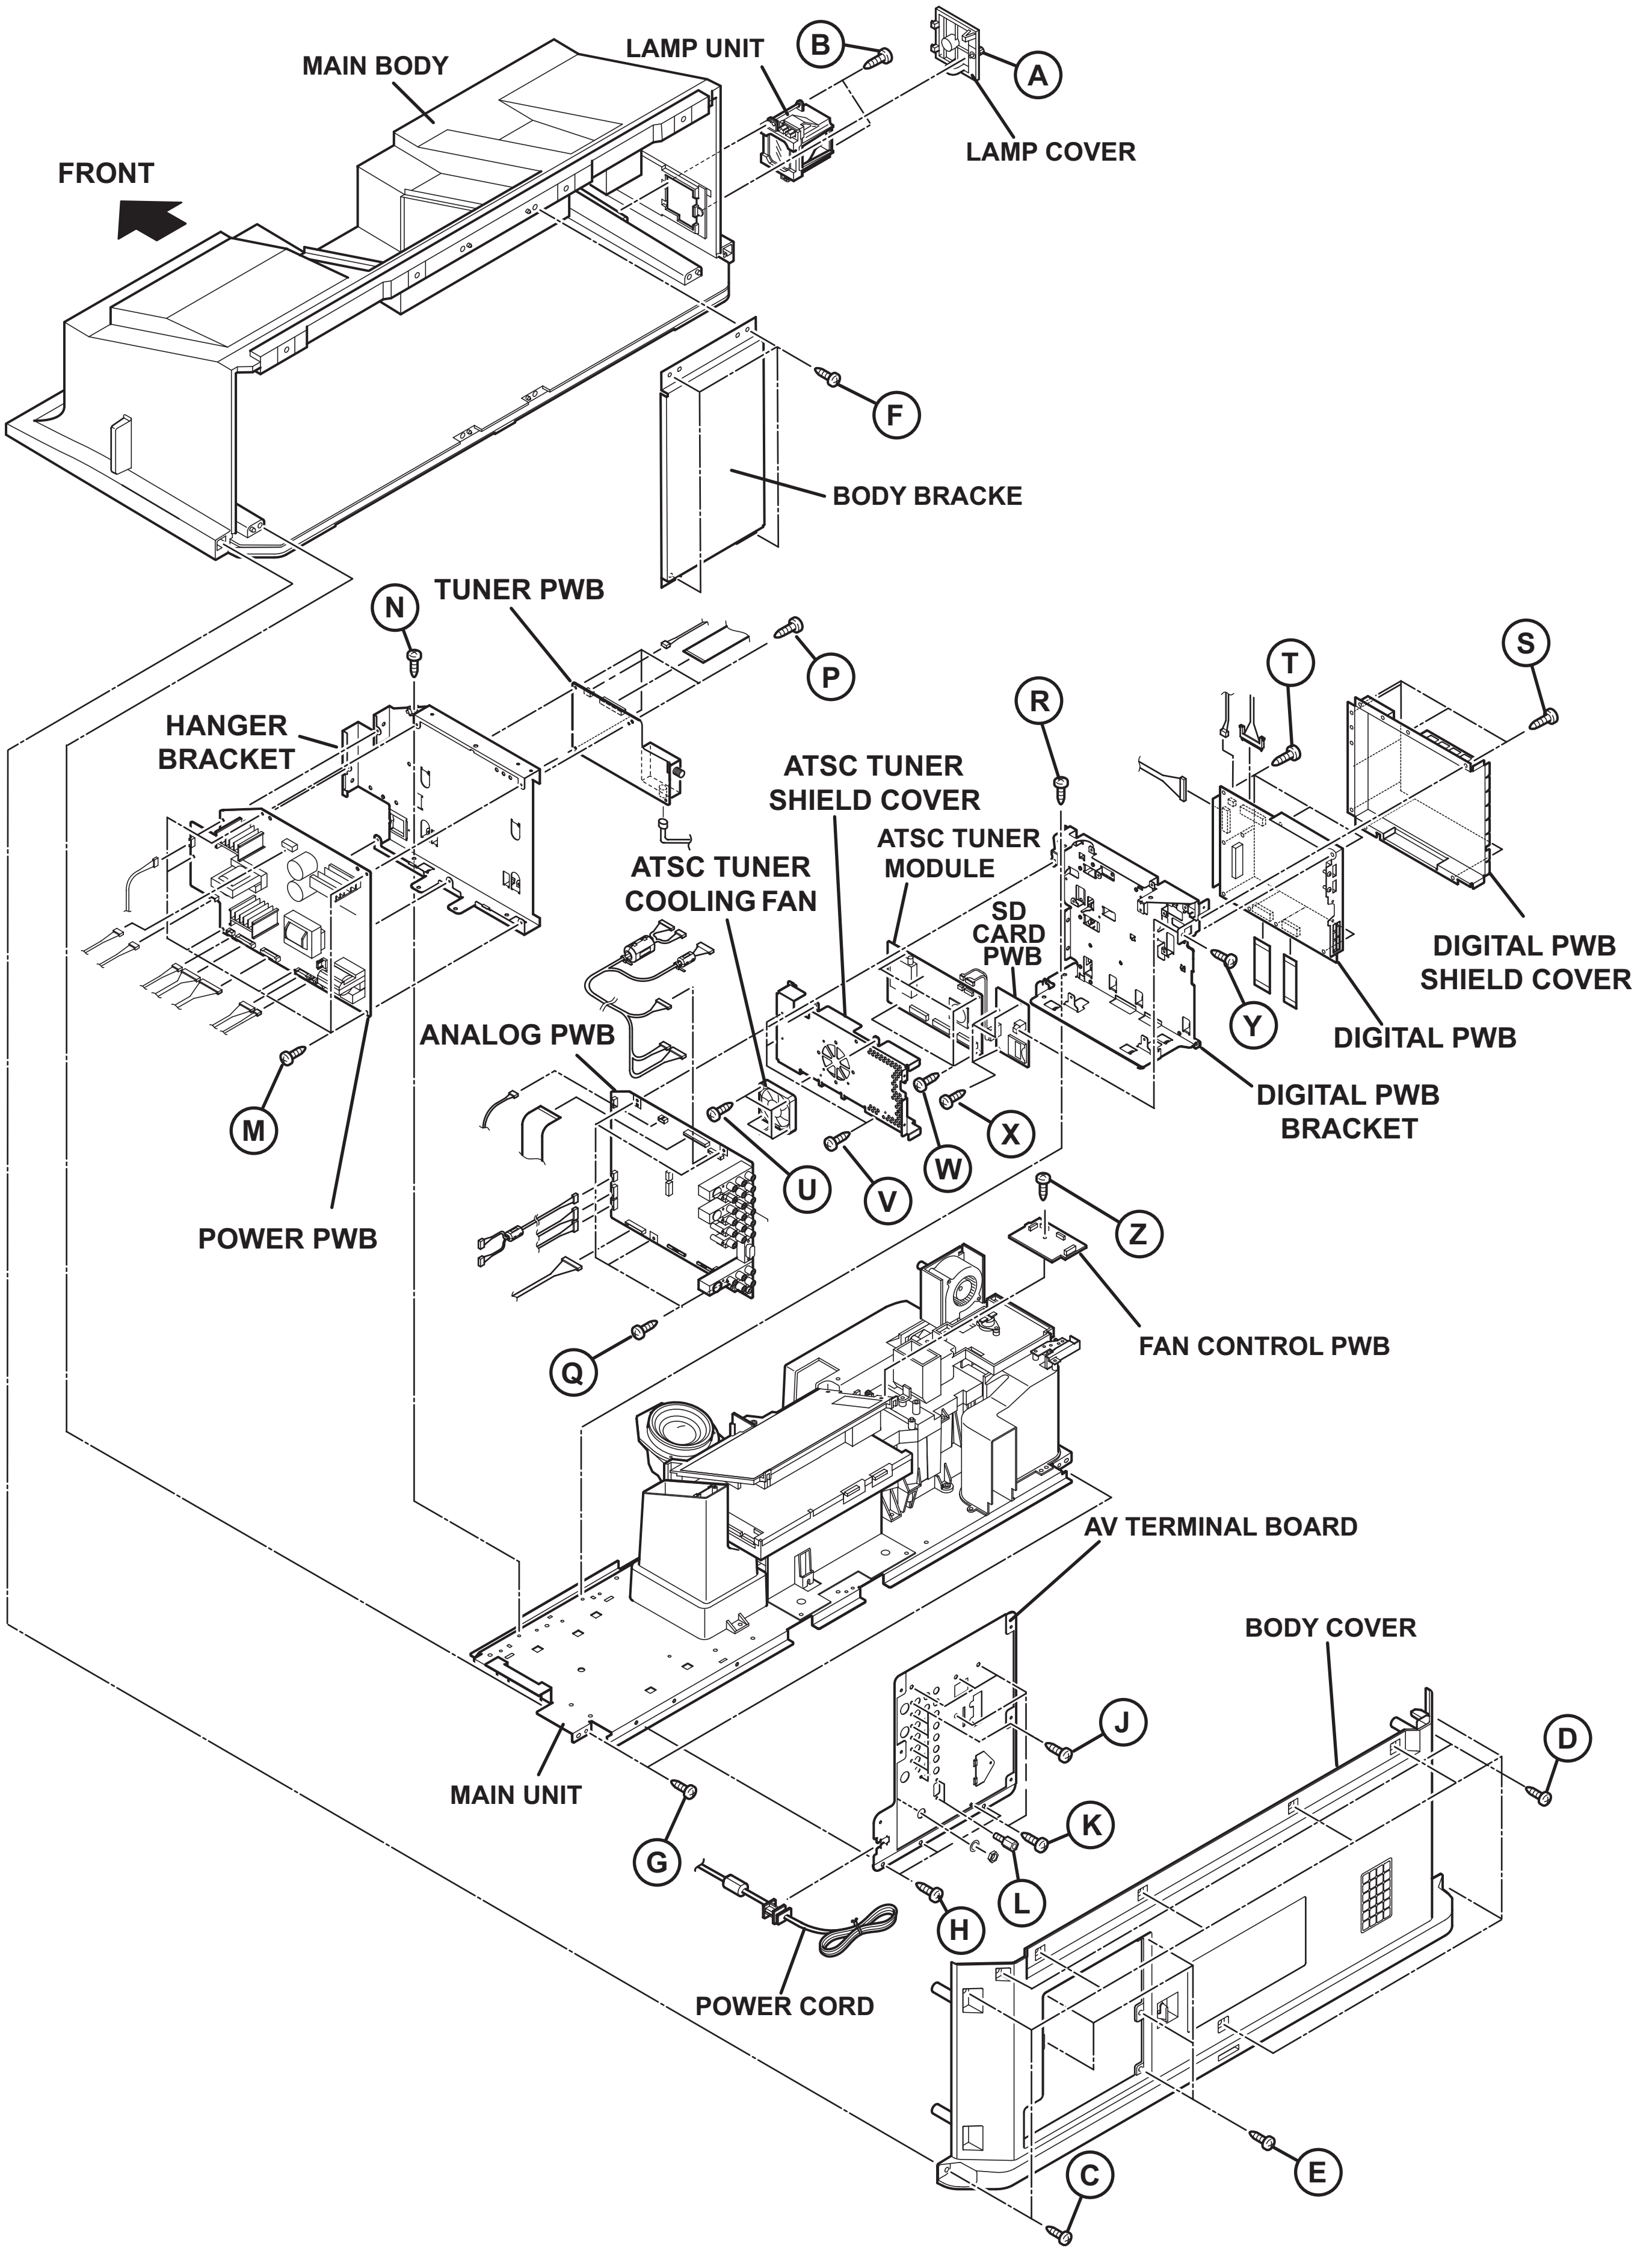
MAIN BODY
LAMP UNIT
B
A
LAMP COVER
FRONT
F
BODY BRACKE
N
TUNER PWB
P
HANGER BRACKET
S
T
R
ATSC TUNER SHIELD COVER
ATSC TUNER MODULE
ATSC TUNER COOLING FAN
SD CARD PWB
DIGITAL PWB SHIELD COVER
Y
DIGITAL PWB
ANALOG PWB
DIGITAL PWB BRACKET
M
X
W
U
V
Z
POWER PWB
FAN CONTROL PWB
Q
AV TERMINAL BOARD
BODY COVER
J
D
MAIN UNIT
K
G
L
H
POWER CORD
C
E

Fig.5

3.1.3.13 REMOVING THE LAMP COVER PWB (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 2 screws **[A]**.
(2) Remove the LAMP COVER BRACKET with LAMP COVER PWB.
(3) Remove the 1 screw **[B]**.
(4) Remove the LAMP COVER PWB.

3.1.3.14 REMOVING THE TERMOSTAT (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 2 screws **[C]**.
(2) Remove the THERMOSTAT.

3.1.3.15 REMOVING THE LAMP FAN DUCT (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the THERMOSTAT.

(1) Remove the 5 screws **[D]**.
(2) Remove the LAMP FAN DUCT.

3.1.3.16 REMOVING THE LAMP COOLING FAN (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the LAMP FAN DUCT.

(1) Remove the 2 screws **[E]**.
(2) Remove the COOLING FAN BRACKET by pulling transversally
(3) Remove the 2 screws **[F]**.
(4) Remove the LAMP COOLING FAN.

3.1.3.17 REMOVING THE BALLAST UNIT COOLING FAN (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the LAMP FAN DUCT.
- Remove the COOLING FAN BRACKET.

(1) Remove the 2 screws **[G]**.
(2) Remove the BALLAST UNIT COOLING FAN.

3.1.3.18 REMOVING THE LAMP BALLAST BLOCK (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 2 screws **[H]**.
(2) Remove the LAMP BALLAST DUCT.
(3) Remove the 2 screws **[I]**.
(4) Remove the LAMP BALLAST UNIT.
(5) Remove the 1 screw **[J]**.
(6) Remove the LAMP BALLAST BRACKET.

3.1.3.19 REMOVING THE IRIS PWB (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 2 screws **[K]**.
(2) Remove the IRIS PWB.

3.1.3.20 REMOVING THE REMOCON PWB(Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.

(1) Remove the 1 screw **[L]**.
(2) Remove the REMOCON PWB.

3.1.3.21 REMOVING THE OPTICAL / DRIVE ASS'Y (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the LAMP FAN DUCT.

(1) Remove the 5 screws **[M]**, 6 screws **[N]** and 1 screw **[O]**.
(2) Remove the OPTICAL / DRIVE ASS'Y.
  - OPTICAL BLOCK (D-ILA device, PBS, Field lens, Integrater, Mirror etc.)
  - PROJECTION LENS
  - Optical base
  - DRIVE PWB
  - IRIS PWB
  - TOP DUCT
  - SHIELD COVER

NOTE :

- The OPTICAL / DRIVE ASS'Y contains precision optical components.
- Handle carefully and avoid imparting strong shock.
- OPTICAL / DRIVE ASS'Y construction
- When not performing repair work, attach the cap on the lens to preventing dust from covering.
- When mounting to the set, make sure the front of the lens side is in contact with the cushion on the body side.
- Do not leave the OPTICAL / DRIVE ASS'Y removed for long time to prevent soiling from dust.

3.1.3.22 REMOVING THE DRIVE PWB (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
  (1) Slide the TOP DUCT PLATE and remove it.
  (2) Remove the 1 screw **[P]** and the 1 screw **[Q]**.
  (3) Remove the TOP DUCT.
  (4) Remove the SHIELD TOP CASE.
  (5) Remove the 2 screws **[R]**.
  (6) Remove the DEVICE SHIELD.
  (7) Remove the 3 screws **[S]** and the 1 screw **[T]**.
  (8) Remove the DRIVE PWB.

3.1.3.23 REMOVING THE OPTICAL BLOCK COOLING FAN (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
- Remove the LAMP FAN DUCT.
- Remove the OPTICAL / DRIVE ASS'Y
  (1) Remove the 2 screws **[U]**.
  (2) Remove the SIROCCO TOP CASE.
  (3) Remove the 2 screws **[V]**.
  (4) Remove the OPTICAL BLOCK COOLING FAN.

3.1.3.24 REMOVING THE PROJECTION LENS (Fig.6)

- Remove the LAMP COVER.
- Remove the BODY COVER.
- Remove the BODY BRACKET.
- Remove the MAIN UNIT.
  (1) Remove the 4 screws **[W]**.
  (2) Remove the PROJECTION LENS.

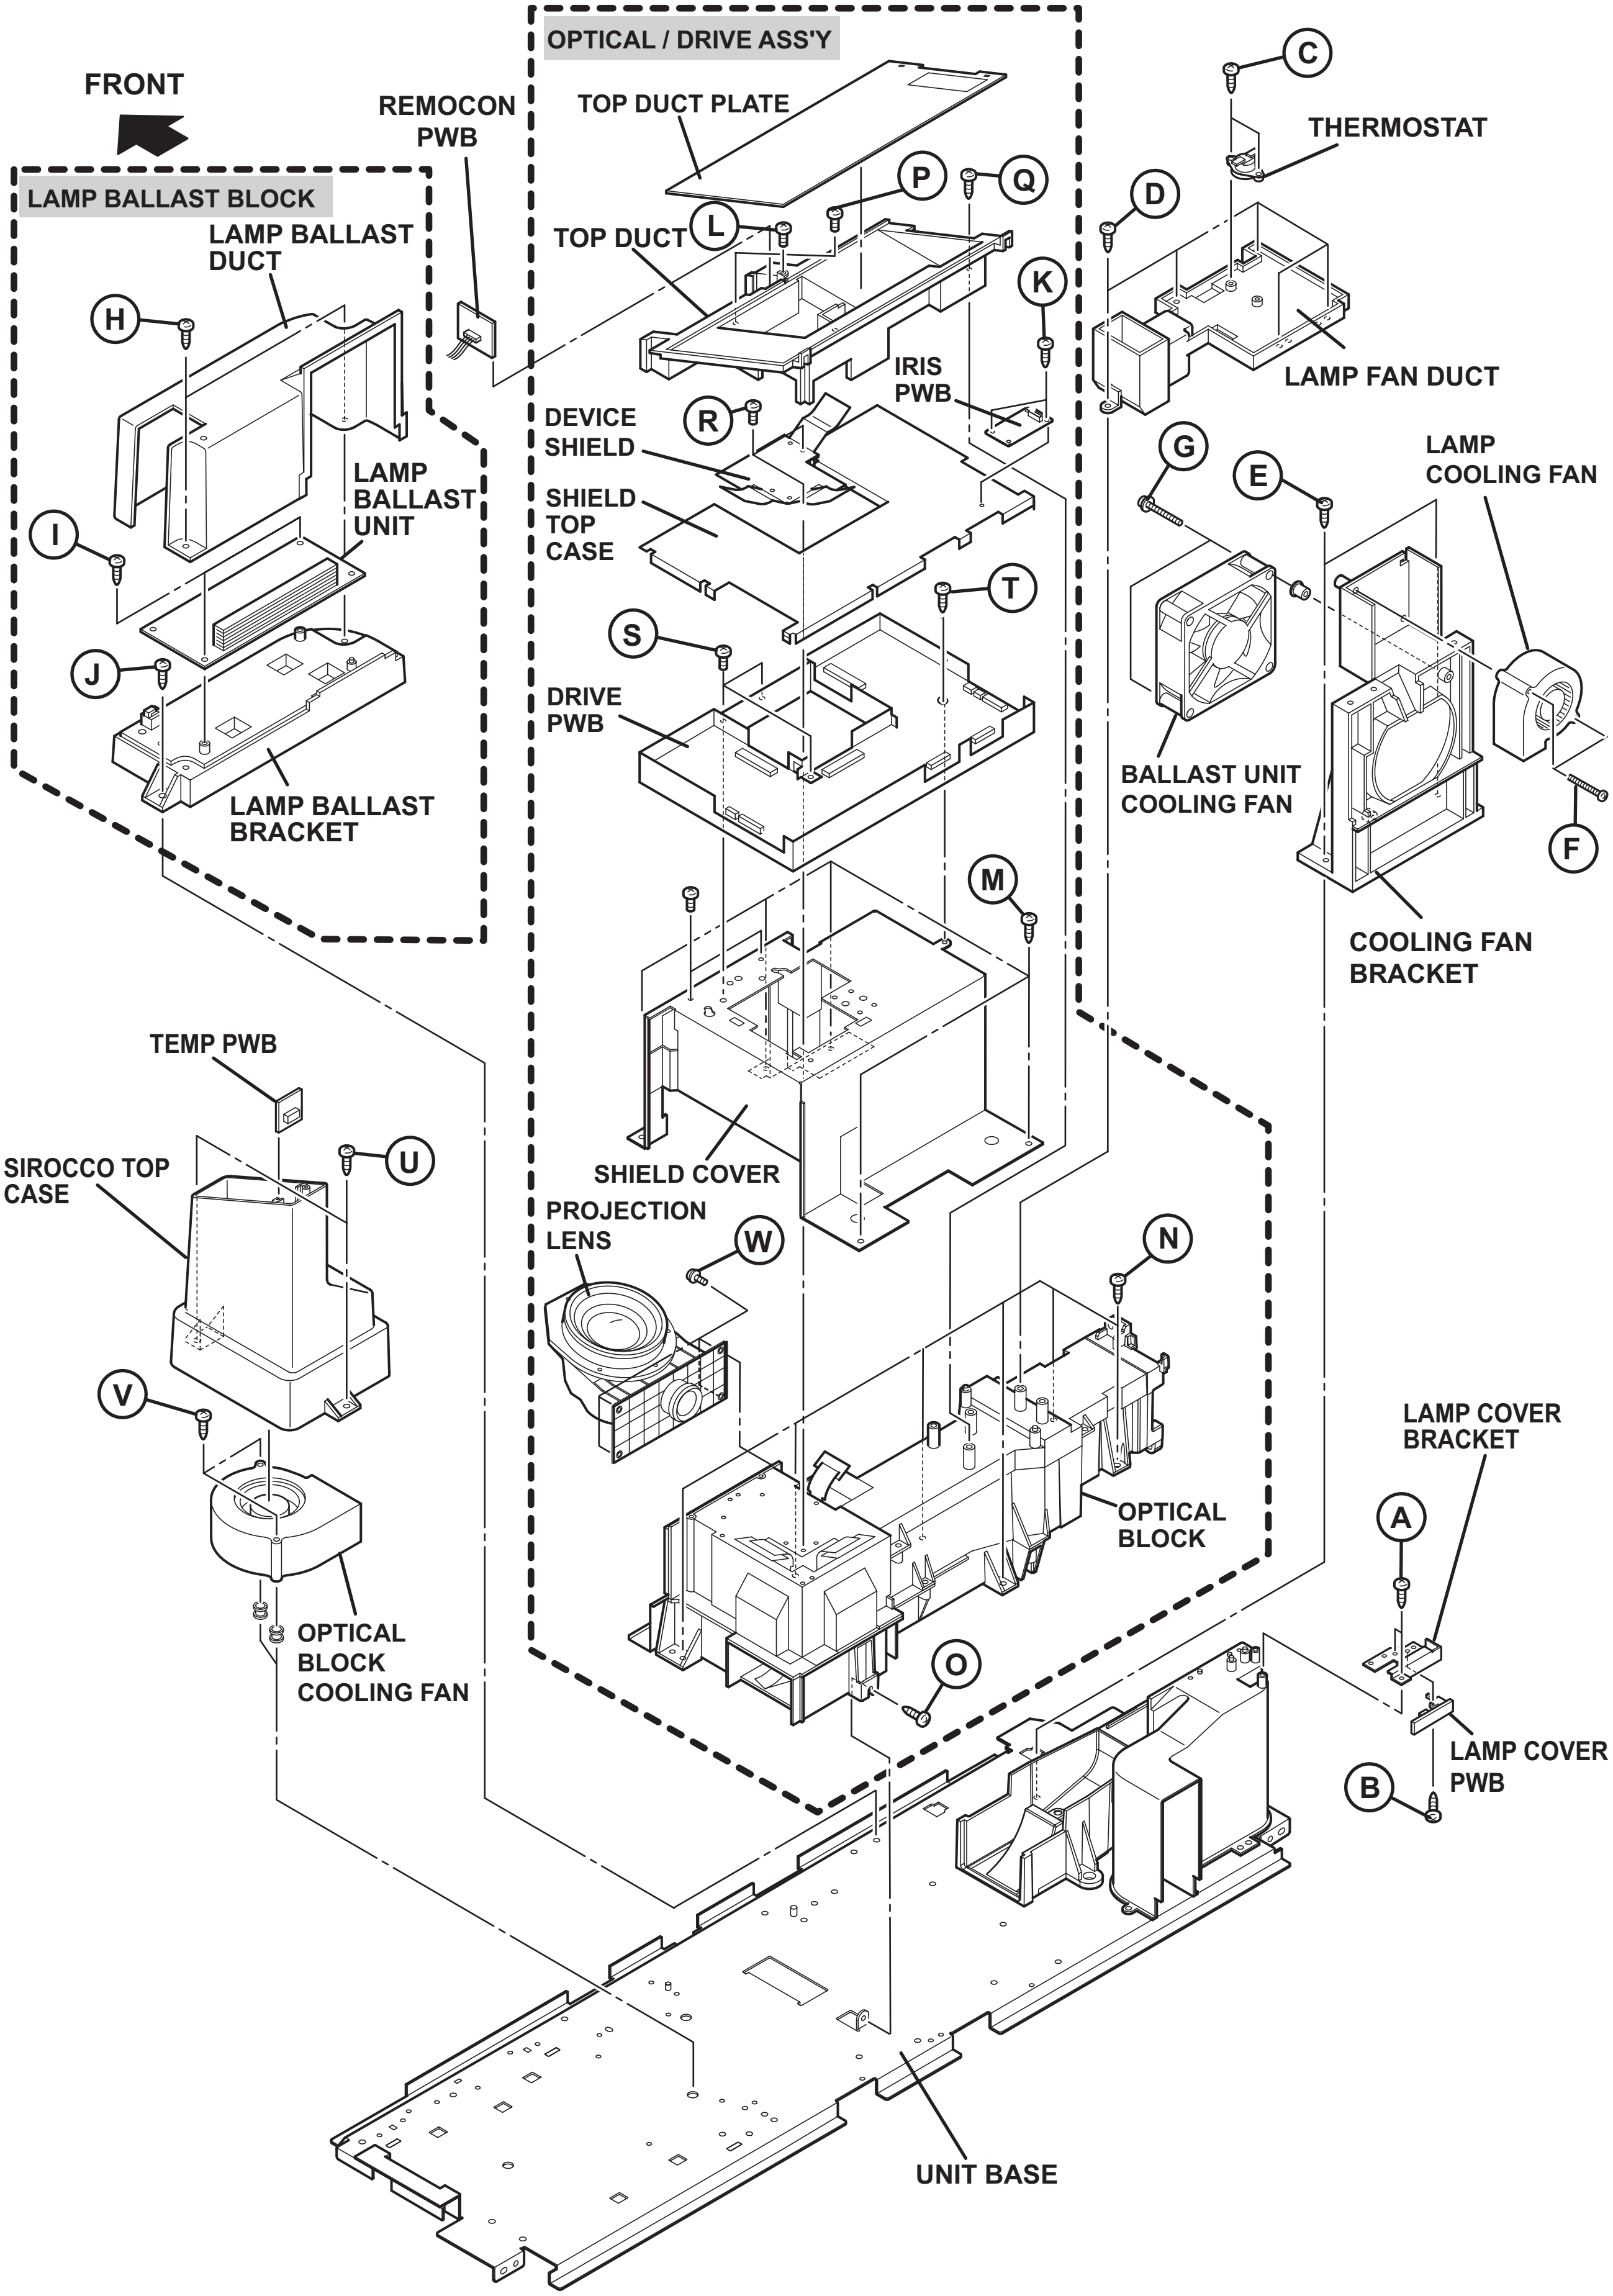
FRONT
LAMP BALLAST BLOCK
LAMP BALLAST DUCT
LAMP BALLAST UNIT
LAMP BALLAST BRACKET
H
I
J
REMOCON PWB
OPTICAL / DRIVE ASS'Y
TOP DUCT PLATE
TOP DUCT
L
P
Q
K
IRIS PWB
R
DEVICE SHIELD
SHIELD TOP CASE
S
T
DRIVE PWB
M
SHIELD COVER
PROJECTION LENS
W
N
OPTICAL BLOCK
O
C
THERMOSTAT
D
LAMP FAN DUCT
G
E
LAMP COOLING FAN
BALLAST UNIT COOLING FAN
F
COOLING FAN BRACKET
TEMP PWB
U
SIROCCO TOP CASE
V
OPTICAL BLOCK COOLING FAN
LAMP COVER BRACKET
A
LAMP COVER PWB
B
UNIT BASE

Fig.6

3.2 MEMORY IC REPLACEMENT

- This model uses the memory IC.
- This memory IC stores data for proper operation of the video and drive circuits.
- When replacing, be sure to use an IC containing this (initial value) data.

3.2.1 MEMORY IC TABLE

Simbol	Number of pins	Mounting PWB	Main content of data
IC3741	8-pin	DRIVE PWB	Adjustment and setting data (GAMMA, SHADING, etc.) of IC3701(DRIVE CPU) are memorized.
IC3742	8-pin	DRIVE PWB	Adjustment and setting data (GAMMA, SHADING, etc.) of IC3701(DRIVE CPU) are memorized.
IC7201	48-pin	DIGITAL PWB	Progaram(Video process) of IC6001(System CPU) is memorized.
IC7602	8-pin	DIGITAL PWB	Setting value of IC7601(MAIN CPU) is memorized.

3.2.2 MEMORY IC REPLACEMENT PROCEDURE

1. Power off
Switch off the power and disconnect the power plug from the AC outlet.

2. Replace the memory IC
Be sure to use the memory IC written with the initial setting values.

3. Power on
Connect the power plug to the AC outlet and switch on the power.

4. Receiving channel setting
Refer to the OPERATING INSTRUCTIONS and set the receive channels (Channels Preset) as described.

5. User setting
Check the user setting items according to the given in page later. Where these do not agree, refer to the OPERATING INSTRUCTIONS and set the items as described.

6. SERVICE MODE setting
Verify what to set in the SERVICE MODE, and set whatever is necessary (Fig.1). Refer to the SERVICE ADJUSTMENT for setting.

3.2.3 SERVICE MODE SETTING

■SERVICE MODE SCREEN

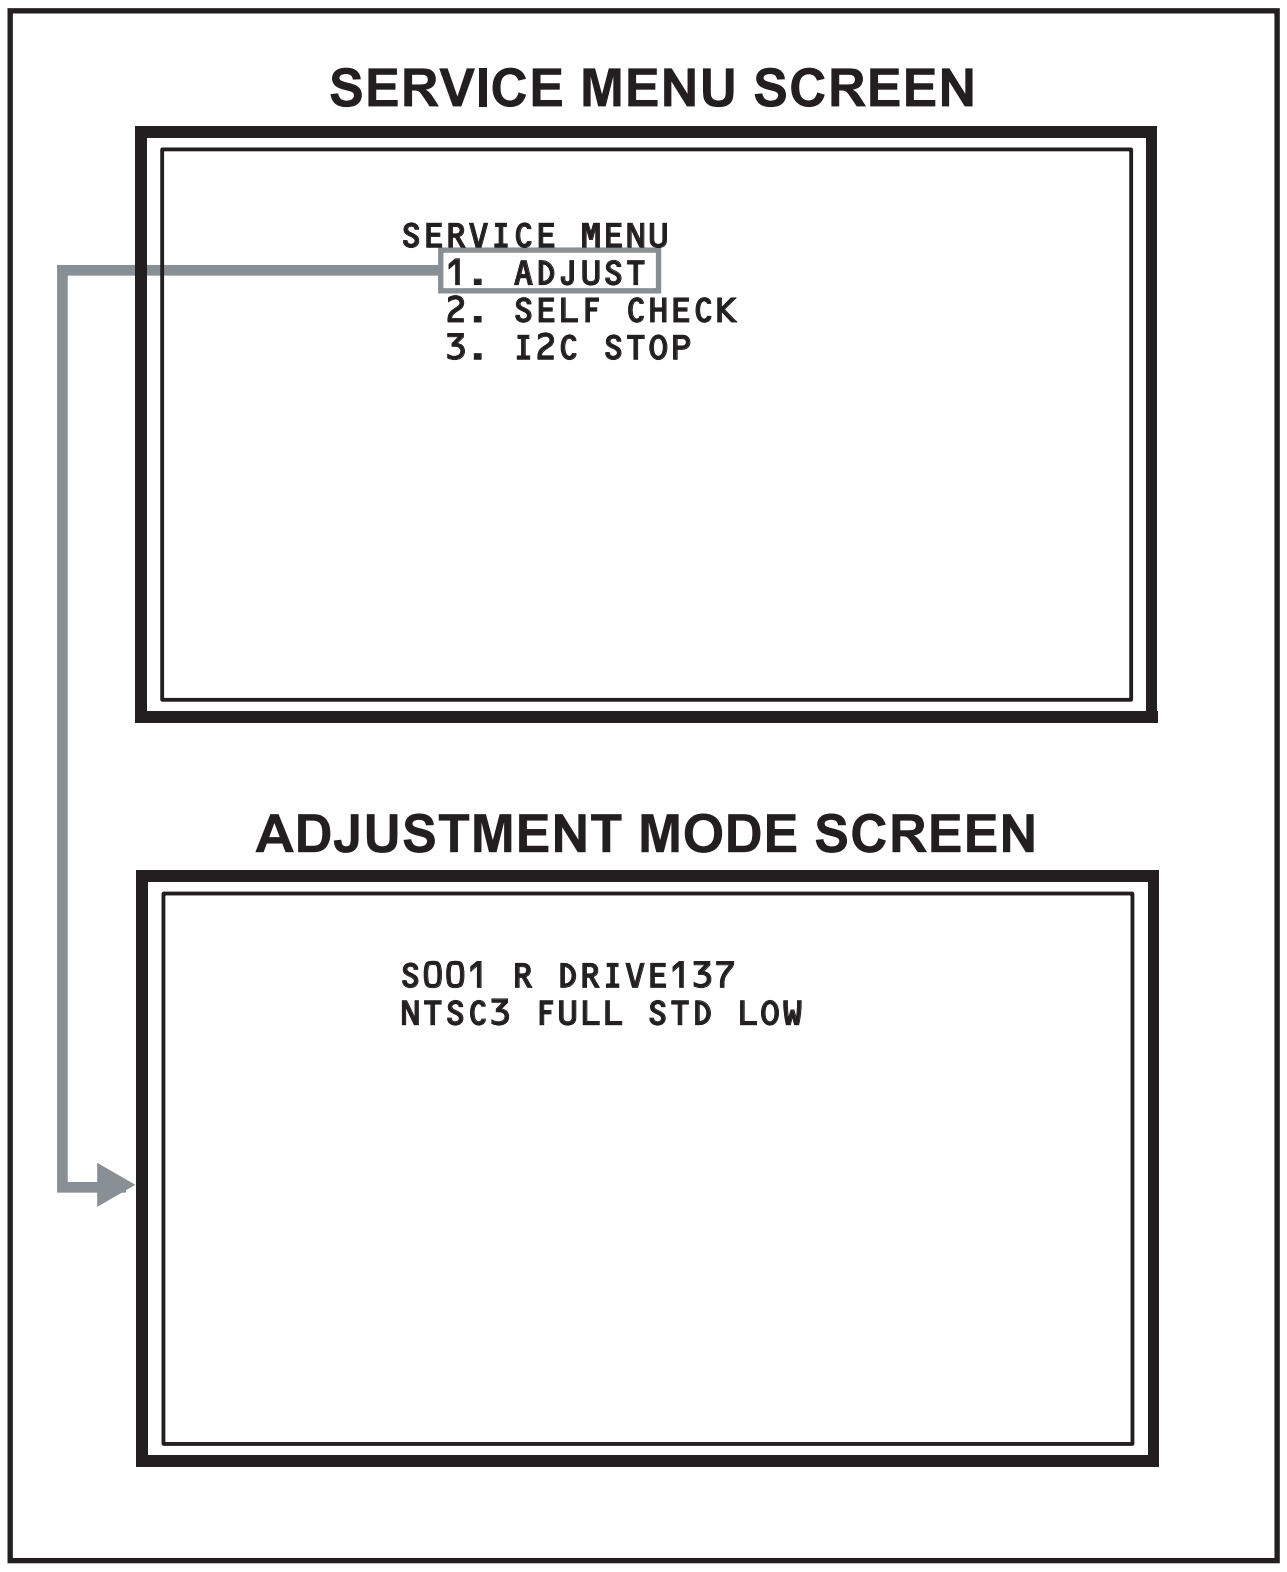

```
S001 R DRIVE137
NTSC3 FULL STD LOW
```

Fig.1

■SETTING ITEM

Setting items	Settings	Item No.
Video system setting	Adjust	S001 - S009
Audio system setting	Adjust	T001 - T003
Main CPU system setting	Fixed	M001 - M224
Drive system setting	Fixed	F001 - F002
(NOT USED)	Fixed	D001
(NOT USED)	Fixed	Z001

3.2.4 SETTINGS OF FACTORY SHIPMENT

3.2.4.1 BUTTON OPERATION

Setting item	Setting position
POWER	Off
CHANNEL	CABLE-02
VOLUME	10
INPUT	TV

3.2.4.2 REMOTE CONTROL DIRECT OPERATION

Setting item		Setting position
INPUT		TV
CHANNEL		CABLE-02
VOLUME		10
MUTING		OFF
DISPLAY		OFF
ASPECT	NTSC	Reguler
	HD	FULL
SLEEP TIMER		OFF
THEATER PRO		OFF
NATURAL CINEMA		AUTO
C.C.		OFF
MTS		STEREO
TWIN SOURCE	LEFT SIDE	CABLE-02
	RIGHT SIDE	INPUT-1
SOUND	A.H.S.+	OFF
	A.T.C.	ON
	SMART SOUND	OFF
	MaxxBass	OFF

3.2.4.3 REMOTE CONTROL MENU OPERATION

■ PICTURE ADJUST

Customers can adjust the picture setting of menu screen as their own like but the picture standard value during factory shipment is as below.

[NTSC MODE]

Setting item	DYNAMIC	STANDARD	GAME	THEATER
TINT	+15	00	-10	00
COLOR	00	00	00	00
PICTURE	00	00	00	00
BRIGHT	00	00	00	00
DETAIL	+05	00	00	00
COLOR TEMPERATURE	HIGH	HIGH	HIGH	HIGH
COLOR MANAGEMENT	ON	ON	ON	ON
DYNAMIC GAMMA	ON	ON	ON	ON
SMART PICTURE	OFF	ON	ON	ON
DIGITAL VNR	AUTO	AUTO	AUTO	AUTO
MPEG NR	OFF	OFF	OFF	OFF

[HD MODE]

Setting item	DYNAMIC	STANDARD	GAME	THEATER
PICTURE	+15	00	-10	00
BRIGHT	00	00	00	00
COLOR	00	00	00	00
TINT	00	00	00	00
DETAIL	+05	00	00	00
COLOR TEMPERATURE	HIGH	LOW	HIGH	LOW
COLOR MANAGEMENT	ON	ON	ON	ON
DYNAMIC GAMMA	ON	ON	ON	ON
SMART PICTURE	OFF	ON	ON	ON
DIGITAL VNR	AUTO	AUTO	AUTO	AUTO
MPEG NR	OFF	OFF	OFF	OFF

■ SOUND ADJUST

Setting item	Setting position
BASS	00
TREBLE	00
BALANCE	00
TURN ON VOLUME	Current
VOLUME LIMIT	50

■ CLOCK / TIMERS

Setting item	Setting position
ON / OFF TIMER	NO

■ INITIAL SETUP

Setting item	Setting position
DIGITAL-IN	AUTO
DIGITAL-IN1 AUDIO	AUTO
NOISE MUTING	ON
FRONT PANEL LOCK	OFF
V1 SMART INPUT	OFF
VIDEO INPUT LABEL	All blank
POSITION ADJUSTMENT	Center
POWER INDICATOR	HIGH
LANGUAGE	ENG.
CLOSED CAPTION	OFF
AUTO SHUT OFF	OFF
XDS ID	ON
AUTO TUNER SETUP	Unnecessary to set
V-CHIP	OFF

3.3 REPLACEMENT OF CHIP COMPONENT

3.3.1 CAUTIONS

(1) Avoid heating for more than 3 seconds.
(2) Do not rub the electrodes and the resist parts of the pattern.
(3) When removing a chip part, melt the solder adequately.
(4) Do not reuse a chip part after removing it.

3.3.2 SOLDERING IRON

(1) Use a high insulation soldering iron with a thin pointed end of it.
(2) A 30w soldering iron is recommended for easily removing parts.

3.3.3 REPLACEMENT STEPS

1. How to remove Chip parts

[Resistors, capacitors, etc.]

(1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.



(2) Shift with the tweezers and remove the chip part.



[Transistors, diodes, variable resistors, etc.]

(1) Apply extra solder to each lead.



(2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.



NOTE :

After removing the part, remove remaining solder from the pattern.

2. How to install Chip parts

[Resistors, capacitors, etc.]

(1) Apply solder to the pattern as indicated in the figure.



(2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.



[Transistors, diodes, variable resistors, etc.]

(1) Apply solder to the pattern as indicated in the figure.
(2) Grasp the chip part with tweezers and place it on the solder.
(3) First solder lead **A** as indicated in the figure.



(4) Then solder leads **B** and **C**.



SECTION 4
ADJUSTMENT

4.1 ADJUSTMENT PREPARATION

(1) **There are 2 ways of adjusting this TV : One is with the REMOTE CONTROL UNIT and the other is the conventional method using adjustment parts and components.**

(2) **The adjustment using the REMOTE CONTROL UNIT is made on the basis of the initial setting values. The setting values which adjust the screen to the optimum condition can be different from the initial setting values.**

(3) Make sure that connection is correctly made AC to AC power source.

(4) Turn on the power of the TV and measuring instruments for warning up for at least 30 minutes before starting adjustments.

(5) If the receive or input signal is not specified, use the most appropriate signal for adjustment.

(6) Never touch the parts (such as variable resistors, transformers and condensers) not shown in the adjustment items of this service adjustment.

4.2 PRESET SETTING BEFORE ADJUSTMENTS

Unless otherwise specified in the adjustment items, preset the following functions with the REMOTE CONTROL UNIT.

Setting item	Settings
VIDEO STATUS	STANDARD
Picture adjustments	00
COLOR TEMPERATURE	LOW
COLOR MANAGEMENT	ON
DYNAMIC GAMMA	ON
SMART PICTURE	OFF
DIGITAL VNR	OFF
MPEG NR	OFF
NATURAL CINEMA	AUTO
Sound adjustments	00
A.H.S.+	OFF
MaxxBass	OFF
SMART SOUND	OFF
ASPECT	FULL

4.3 MEASURING INSTRUMENT AND FIXTURES

- Oscilloscope
- Signal generator (Pattern generator)
  [NTSC / 525i / 525p / 750p / 1125i]
- TV audio multiplex signal generator
- Remote control unit

4.4 ADJUSTMENT ITEMS

■ **FOCUS**
- LENS FOCUS adjustment

■ **DRIVE CIRCUIT**
- DRIVE CONVERGENCE adjustment
- DRIVE CENTER POSITION adjustment

■ **VIDEO CIRCUIT**
- WHITE BALANCE (HIGHLIGHT) adjustment

■ **MTS CIRCUIT**
- MTS INPUT LEVEL adjustment
- MTS SEPARATION adjustment

4.5 BASIC OPERATION OF SERVICE MODE

4.5.1 HOW TO ENTER THE SERVICE MODE

(1) Set to **"0 minutes"** using the **[SLEEP TIMER]** key.

(2) While **"0 minutes"** is displayed, press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, then enter the SERVICE MODE (Fig.1)

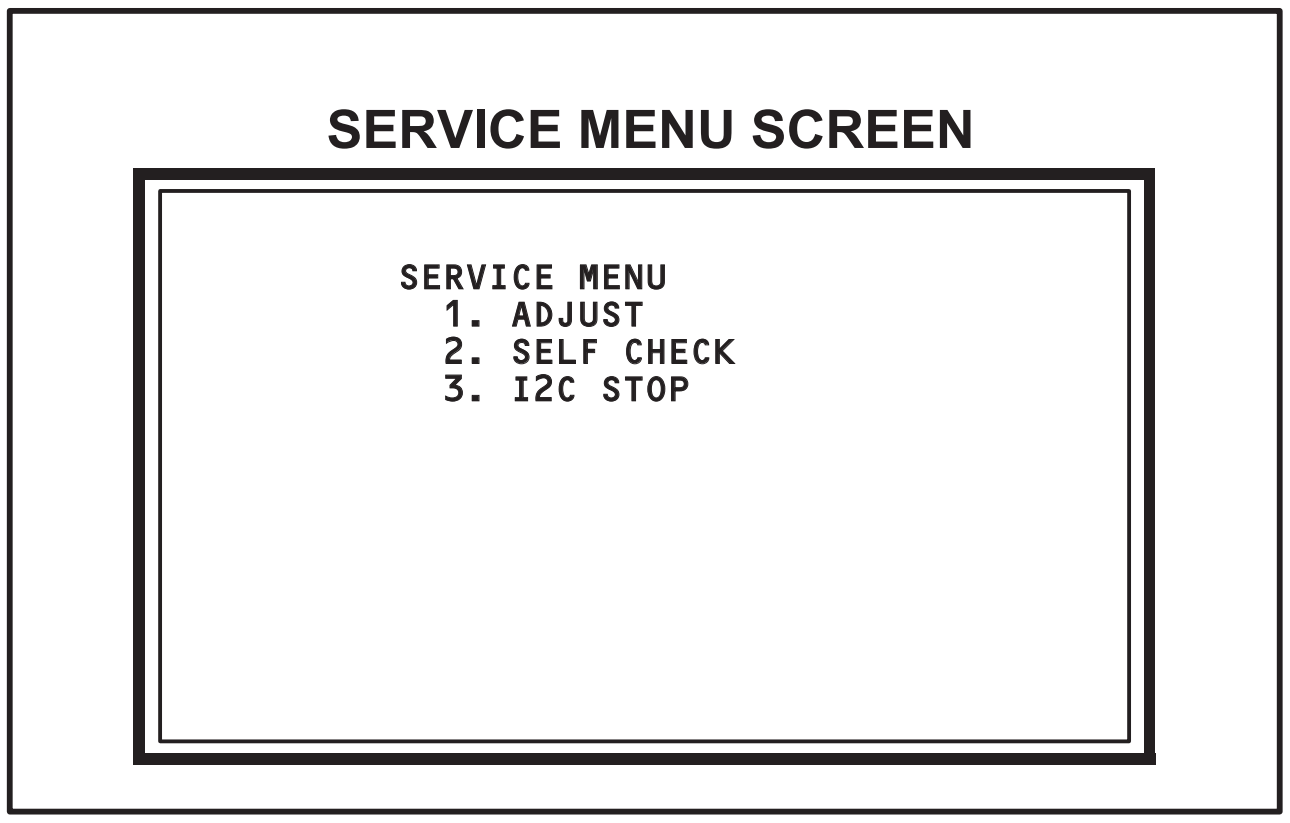

SERVICE MENU SCREEN

```
SERVICE MENU
  1. ADJUST
  2. SELF CHECK
  3. I2C STOP
```

Fig.1

NOTE:

- Before entering the SERVICE MODE, confirm that the setting of **TV/CATV** switch of the REMOTE CONTROL UNIT is at the "TV" side and the setting of **VCR/DVD** switch is at the "**VCR**" side. If the switches have not been properly set, you cannot enter the SERVICE MODE.
- When a number key other than the **[1]** or **[9]** keys is pressed in the SERVICE MENU SCREEN, the other relevant screen may be displayed.
  This is not used in the adjustment procedure. Press the **[MENU]** key to return to the SERVICE MENU SCREEN.

4.5.2 HOW TO EXIT THE SERVICE MODE

Press the **[BACK]** key to exit the Service mode.

4.5.3 SERVICE MODE SELECT KEY LOCATION

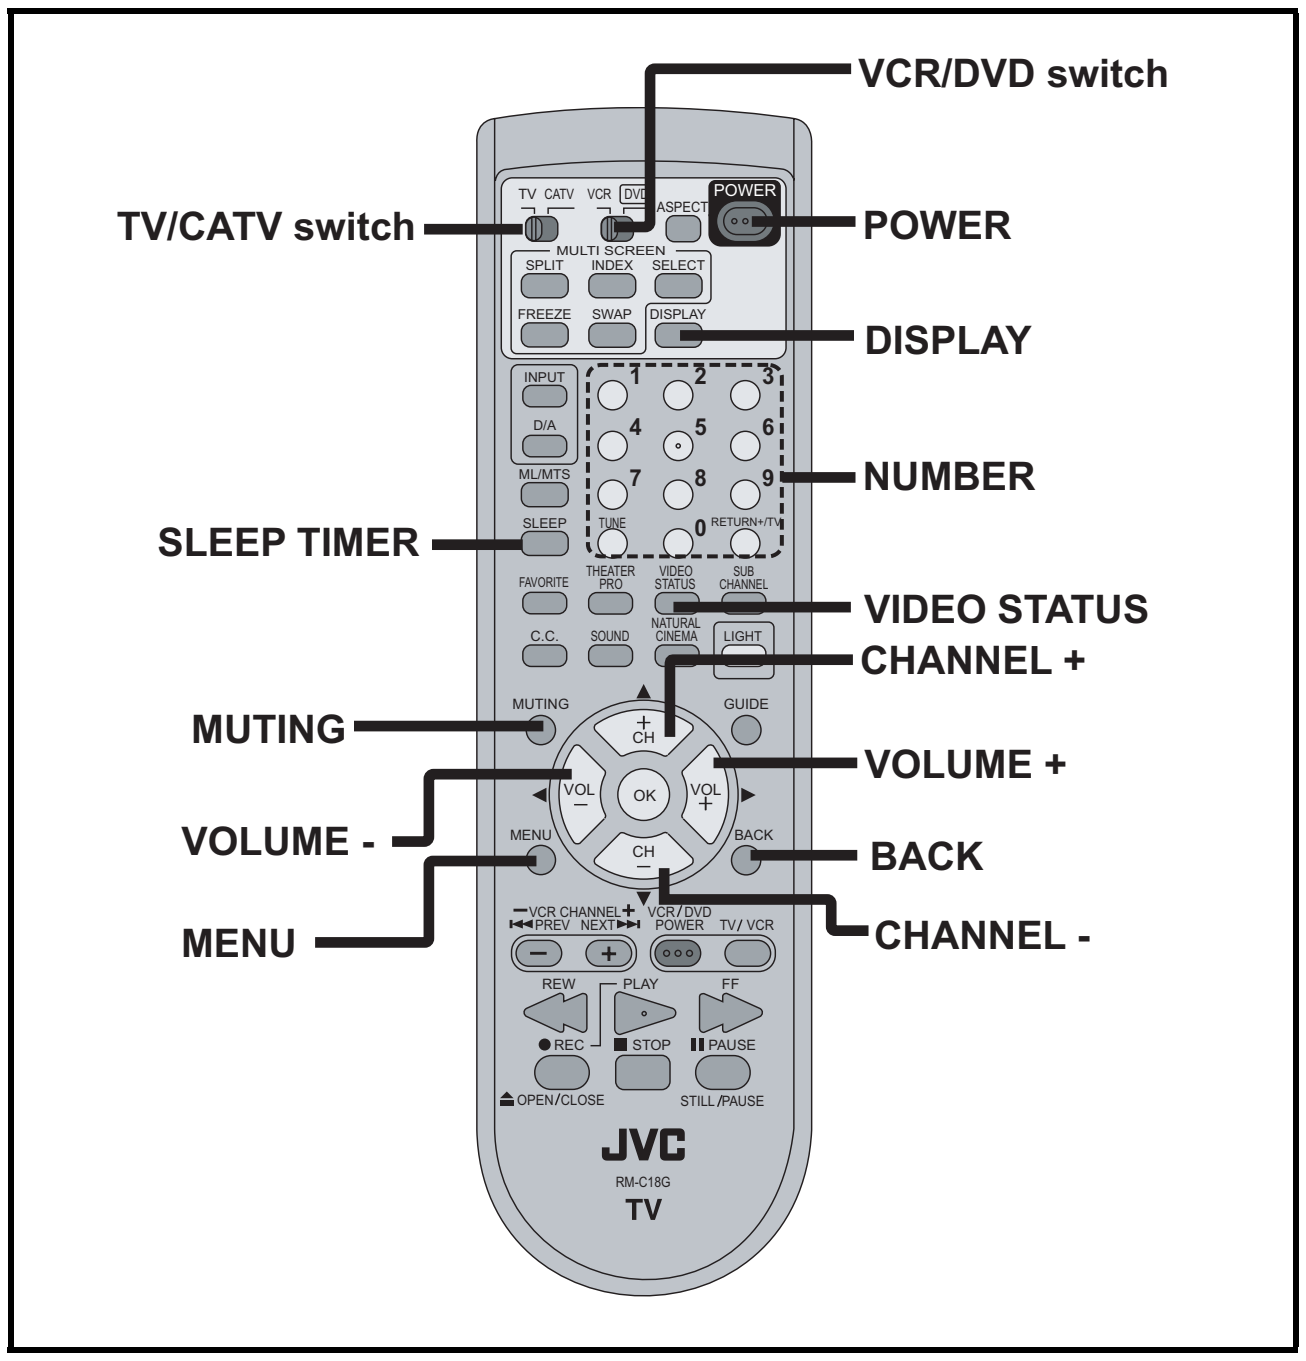
VCR/DVD switch
TV/CATV switch
POWER
DISPLAY
NUMBER
SLEEP TIMER
VIDEO STATUS
CHANNEL +
MUTING
VOLUME +
VOLUME -
BACK
MENU
CHANNEL -
JVC
RM-C18G
TV

4.5.4 ADJUSTMENT MODE

This mode is used to adjust the VIDEO CIRCUIT and the MTS CIRCUIT.

4.5.4.1 HOW TO ENTER THE ADJUSTMENT MODE

When the SERVICE MENU SCREEN of SERVICE MODE is displayed, press **[1]** key to enter the **ADJUSTMENT MODE (Fig.2)**.

4.5.4.2 DESCRIPTION OF STATUS DISPLAY OF ADJUSTMENT MODE

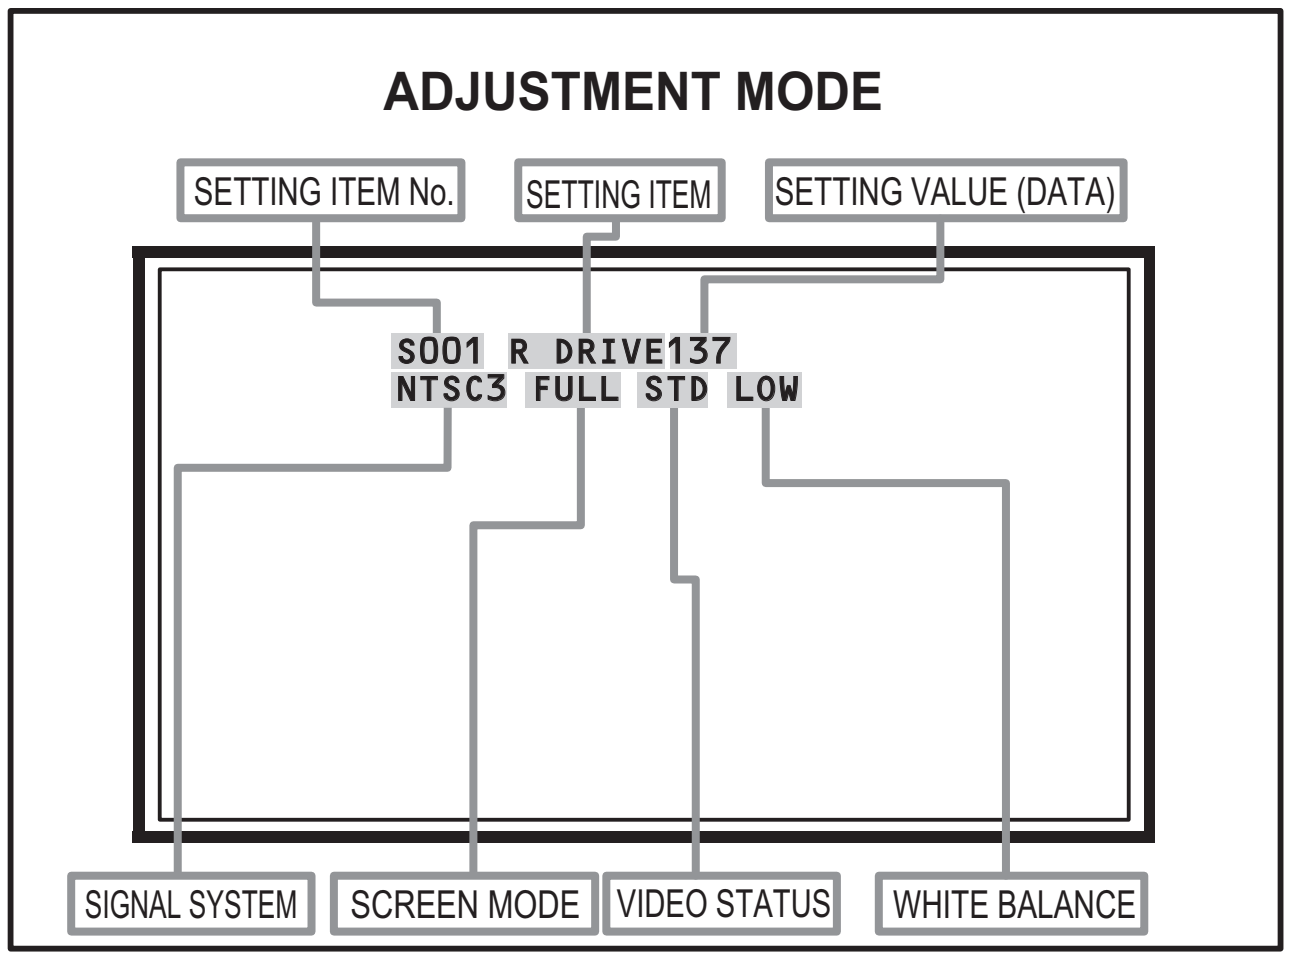

ADJUSTMENT MODE

```
S001 R DRIVE137
NTSC3 FULL STD LOW
```

SETTING ITEM No.
SETTING ITEM
SETTING VALUE (DATA)
SIGNAL SYSTEM
SCREEN MODE
VIDEO STATUS
WHITE BALANCE

Fig.2

(1) SIGNAL SYSTEM

The signal displayed on the screen is displayed.

NTSC3 : 525i (Composite / S-video input)
525I : 525i (Component input)
525P : 525p
1125I6 : 1125i
750P : 750p
PCVGA : PC (VGA)
PCXGA : PC (XGA)
H525I : HDMI 525i
H525P : HDMI 525p
H1125I6 : HDMI 1125i
H750P : HDMI 750p
D525I : ATSC 525i
D525P : ATSC 525p
D1125I6 : ATSC 1125i

(2) SCREEN MODE

State of the SCREEN SIZE or MULTI PICTURE is displayed.

SINGLE SCREEN

FULL : FULL
1609 : CINEMA, CINEMA ZOOM
PANO : PANORAMA, HD PANORAMA
REGU : REGULAR, SLIM

MULTI SCREEN

M2 : TWIN, FREEZE screen
M12 : INDEX screen

(3) VIDEO STATUS

STD	: STANDARD
DYN	: DYNAMIC
TH	: THEATER
GAME	: GAME

(4) WHITE BALANCE

HIGH	: HIGH
LOW	: LOW

(5) SETTING ITEM NAME

Setting item name are displayed. The setting item numbers to be displayed are listed below.

Item No.	Setting item
S001 - S009	Video system setting
T001 - T003	Audio system setting
M001 - M224	Main CPU system setting
F001 - F002	Drive system setting
D001	(NOT USED)
Z001	(NOT USED)

(6) SETTING ITEM NO.

Setting item numbers are displayed. For the setting item names to be displayed, refer to "Initial setting value of adjustment mode".

(7) SETTING VALUE (DATA)

The SETTING VALUE is displayed.

4.5.4.3 CHANGE AND MEMORY OF SETTING VALUE

■SELECTION OF SETTING ITEM

- **[CH+]** / **[CH-]** key.
  Change the setting items up/ down.

S001... ↔ T001... ↔ M001... ↔ F001... ↔ D001... ↔ Z001...

- **[SLEEP TIMER]** key.
  Switches to the next items.

S001 → T001 → M001... → F001... → D001 → Z001

■CHANGE OF SETTING VALUE (DATA)

- **[VOL+]** / **[VOL-]** key.
  Change the setting values up/down.

■MEMORY OF SETTING VALUE (DATA)

Changed setting value is memorized by pressing **[MUTING]** key.

4.5.5 RGB BOX PATTERN MODE

This mode is used to adjust the DRIVE CIRCUIT.

4.5.5.1 HOW TO ENTER THE RGB BOX PATTERN MODE

When the SERVICE MENU SCREEN of SERVICE MODE is displayed, press **[9]** key to enter the **RGB BOX PATTERN MODE (Fig3)**.

4.5.5.2 DESCRIPTION OF STATUS DISPLAY OF RGB BOX PATTERN MODE

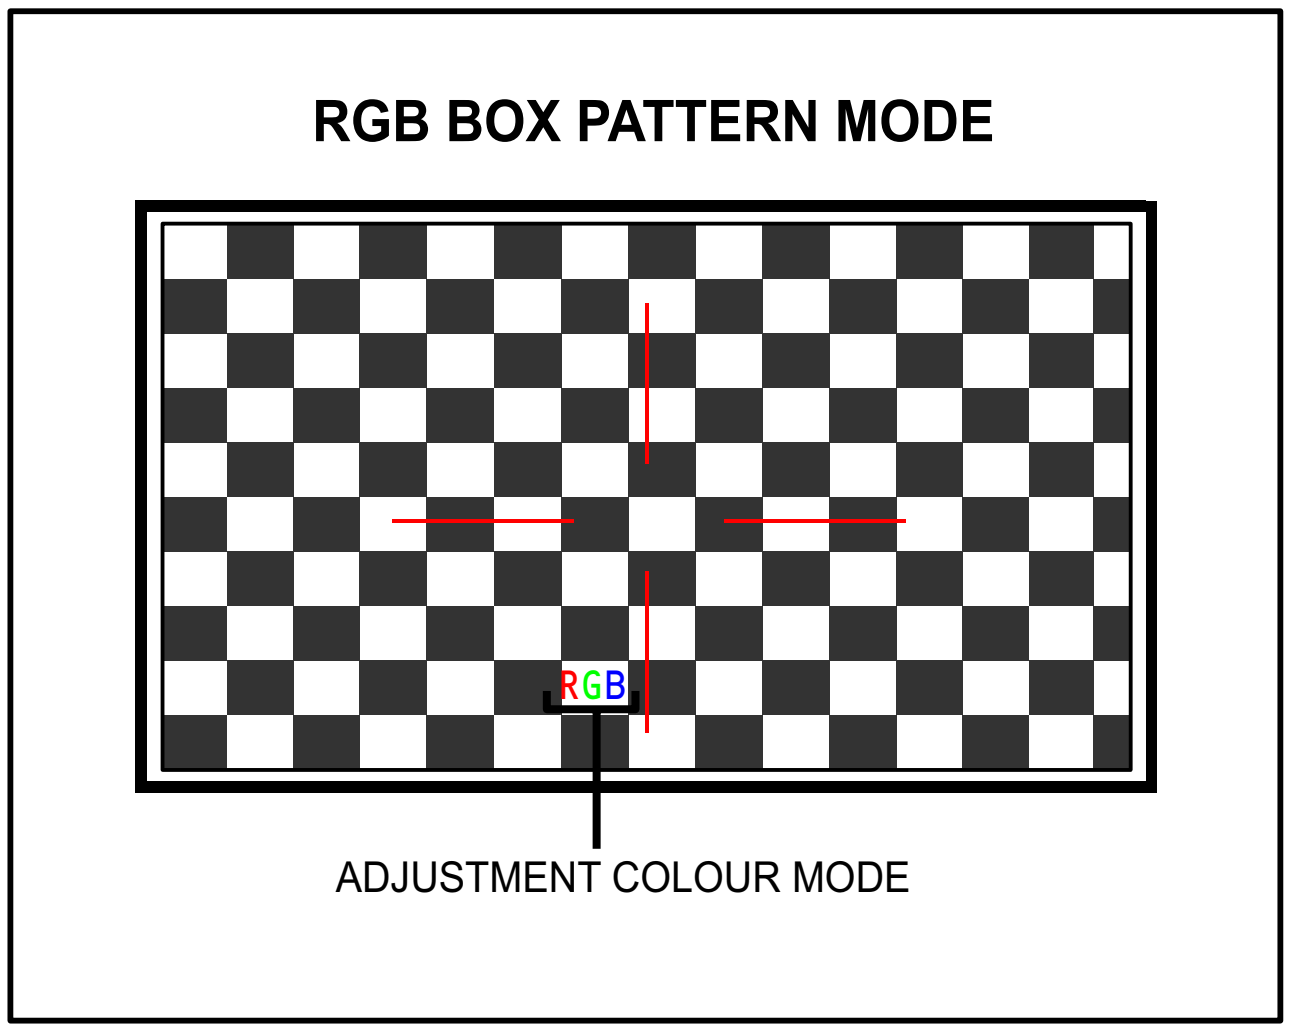

Fig.3

(1) RGB BOX PATTERN

The checkered pattern is displayed. White is a synthesis of RGB.

(2) ADJUSTMENT COLOR MODE

Presently selected ADJUSTMENT COLOR MODE is displayed.

■SELECTION OF SETTING ITEM

- **[CH+]** / **[CH-]** key.
  Move the selected RGB BOX PATTERN up/ down pixel by pixel.
- **[VOL+]** / **[VOL-]** key.
  Move the selected RGB BOX PATTERN left/ right pixel by pixel.
- **[SLEEP TIMER]** key.
  Adjusts the data reset.
- **[DISPLAY]** key.
  Adjusts the selected COLOR BOX PATTERN.

R → B → RGB

- **[BACK]** key.
  Returns to the SERVICE MENU SCREEN from the RGB BOX PATTERN MODE.

■MEMORY OF SETTING VALUE (DATA)

With the RGB BOX PATTERN MODE, the changed date is written in the MEMORY instantly.

4.6 INITIAL SETTING VALUES IN THE SERVICE MODE

- Perform fine-tuning based on the "initial values" using the remote control when in the Service mode.
- The "initial values" serve only as an indication rough standard and therefore the values with which optimal display can be achieved may be different from the default values. But, don't change the values that are not written in "ADJUSTMENT PROCEDURE". They are fixed values.

4.6.1 VIDEO SYSTEM SETTING

Item No.	Item	Variable range	Setting value
S001	R DRIVE	000 - 255	136
S002	G DRIVE	000 - 255	138
S003	B DRIVE	000 - 255	138
S004	RESREV	000 - 255	000
S005	RESREV	000 - 255	002
S006	RESREV	000 - 255	002
S007	RESREV	000 - 255	002
S008	RESREV	000 - 255	002
S009	RESREV	000 - 255	002

4.6.2 AUDIO SYSTEM SETTING

Item No.	Item	Variable range	Setting value
T001	INPLEVEL	000 - 015	006
T002	LOWSEPA	000 - 063	020
T003	HIGHSEPA	000 - 063	038

4.6.3 MAIN CPU SYSTEM SETTING (Fixed values)

Item No.	Item	Variable range	Setting value
M001	1E00	00 - FF	00
M002	1E01	00 - FF	00
M003	1E02	00 - FF	0A
M004	1E03	00 - FF	3B
M005	1E04	00 - FF	10
M006	1E05	00 - FF	00
M007	1E06	00 - FF	00
M008	1E07	00 - FF	00
M009	1E08	00 - FF	10
M010	1E09	00 - FF	00
M011	1E0A	00 - FF	05
M012	1E0B	00 - FF	00
M013	1E0C	00 - FF	01
M014	1E0D	00 - FF	00
M015	1E0E	00 - FF	00
M016	1E0F	00 - FF	00
M017	1E10	00 - FF	00
M018	1E11	00 - FF	00
M019	1E12	00 - FF	00
M020	1E13	00 - FF	01
M021	1E14	00 - FF	01
M022	1E15	00 - FF	00
M023	1E16	00 - FF	00
M024	1E17	00 - FF	00
M025	1E18	00 - FF	00
M026	1E19	00 - FF	00
M027	1E1A	00 - FF	00
M028	1E1B	00 - FF	00
M029	1E1C	00 - FF	00
M030	1E1D	00 - FF	00
M031	1E1E	00 - FF	00
M032	1E1F	00 - FF	00
M033	1E20	00 - FF	00
M034	1E21	00 - FF	00
M035	1E22	00 - FF	00
M036	1E23	00 - FF	00
M037	1E24	00 - FF	00
M038	1E25	00 - FF	00
M039	1E26	00 - FF	00
M040	1E27	00 - FF	00
M041	1E28	00 - FF	00
M042	1E29	00 - FF	00
M043	1E2A	00 - FF	00
M044	1E2B	00 - FF	00
M045	1E2C	00 - FF	00
M046	1E2D	00 - FF	00
M047	1E2E	00 - FF	00
M048	1E2F	00 - FF	00
M049	1E30	00 - FF	00
M050	1E31	00 - FF	00
M051	1E32	00 - FF	00
M052	1E33	00 - FF	00
M053	1E34	00 - FF	00
M054	1E35	00 - FF	00
M055	1E36	00 - FF	02
M056	1E37	00 - FF	00
M057	1E38	00 - FF	01
M058	1E39	00 - FF	06
M059	1E3A	00 - FF	10
M060	1E3B	00 - FF	83
M061	1E3C	00 - FF	00
M062	1E3D	00 - FF	00
M063	1E3E	00 - FF	00
M064	1E3F	00 - FF	00
M065	1E40	00 - FF	00
M066	1E41	00 - FF	00
M067	1E42	00 - FF	02
M068	1E43	00 - FF	03
M069	1E44	00 - FF	04
M070	1E45	00 - FF	03
M071	1E46	00 - FF	02
M072	1E47	00 - FF	00

Item No.	Item	Variable range	Setting value
M073	1E48	00 - FF	00
M074	1E49	00 - FF	00
M075	1E4A	00 - FF	00
M076	1E4B	00 - FF	00
M077	1E4C	00 - FF	00
M078	1E4D	00 - FF	00
M079	1E4E	00 - FF	00
M080	1E4F	00 - FF	00
M081	1E50	00 - FF	00
M082	1E51	00 - FF	00
M083	1E52	00 - FF	00
M084	1E53	00 - FF	00
M085	1E54	00 - FF	00
M086	1E55	00 - FF	00
M087	1E56	00 - FF	00
M088	1E57	00 - FF	00
M089	1E58	00 - FF	00
M090	1E59	00 - FF	00
M091	1E5A	00 - FF	00
M092	1E5B	00 - FF	00
M093	1E5C	00 - FF	01
M094	1E5D	00 - FF	00
M095	1E5E	00 - FF	00
M096	1E5F	00 - FF	00
M097	1E60	00 - FF	00
M098	1E61	00 - FF	00
M099	1E62	00 - FF	00
M100	1E63	00 - FF	00
M101	1E64	00 - FF	00
M102	1E65	00 - FF	00
M103	1E66	00 - FF	00
M104	1E67	00 - FF	00
M105	1E68	00 - FF	00
M106	1E69	00 - FF	00
M107	1E6A	00 - FF	02
M108	1E6B	00 - FF	00
M109	1E6C	00 - FF	00
M110	1E6D	00 - FF	00
M111	1E6E	00 - FF	00
M112	1E6F	00 - FF	00
M113	1E70	00 - FF	00
M114	1E71	00 - FF	00
M115	1E72	00 - FF	00
M116	1E73	00 - FF	00
M117	1E74	00 - FF	00
M118	1E75	00 - FF	00
M119	1E76	00 - FF	00
M120	1E77	00 - FF	00
M121	1E78	00 - FF	03
M122	1E79	00 - FF	00

Item No.	Item	Variable range	Setting value
M123	1E7A	00 - FF	00
M124	1E7B	00 - FF	00
M125	1E7C	00 - FF	00
M126	1E7D	00 - FF	00
M127	1E7E	00 - FF	01
M128	1E7F	00 - FF	00
M129	1E80	00 - FF	01
M130	1E81	00 - FF	00
M131	1E82	00 - FF	01
M132	1E83	00 - FF	00
M133	1E84	00 - FF	00
M134	1E85	00 - FF	00
M135	1E86	00 - FF	00
M136	1E87	00 - FF	00
M137	1E88	00 - FF	00
M138	1E89	00 - FF	00
M139	1E8A	00 - FF	00
M140	1E8B	00 - FF	00
M141	1E8C	00 - FF	00
M142	1E8D	00 - FF	00
M143	1E8E	00 - FF	00
M144	1E8F	00 - FF	00
M145	1E90	00 - FF	00
M146	1E91	00 - FF	00
M147	1E92	00 - FF	00
M148	1E93	00 - FF	00
M149	1E94	00 - FF	00
M150	1E95	00 - FF	00
M151	1E96	00 - FF	00
M152	1E97	00 - FF	00
M153	1E98	00 - FF	00
M154	1E99	00 - FF	00
M155	1E9A	00 - FF	01
M156	1E9B	00 - FF	00
M157	1E9C	00 - FF	03
M158	1E9D	00 - FF	00
M159	1E9E	00 - FF	00
M160	1E9F	00 - FF	00
M161	1EA0	00 - FF	00
M162	1EA1	00 - FF	00
M163	1EA2	00 - FF	01
M164	1EA3	00 - FF	00
M165	1EA4	00 - FF	00
M166	1EA5	00 - FF	00
M167	1EA6	00 - FF	00
M168	1EA7	00 - FF	00
M169	1EA8	00 - FF	00
M170	1EA9	00 - FF	00
M171	1EAA	00 - FF	00
M172	1EAB	00 - FF	00

Item No.	Item	Variable range	Setting value
M173	1EAC	00 - FF	09
M174	1EAD	00 - FF	00
M175	1EAE	00 - FF	00
M176	1EAF	00 - FF	00
M177	1EB0	00 - FF	0A
M178	1EB1	00 - FF	00
M179	1EB2	00 - FF	01
M180	1EB3	00 - FF	00
M181	1EB4	00 - FF	00
M182	1EB5	00 - FF	00
M183	1EB6	00 - FF	00
M184	1EB7	00 - FF	00
M185	1EB8	00 - FF	00
M186	1EB9	00 - FF	00
M187	1EBA	00 - FF	00
M188	1EBB	00 - FF	00
M189	1EBC	00 - FF	00
M190	1EBD	00 - FF	00
M191	1EBE	00 - FF	00
M192	1EBF	00 - FF	00
M193	1EC0	00 - FF	00
M194	1EC1	00 - FF	00
M195	1EC2	00 - FF	00
M196	1EC3	00 - FF	00
M197	1EC4	00 - FF	00
M198	1EC5	00 - FF	00
M199	1EC6	00 - FF	00
M200	1EC7	00 - FF	00
M201	1EC8	00 - FF	00
M202	1EC9	00 - FF	00
M203	1ECA	00 - FF	00
M204	1ECB	00 - FF	00
M205	1ECC	00 - FF	02
M206	1ECD	00 - FF	00
M207	1ECE	00 - FF	00
M208	1ECF	00 - FF	00
M209	1ED0	00 - FF	00
M210	1ED1	00 - FF	00
M211	1ED2	00 - FF	00
M212	1ED3	00 - FF	00
M213	1ED4	00 - FF	00
M214	1ED5	00 - FF	FF
M215	1ED6	00 - FF	00
M216	1ED7	00 - FF	00
M217	1ED8	00 - FF	00
M218	1ED9	00 - FF	00
M219	1EDA	00 - FF	00
M220	1EDB	00 - FF	00
M221	1EDC	00 - FF	00
M222	1EDD	00 - FF	00
M223	1EDE	00 - FF	00
M224	1EDF	00 - FF	00

4.6.4 DRIVE SYSTEM SETTING (Fixed values)

Item No.	Item	Variable range	Setting value
F001	DD	000 - 001	000
F002	RAM REF	000 - 001	000

4.6.5 NOT USED (Fixed values)

Item No.	Item	Variable range	Setting value
D001	RESREV	000 - 255	002

4.6.6 NOT USED (Fixed values)

Item No.	Item	Variable range	Setting value
Z001	RESREV	000 - 255	002

4.7 ADJUSTMENT PROCEDURE

4.7.1 FOCUS

Item	Measuring instrument	Test point	Adjustment part	Description
LENS FOCUS	Hexagon wrench (2.5mm)		FOCUS knob [PROJECTION LENS]	(1) Remove the SPEAKER GRILL and CENTER PANEL. (2) Display the MENU screen. (3) Loosen the focus lock screw. (4) Adjust the **FOCUS knob** so that the center screen may become the best focus. (5) Fix the focus lock screw by using the Hexagon wrench. • On this occasion, hold the FOCUS knob with your left hand. (6) Confirm the whole focus of the best screen. (7) Install the CENTER PANEL and SPEAKER GRILL.
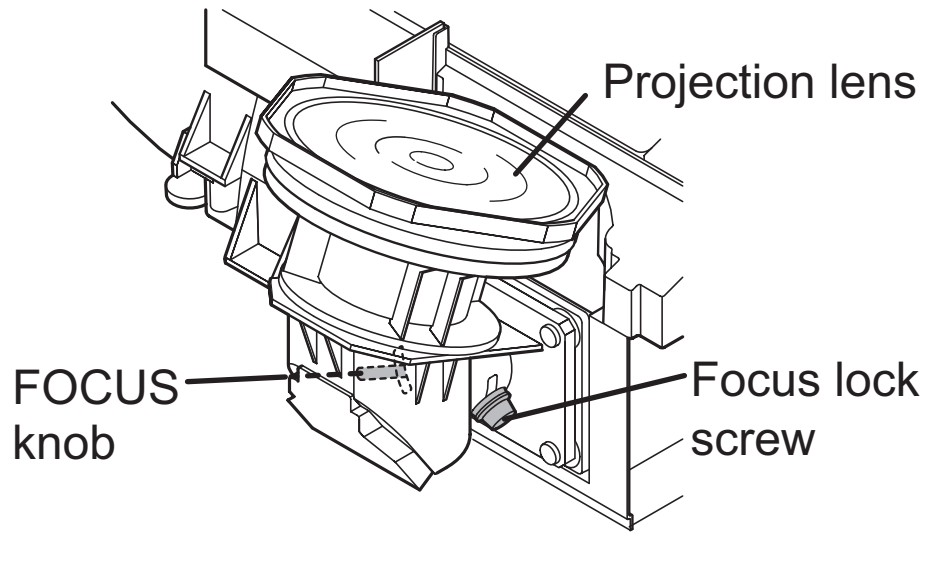				

4.7.2 DRIVE CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
DRIVE CONVERGENCE 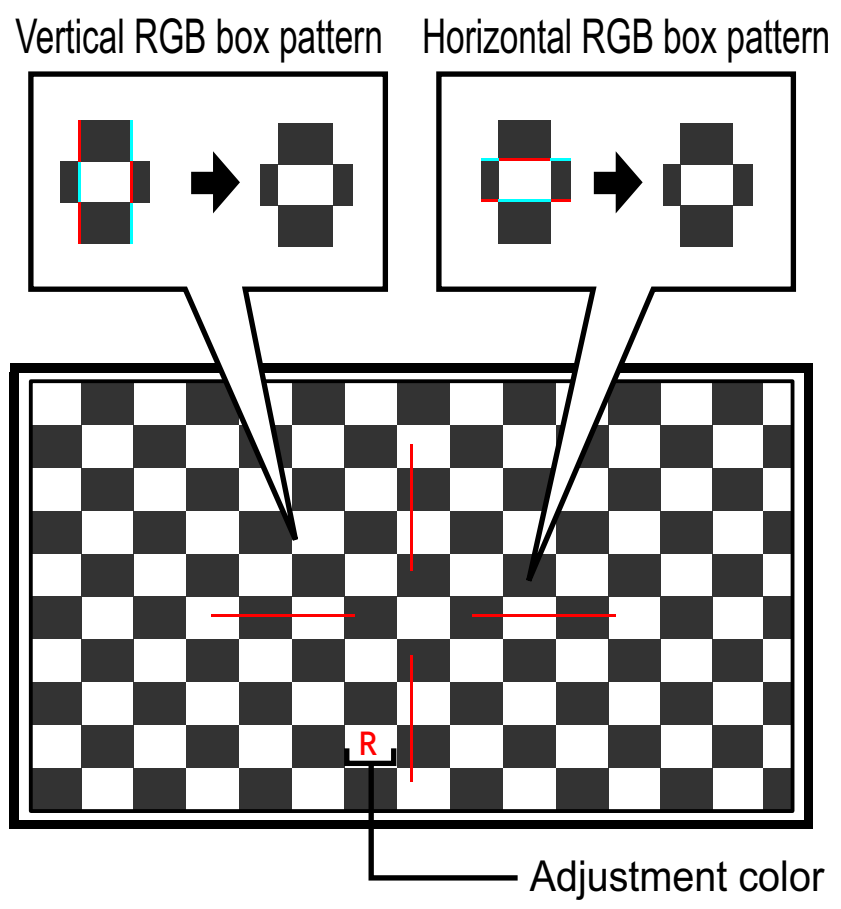 Vertical RGB box pattern Horizontal RGB box pattern R Adjustment color	Remote control unit		[9.RGB BOX PATTERN]	(1) Set to **"0 minutes"** using the **[SLEEP TIMER]** key. (2) Press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, to enter the SERVICE MODE. (3) Press the **[9]** key, to select "**RGB BOX PATTERN MODE**" from the SERVICE MODE. (4) Set the adjustment color mode to "R" to set the red color adjustment mode. (5) At Horizontal RGB box pattern, adjust the top edge position as same or less than 0.5 pixel hight as green. (6) At Vertical RGB box pattern, adjust the right edge position as same or less than 0.5 pixel hight as green. (7) Set the adjustment color mode to "B" to set the blue color adjustment mode. (8) At Horizontal RGB box pattern, adjust the top edge position as same or less than 0.5 pixel hight as green. (9) At Vertical RGB box pattern, adjust the right edge position as same or less than 0.5 pixel hight as green. (10) Check to see that the cross pattern is white. If the cross pattern is not white, repeat the step 4. to 9. as abobe. **NOTE:** • Green is a fixed. (It can not be removed.) • With this adjustment mode, the changed data is written in the MEMORY instantly.
DRIVE CENTER POSITION 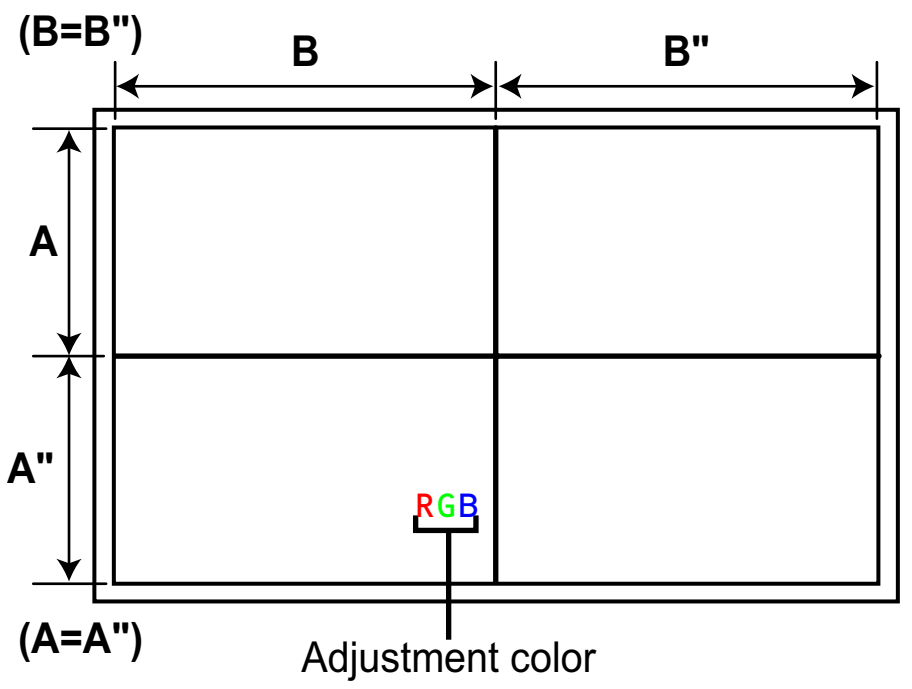 (B=B") B B" A A" (A=A") RGB Adjustment color	Remote control unit Signal generator		[9.RGB BOX PATTERN]	(1) Receive a center cross (or crosshatch) pattern. (2) Set to **"0 minutes"** using the **[SLEEP TIMER]** key. (3) Press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, to enter the SERVICE MODE. (4) Press the **[9]** key, to select "**RGB BOX PATTERN MODE**" from the SERVICE MODE. (5) Set the adjustment color mode to "RGB" to set the display position adjustment mode. (6) Adjust the top and the bottom width to make **A** and **A"** even. (7) Adjust the left and the right width to make **B** and **B"** even. **NOTE:** • With this adjustment mode, the changed data is written in the MEMORY instantly.

4.7.3 VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE (HIGHLIGHT)	Remote control unit Signal generator		[1.ADJUST] S001: R DRIVE (Red drive) S002: G DRIVE (Green drive) S003: B DRIVE (Blue drive)	(1) Receive a NTSC 75% all white pattern. (2) Set "VIDEO STATUS" to **"STANDARD"**. (3) Set "ASPECT" to **"FULL"**. (4) Select "COLOR TEMPERATURE" to **"LOW"**. (5) Select **"1.ADJUST"** from the SERVICE MODE. (6) Adjust to keep one of **< S001 >** (Red drive), **< S002 >** (Green drive) or **< S003 >** (Blue drive) unchanged, then lower the other two so that the all-white screen is equally white throughout. **NOTE:** Set one or more of **< S001 >**, **< S002 >**, and **< S003 >** to **"138"**. (7) Check that white balance is properly tracked from low light to high light. If the white balance tracking is deviated, adjust to correct it. (8) Press the **[MUTING]** key to memoirze the set value.

4.7.4 MTS CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
MTS INPUT LEVEL	Remote control unit		[1.ADJUST] T001: IN LEVEL	(1) Receive the any broadcast. (2) Select **"1.ADJUST"** from the SERVICE MODE. (3) Verify that the **< T001 >** (IN LEVEL) is set at its initial setting value. (4) Press the **[MUTING]** key to memorize the set value.
MTS SEPARATION	TV audio multiplex signal generator Oscilloscope Remote control unit	L OUT R OUT	[1.ADJUST] T002: LOW SEP T003: HI SEP	(1) Input the stereo L signal (300Hz) from the TV audio multiplex signal generator to the antenna terminal. (2) Connect an oscilloscope to **L OUT** pin of the **AUDIO OUT**, and display one cycle portion of the 300Hz signal. (3) Change the connection of the oscilloscope to **R OUT** pin of the **AUDIO OUT**, and enlarge the voltage axis. (4) Select **"1.ADJUST"** from the SERVICE MODE. (5) Set the initial setting value of the **< T002 >** (LOW SEP). (6) Adjust the **< T002 >** so that the stroke element of the 300Hz signal will become minimum. (7) Change the signal to 3kHz, and similarly adjust the **< T003>** (HI SEP). (8) Press the **[MUTING]** key to memorize the set value.
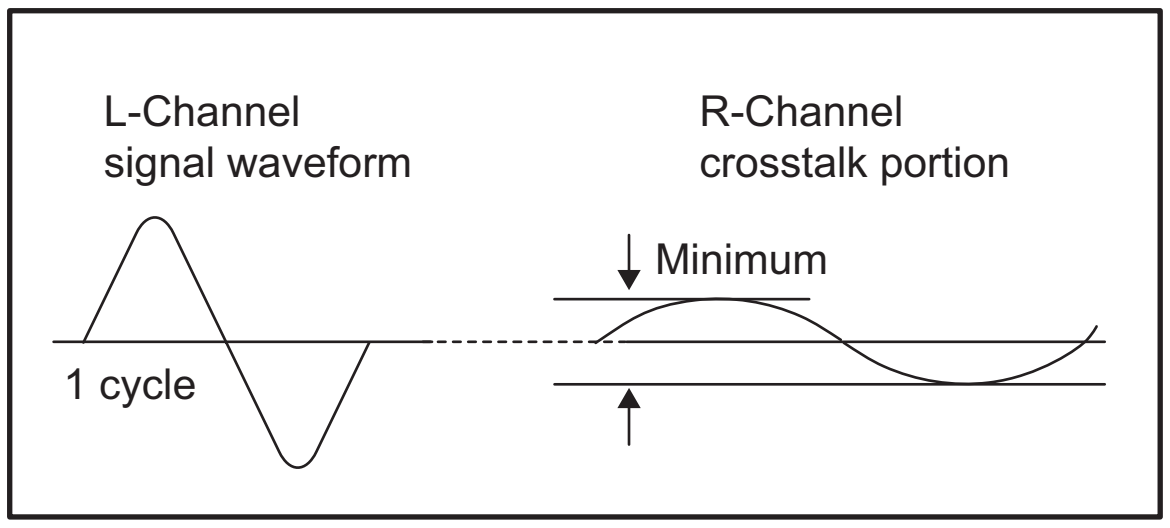				

SECTION 5
TROUBLESHOOTING

5.1 SELF CHECK FEATURE

5.1.1 OUTLINE

This unit comes with the "Self check" feature, which checks the operational state of the circuit and displays/saves it during failure.Diagnosis is performed when power is turned on, and information input to the main microcomputer is monitored at all time.Diagnosis is displayed in 2 ways via screen display and LED flashes. Failure detection is based on input state of I^{2}C bus and the various control lines connected to the main microcomputer.

5.1.2 HOW TO ENTER THE SELF CHECK MODE

Before entering the Self check mode, confirm that the setting of **TV/CATV** SW of the REMOTE CONTROL UNIT is at the **"TV"** side and the setting of **VCR/DVD** SW is at the **"VCR"** side. If the switches have not been properly set, you cannot enter the Self check mode.

(1) Set to "**0 minutes**" using the **[SLEEP TIMER]** key.
(2) While **"0 minutes"** is displayed, press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously, then enter the service mode.
(3) Press the **[2]** key (SELF CHECK) before the service mode screen disappears.
(4) Self check mode screen is displayed.
(5) Press the **[SLEEP TIMER]** key to enter Page 2 of the SELF CHECK MODE.
  - When the **[RETURN+]** key pressed, the first page change screen.

NOTE:
When a number key other than the **[2]** key is pressed in the SERVICE MENU SCREEN, the other relevant screen may be displayed.
This is not used in the SELF CHECK. Press the **[MENU]** key to return to the SERVICE MENU SCREEN.

5.1.3 HOW TO EXIT THE SELF CHECK MODE

TO SAVE FAILURE HISTORY:
Turn off the power by unplugging the AC power cord plug when in the Self check mode.

TO CLEAR (RESET) FAILURE HISTORY:
Turn off the power by pressing the **[POWER]** key on the remote control unit when in the Self check mode.

5.1.4 FAILURE HISTORY

Failure history can be counted up to 9 times for each item. When the number exceeds 9, display will remain as 9. Failure history will be stored in the memory unless it has been deleted.

NOTE:
Only SYNC (with/without sync signals) will be neither counted nor stored.

5.1.5 POINTS TO NOTE WHEN USING THE SELF CHECK FEATURE

In addition to circuit failures (abnormal operation), the following cases may also be diagnosed as "Abnormal" and displayed and counted as "NG".

(1) Temporary defective transmissions across circuits due to pulse interruptions
(2) Misalignment in the on/off timing of power for I^{2}C bus (VCC) when turning on/off the main power.

Diagnosis may be impeded if a large number of items are displayed as "NG". As such, start Self check check only after 3 seconds in the case of receivers and 5 seconds in the case of panels upon turning on the power. If recurrences are expected, ensure to clear (reset) the failure history and record the new diagnosis reults.

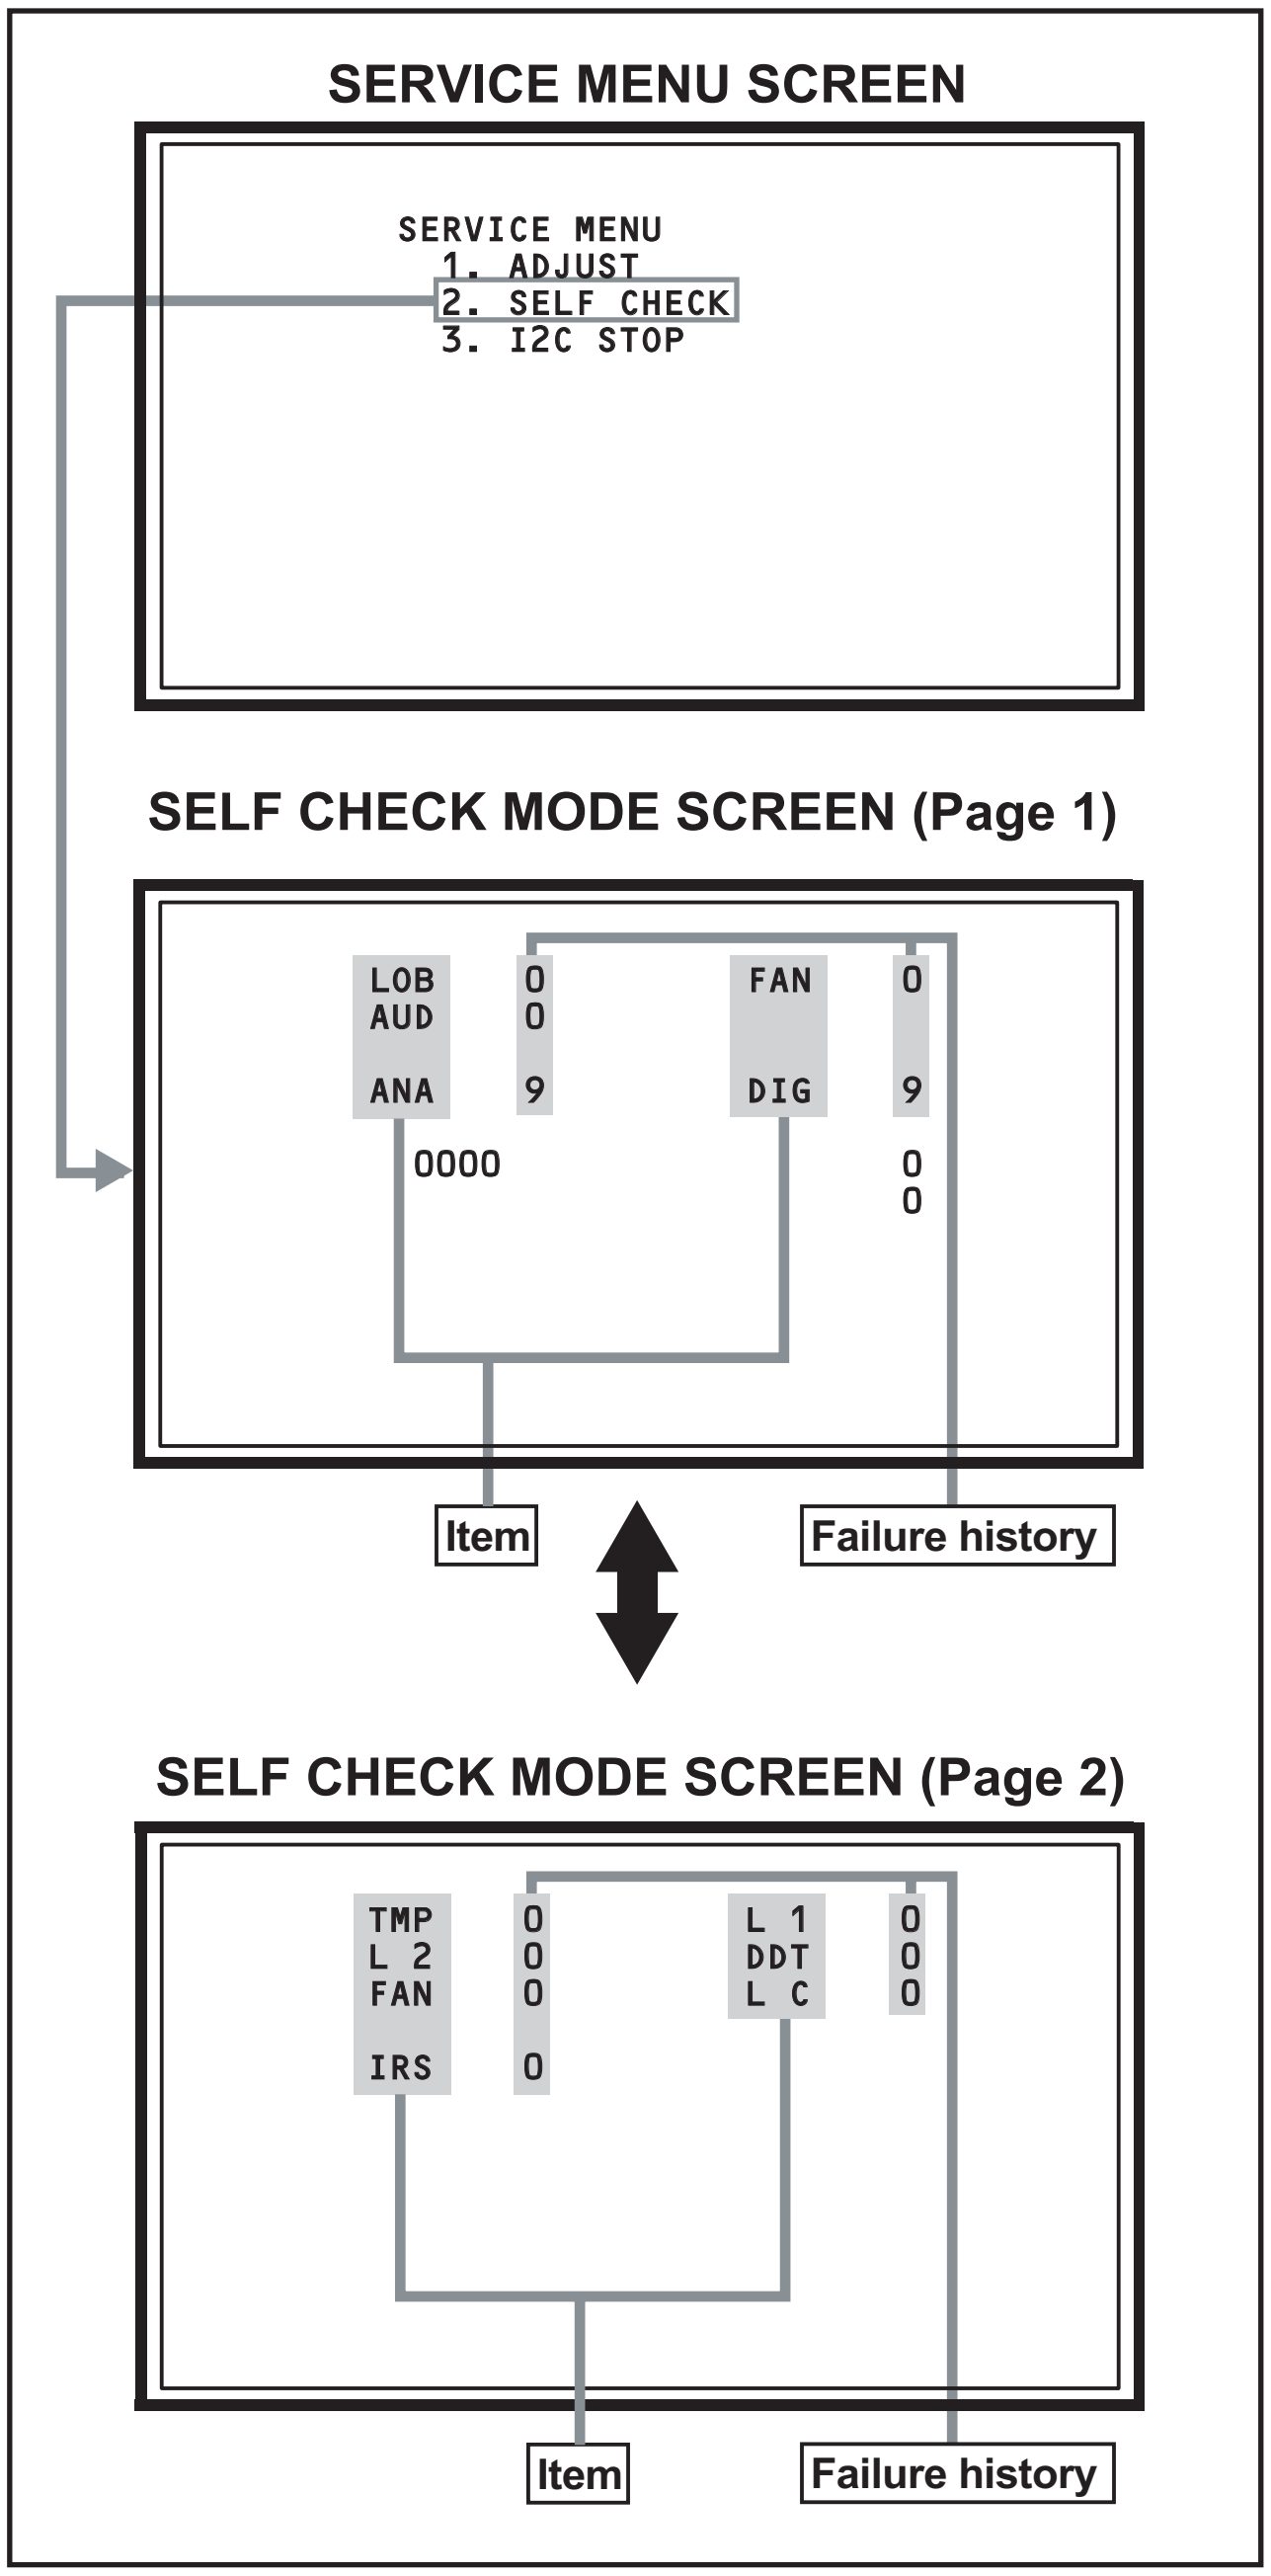

Fig.1

5.1.6 DETAILS

Self check is performed for the following items:

< Page 1 of screen >

Detection item	Display	Detection content	Diagnosis signal (line)	Detection timing
Low bias line short protection	LOB	Detection of the low bias line(5V/9V/12V) short. Q9821, Q9831, Q9861 **[POWER PWB**]	LB_PRO	Detection starts 3 seconds after the power is turned on. If error continues between 200ms the power is turned off.
Fan lock	FAN	Not used	----	----
Audio	AUD	Not used	----	----
Devices on the ANALOG PWB	ANA	Confirmation of reply of ACK signal which uses I2C communication. IC101, IC102, IC381, IC601, IC606, IC061, TU001 **[ANALOG PWB]**	SDA	If it checks whenever I2C communication is performed and no reply of ACK signal an error will be counted.
Devices on the DIGITAL PWB	DIG	Confirmation of reply of ACK signal which uses I2C communication. IC6401 **[DIGITAL PWB]**	SDA	If it checks whenever I2C communication is performed and no reply of ACK signal an error will be counted.

< Page 2 of screen >

Detection item	Display	Detection content	Diagnosis signal (line)	Detection timing
Temp. sensor	TMP	Confirmation of the abnormal inner cabinet temperature. (53°C) IC2001 **[TEMP PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.
Lamp does not light up	L1	Confirm that the lamp dose not light up. CN3011 **[DRIVE PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.
Lamp goes out	L2	Confirm that the lamp dose not goes out. CN3011 **[DRIVE PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.
Abnormal DD CPU circuit	DDT	Confirmation of the serial communication error between DRIVE PWB and DIGITAL PWB. IC3701 **[DRIVE PWB]**	TXD	It will count if the serial communication error is error occurs.
Fan lock	FAN	Confirmation of the lock signals outputting the operation(circuit) status of the cooling fan. IC8005 **[FAN PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.
Lamp cover open	LC	Confirmation of the interlock switch status for the lamp cover. S0861 **[LAMP COVER PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.
Abnormal of optical iris	IRS	Confirmation of the abnormal optical iris operation. IC5005 **[IRIS PWB]**	TXD	It will count if the serial communication from a DD MICOM is always supervised and an error occurs.

5.1.7 DISPLAY METHOD WHEN RASTER IS NOT AVAILABLE

In a state where a display screen does not appear due to the failure of this unit, the POWER LED (blue) and LAMP/PROGRAM LED (orange) can be flushing and display a trouble mode.

The factors in case the power is forcibly shut down at the time of failure are memorized and those are displayed.

Check item	**Contents**	**Classifications**	**LED flash cycle**	
			POWER LED (BLUE)	**LAMP/ PROGRAM LED (ORANGE)**
Fan lock (stop) and CABLE CARD error for ATSC tuner	MAIN CPU detects the command of the Fan lock (stop) and CABLE CARD error which ATSC TUNER MODULE has detected. IC7601 **[DIGITAL PWB]**	1	---	2 sec interval
Low bias line short protection	Detection of the low bias line(5V/9V/12V) short. Q9821, Q9831, Q9861 **[POWER PWB**]	2	---	1 sec interval
Lamp cover open	Detection of the interlock switch status for the lamp cover. (H = Abnormal) S0861 **[LAMP COVER PWB]**	3	0.1 sec interval Simultaneously	
Lamp goes out	Detection of lamp return (LAMP_RTN) signals output depending on the status of the lamp supply electric current monitored constantly within the lamp ballast unit. (H = Off) CN3011 **[DRIVE PWB]**	6	0.1 sec interval Simultaneously	
Lamp does not light up	Detection of lamp return (LAMP_RTN) signals output depending on the status of the lamp supply electric current monitored constantly within the lamp ballast unit. (H = Off) CN3011 **[DRIVE PWB]**	6	0.1 sec interval Simultaneously	
Fan lock (stop) for optical system	Detection of LOCK signals outputting the operation (circuit) status of the cooling fan. (H=Abnormal) IC8005 **[FAN PWB]**	4	0.5 sec interval Alternately	
Abnormal DD CPU circuit	Detection of serial communication error between MAIN DRIVE PWB and RECEIVER PWB. IC3701 **[DRIVE PWB]**	5	0.5 sec interval Alternately	
Abnormal D-ILA DEVICE temperature	Detection of abnormal inner cabinet temperature. (53°C) IC2001 **[TEMP PWB]**	7	0.5 sec interval Alternately	

EXPLANATION ON ACTION

If NG is detected on an item being diagnosed, turn off the power on this unit. As soon as the power goes off, turn on and off POWER LED and LAMP LED immediately. After the power is shut down, it becomes impossible to turn on the power until the power cable is either plugged in or unplugged from the AC outlet.

- When the error of [1] or [2] occur, [3], [4], [5], [6], [7] are no longer recognized.

Victor Company of Japan, Limited
ILA Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

Printed in Japan
VPT

JVC

SCHEMATIC DIAGRAMS

D-ILA PROJECTION TELEVISION

HD-52G787, HD-52G887, HD-56G787, HD-56G887, HD-61G787, HD-61G887

CD-ROM No.SML200604

BASIC CHASSIS
RA2

HD-ILA™ Powered by D-ILA

GENESSA

HDTV

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE

MaxxBass®

DCR

DOLBY DIGITAL

[HD-52G887]

COPYRIGHT © 2006 Victor Company of Japan, Limited

No.YA397
2006/4

HD-52G787, HD-52G887, HD-56G787, HD-56G887, HD-61G787, HD-61G887

STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the ⚠ symbol and shading are critical for safety. For continued safety replace safety ciritical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

(1)Input signal	: Colour bar signal
(2)Setting positions of each knob/button and variable resistor	: Original setting position when shipped
(3)Internal resistance of tester	: DC 20kΩ/V
(4)Oscilloscope sweeping time	: H ⇒ 20μs / div
	: V ⇒ 5ms / div
	: Otthers ⇒ Sweeping time is specified
(5)Voltage values	: All DC voltage values

∗ Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- ● In the PW board : R209 → R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

● Resistance value

No unit	: [Ω]
K	: [kΩ]
M	: [MΩ]

● Rated allowable power

No indication	: 1/16 [W]
Others	: As specified

● Type

No indication	: Carbon resistor
OMR	: Oxide metal film resistor
MFR	: Metal film resistor
MPR	: Metal plate resistor
UNFR	: Uninflammable resistor
FR	: Fusible resistor

∗ Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

● Capacitance value

1 or higher	: [pF]
less than 1	: [μF]

● Withstand voltage

No indication	: DC50[V]
Others	: DC withstand voltage [V]
AC indicated	: AC withstand voltage [V]

∗ Electrolytic Capacitors
47/50[Example]: Capacitance value [μF]/withstand voltage[V]

● Type

No indication	: Ceramic capacitor
MM	: Metalized mylar capacitor
PP	: Polypropylene capacitor
MPP	: Metalized polypropylene capacitor
MF	: Metalized film capacitor
TF	: Thin film capacitor
BP	: Bipolar electrolytic capacitor
TAN	: Tantalum capacitor

(3)Coils

No unit	: [μH]
Others	: As specified

(4)Power Supply

═══	: B1	■■■■	: B2 (12V)
■□■□	: 9V	□□□□	: 5V

∗Respective voltage values are indicated

(5)Test point

⊙	: Test point	○	: Only test point display

(6)Connecting method

▭	: Connector	◯	: Wrapping or soldering
→≻— →⊁—	: Receptacle		

(7)Ground symbol

⊥	: LIVE side ground
⏚	: ISOLATED(NEUTRAL) side ground
⏚	: EARTH ground
▽	: DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (⊥) side GND and the ISOLATED(NEUTRAL) : (⏚) side GND. Therefore, care must be taken for the following points.

(1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.

(2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time.
If the above precaution is not respected, a fuse or any parts will be broken.

◆ **Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.**

NOTE

◆ **Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.**
When ordering parts, please use the numbers that appear in the Parts List.

CONTENTS

SEMICONDUCTOR SHAPES 2-4

WIRING DIAGRAM 2-5

BLOCK DIAGRAM 2-7

CIRCUIT DIAGRAMS

TUNER PWB CIRCUIT DIAGRAM 2-9
ANALOG PWB CIRCUIT DIAGRAM 2-13
DIGITAL PWB CIRCUIT DIAGRAM 2-25
DRIVE PWB CIRCUIT DIAGRAM 2-57
POWER PWB CIRCUIT DIAGRAM 2-71
IRIS PWB CIRCUIT DIAGRAM 2-77
FRONT LED PWB CIRCUIT DIAGRAM 2-79
TEMP PWB CIRCUIT DIAGRAM 2-80
LAMP COVER PWB CIRCUIT DIAGRAM 2-81
REMOCON PWB CIRCUIT DIAGRAM 2-82
SIDE CONTROL PWB CIRCUIT DIAGRAM 2-83
FAN PWB CIRCUIT DIAGRAM 2-85
SD CARD PWB CIRCUIT DIAGRAM 2-87

PATTERN DIAGRAMS

TUNER PWB PWB PATTERN 2-89
ANALOG PWB PATTERN 2-91
DIGITAL PWB PATTERN 2-95
DRIVE PWB PATTERN 2-99
POWER PWB PATTERN 2-103
FRONT LED PWB PATTERN 2-107
TEMP PWB PATTERN 2-107
LAMP COVER PWB PATTERN 2-107
REMOCON PWB PATTERN 2-107
SIDE CONTROL PWB PATTERN 2-107
FAN PWB PATTERN 2-108
SD CARD PWB PATTERN 2-108
IRIS PWB PATTERN 2-108

VOLTAGE CHATRS 2-109

WAVEFORMS 2-111

USING P.W. BOARD

P.W.B ASS'Y name	HD-52G787	HD-52G887	HD-56G787	HD-56G887
ANALOG P.W. BOARD	SRA-1011A-M2	←	←	←
DRIVE P.W. BOARD	SRA-3003A-M2	←	←	←
REMOCON P.W. BOARD	SRA-8011A-M2	←	←	←
TEMP P.W. BOARD	SRA-8202A-M2	←	←	←
IRIS P.W. BOARD	SRA-8302A-M2	←	←	←
FAN P.W. BOARD	SRA-8401A-M2	←	←	←
SD CARD P.W. BOARD	SRA-8511A-M2	←	←	←
POWER P.W. BOARD	SRA-9011A-M2	←	←	←
DIGITAL P.W. BOARD	SRA0D016A-M2	SRA0D013A-M2	SRA0D015A-M2	SRA0D012A-M2
SIDE CONTROL P.W. BOARD	SRA0L011A-M2	←	←	←
FRONT LED P.W. BOARD	SRA0L111A-M2	←	←	←
LAMP COVER P.W. BOARD	SRA0L211A-M2	←	←	←
TUNER P.W. BOARD	SRA0R011A-M2	←	←	←

P.W.B ASS'Y name	HD-61G787	HD-61G887
ANALOG P.W. BOARD	SRA-1011A-M2	←
DRIVE P.W. BOARD	SRA-3003A-M2	←
REMOCON P.W. BOARD	SRA-8011A-M2	←
TEMP P.W. BOARD	SRA-8202A-M2	←
IRIS P.W. BOARD	SRA-8302A-M2	←
FAN P.W. BOARD	SRA-8401A-M2	←
SD CARD P.W. BOARD	SRA-8511A-M2	←
POWER P.W. BOARD	SRA-9011A-M2	←
DIGITAL P.W. BOARD	SRA0D014A-M2	SRA0D011A-M2
SIDE CONTROL P.W. BOARD	SRA0L011A-M2	←
FRONT LED P.W. BOARD	SRA0L111A-M2	←
LAMP COVER P.W. BOARD	SRA0L211A-M2	←
TUNER P.W. BOARD	SRA0R011A-M2	←

SEMICONDUCTOR SHAPES

TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR 

IC

BOTTOM VIEW	FRONT VIEW			TOP VIEW
				

CHIP IC

TOP VIEW		
		

WIRING DIAGRAM

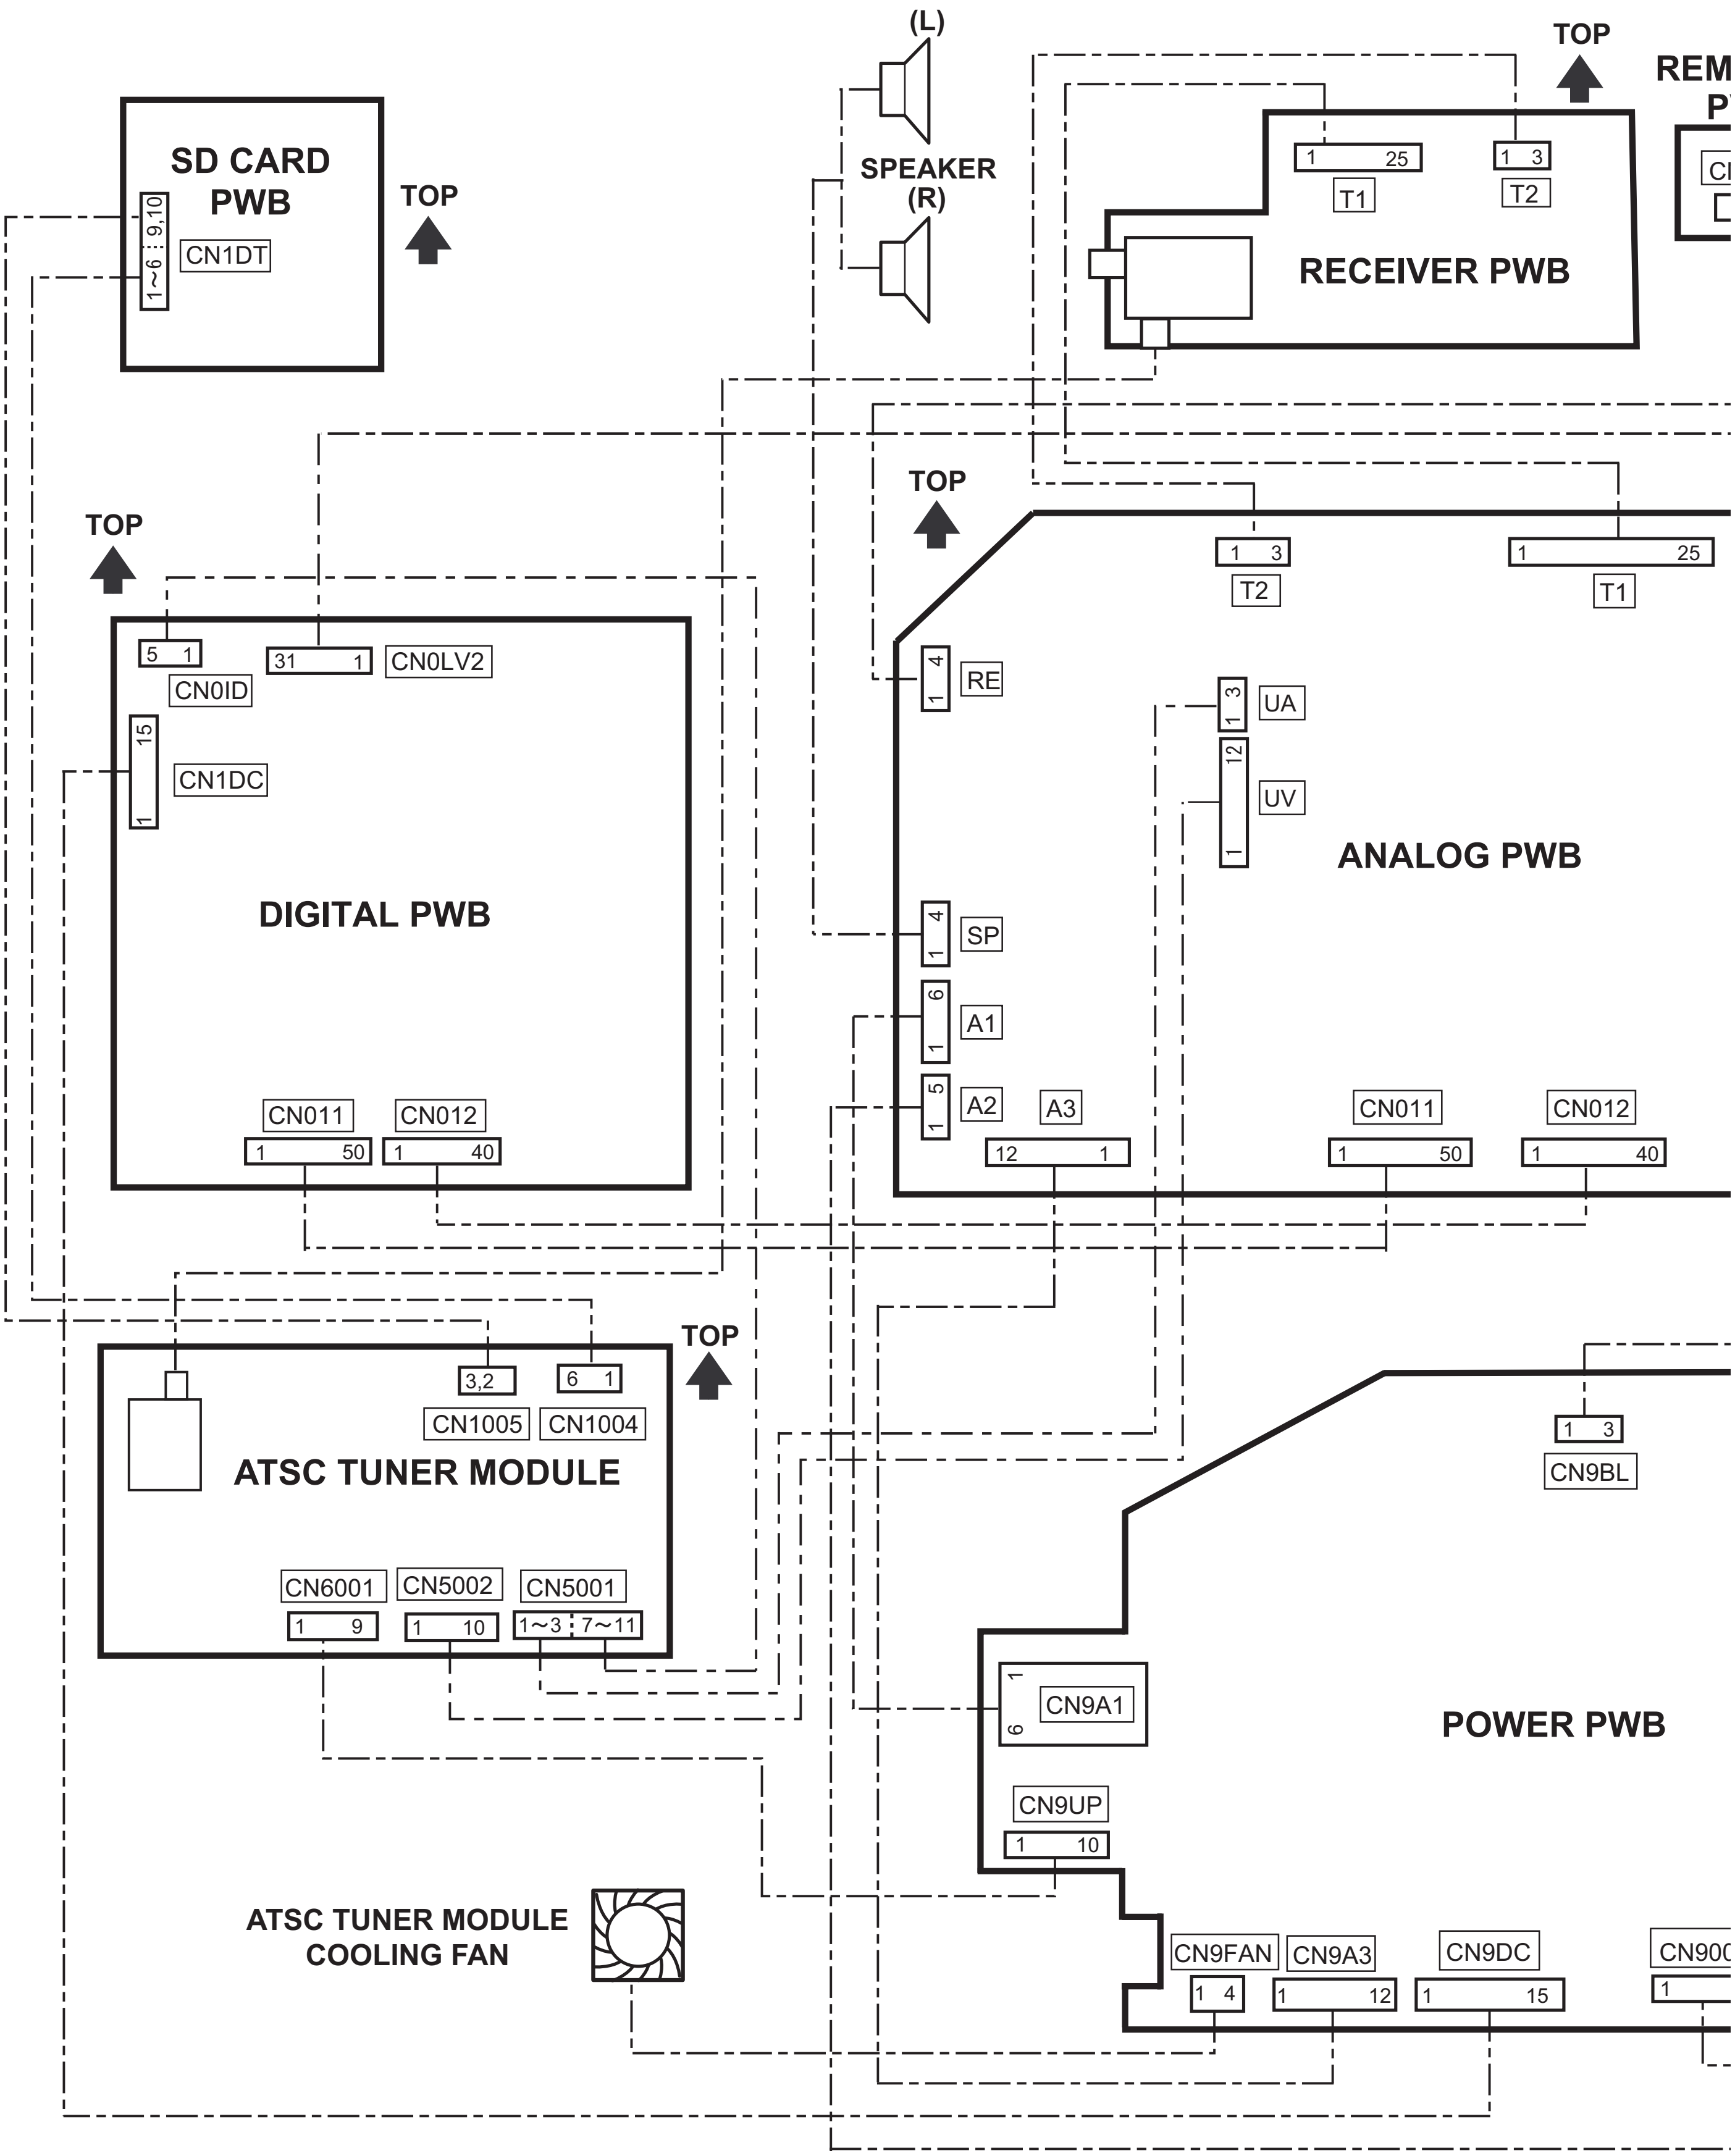
SPEAKER (L)
SPEAKER (R)
TOP
REM
P
CI
SD CARD PWB
CN1DT
9,10
1~6
TOP
1 25
T1
1 3
T2
RECEIVER PWB
TOP
TOP
1 3
T2
1 25
T1
5 1
CN0ID
31 1
CN0LV2
15
1
CN1DC
DIGITAL PWB
1 4
RE
1 3
UA
12 1
UV
ANALOG PWB
1 4
SP
1 6
A1
1 5
A2
A3
12 1
CN011
1 50
CN012
1 40
CN011
1 50
CN012
1 40
TOP
3,2
6 1
CN1005
CN1004
ATSC TUNER MODULE
1 3
CN9BL
CN6001
1 9
CN5002
1 10
CN5001
1~3
7~11
1
6
CN9A1
POWER PWB
CN9UP
1 10
ATSC TUNER MODULE COOLING FAN
CN9FAN
1 4
CN9A3
1 12
CN9DC
1 15
CN900
1

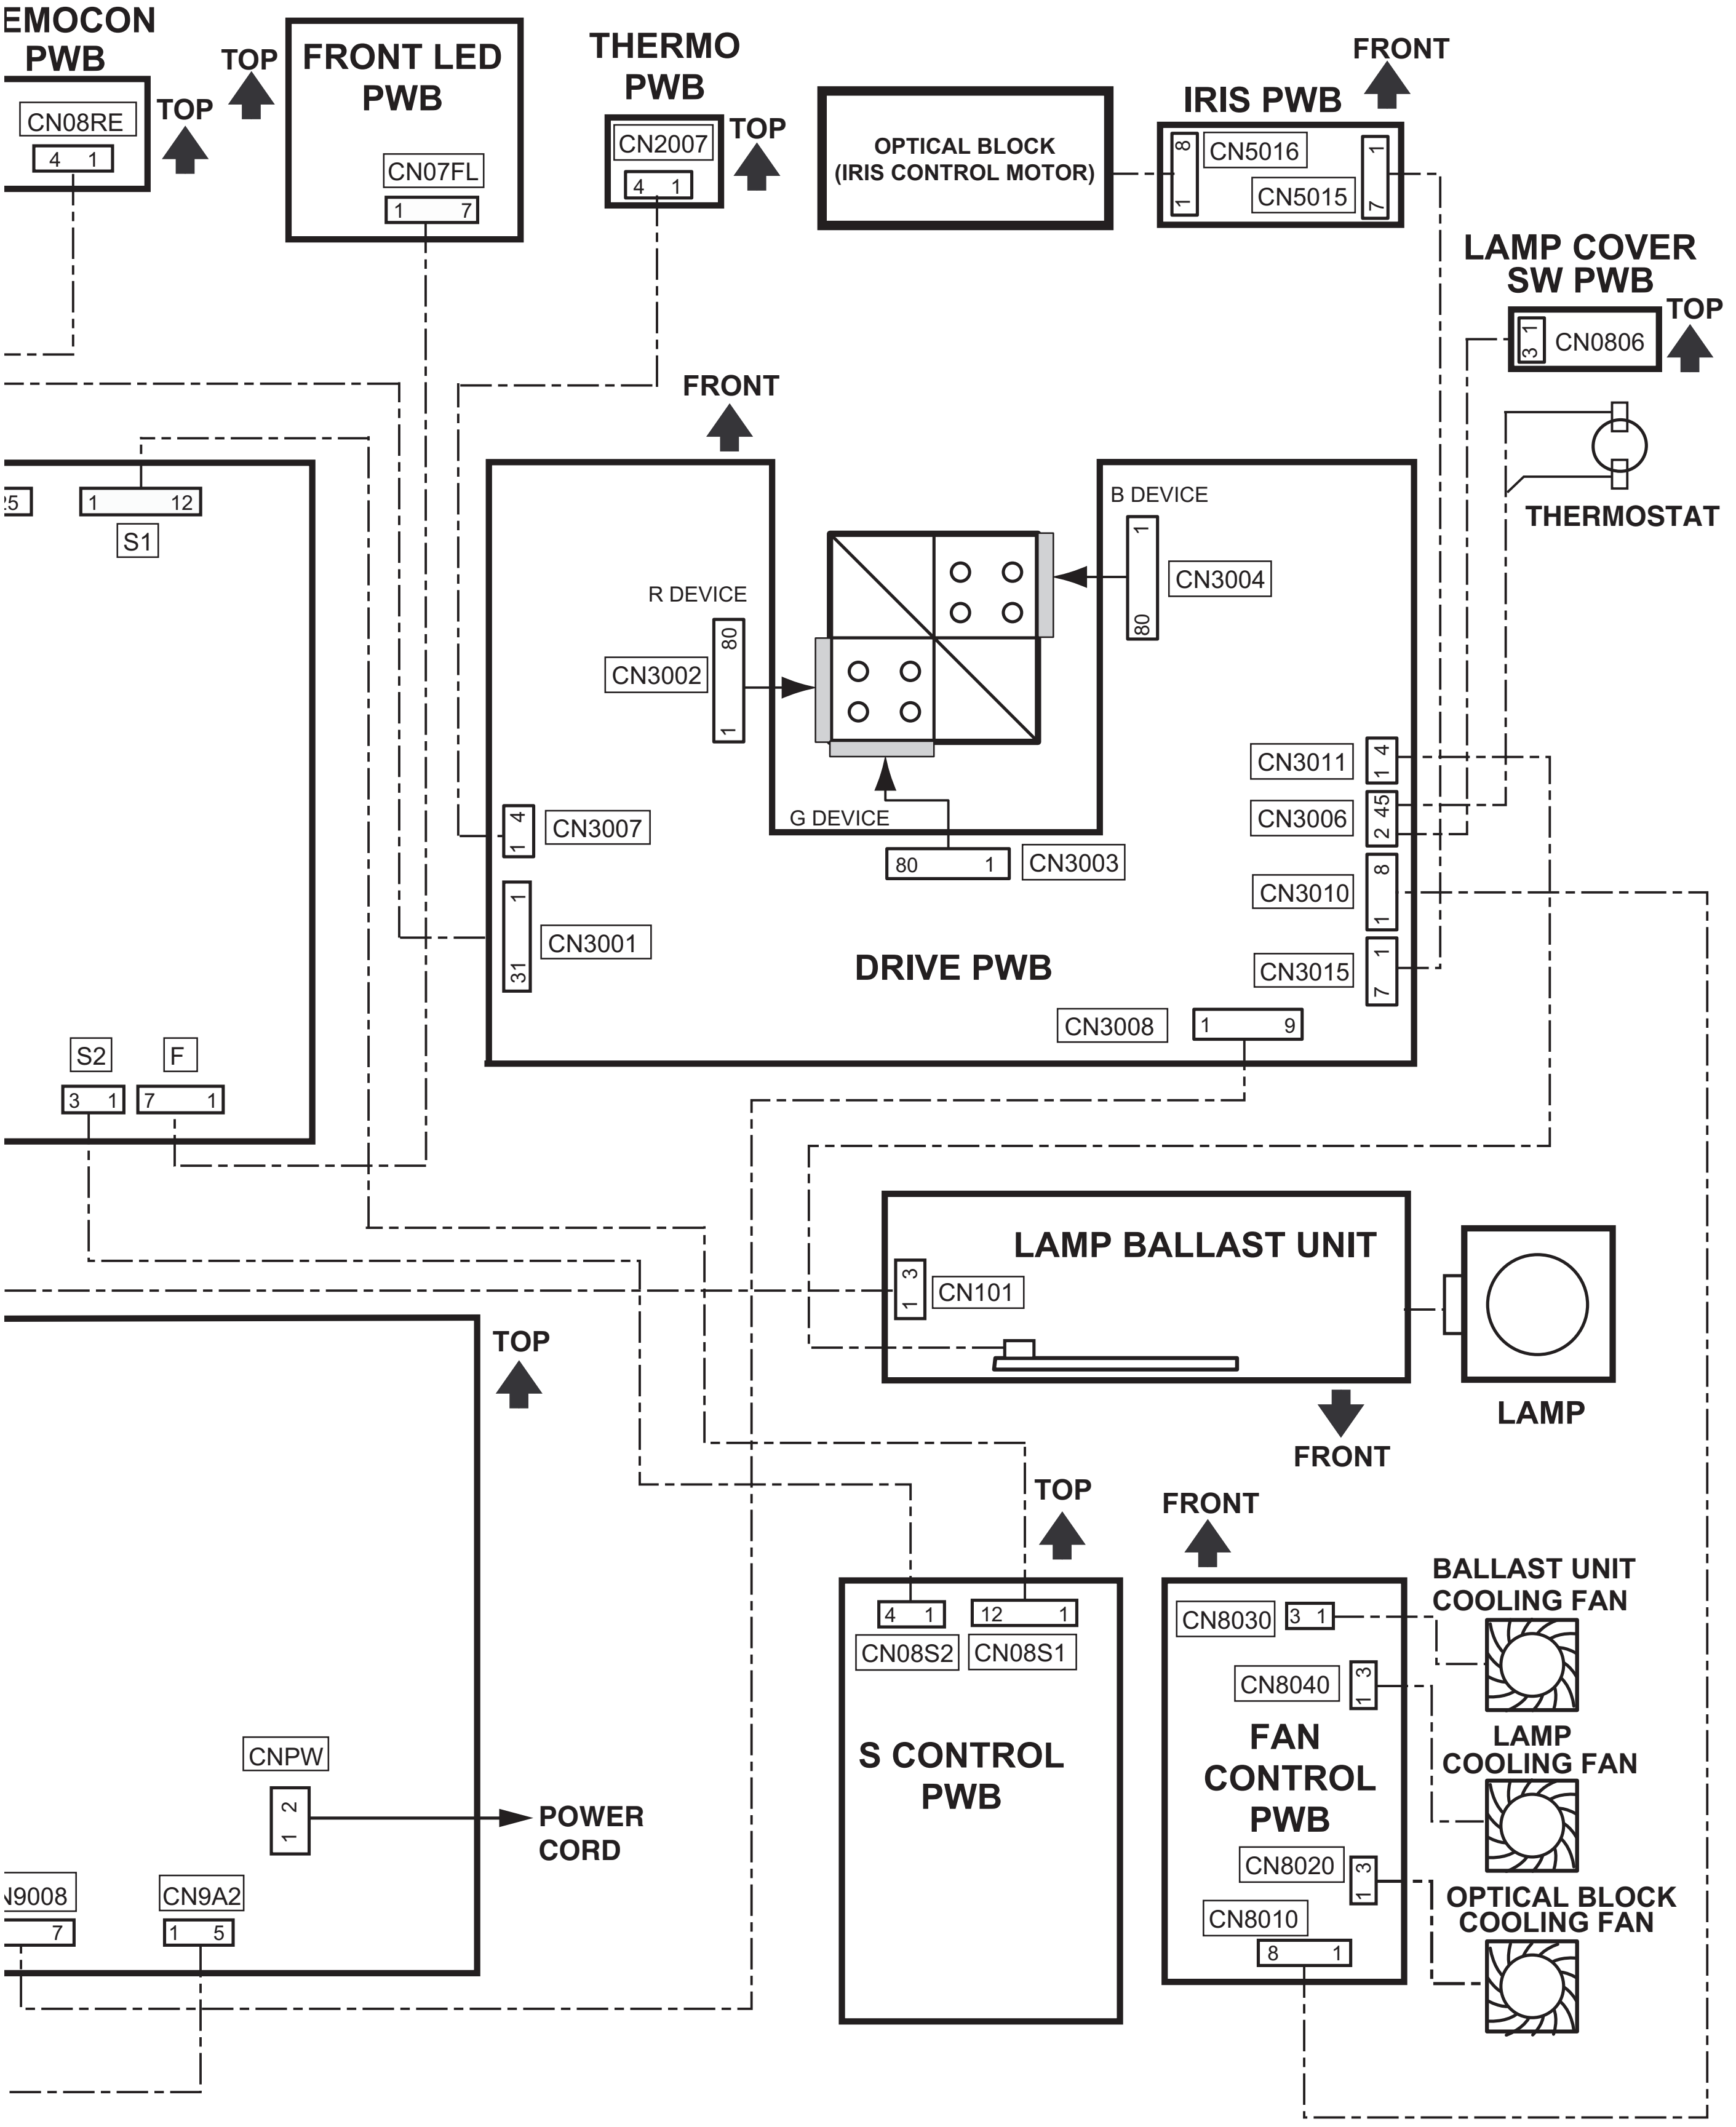
EMOCON PWB
CN08RE
4 1
TOP
TOP
FRONT LED PWB
CN07FL
1 7
THERMO PWB
CN2007
4 1
TOP
OPTICAL BLOCK (IRIS CONTROL MOTOR)
FRONT
IRIS PWB
CN5016
CN5015
8 1
1 7
LAMP COVER SW PWB
TOP
CN0806
3 1
THERMOSTAT
FRONT
25
1 12
S1
B DEVICE
CN3004
1 80
R DEVICE
CN3002
80 1
G DEVICE
CN3011
1 4
CN3006
2 45
CN3007
1 4
80 1
CN3003
CN3010
8 1
CN3001
1 31
CN3015
1 7
DRIVE PWB
CN3008
1 9
S2
F
3 1
7 1
LAMP BALLAST UNIT
CN101
1 3
LAMP
FRONT
TOP
TOP
CNPW
1 2
POWER CORD
9008
7
CN9A2
1 5
FRONT
4 1
12 1
CN08S2
CN08S1
S CONTROL PWB
CN8030
3 1
CN8040
1 3
FAN CONTROL PWB
CN8020
1 3
CN8010
8 1
BALLAST UNIT COOLING FAN
LAMP COOLING FAN
OPTICAL BLOCK COOLING FAN

BLOCK DIAGRAM

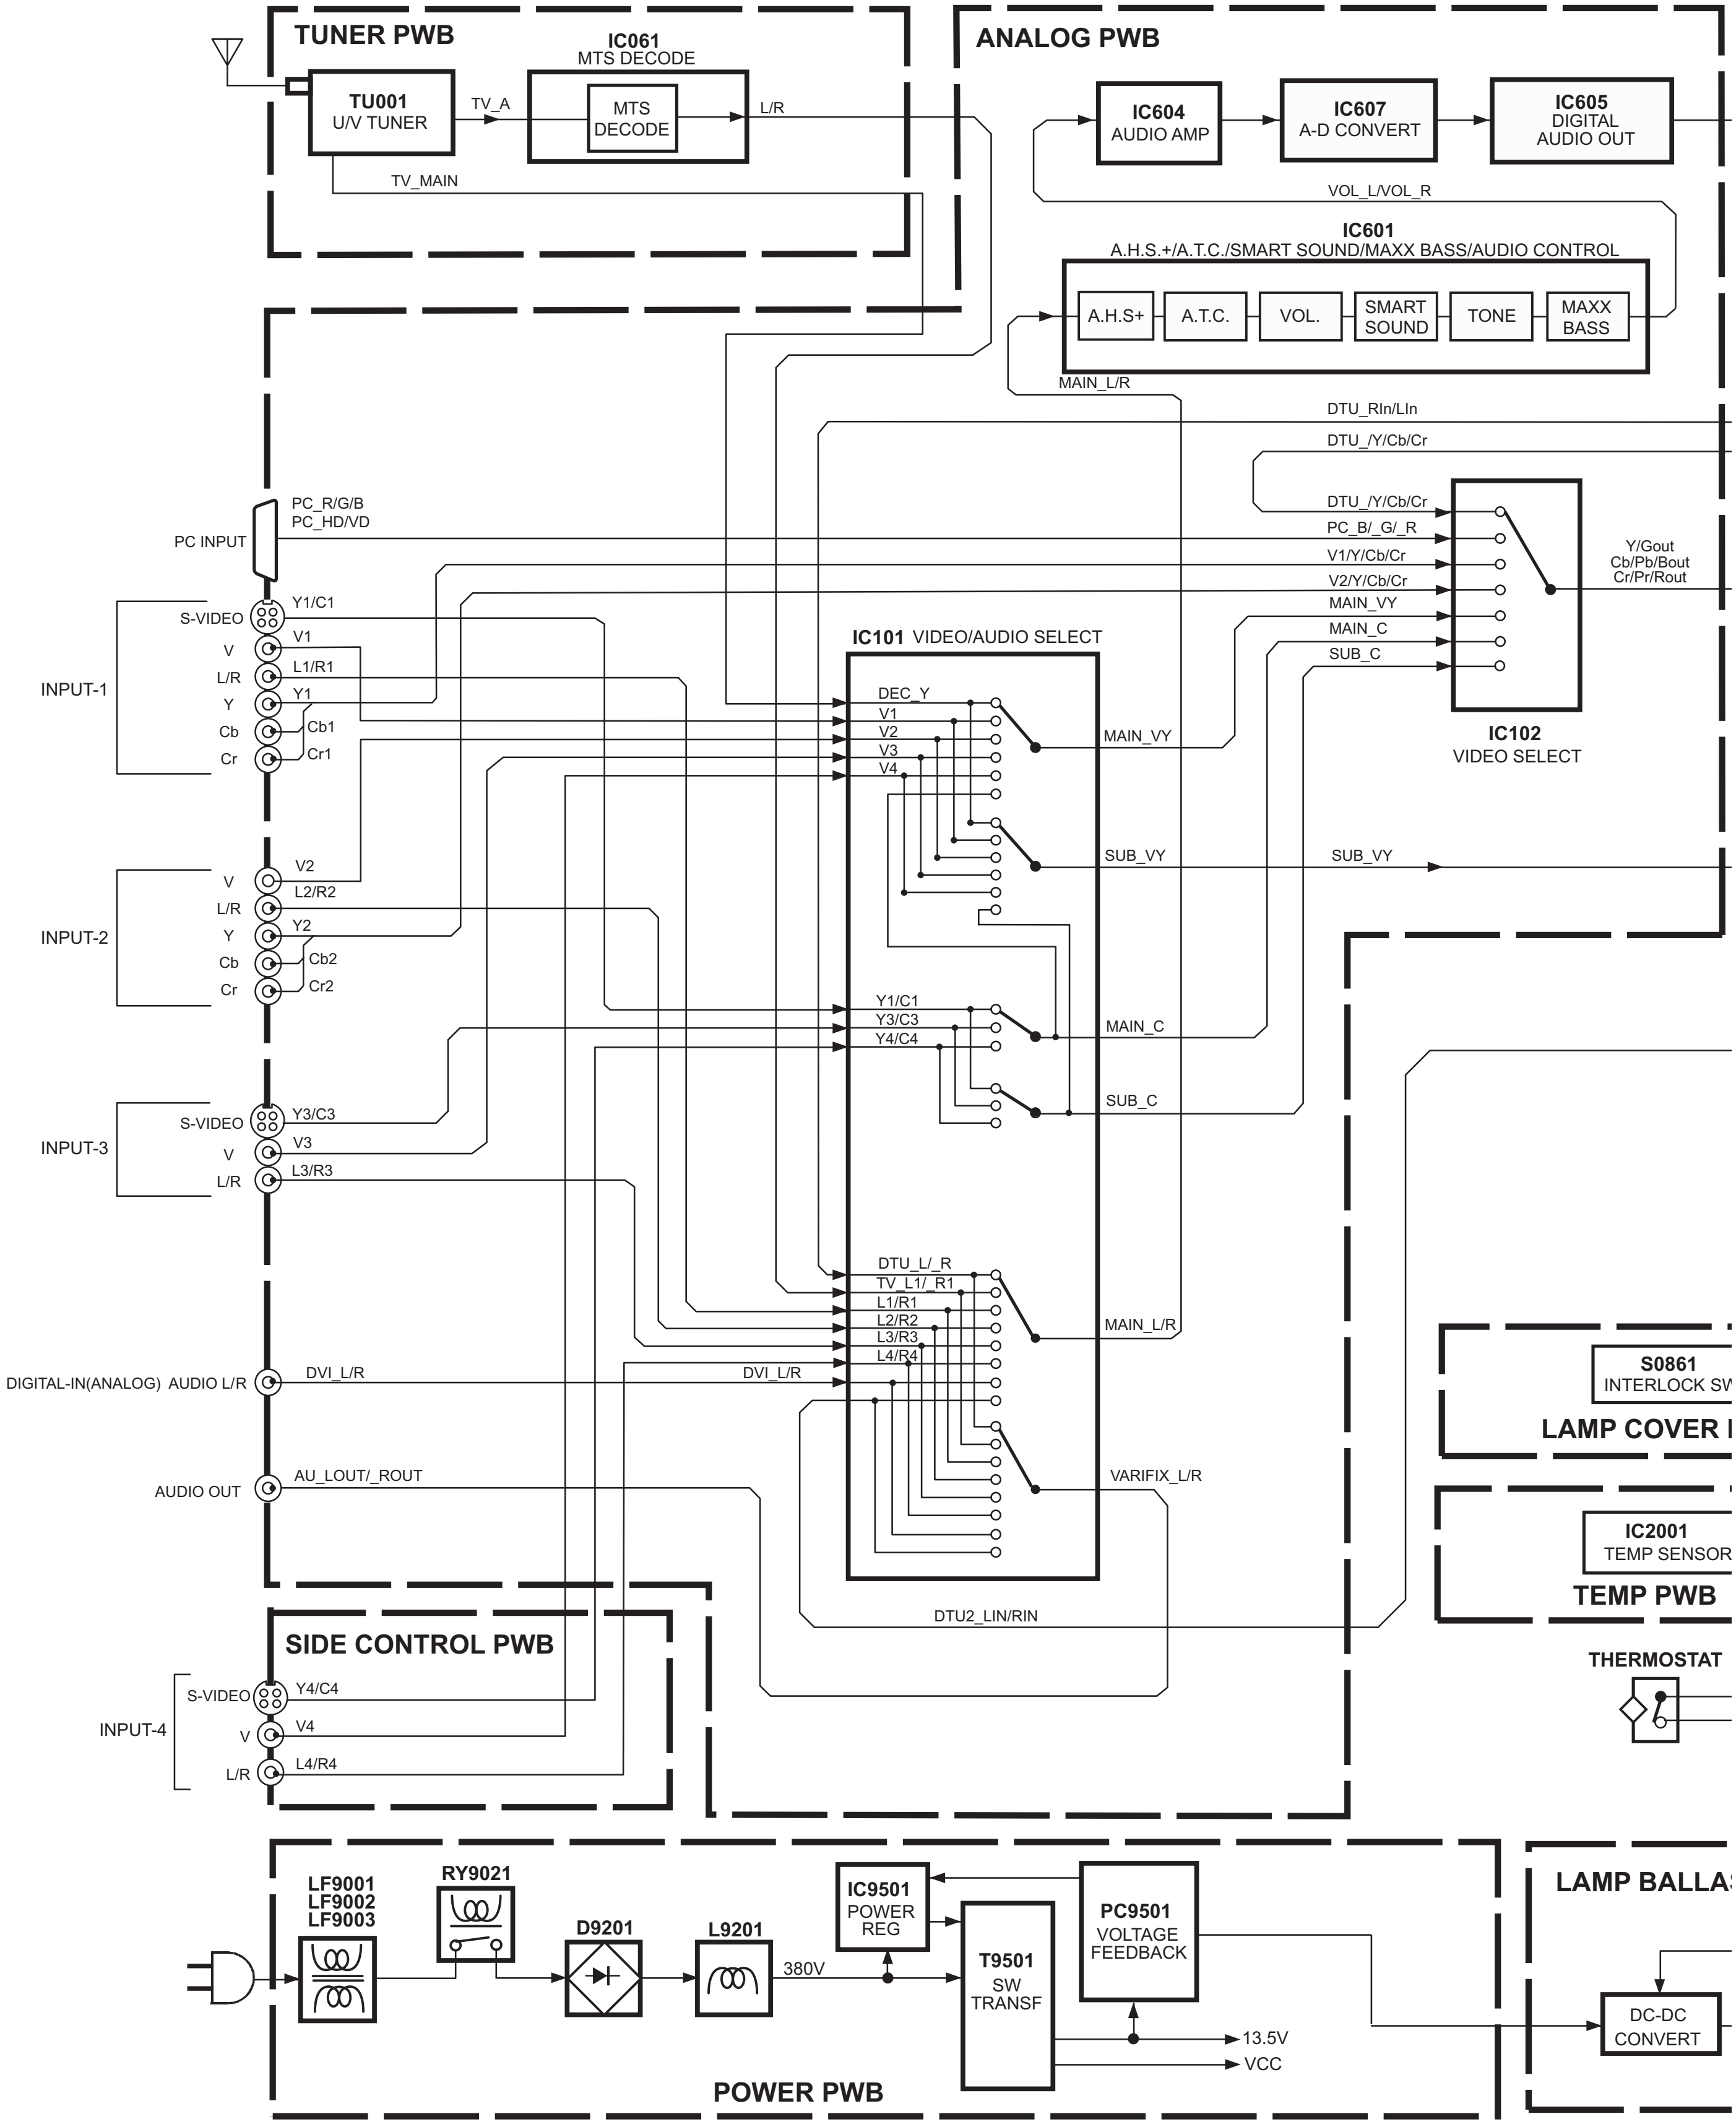

TUNER PWB
TU001
U/V TUNER
TV_A
IC061
MTS DECODE
MTS
DECODE
L/R
TV_MAIN
ANALOG PWB
IC604
AUDIO AMP
IC607
A-D CONVERT
IC605
DIGITAL
AUDIO OUT
VOL_L/VOL_R
IC601
A.H.S.+/A.T.C./SMART SOUND/MAXX BASS/AUDIO CONTROL
A.H.S+
A.T.C.
VOL.
SMART
SOUND
TONE
MAXX
BASS
MAIN_L/R
DTU_RIn/LIn
DTU_/Y/Cb/Cr
PC_R/G/B
PC_HD/VD
PC INPUT
DTU_/Y/Cb/Cr
PC_B/_G/_R
V1/Y/Cb/Cr
V2/Y/Cb/Cr
MAIN_VY
MAIN_C
SUB_C
Y/Gout
Cb/Pb/Bout
Cr/Pr/Rout
IC102
VIDEO SELECT
INPUT-1
S-VIDEO
V
L/R
Y
Cb
Cr
Y1/C1
V1
L1/R1
Y1
Cb1
Cr1
IC101 VIDEO/AUDIO SELECT
DEC_Y
V1
V2
V3
V4
MAIN_VY
SUB_VY
SUB_VY
INPUT-2
V
L/R
Y
Cb
Cr
V2
L2/R2
Y2
Cb2
Cr2
Y1/C1
Y3/C3
Y4/C4
MAIN_C
SUB_C
INPUT-3
S-VIDEO
V
L/R
Y3/C3
V3
L3/R3
DTU_L/_R
TV_L1/_R1
L1/R1
L2/R2
L3/R3
L4/R4
MAIN_L/R
DIGITAL-IN(ANALOG) AUDIO L/R
DVI_L/R
DVI_L/R
AUDIO OUT
AU_LOUT/_ROUT
VARIFIX_L/R
DTU2_LIN/RIN
S0861
INTERLOCK SW
LAMP COVER
IC2001
TEMP SENSOR
TEMP PWB
THERMOSTAT
SIDE CONTROL PWB
INPUT-4
S-VIDEO
V
L/R
Y4/C4
V4
L4/R4
LF9001
LF9002
LF9003
RY9021
D9201
L9201
380V
IC9501
POWER
REG
T9501
SW
TRANSF
PC9501
VOLTAGE
FEEDBACK
13.5V
VCC
POWER PWB
LAMP BALLAS
DC-DC
CONVERT

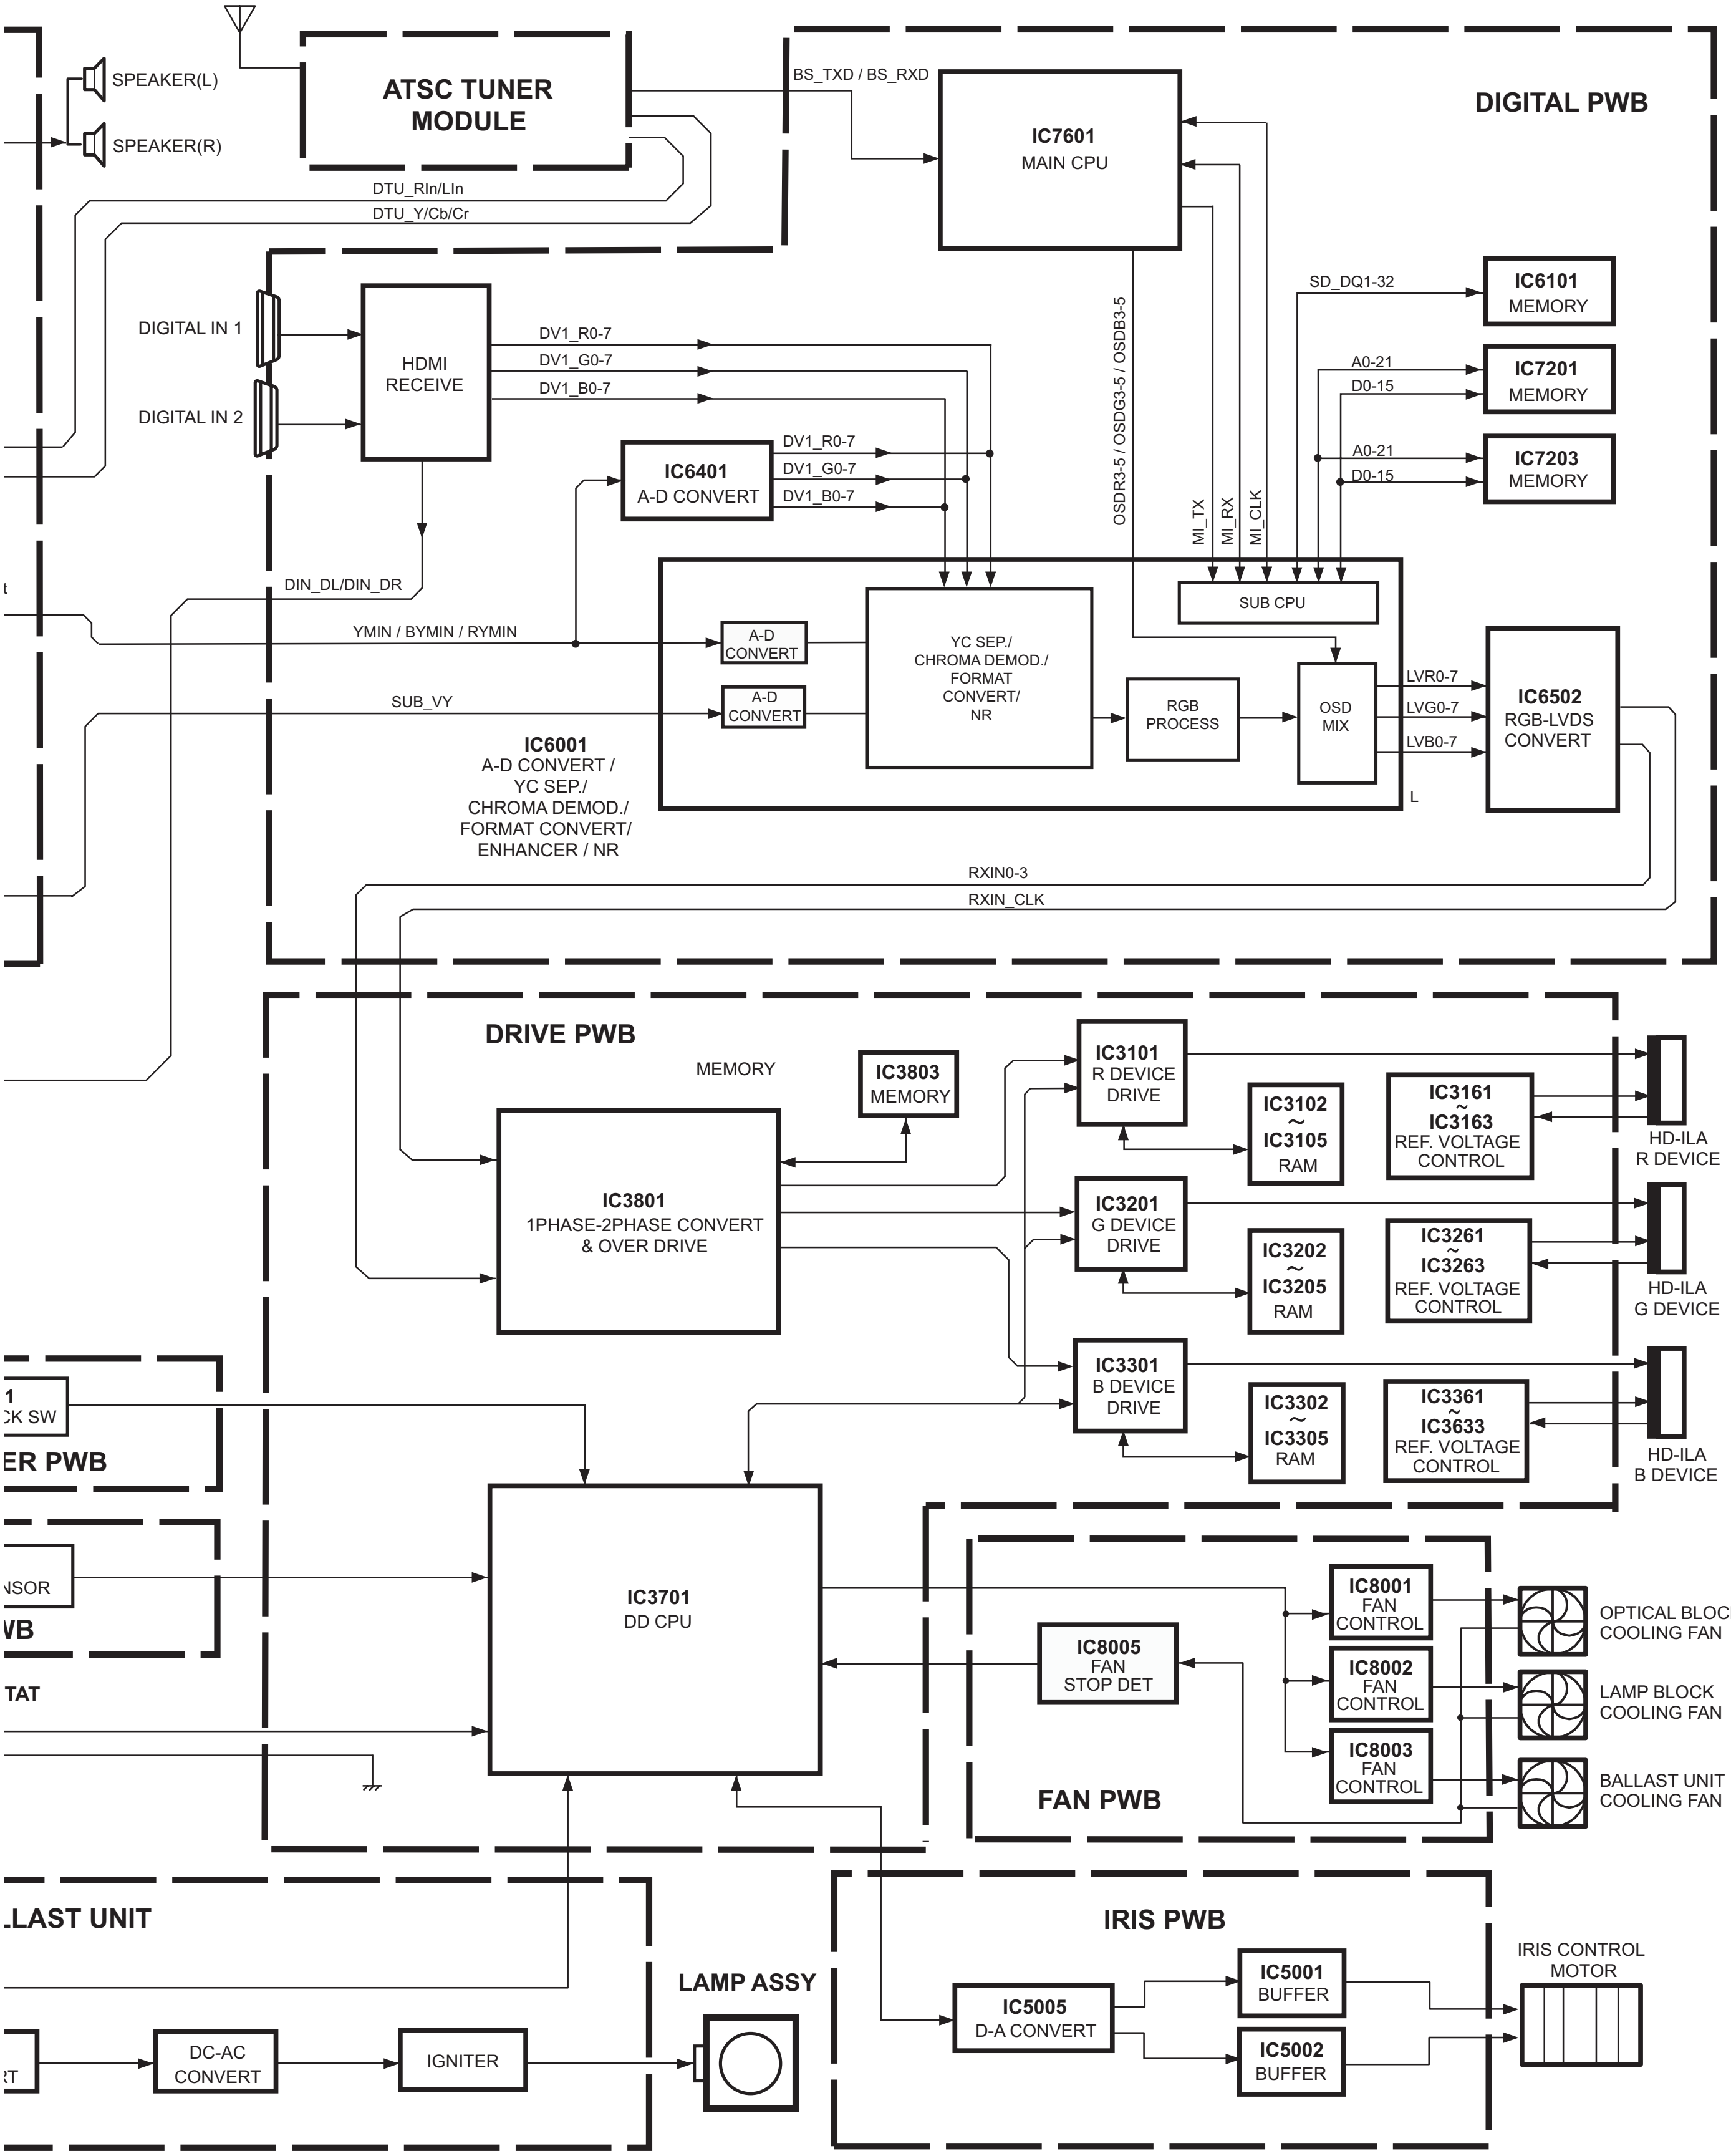

SPEAKER(L)
SPEAKER(R)
ATSC TUNER MODULE
DTU_RIn/LIn
DTU_Y/Cb/Cr
BS_TXD / BS_RXD
IC7601
MAIN CPU
DIGITAL PWB
DIGITAL IN 1
DIGITAL IN 2
HDMI RECEIVE
DV1_R0-7
DV1_G0-7
DV1_B0-7
IC6401
A-D CONVERT
OSDR3-5 / OSDG3-5 / OSDB3-5
MI_TX
MI_RX
MI_CLK
SD_DQ1-32
IC6101
MEMORY
A0-21
D0-15
IC7201
MEMORY
IC7203
MEMORY
DIN_DL/DIN_DR
YMIN / BYMIN / RYMIN
SUB_VY
A-D CONVERT
A-D CONVERT
YC SEP./ CHROMA DEMOD./ FORMAT CONVERT/ NR
RGB PROCESS
SUB CPU
OSD MIX
LVR0-7
LVG0-7
LVB0-7
L
IC6502
RGB-LVDS CONVERT
IC6001
A-D CONVERT / YC SEP./ CHROMA DEMOD./ FORMAT CONVERT/ ENHANCER / NR
RXIN0-3
RXIN_CLK
DRIVE PWB
MEMORY
IC3803
MEMORY
IC3801
1PHASE-2PHASE CONVERT & OVER DRIVE
IC3101
R DEVICE DRIVE
IC3102 ~ IC3105
RAM
IC3161 ~ IC3163
REF. VOLTAGE CONTROL
HD-ILA R DEVICE
IC3201
G DEVICE DRIVE
IC3202 ~ IC3205
RAM
IC3261 ~ IC3263
REF. VOLTAGE CONTROL
HD-ILA G DEVICE
IC3301
B DEVICE DRIVE
IC3302 ~ IC3305
RAM
IC3361 ~ IC3633
REF. VOLTAGE CONTROL
HD-ILA B DEVICE
1
CK SW
ER PWB
NSOR
WB
TAT
IC3701
DD CPU
IC8001
FAN CONTROL
IC8002
FAN CONTROL
IC8003
FAN CONTROL
IC8005
FAN STOP DET
FAN PWB
OPTICAL BLOCK COOLING FAN
LAMP BLOCK COOLING FAN
BALLAST UNIT COOLING FAN
LLAST UNIT
LAMP ASSY
RT
DC-AC CONVERT
IGNITER
IRIS PWB
IC5005
D-A CONVERT
IC5001
BUFFER
IC5002
BUFFER
IRIS CONTROL MOTOR

CIRCUIT DIAGRAMS

TUNER PWB CIRCUIT DIAGRAM (1/2) SHEET1

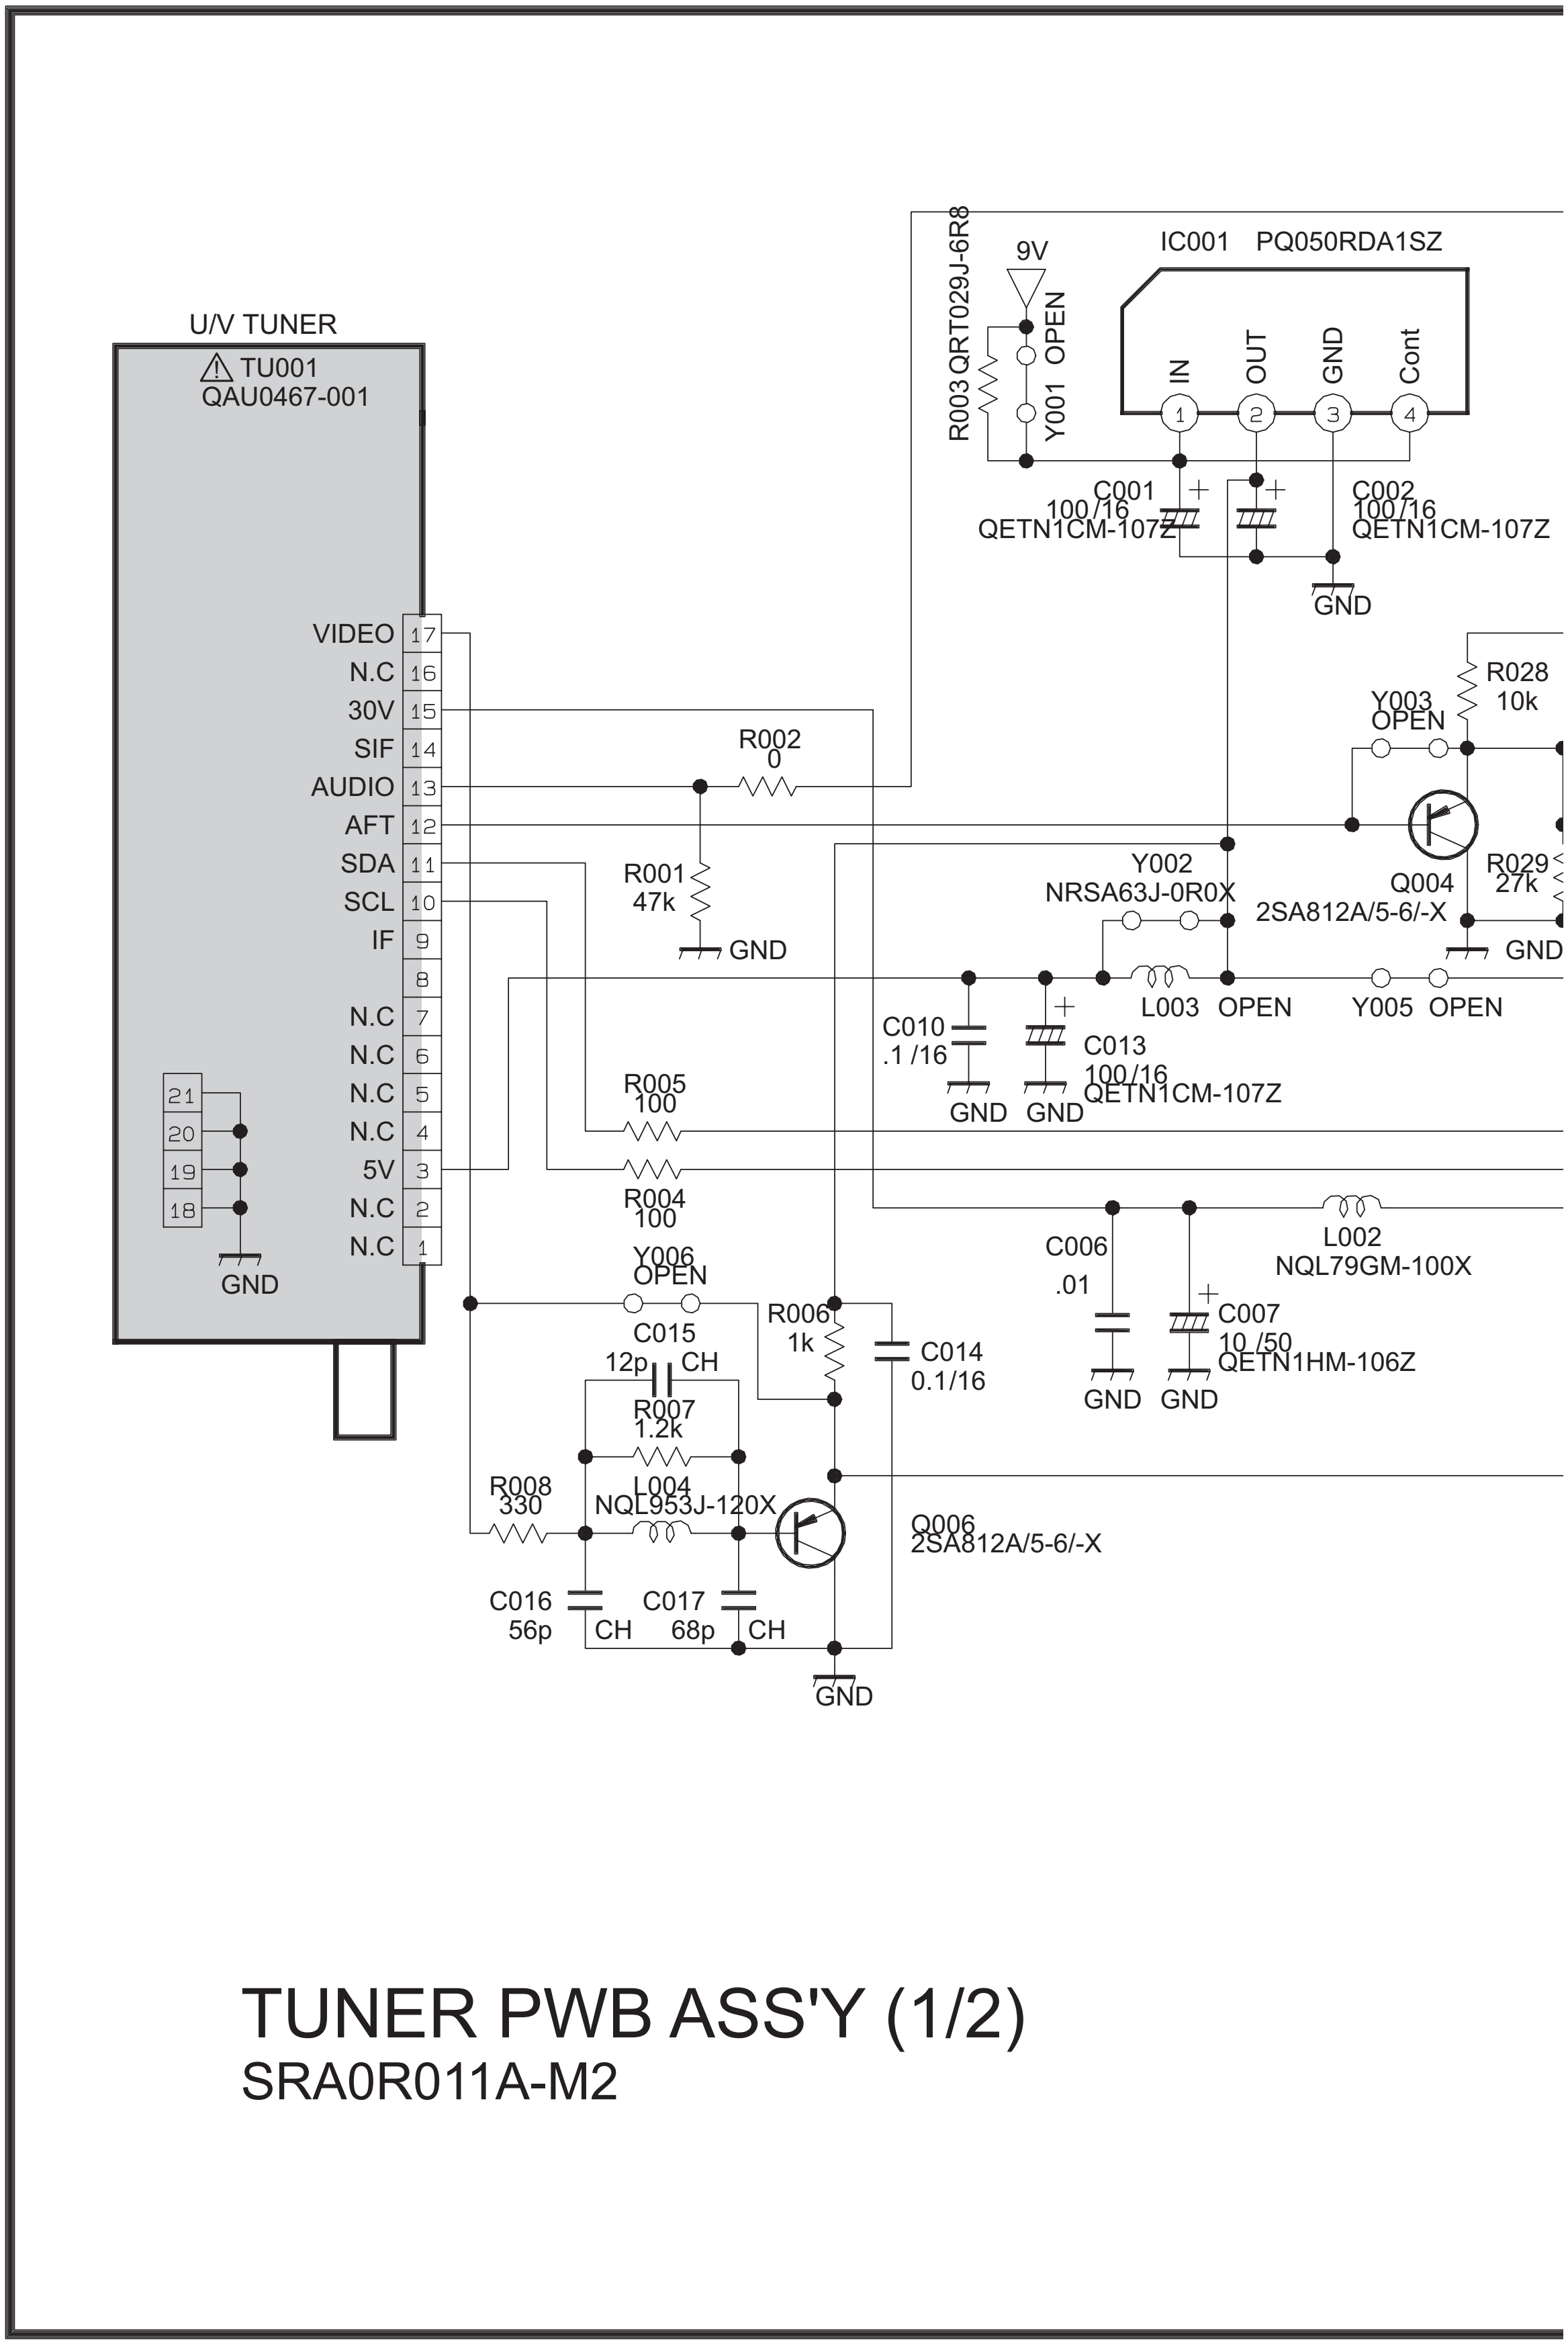

U/V TUNER
TU001
QAU0467-001
VIDEO 17
N.C 16
30V 15
SIF 14
AUDIO 13
AFT 12
SDA 11
SCL 10
IF 9
8
N.C 7
N.C 6
N.C 5
N.C 4
5V 3
N.C 2
N.C 1
21
20
19
18
GND
R003 QRT029J-6R8
9V
Y001 OPEN
IC001 PQ050RDA1SZ
IN
OUT
GND
Cont
1
2
3
4
C001
100/16
QETN1CM-107Z
C002
100/16
QETN1CM-107Z
GND
R028
10k
Y003
OPEN
R002
0
R001
47k
GND
Y002
NRSA63J-0R0X
Q004
2SA812A/5-6/-X
R029
27k
GND
L003 OPEN
Y005 OPEN
C010
.1 /16
C013
100/16
QETN1CM-107Z
GND
GND
R005
100
R004
100
C006
.01
L002
NQL79GM-100X
C007
10 /50
QETN1HM-106Z
GND
GND
Y006
OPEN
C015
12p CH
R006
1k
C014
0.1/16
R007
1.2k
L004
NQL953J-120X
R008
330
Q006
2SA812A/5-6/-X
C016
56p
CH
C017
68p
CH
GND
TUNER PWB ASS'Y (1/2)
SRA0R011A-M2

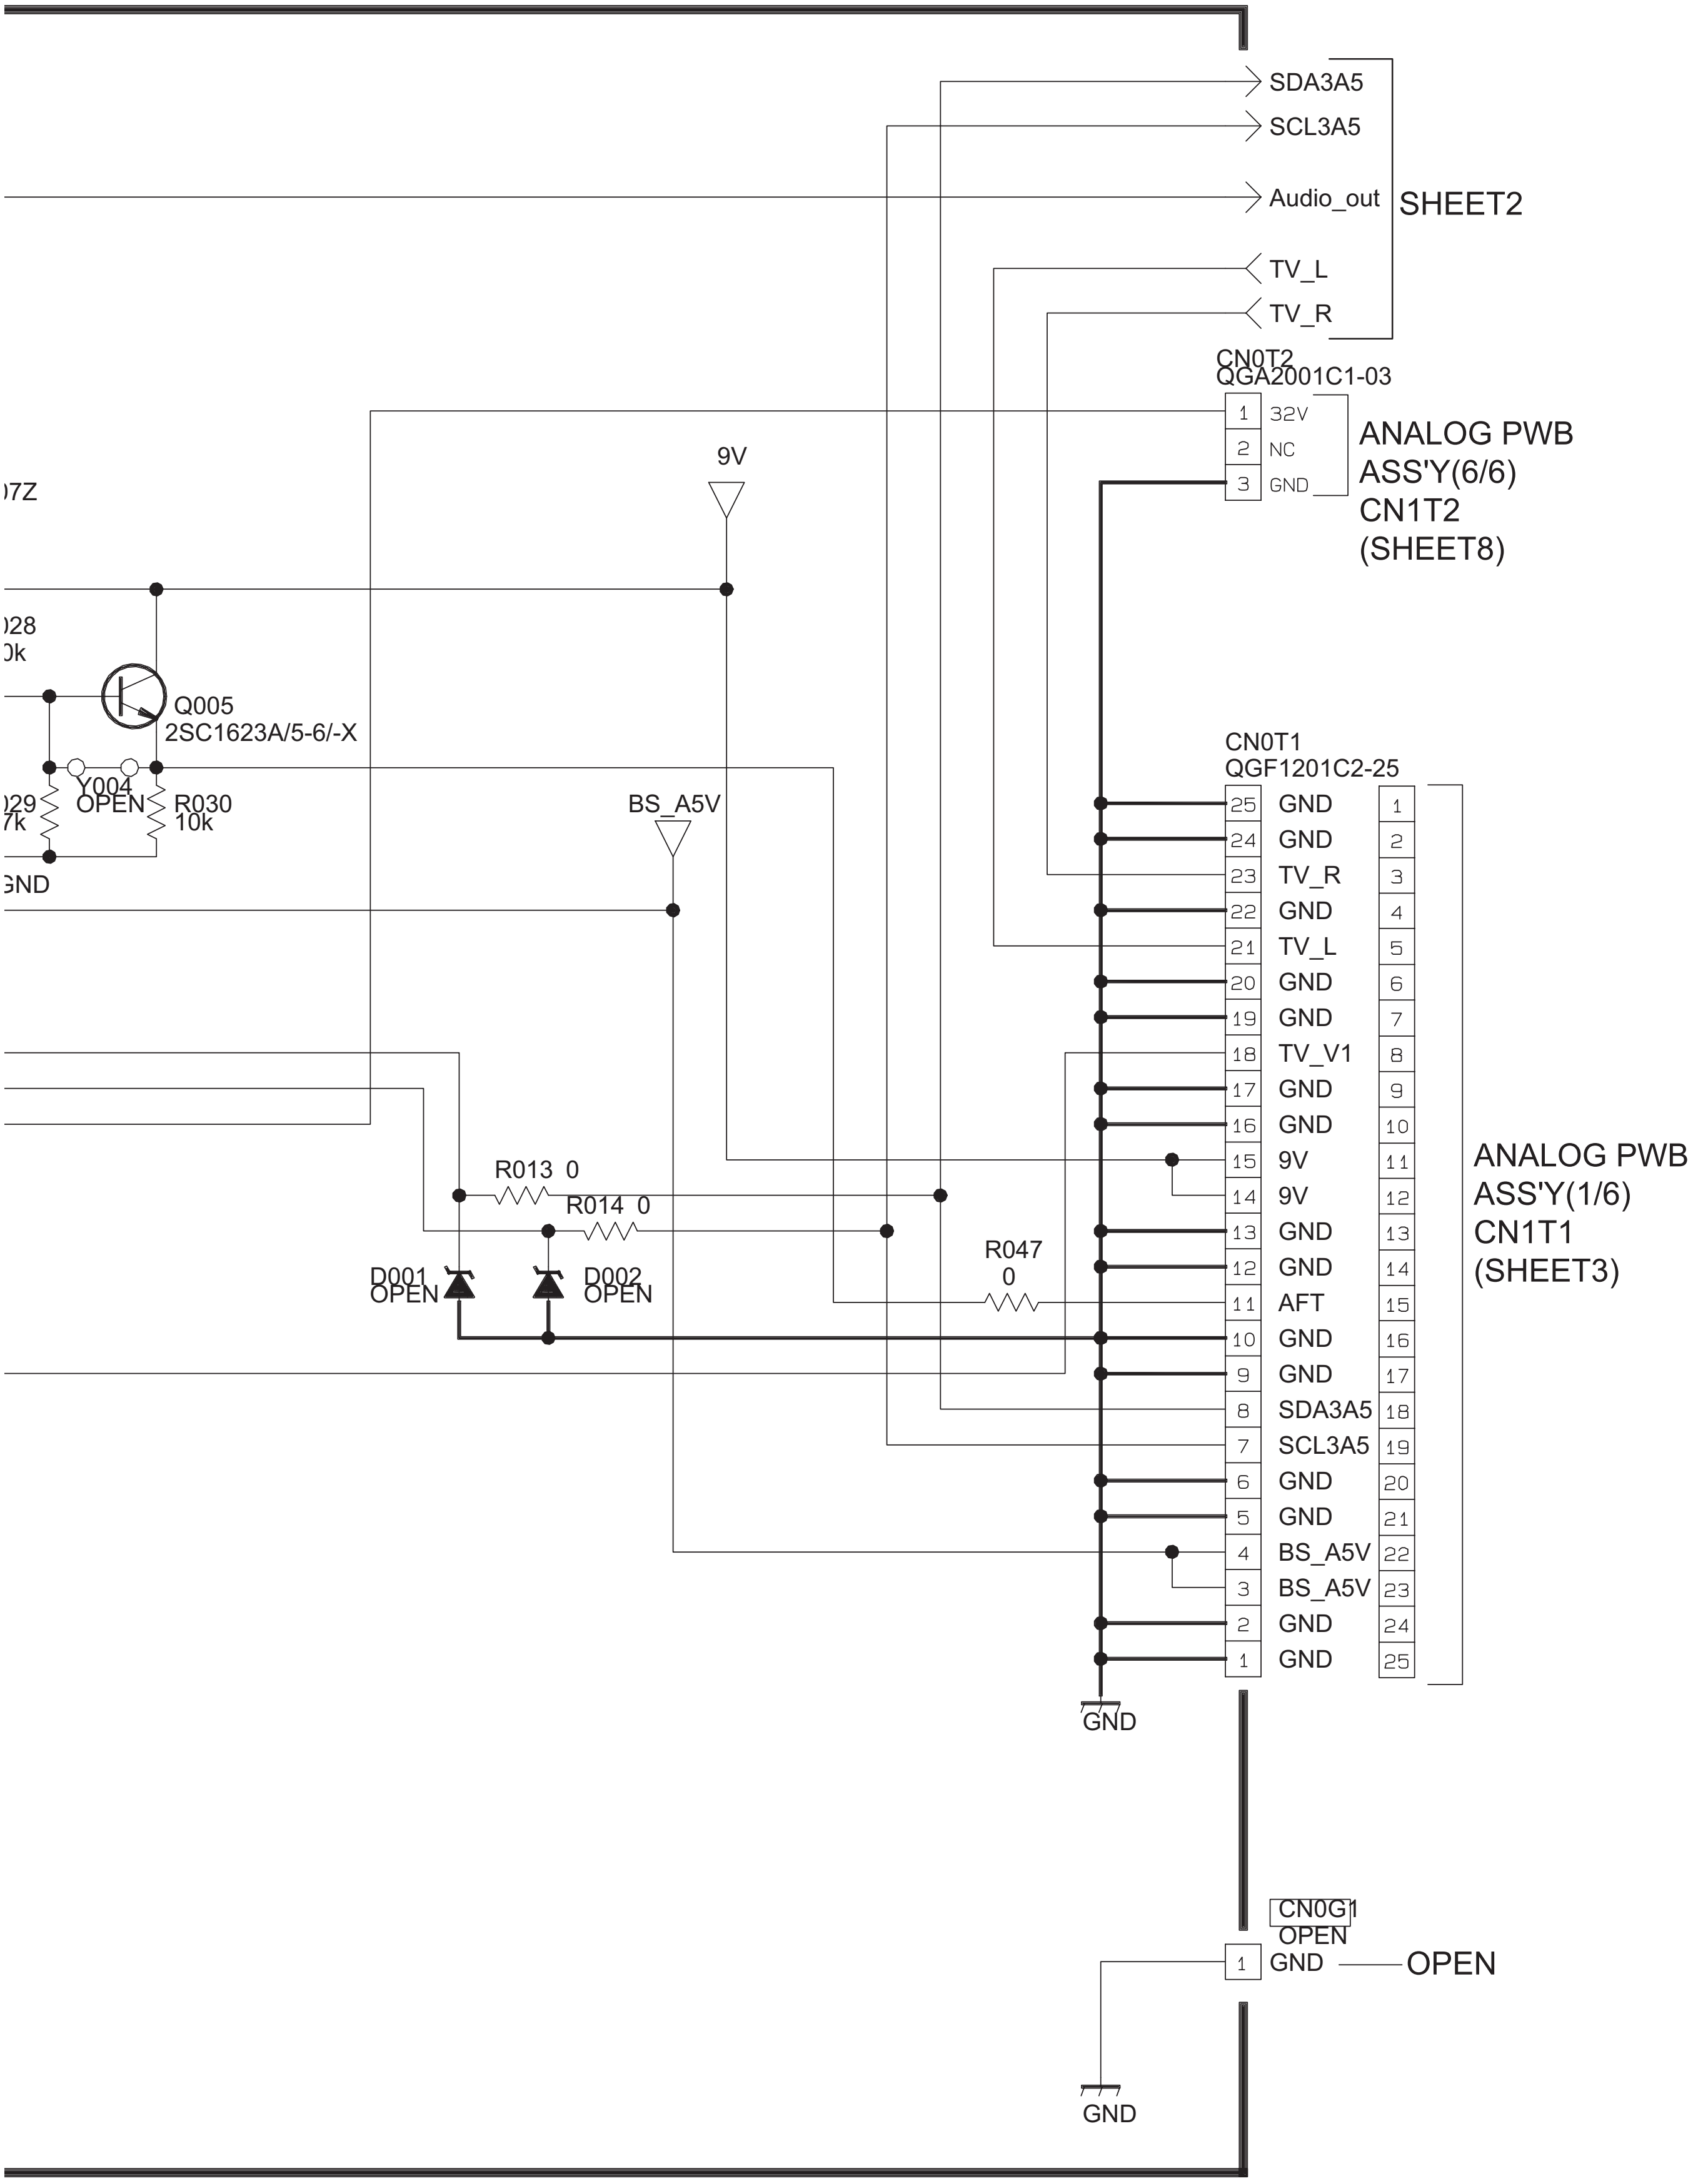
SDA3A5
SCL3A5
Audio_out
TV_L
TV_R
SHEET2
CN0T2
QGA2001C1-03
1 32V
2 NC
3 GND
ANALOG PWB
ASS'Y(6/6)
CN1T2
(SHEET8)
9V
)7Z
)28
)k
Q005
2SC1623A/5-6/-X
Y004
OPEN
)29
7k
R030
10k
GND
BS_A5V
CN0T1
QGF1201C2-25
25 GND 1
24 GND 2
23 TV_R 3
22 GND 4
21 TV_L 5
20 GND 6
19 GND 7
18 TV_V1 8
17 GND 9
16 GND 10
15 9V 11
14 9V 12
13 GND 13
12 GND 14
11 AFT 15
10 GND 16
9 GND 17
8 SDA3A5 18
7 SCL3A5 19
6 GND 20
5 GND 21
4 BS_A5V 22
3 BS_A5V 23
2 GND 24
1 GND 25
ANALOG PWB
ASS'Y(1/6)
CN1T1
(SHEET3)
R013 0
R014 0
R047
0
D001
OPEN
D002
OPEN
GND
CN0G1
OPEN
1 GND
OPEN
GND

c30202001_0214_1/2_0.0

TUNER PWB CIRCUIT DIAGRAM (2/2) SHEET2

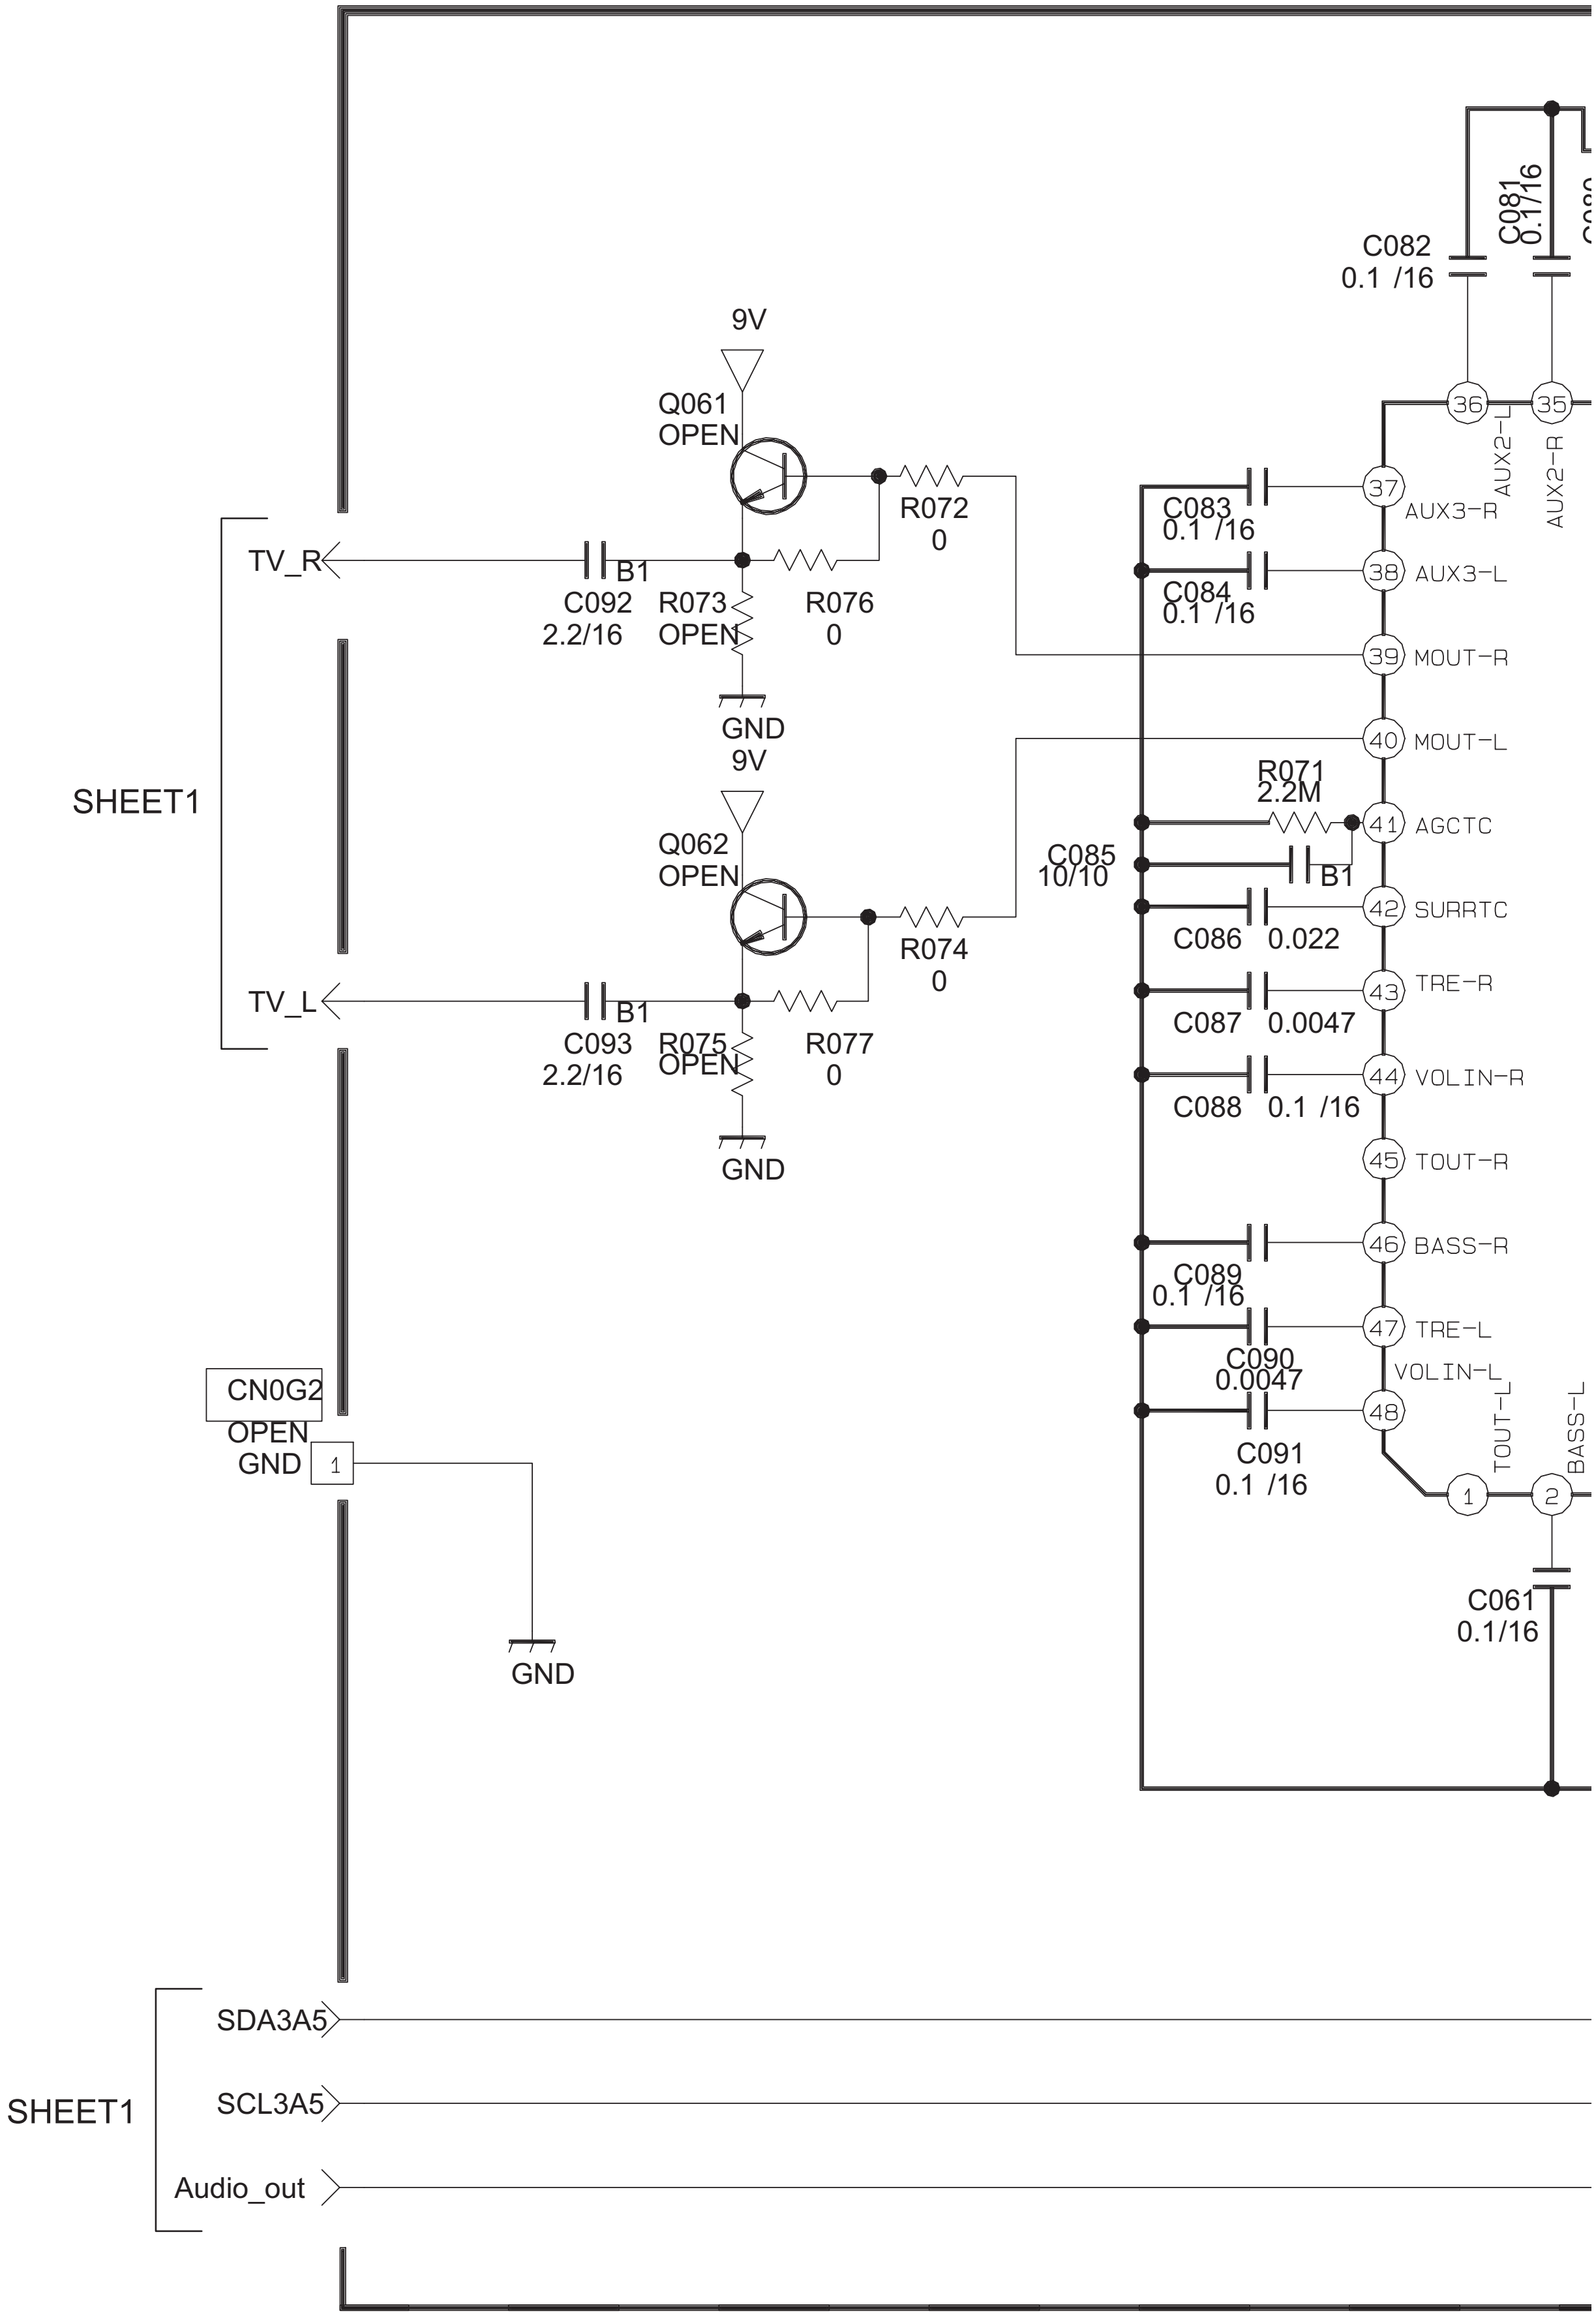

C082
0.1 /16
C081
0.1/16
9V
Q061
OPEN
R072
0
TV_R
B1
C092
2.2/16
R073
OPEN
R076
0
GND
9V
SHEET1
Q062
OPEN
R074
0
TV_L
B1
C093
2.2/16
R075
OPEN
R077
0
GND
C083
0.1 /16
C084
0.1 /16
R071
2.2M
C085
10/10
B1
C086 0.022
C087 0.0047
C088 0.1 /16
C089
0.1 /16
C090
0.0047
C091
0.1 /16
C061
0.1/16
36
35
AUX2-L
AUX2-R
37 AUX3-R
38 AUX3-L
39 MOUT-R
40 MOUT-L
41 AGCTC
42 SURRTC
43 TRE-R
44 VOLIN-R
45 TOUT-R
46 BASS-R
47 TRE-L
VOLIN-L
48
1
2
TOUT-L
BASS-L
CN0G2
OPEN
GND
1
GND
SHEET1
SDA3A5
SCL3A5
Audio_out

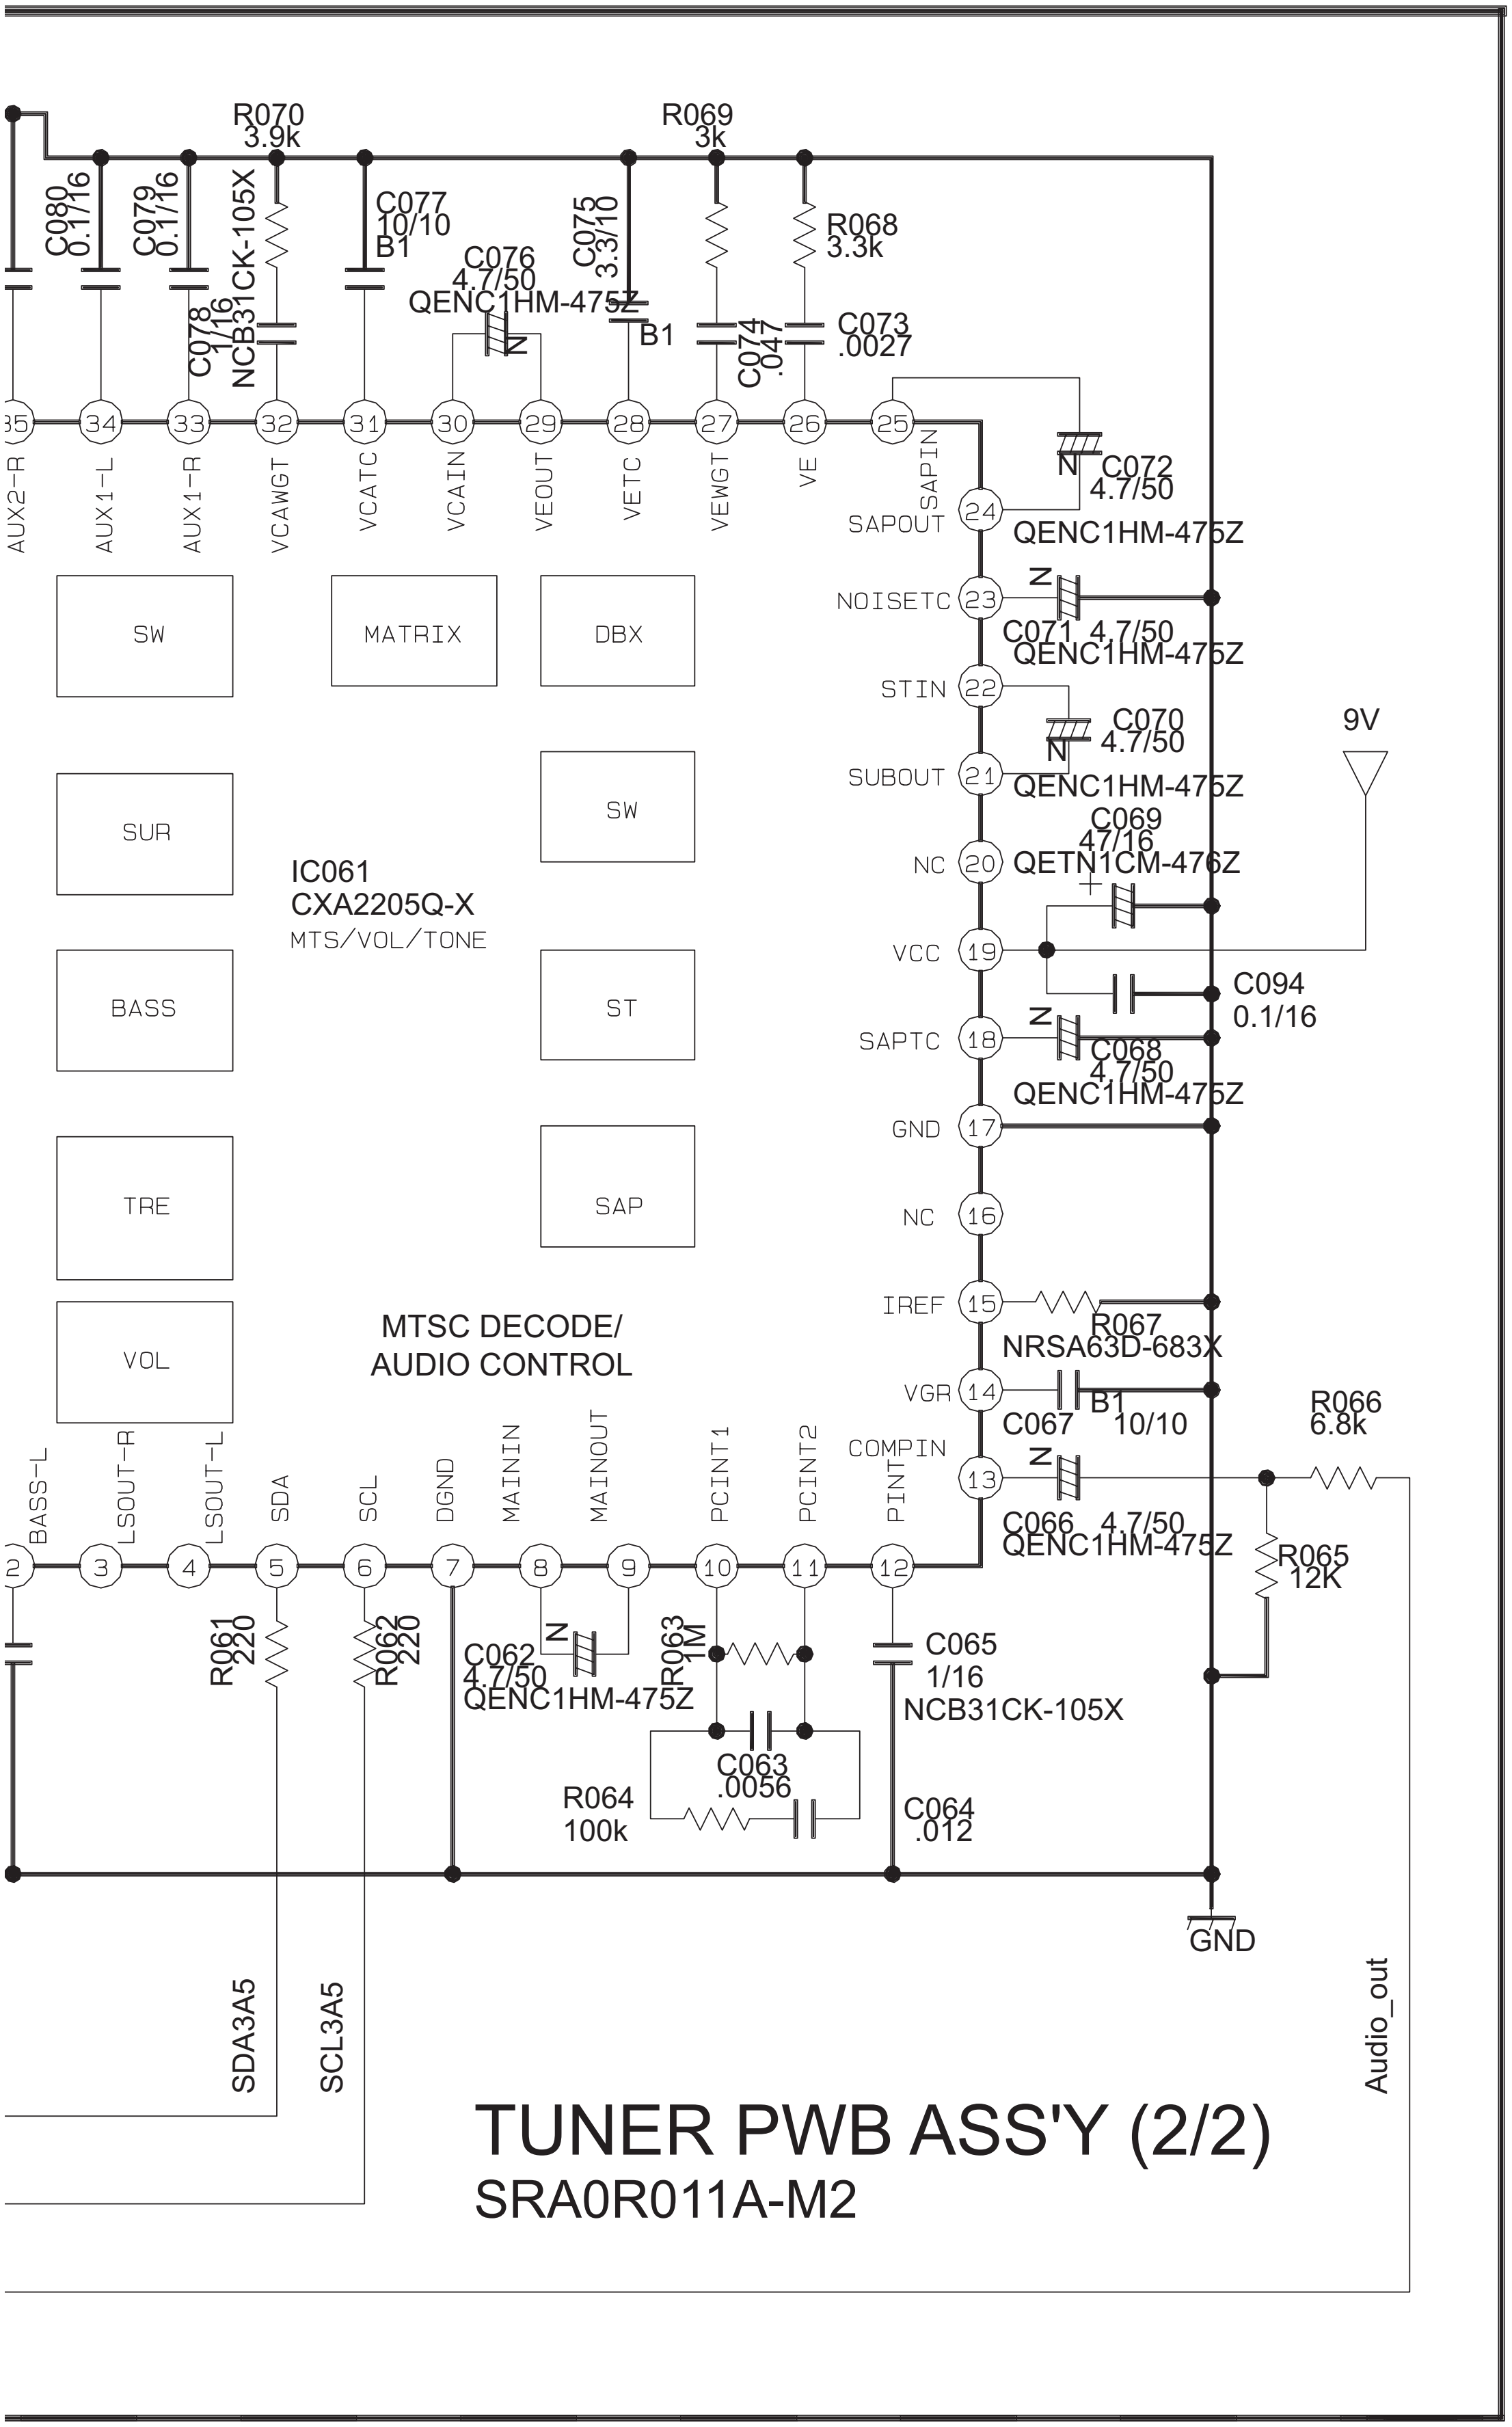
R070
3.9k
R069
3k
C080
0.1/16
C079
0.1/16
NCB31CK-105X
C077
10/10
B1
C076
4.7/50
QENC1HM-475Z
C075
3.3/10
B1
R068
3.3k
C078
1/16
C074
.047
C073
.0027
AUX2-R
AUX1-L
AUX1-R
VCAWGT
VCATC
VCAIN
VEOUT
VETC
VEWGT
VE
SAPIN
SAPOUT
C072
4.7/50
QENC1HM-475Z
NOISETC
C071 4.7/50
QENC1HM-475Z
STIN
C070
4.7/50
SUBOUT
QENC1HM-475Z
9V
C069
47/16
NC
QETN1CM-476Z
VCC
C094
0.1/16
SAPTC
C068
4.7/50
QENC1HM-475Z
GND
NC
IREF
R067
NRSA63D-683X
VGR
B1
C067
10/10
R066
6.8k
COMPIN
PINT
C066 4.7/50
QENC1HM-475Z
R065
12K
SW
MATRIX
DBX
SUR
SW
IC061
CXA2205Q-X
MTS/VOL/TONE
BASS
ST
TRE
SAP
VOL
MTSC DECODE/
AUDIO CONTROL
BASS-L
LSOUT-R
LSOUT-L
SDA
SCL
DGND
MAININ
MAINOUT
PCINT1
PCINT2
R061
220
R062
220
C062
4.7/50
QENC1HM-475Z
R063
1M
C065
1/16
NCB31CK-105X
C063
.0056
R064
100k
C064
.012
GND
SDA3A5
SCL3A5
Audio_out
N
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2

TUNER PWB ASS'Y (2/2)

SRA0R011A-M2

ANALOG PWB CIRCUIT DIAGRAM (1/6) SHEET 3

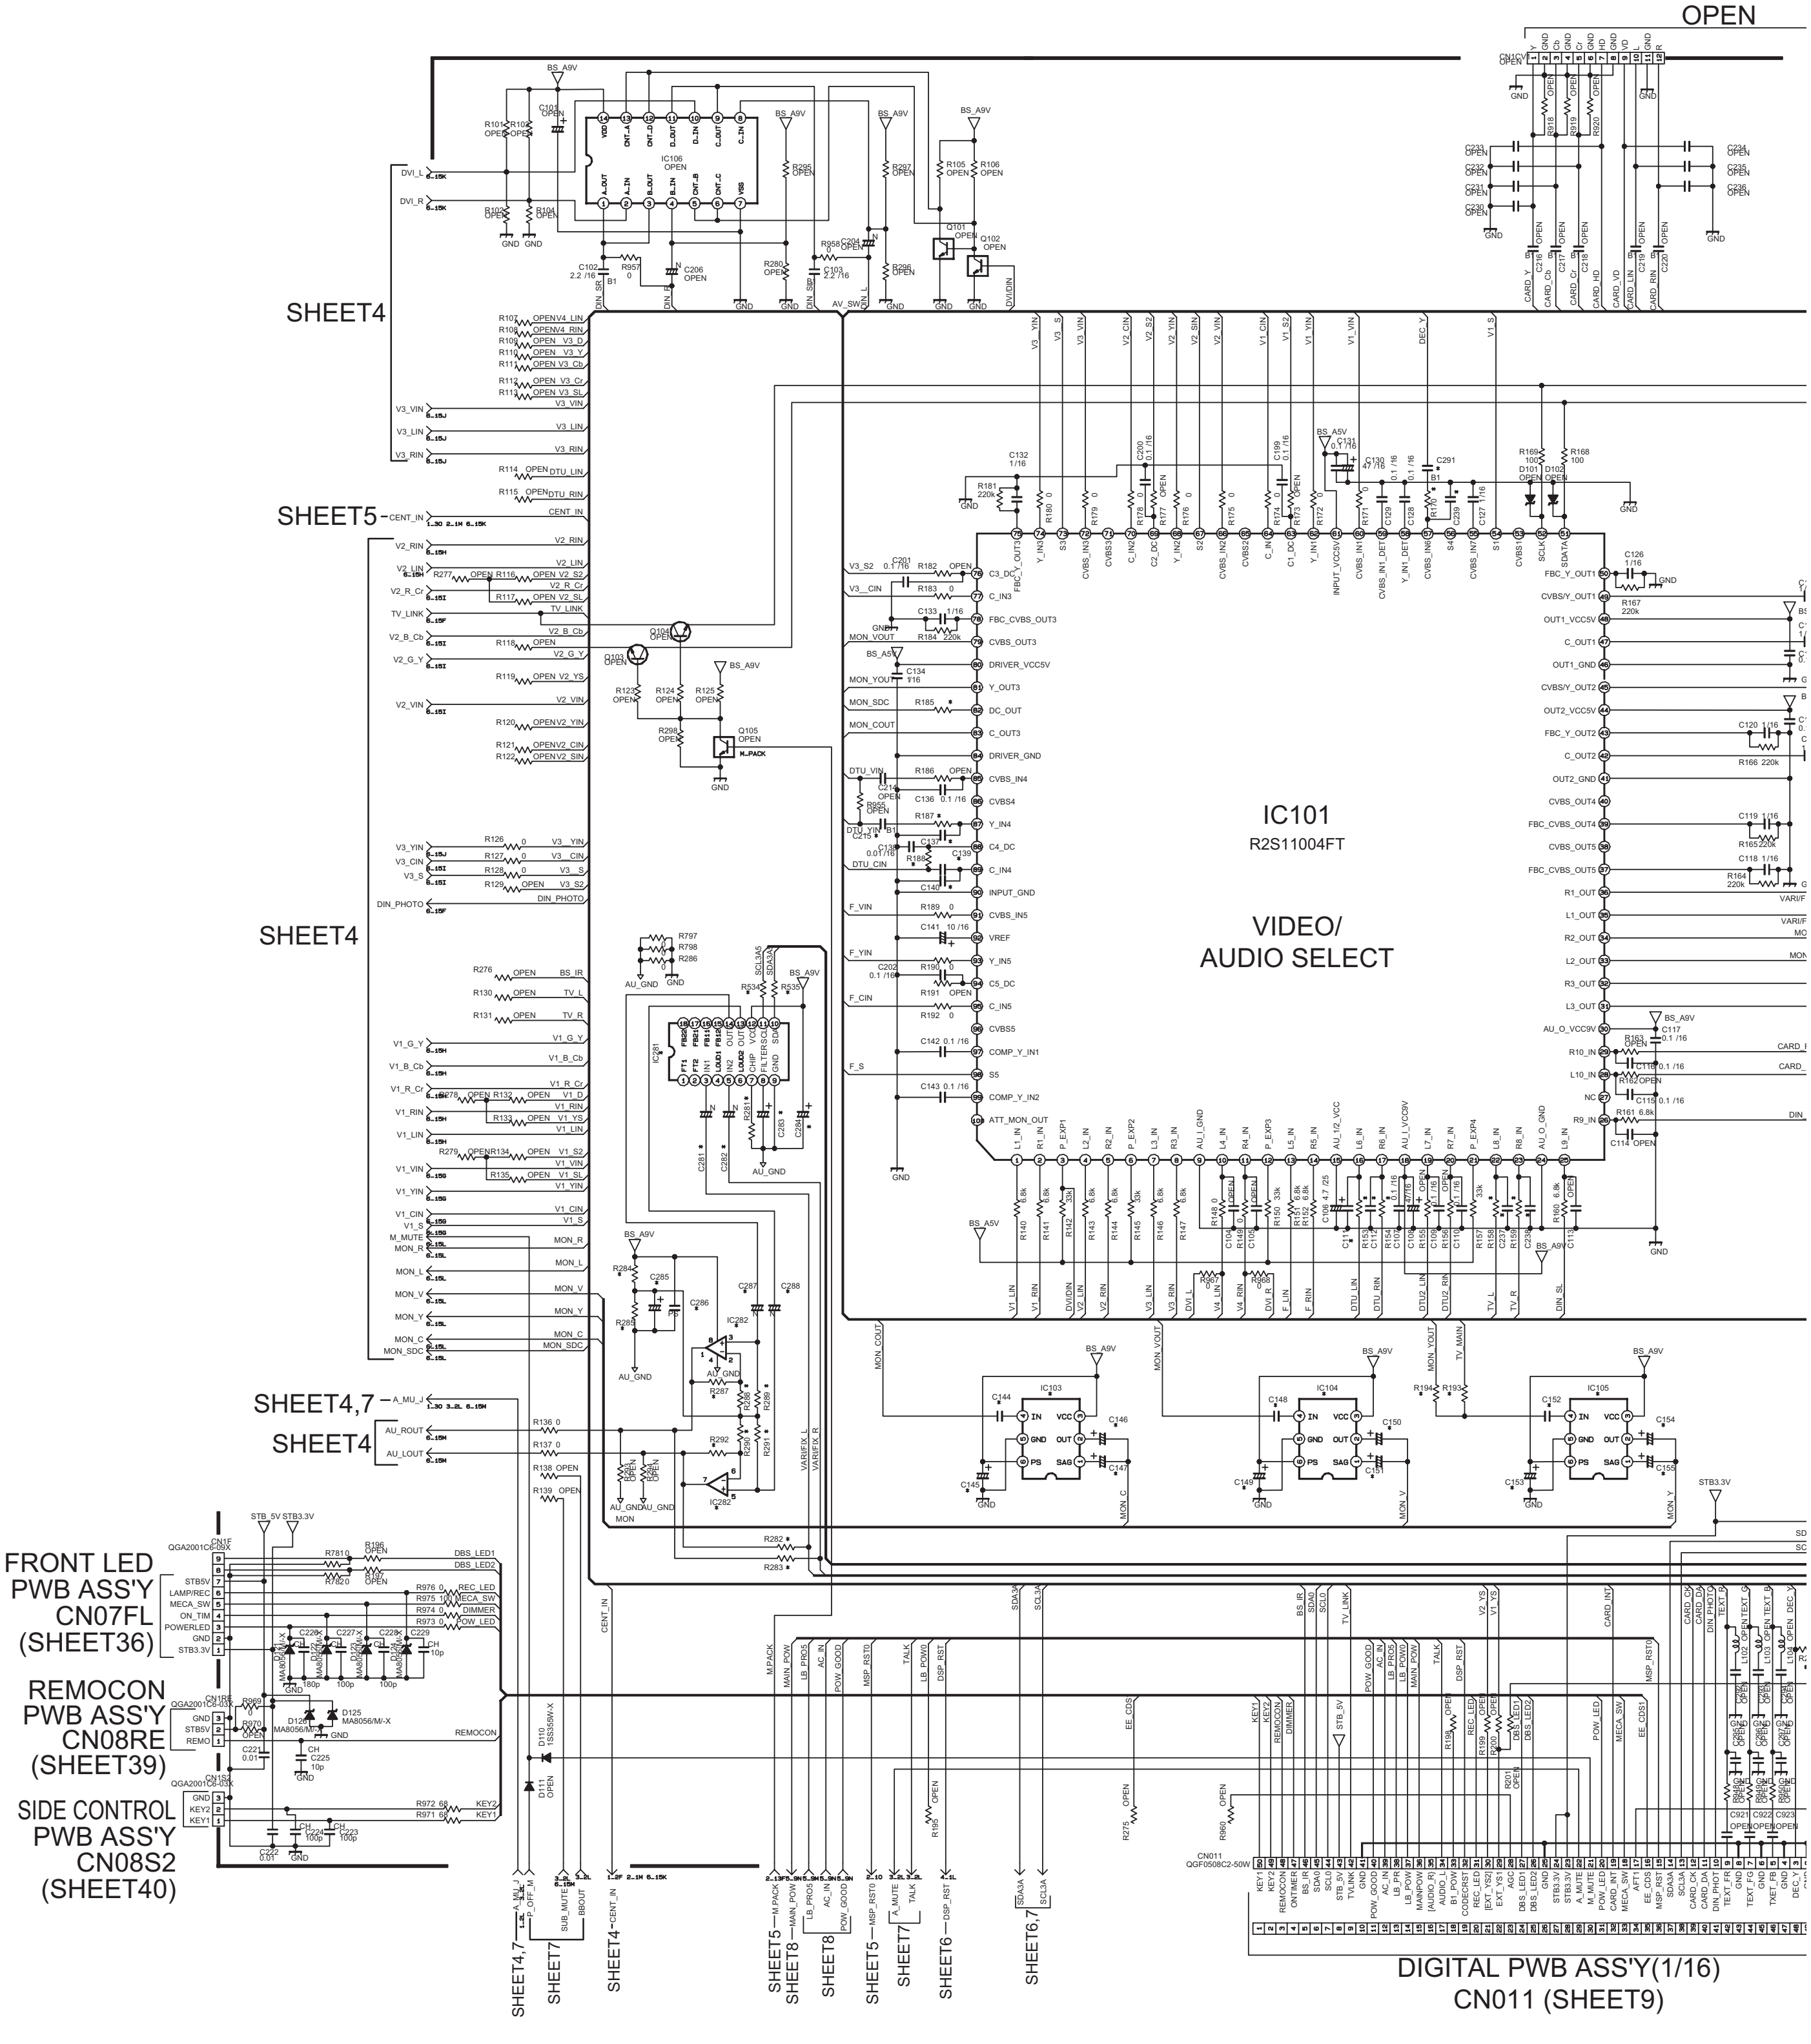

MONITOR OUT								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
IC103	OPEN	OPEN	OPEN	OPEN	MM1510XN-X	MM1510XN-X	MM1510XN-X	OPEN
IC104	OPEN	OPEN	OPEN	OPEN	MM1510XN-X	MM1510XN-X	MM1510XN-X	OPEN
IC105	OPEN	OPEN	OPEN	OPEN	MM1510XN-X	MM1510XN-X	MM1510XN-X	OPEN
C144	OPEN	OPEN	OPEN	OPEN	1/16	1/16	1/16	OPEN
C145	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
C146	OPEN	OPEN	OPEN	OPEN	100/10	100/10	100/10	OPEN
C147	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
C148	OPEN	OPEN	OPEN	OPEN	1/16	1/16	1/16	OPEN
C149	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
C150	OPEN	OPEN	OPEN	OPEN	100/10	100/10	100/10	OPEN
C151	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
C152	OPEN	OPEN	OPEN	OPEN	1/16	1/16	1/16	OPEN
C153	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
C154	OPEN	OPEN	OPEN	OPEN	100/10	100/10	100/10	OPEN
C155	OPEN	OPEN	OPEN	OPEN	10/16	10/16	10/16	OPEN
R185	OPEN	OPEN	OPEN	OPEN	0	0	0	OPEN
R194	OPEN	OPEN	OPEN	OPEN	0	0	0	OPEN

VARIABLE AUDIO								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
IC281	OPEN	OPEN	OPEN	OPEN	BD3869AF-X	BD3869AF-X	OPEN	OPEN
IC282	OPEN	OPEN	OPEN	OPEN	RC4558D-X	RC4558D-X	OPEN	OPEN
R281	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	OPEN
R282	0	0	0	0	OPEN	OPEN	0	0
R283	0	0	0	0	OPEN	OPEN	0	0
R284	OPEN	OPEN	OPEN	OPEN	4.7k	4.7k	OPEN	OPEN
R285	OPEN	OPEN	OPEN	OPEN	4.7k	4.7k	OPEN	OPEN
R287	OPEN	OPEN	OPEN	OPEN	15k	15k	OPEN	OPEN
R288	OPEN	OPEN	OPEN	OPEN	15k	15k	OPEN	OPEN
R289	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	OPEN
R290	OPEN	OPEN	OPEN	OPEN	15k	15k	OPEN	OPEN
R291	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	OPEN
R292	OPEN	OPEN	OPEN	OPEN	15k	15k	OPEN	OPEN
R534	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	OPEN
R535	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	OPEN

VARIABLE AUDIO								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
C281	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN
C282	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN
C283	OPEN	OPEN	OPEN	OPEN	22/25	22/25	OPEN	OPEN
C284	OPEN	OPEN	OPEN	OPEN	100/16	100/16	OPEN	OPEN
C285	OPEN	OPEN	OPEN	OPEN	47/16	47/16	OPEN	OPEN
C286	OPEN	OPEN	OPEN	OPEN	0.1/16	0.1/16	OPEN	OPEN
C287	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN
C288	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN

PC IN								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FN97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
R228	0	OPEN	0	OPEN	0	0	OPEN	0
R229	0	OPEN	0	OPEN	0	0	OPEN	0
R245	0	OPEN	0	OPEN	0	0	OPEN	0
R246	0	OPEN	0	OPEN	0	0	OPEN	0
R247	0	OPEN	0	OPEN	0	0	OPEN	0
R588	0	OPEN	0	OPEN	0	0	OPEN	0
R589	0	OPEN	0	OPEN	0	0	OPEN	0
R590	0	OPEN	0	OPEN	0	0	OPEN	0
R591	0	OPEN	0	OPEN	0	0	OPEN	0
R592	0	OPEN	0	OPEN	0	0	OPEN	0
C186	OPEN	0.1/16	OPEN	0.1/16	OPEN	OPEN	0.1/16	OPEN
C188	OPEN	0.1/16	OPEN	0.1/16	OPEN	OPEN	0.1/16	OPEN
C190	OPEN	0.1/16	OPEN	0.1/16	OPEN	OPEN	0.1/16	OPEN

ANALOG PWB ASS'Y (1/6)
SRA-1011A-M2

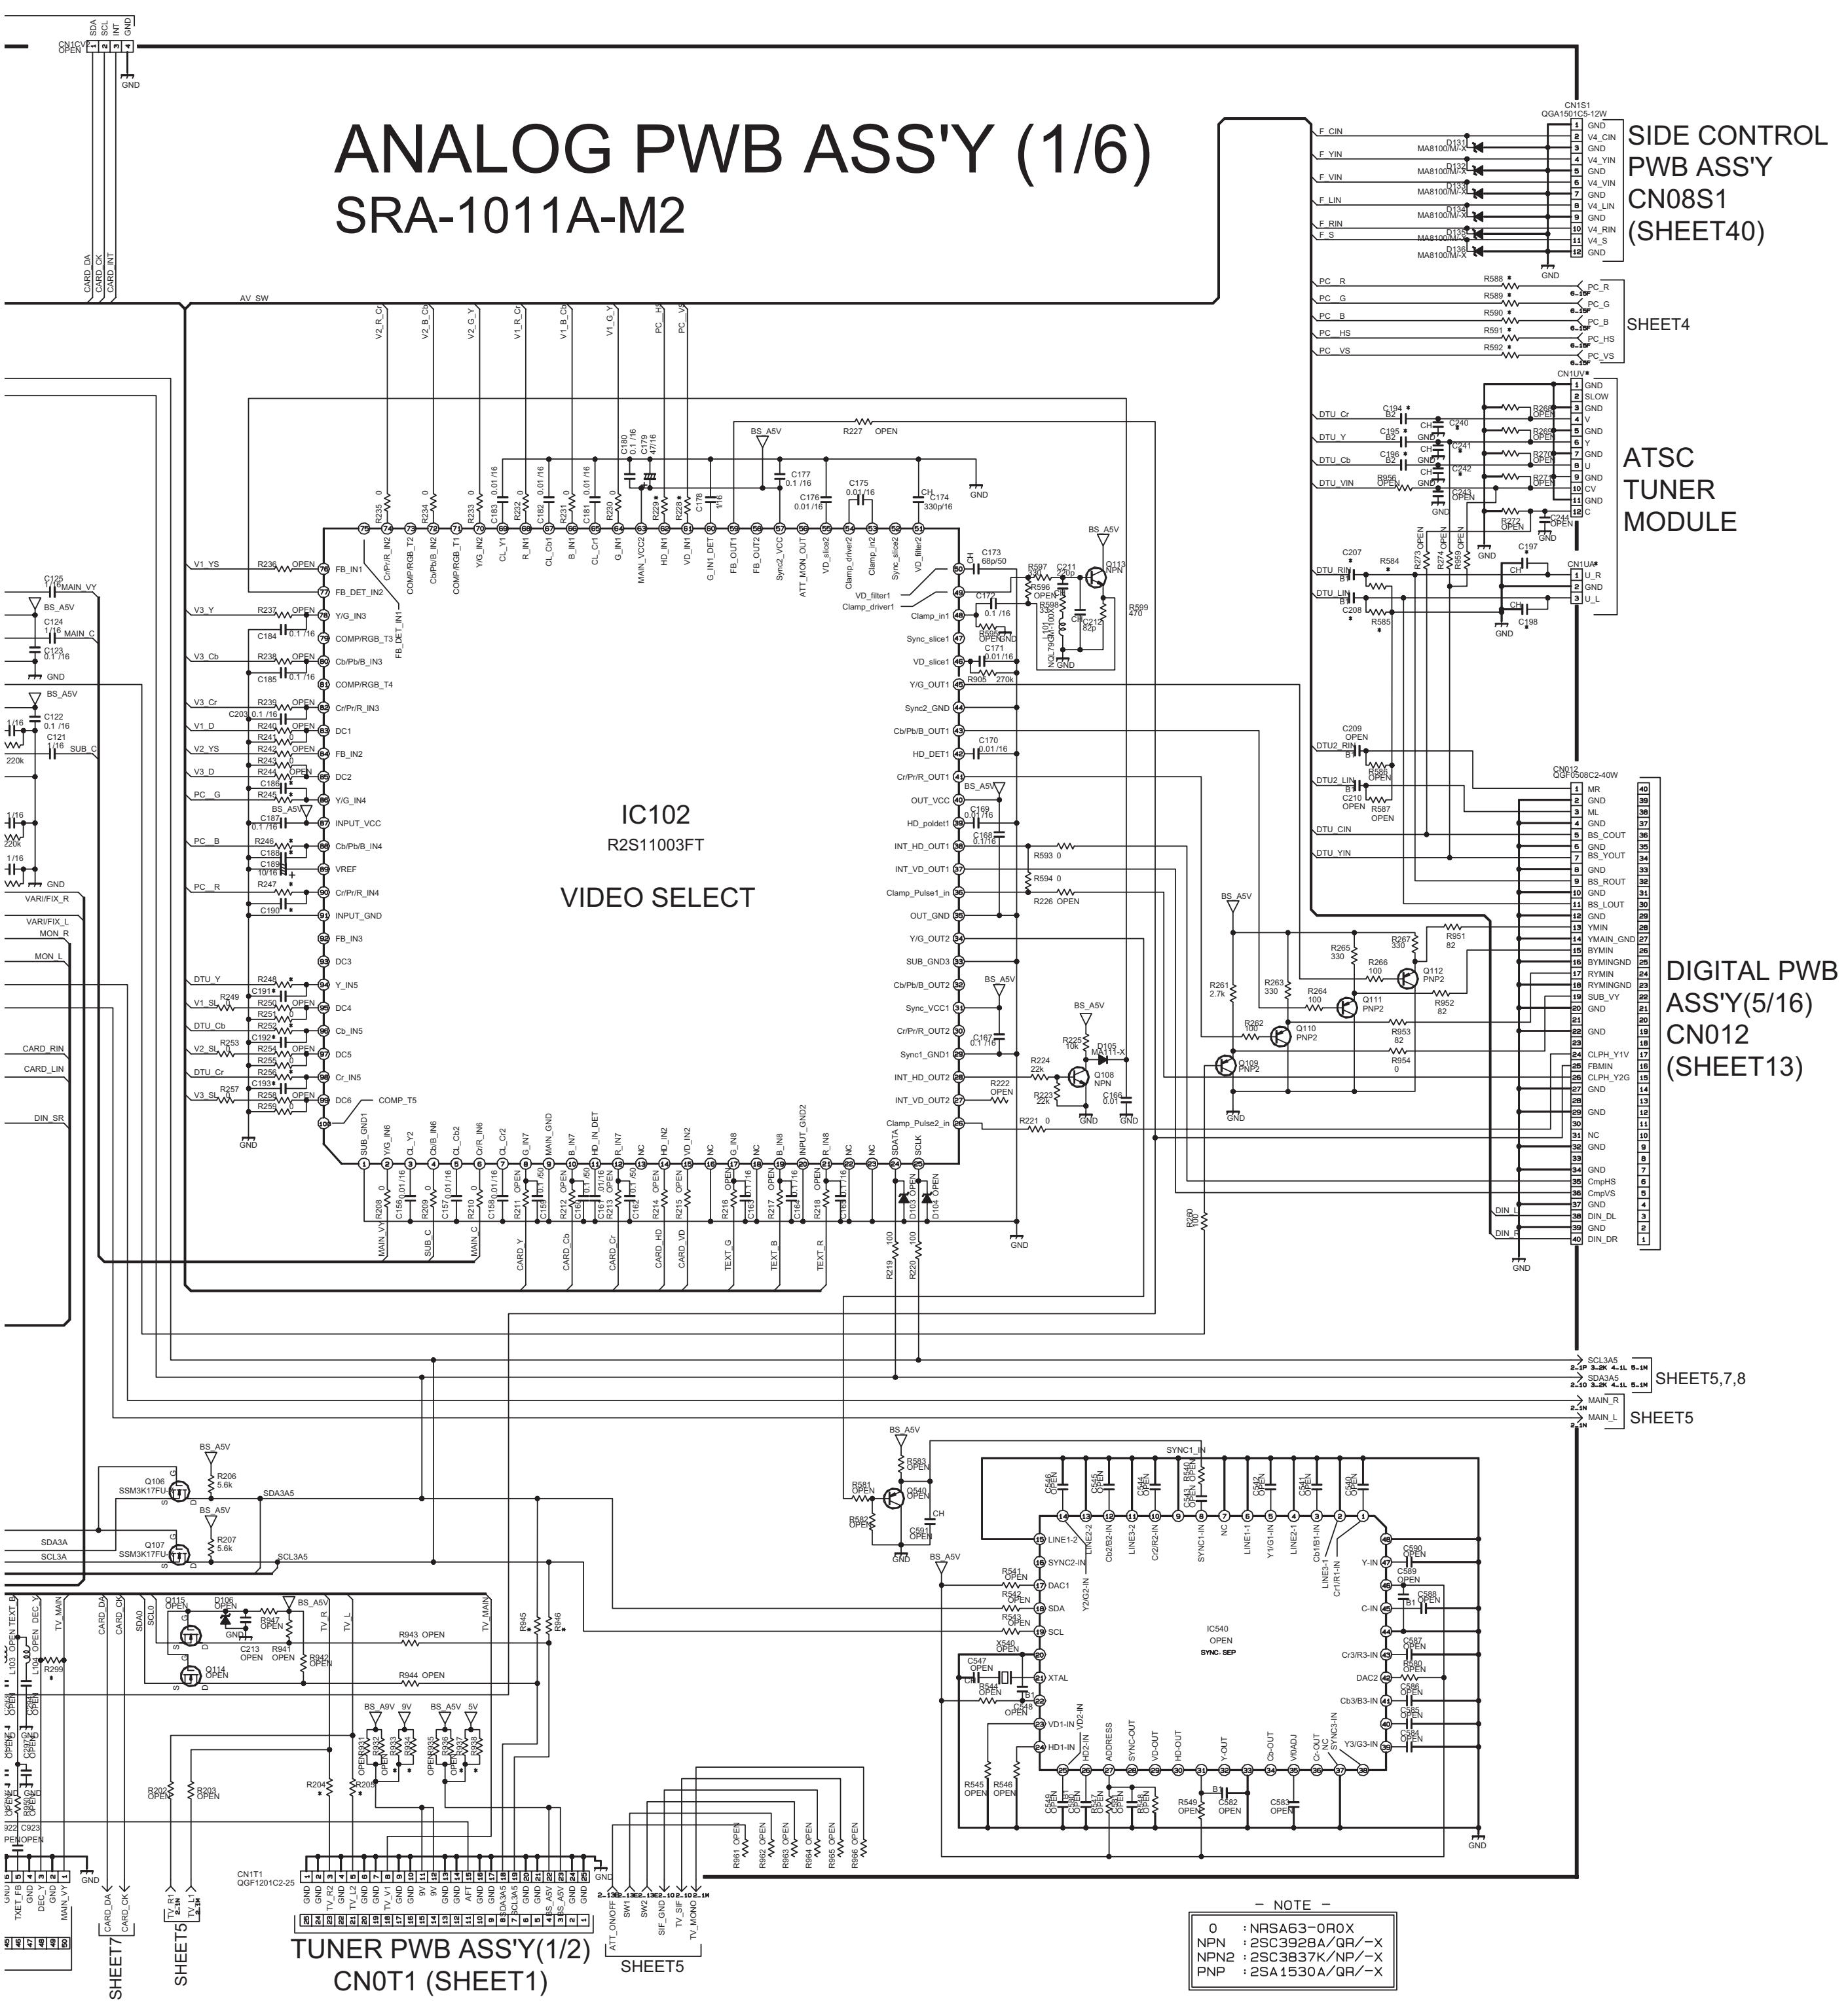
SIDE CONTROL PWB ASS'Y CN08S1 (SHEET40)
CN1S1
QGA1501C5-12W
SHEET4
ATSC TUNER MODULE
CN1UV
CN1UA
DIGITAL PWB ASS'Y(5/16) CN012 (SHEET13)
CN012
QGF0508C2-40W
IC102
R2S11003FT
VIDEO SELECT
IC540
OPEN
SYNC SEP
SHEET5,7,8
SHEET5
SCL3A5
SDA3A5
MAIN_R
MAIN_L
Q106
SSM3K17FU
Q107
SSM3K17FU
Q109 PNP2
Q110 PNP2
Q111 PNP2
Q112 PNP2
Q108 NPN
Q113 NPN
CN1T1
QGF1201C2-25
TUNER PWB ASS'Y(1/2) CN0T1 (SHEET1)
SHEET7
SHEET5
GND
BS_A5V

- NOTE -

0 : NRSA63-0R0X
NPN : 2SC3928A/QR/-X
NPN2 : 2SC3837K/NP/-X
PNP : 2SA1530A/QR/-X

DIGITAL TUNER								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
CNUV	QGA2001C6-12X	QGA2001C6-12X	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
CNUA	QGA2001C6-03X	QGA2001C6-03X	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R153	6.8k	6.8k	OPEN	OPEN	6.8k	6.8k	6.8k	OPEN
R154	6.8k	6.8k	OPEN	OPEN	6.8k	6.8k	6.8k	OPEN
R248	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R252	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R256	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R584	10k	10k	OPEN	OPEN	10k	10k	10k	OPEN
R585	10k	10k	OPEN	OPEN	10k	10k	10k	OPEN
C111	OPEN	OPEN	0.1/16	0.1/16	OPEN	OPEN	OPEN	0.1/16
C112	OPEN	OPEN	0.1/16	0.1/16	OPEN	OPEN	OPEN	0.1/16
C191	OPEN	OPEN	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16
C192	OPEN	OPEN	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16
C193	OPEN	OPEN	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16	0.1/16
C194	2.2/10	2.2/10	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C195	2.2/10	2.2/10	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C196	2.2/10	2.2/10	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C207	2.2/16	2.2/16	OPEN	OPEN	2.2/16	2.2/16	2.2/16	OPEN
C208	2.2/16	2.2/16	OPEN	OPEN	2.2/16	2.2/16	2.2/16	OPEN

DIGITAL TUNER								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
R187	OPEN	OPEN	OPEN	OPEN	0	0	0	OPEN
R188	OPEN	OPEN	OPEN	OPEN	10k	10k	10k	OPEN
C215	OPEN	OPEN	OPEN	OPEN	10/10	10/10	10/10	OPEN
C137	0.1/16	0.1/16	0.1/16	0.1/16	OPEN	OPEN	OPEN	0.1/16
C139	OPEN	OPEN	OPEN	OPEN	1/16	1/16	1/16	OPEN
C140	0.1/16	0.1/16	0.1/16	0.1/16	OPEN	OPEN	OPEN	0.1/16
C240	10p	10p	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C241	10p	10p	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C242	10p	10p	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C197	100p	100p	OPEN	100p	OPEN	OPEN	OPEN	OPEN
C198	100p	100p	OPEN	100p	OPEN	OPEN	OPEN	OPEN

ANALOG TUNER								
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
R158	6.8k	6.8k	OPEN	6.8k	6.8k	6.8k	6.8k	OPEN
R159	6.8k	6.8k	OPEN	6.8k	6.8k	6.8k	6.8k	OPEN
R170	0	0	OPEN	0	0	0	0	OPEN
R204	0	0	OPEN	0	0	0	0	OPEN
R205	0	0	OPEN	0	0	0	0	OPEN
R299	0	0	OPEN	0	0	0	0	OPEN
R933	0	0	OPEN	0	0	0	0	OPEN
R934	0	0	OPEN	0	0	0	0	OPEN
R937	0	0	OPEN	0	0	0	0	OPEN
R938	0	0	OPEN	0	0	0	0	OPEN
R945	0	0	OPEN	0	0	0	0	OPEN
R946	0	0	OPEN	0	0	0	0	OPEN
C237	OPEN	OPEN	0.1/16	OPEN	OPEN	OPEN	OPEN	0.1/16
C238	OPEN	OPEN	0.1/16	OPEN	OPEN	OPEN	OPEN	0.1/16
C239	OPEN	OPEN	0.1/16	OPEN	OPEN	OPEN	OPEN	0.1/16
C291	10/10	10/10	OPEN	10/10	10/10	10/10	10/10	OPEN

c10447001_0214_1/6_0.0

ANALOG PWB CIRCUIT DIAGRAM (2/6) SHEET 4

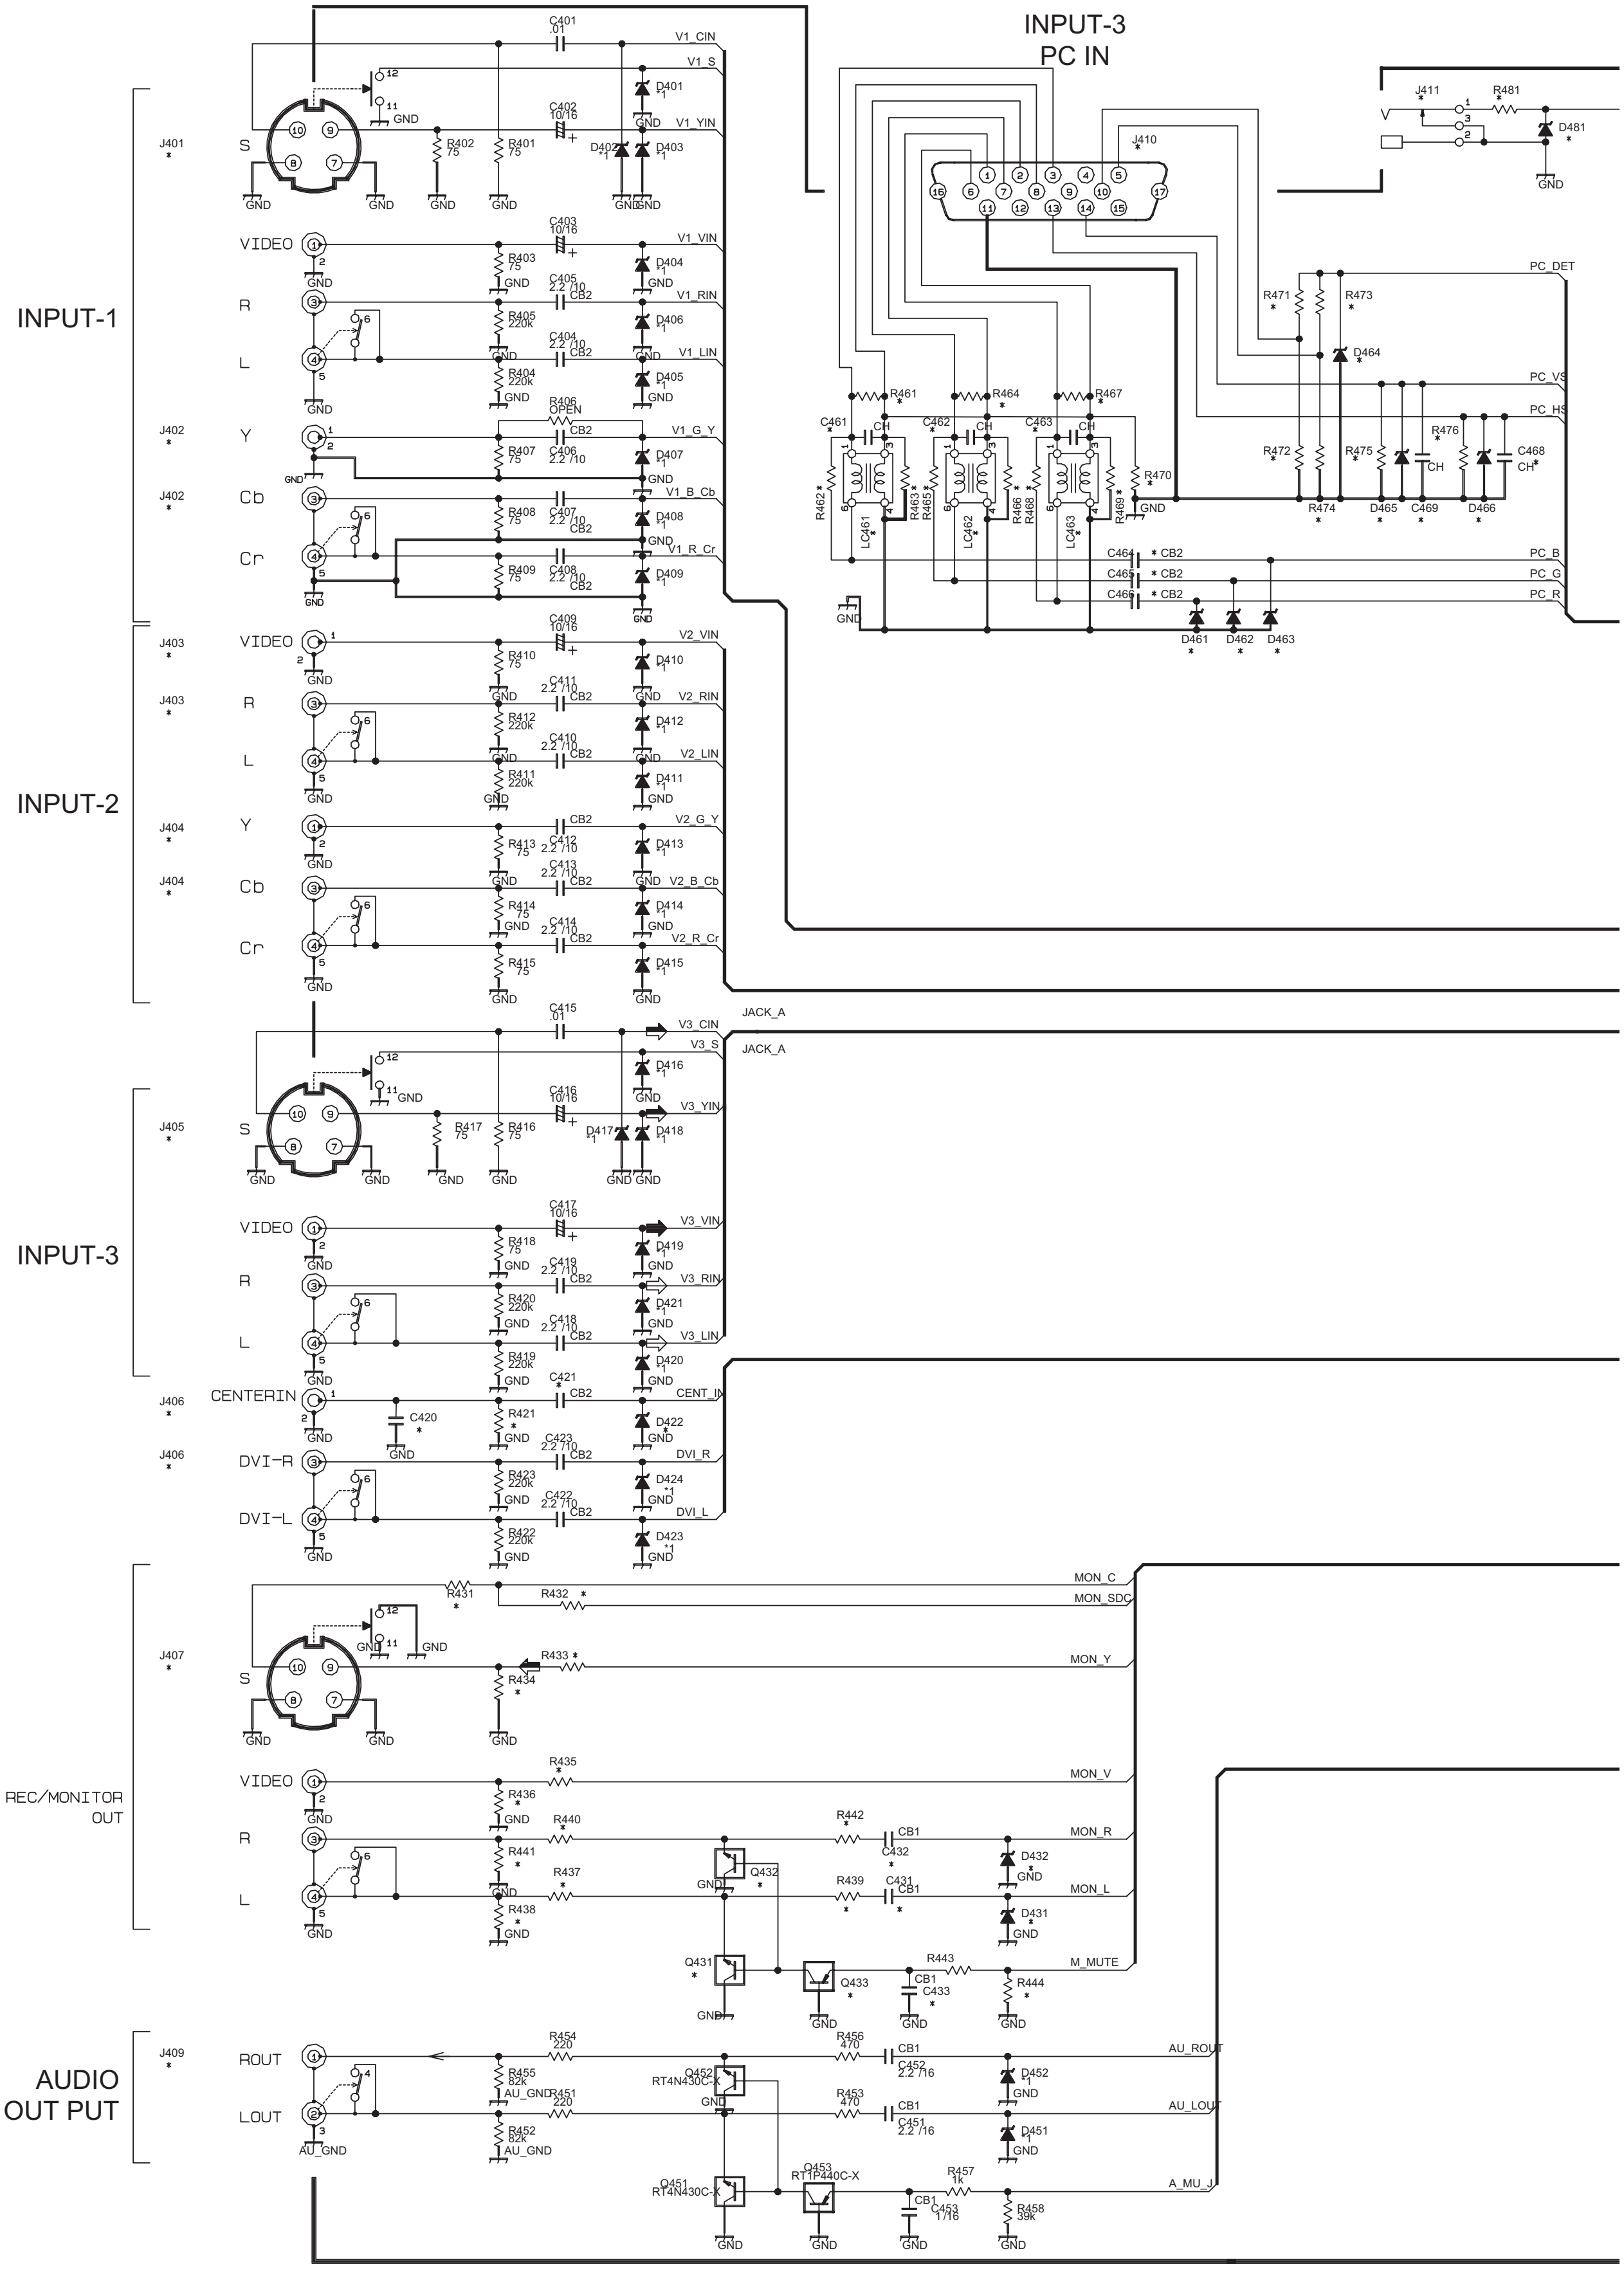
INPUT-3
PC IN
INPUT-1
INPUT-2
INPUT-3
REC/MONITOR
OUT
AUDIO
OUT PUT
J401
J402
J403
J404
J405
J406
J407
J409
J410
J411
S
VIDEO
R
L
Y
Cb
Cr
CENTERIN
DVI-R
DVI-L
ROUT
LOUT
V1_CIN
V1_S
V1_YIN
V1_VIN
V1_RIN
V1_LIN
V1_G_Y
V1_B_Cb
V1_R_Cr
V2_VIN
V2_RIN
V2_LIN
V2_G_Y
V2_B_Cb
V2_R_Cr
V3_CIN
V3_S
V3_YIN
V3_VIN
V3_RIN
V3_LIN
CENT_IN
DVI_R
DVI_L
JACK_A
MON_C
MON_SDC
MON_Y
MON_V
MON_R
MON_L
M_MUTE
AU_ROUT
AU_LOUT
A_MU_J
PC_DET
PC_VS
PC_HS
PC_B
PC_G
PC_R
AU_GND
GND
C401 .01
C402 10/16
C403 10/16
C405 2.2 /10 CB2
C404 2.2 /10 CB2
R406 OPEN
C406 2.2 /10
C407 2.2 /10
C408 2.2 /10
C409 10/16
C411 2.2 /10
C410 2.2 /10
C412 2.2 /10
C413 2.2 /10
C414 2.2 /10
C415 .01
C416 10/16
C417 10/16
C419 2.2 /10
C418 2.2 /10
C421
C420
C423 2.2 /10
C422 2.2 /10
R401 75
R402 75
R403 75
R405 220k
R404 220k
R407 75
R408 75
R409 75
R410 75
R412 220k
R411 220k
R413 75
R414 75
R415 75
R416 75
R417 75
R418 75
R420 220k
R419 220k
R421
R423 220k
R422 220k
D401
D402
D403
D404
D405
D406
D407
D408
D409
D410
D411
D412
D413
D414
D415
D416
D417
D418
D419
D420
D421
D422
D423
D424
R431
R432
R433
R434
R435
R436
R440
R441
R437
R438
R442
R439
R443
R444
C432
C431
C433
CB1
D432
D431
Q432
Q431
Q433
R454 220
R455 82k
R451 220
R452 82k
R456 470
R453 470
C452 2.2 /16
C451 2.2 /16
D452
D451
Q452 RT4N430C-X
Q451 RT4N430C-X
Q453 RT1P440C-X
R457 1k
C453 1/16
R458 39k
R461
R464
R467
R462
R463
R465
R466
R468
R469
R470
C461
C462
C463
CH
LC461
LC462
LC463
C464
C465
C466
D461
D462
D463
R471
R472
R473
R474
R475
R476
D464
D465
D466
C469
C468
R481
D481

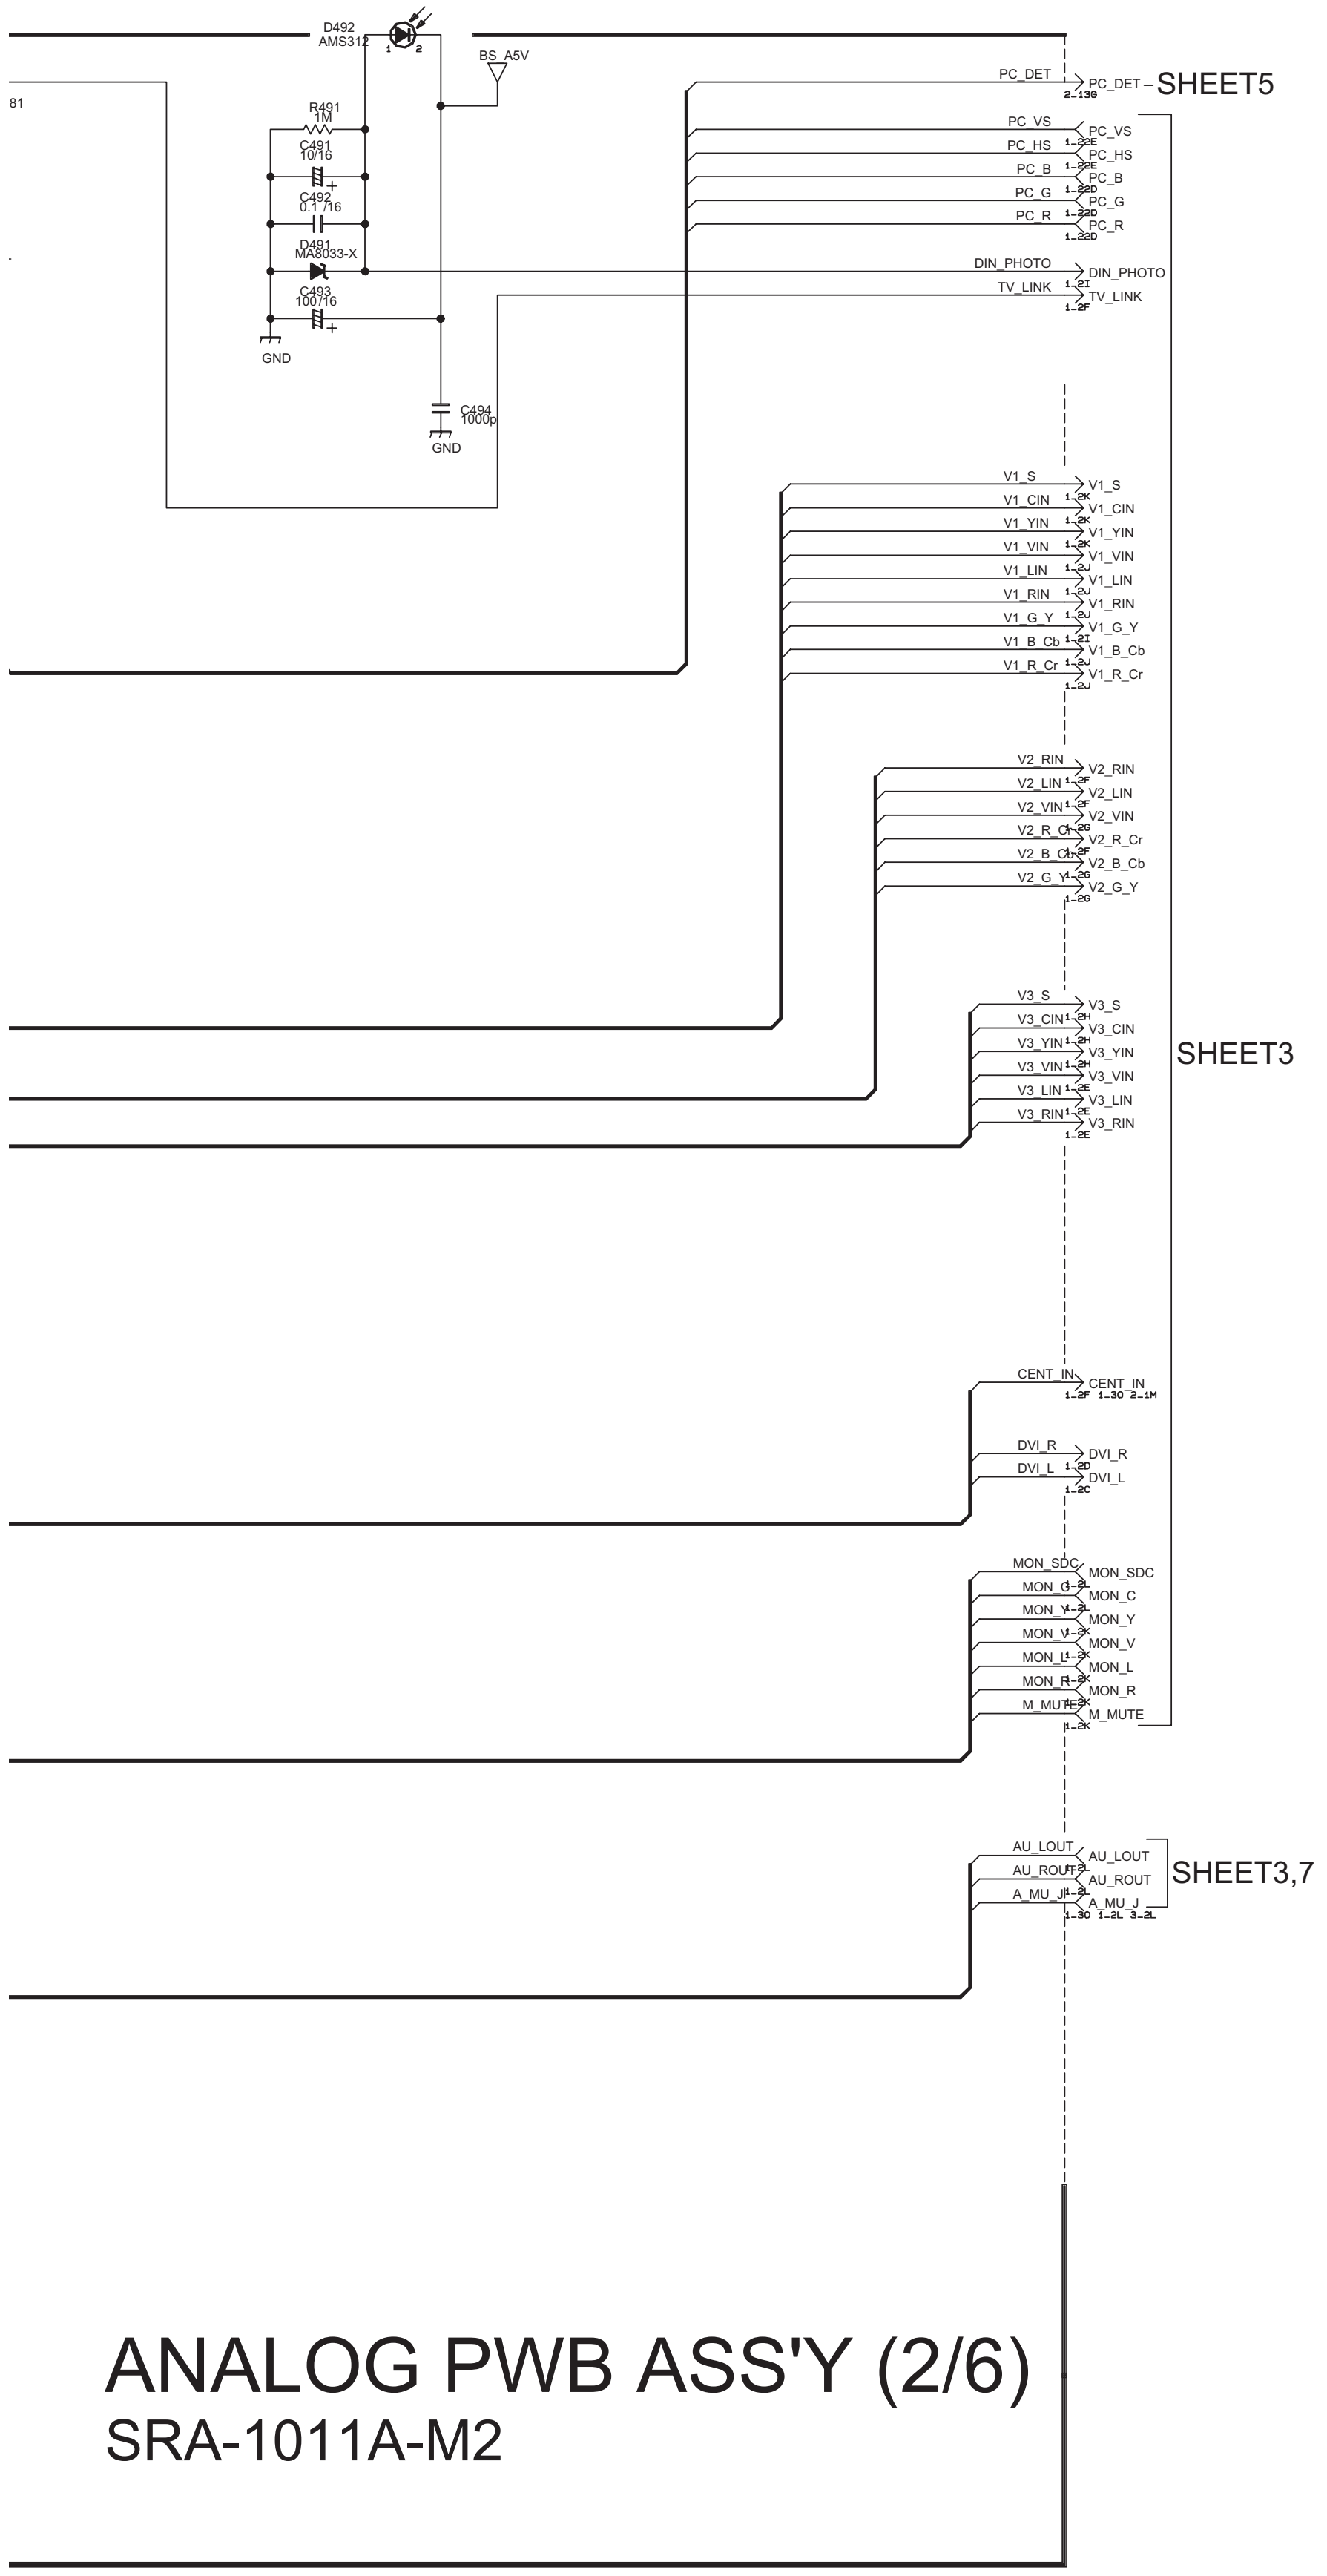
D492
AMS312
1
2
BS_A5V
81
R491
1M
C491
10/16
C492
0.1 /16
D491
MA8033-X
C493
100/16
GND
C494
1000p
GND
PC_DET
PC_DET
2_13G
SHEET5
PC_VS
PC_VS
1_22E
PC_HS
PC_HS
1_22E
PC_B
PC_B
1_22D
PC_G
PC_G
1_22D
PC_R
PC_R
1_22D
DIN_PHOTO
DIN_PHOTO
1_2I
TV_LINK
TV_LINK
1_2F
V1_S
V1_S
1_2K
V1_CIN
V1_CIN
1_2K
V1_YIN
V1_YIN
1_2K
V1_VIN
V1_VIN
1_2J
V1_LIN
V1_LIN
1_2J
V1_RIN
V1_RIN
1_2J
V1_G_Y
V1_G_Y
1_2I
V1_B_Cb
V1_B_Cb
1_2J
V1_R_Cr
V1_R_Cr
1_2J
V2_RIN
V2_RIN
1_2F
V2_LIN
V2_LIN
1_2F
V2_VIN
V2_VIN
1_2G
V2_R_Cr
V2_R_Cr
1_2F
V2_B_Cb
V2_B_Cb
1_2G
V2_G_Y
V2_G_Y
1_2G
V3_S
V3_S
1_2H
V3_CIN
V3_CIN
1_2H
V3_YIN
V3_YIN
1_2H
V3_VIN
V3_VIN
1_2E
V3_LIN
V3_LIN
1_2E
V3_RIN
V3_RIN
1_2E
SHEET3
CENT_IN
CENT_IN
1_2F 1_30 2_1M
DVI_R
DVI_R
1_2D
DVI_L
DVI_L
1_2C
MON_SDC
MON_SDC
1_2L
MON_C
MON_C
1_2L
MON_Y
MON_Y
1_2K
MON_V
MON_V
1_2K
MON_L
MON_L
1_2K
MON_R
MON_R
1_2K
M_MUTE
M_MUTE
1_2K
AU_LOUT
AU_LOUT
1_2L
AU_ROUT
AU_ROUT
1_2L
A_MU_J
A_MU_J
1_30 1_2L 3_2L
SHEET3,7

ANALOG PWB ASS'Y (2/6)

SRA-1011A-M2

		HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A
		OLLC09896	OLLC10118	OLLC10118-02	
IR	J411	OPEN	OPEN	OPEN	OPEN
	R481	OPEN	OPEN	OPEN	OPEN
	D481	OPEN	OPEN	OPEN	OPEN
CENTER CH	J406	QNN0766-001	QNN0766-001	QNN0766-001	QNN0766-001
	C420	OPEN	OPEN	OPEN	OPEN
	C421	OPEN	OPEN	OPEN	OPEN
	R421	OPEN	OPEN	OPEN	OPEN
	D422	OPEN	OPEN	OPEN	OPEN
MONITOR	J407	OPEN	OPEN	OPEN	OPEN
	R431	OPEN	OPEN	OPEN	OPEN
	R432	OPEN	OPEN	OPEN	OPEN
	R433	OPEN	OPEN	OPEN	OPEN
	R434	OPEN	OPEN	OPEN	OPEN
	R435	OPEN	OPEN	OPEN	OPEN
	R436	OPEN	OPEN	OPEN	OPEN
	R437	OPEN	OPEN	OPEN	OPEN
	R438	OPEN	OPEN	OPEN	OPEN
	R439	OPEN	OPEN	OPEN	OPEN
	R440	OPEN	OPEN	OPEN	OPEN
	R441	OPEN	OPEN	OPEN	OPEN
	R442	OPEN	OPEN	OPEN	OPEN
	R443	OPEN	OPEN	OPEN	OPEN
	R444	OPEN	OPEN	OPEN	OPEN
	C431	OPEN	OPEN	OPEN	OPEN
	C432	OPEN	OPEN	OPEN	OPEN
	C433	OPEN	OPEN	OPEN	OPEN
	D431	OPEN	OPEN	OPEN	OPEN
	D432	OPEN	OPEN	OPEN	OPEN
	Q431	OPEN	OPEN	OPEN	OPEN
	Q432	OPEN	OPEN	OPEN	OPEN
	Q433	OPEN	OPEN	OPEN	OPEN
PC	J410	QNZ0561-001	OPEN	QNZ0561-001	OPEN
	R461	75	OPEN	75	OPEN
	R462	0	OPEN	0	OPEN
	R463	0	OPEN	0	OPEN
	R464	75	OPEN	75	OPEN
	R465	0	OPEN	0	OPEN
	R466	0	OPEN	0	OPEN
	R467	75	OPEN	75	OPEN
	R468	0	OPEN	0	OPEN
	R469	0	OPEN	0	OPEN
	R470	0	OPEN	0	OPEN
	R471	0	OPEN	0	OPEN
	R474	0	OPEN	0	OPEN
	R475	330	OPEN	330	OPEN
	R476	330	OPEN	330	OPEN
	C461	100p	OPEN	100p	OPEN
	C462	100p	OPEN	100p	OPEN
	C463	100p	OPEN	100p	OPEN
	C464	2.2/10	OPEN	2.2/10	OPEN
	C465	2.2/10	OPEN	2.2/10	OPEN
	C466	2.2/10	OPEN	2.2/10	OPEN
	C468	100p	OPEN	100p	OPEN
	C469	100p	OPEN	100p	OPEN
	D461	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	D462	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	D463	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	D464	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	D465	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	D466	MA8100/M/-X	OPEN	MA8100/M/-X	OPEN
	J401	QNZ0825-001	QNZ0825-001	QNZ0825-001	QNZ0825-001
	J402	QNN0349-002	QNN0349-002	QNN0349-002	QNN0349-002
	J403	QNN0764-001	QNN0764-001	QNN0764-001	QNN0764-001
	J404	QNN0349-002	QNN0349-002	QNN0349-002	QNN0349-002
	J405	QNZ0825-001	QNZ0825-001	QNZ0825-001	QNZ0825-001
	J409	QNN0766-001	QNN0766-001	QNN0766-001	QNN0766-001

		HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
		OLLC10494	OLLC10494-02		
IR	J411	OPEN	OPEN	OPEN	OPEN
	R481	OPEN	OPEN	OPEN	OPEN
	D481	OPEN	OPEN	OPEN	OPEN
CENTER CH	J406	QNN0765-002	QNN0765-001	QNN0765-001	QNN0765-001
	C420	1000p/50	1000p/50	OPEN	OPEN
	C421	2.2/10	2.2/10	OPEN	OPEN
	R421	220k	220k	OPEN	OPEN
	D422	MA8100/M/-X	MA8100/M/-X	OPEN	OPEN
MONITOR	J407	QNZ0825-002	QNZ0825-001	QNZ0825-001	OPEN
	R431	75	75	75	OPEN
	R432	OPEN	OPEN	OPEN	OPEN
	R433	75	75	75	OPEN
	R434	2.2k	2.2k	2.2k	OPEN
	R435	75	75	75	OPEN
	R436	2.2k	2.2k	2.2k	OPEN
	R437	390	390	390	OPEN
	R438	22k	22k	22k	OPEN
	R439	470	470	470	OPEN
	R440	390	390	390	OPEN
	R441	22k	22k	22k	OPEN
	R442	470	470	470	OPEN
	R443	1k	1k	1k	OPEN
	R444	39k	39k	39k	OPEN
	C431	2.2/16	2.2/16	2.2/16	OPEN
	C432	2.2/16	2.2/16	2.2/16	OPEN
	C433	1/16	1/16	1/16	OPEN
	D431	MA8100/M/-X	MA8100/M/-X	MA8100/M/-X	OPEN
	D432	MA8100/M/-X	MA8100/M/-X	MA8100/M/-X	OPEN
	Q431	UN2226-X	UN2226-X	UN2226-X	OPEN
	Q432	UN2226-X	UN2226-X	UN2226-X	OPEN
	Q433	UN2110-X	UN2110-X	UN2110-X	OPEN
PC	J410	QNZ0561-001	QNZ0561-001	OPEN	QNZ0561-001
	R461	75	75	OPEN	75
	R462	0	0	OPEN	0
	R463	0	0	OPEN	0
	R464	75	75	OPEN	75
	R465	0	0	OPEN	0
	R466	0	0	OPEN	0
	R467	75	75	OPEN	75
	R468	0	0	OPEN	0
	R469	0	0	OPEN	0
	R470	0	0	OPEN	0
	R471	0	0	OPEN	0
	R474	0	0	OPEN	0
	R475	330	330	OPEN	330
	R476	330	330	OPEN	330
	C461	100p	100p	OPEN	100p
	C462	100p	100p	OPEN	100p
	C463	100p	100p	OPEN	100p
	C464	2.2/10	2.2/10	OPEN	2.2/10
	C465	2.2/10	2.2/10	OPEN	2.2/10
	C466	2.2/10	2.2/10	OPEN	2.2/10
	C468	100p	100p	OPEN	100p
	C469	100p	100p	OPEN	100p
	D461	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	D462	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	D463	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	D464	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	D465	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	D466	MA8100/M/-X	MA8100/M/-X	OPEN	MA8100/M/-X
	J401	QNZ0825-002	QNZ0825-001	QNZ0825-001	QNZ0825-001
	J402	QNN0349-004	QNN0349-002	QNN0349-002	QNN0349-002
	J403	QNN0764-002	QNN0764-001	QNN0764-001	QNN0764-001
	J404	QNN0349-004	QNN0349-002	QNN0349-002	QNN0349-002
	J405	QNZ0825-002	QNZ0825-001	QNZ0825-001	QNZ0825-001
	J409	QNN0766-002	QNN0766-001	QNN0766-001	QNN0766-001

ANALOG PWB ASS'Y (3/6)

SRA-1011A-M2

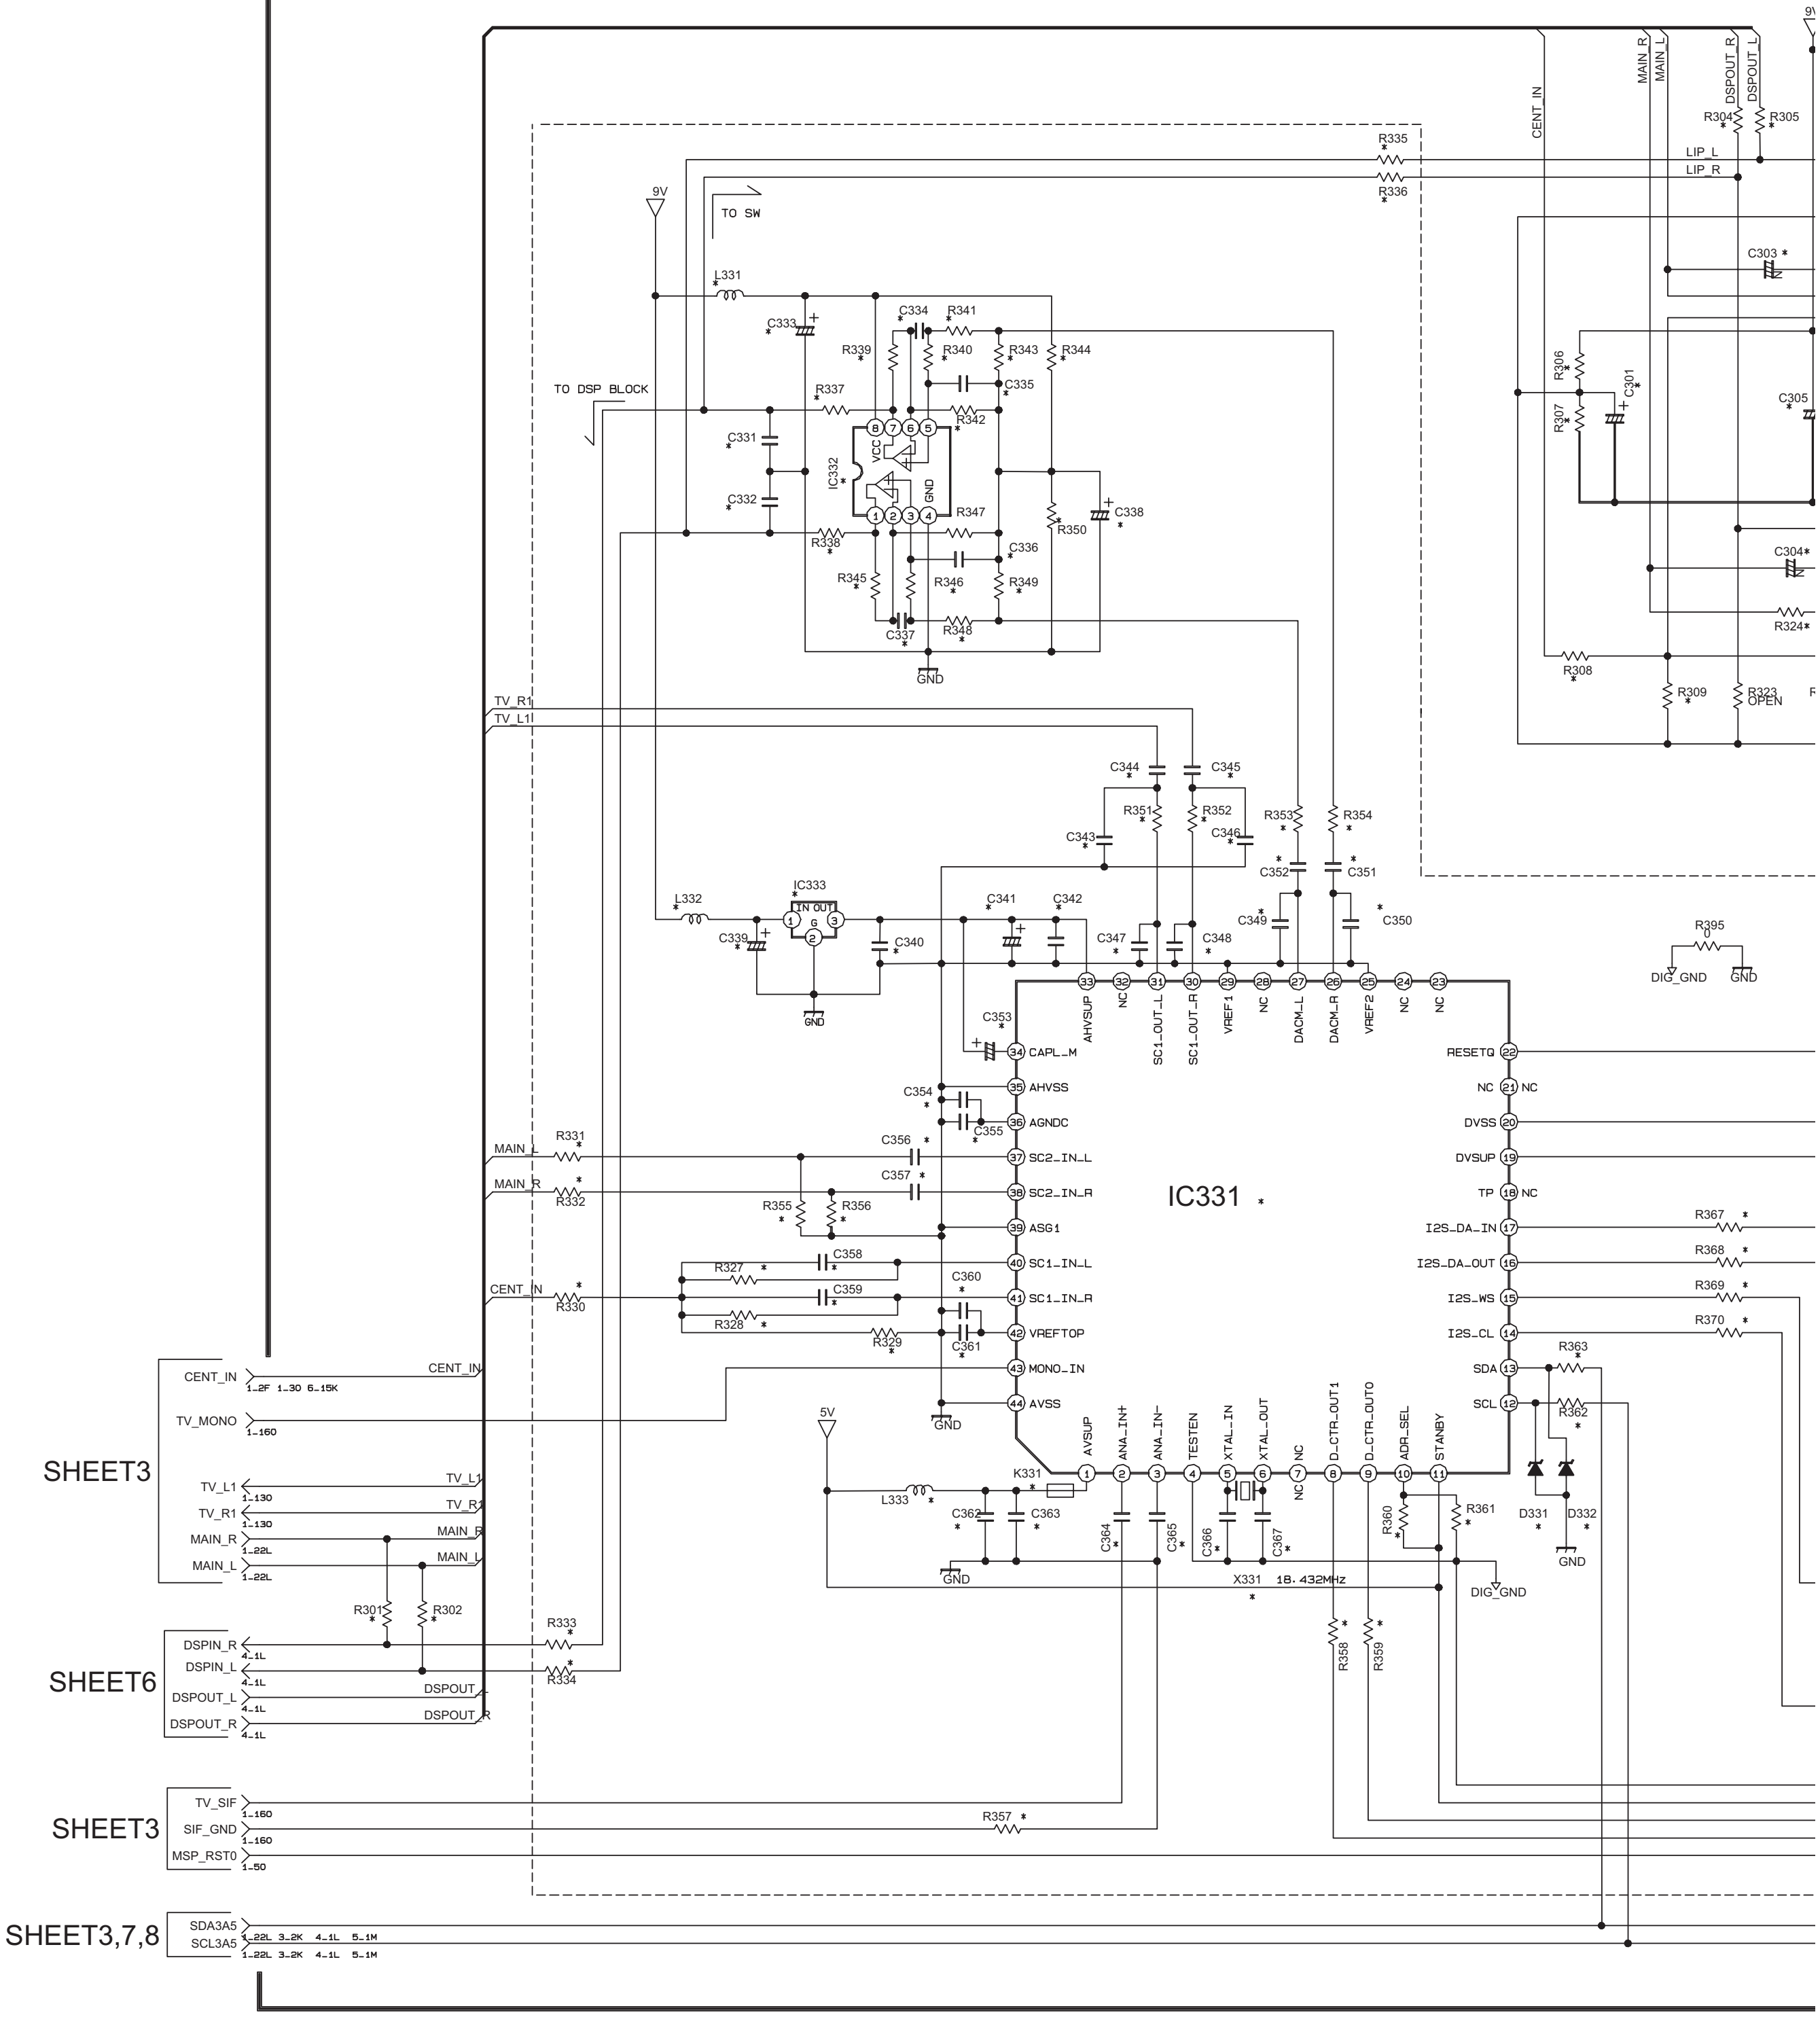

SHEET3
CENT_IN
TV_MONO
TV_L1
TV_R1
MAIN_R
MAIN_L
SHEET6
DSPIN_R
DSPIN_L
DSPOUT_L
DSPOUT_R
SHEET3
TV_SIF
SIF_GND
MSP_RST0
SHEET3,7,8
SDA3A5
SCL3A5
TO DSP BLOCK
TO SW
9V
5V
L331
L332
L333
IC332
IC333
IC331
X331 18.432MHz
K331
D331
D332
R301
R302
R304
R305
R335
R336
R337
R338
R339
R340
R341
R342
R343
R344
R345
R346
R347
R348
R349
R350
R351
R352
R353
R354
R355
R356
R357
R358
R359
R360
R361
R362
R363
R367
R368
R369
R370
R395
R306
R307
R308
R309
R323 OPEN
R324
R327
R328
R329
R330
R331
R332
R333
R334
C301
C303
C304
C305
C331
C332
C333
C334
C335
C336
C337
C338
C339
C340
C341
C342
C343
C344
C345
C346
C347
C348
C349
C350
C351
C352
C353
C354
C355
C356
C357
C358
C359
C360
C361
C362
C363
C364
C365
C366
C367
LIP_L
LIP_R
GND
DIG_GND
AHVSUP
SC1_OUT_L
SC1_OUT_R
VREF1
DACM_L
DACM_R
VREF2
NC
CAPL_M
AHVSS
AGNDC
SC2_IN_L
SC2_IN_R
ASG1
SC1_IN_L
SC1_IN_R
VREFTOP
MONO_IN
AVSS
AVSUP
ANA_IN+
ANA_IN-
TESTEN
XTAL_IN
XTAL_OUT
D_CTR_OUT1
D_CTR_OUT0
ADR_SEL
STANBY
RESETQ
DVSS
DVSUP
TP
I2S_DA_IN
I2S_DA_OUT
I2S_WS
I2S_CL
SDA
SCL

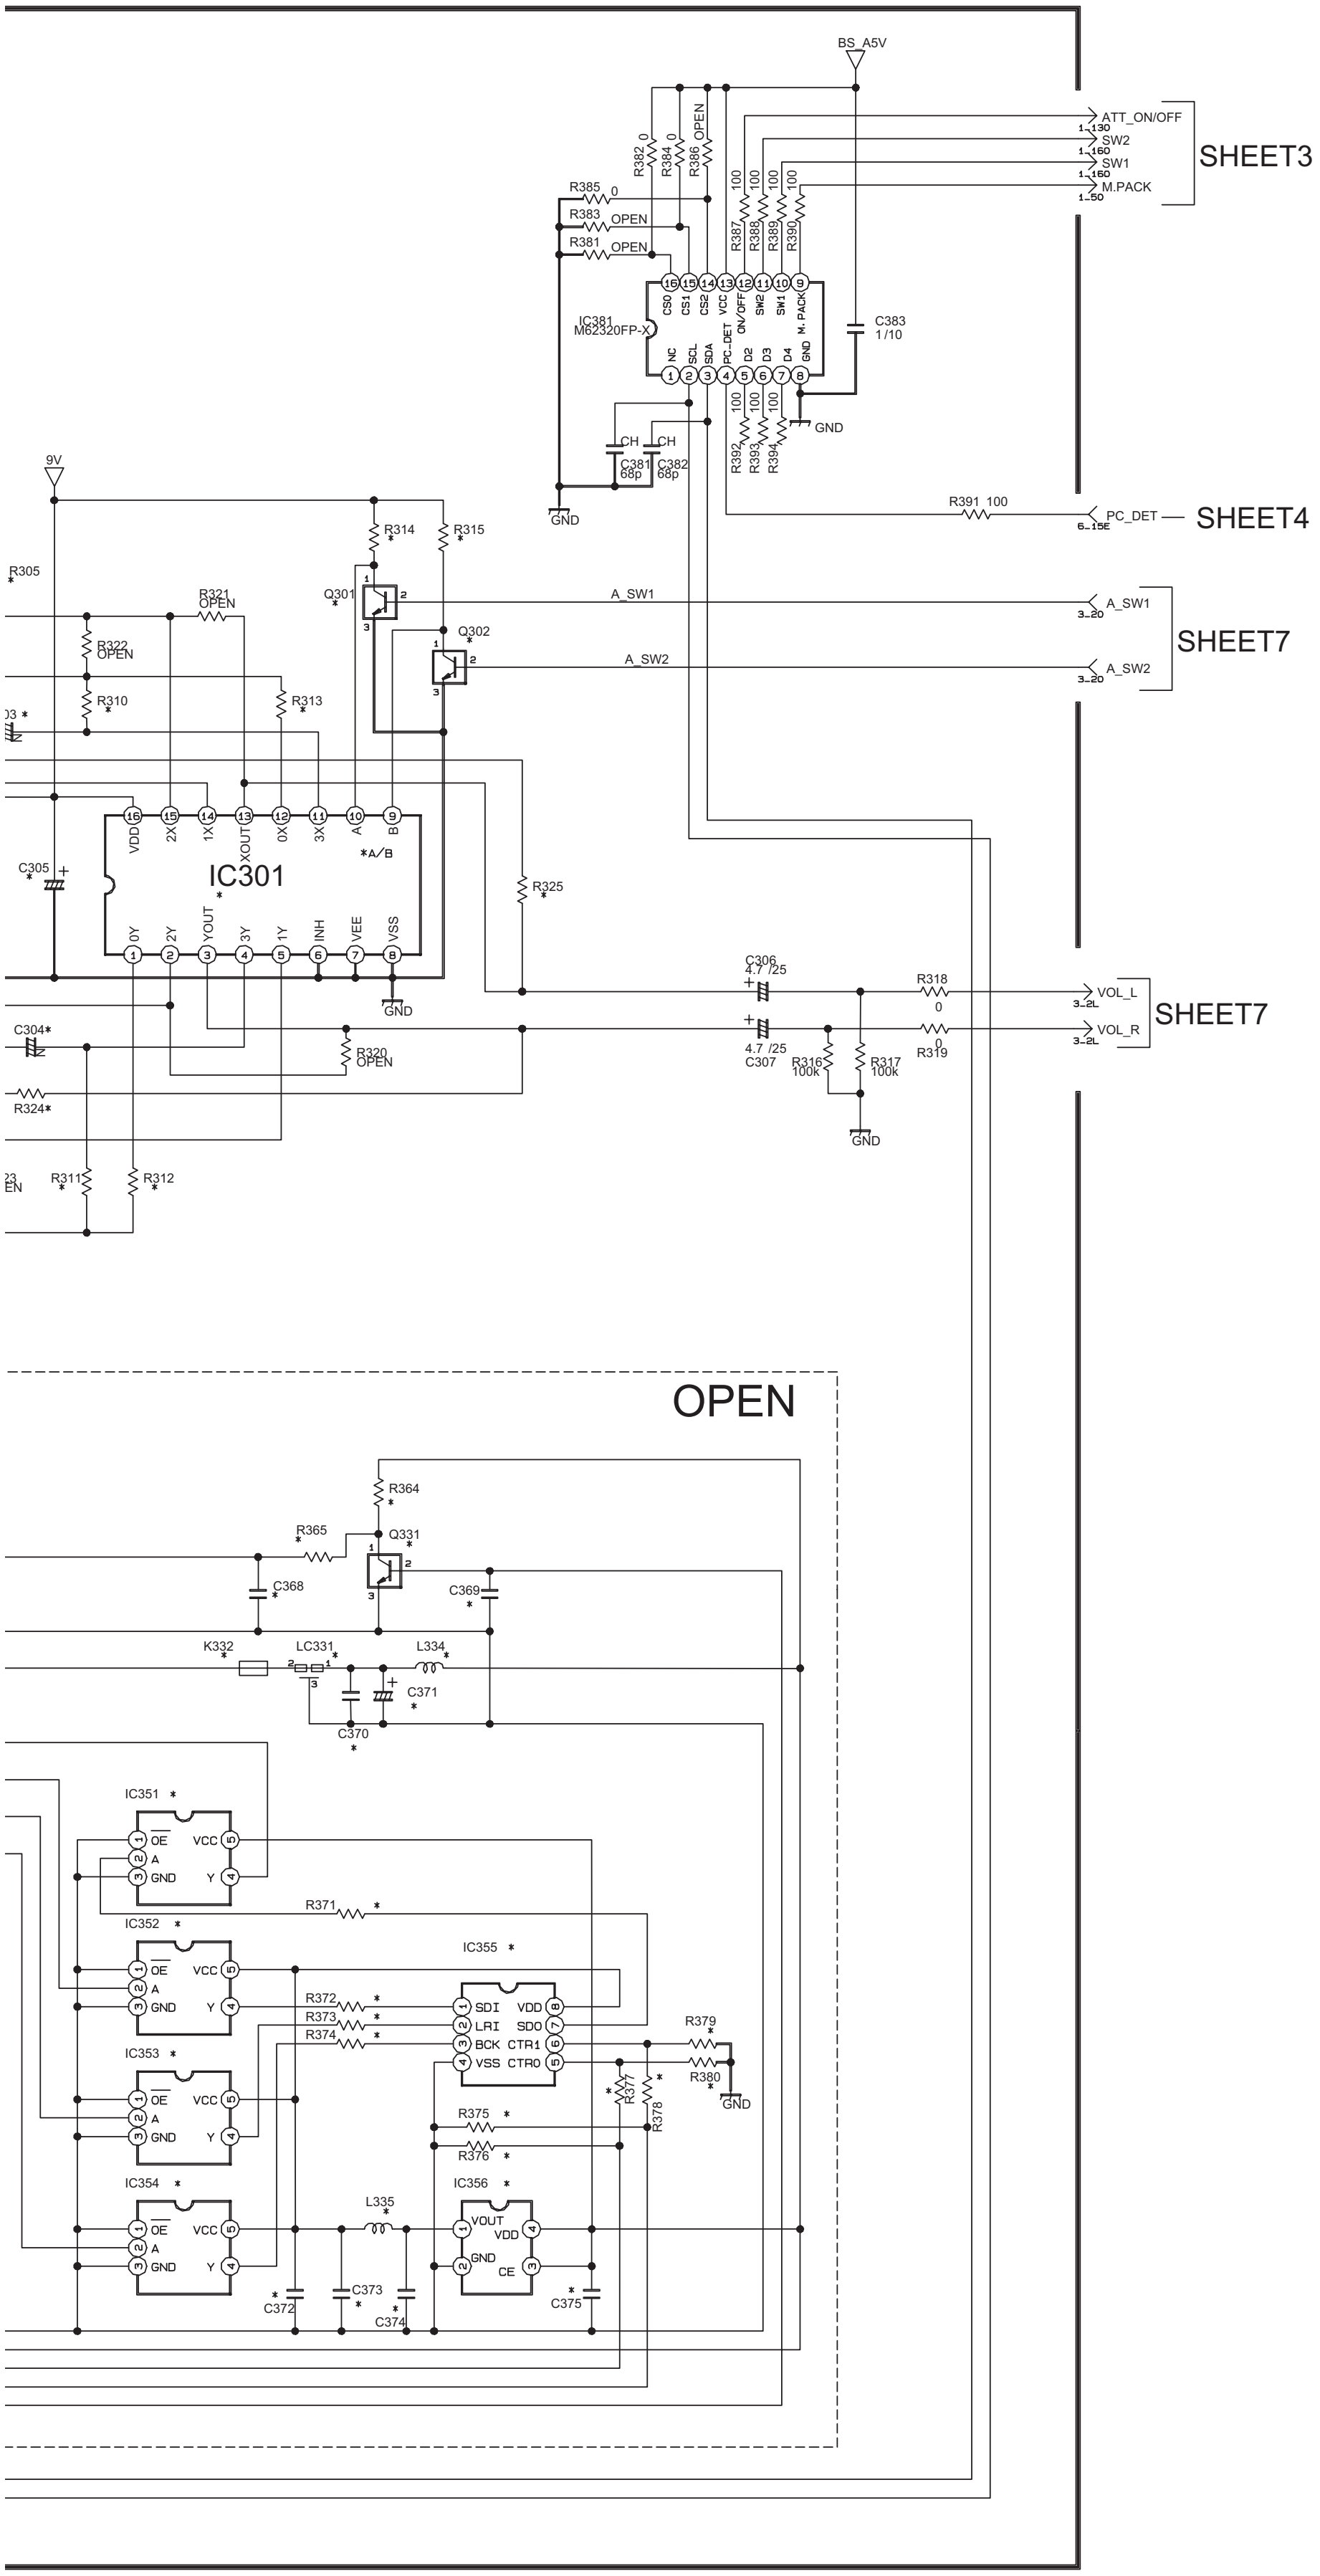
BS_A5V
ATT_ON/OFF
SW2
SW1
M.PACK
SHEET3
R382 0
R384 0
R386 OPEN
R385 0
R383 OPEN
R381 OPEN
R387 100
R388 100
R389 100
R390 100
IC381
M62320FP-X
CS0
CS1
CS2
VCC
ON/OFF
SW2
SW1
M.PACK
NC
SCL
SDA
PC_DET
D2
D3
D4
GND
C383
1/10
R392 100
R393 100
R394 100
GND
CH
CH
C381 68p
C382 68p
R391 100
PC_DET
SHEET4
9V
R314
R315
R305
Q301
Q302
A_SW1
A_SW2
SHEET7
R321 OPEN
R322 OPEN
R310
R313
IC301
VDD
2X
1X
XOUT
0X
3X
A
B
*A/B
0Y
2Y
YOUT
3Y
1Y
INH
VEE
VSS
C305
R325
C306 4.7/25
C307 4.7/25
R318 0
R319 0
R316 100k
R317 100k
VOL_L
VOL_R
SHEET7
C304
R320 OPEN
R324
R311
R312
GND
OPEN
R364
R365
Q331
C368
C369
K332
LC331
L334
C371
C370
IC351
IC352
IC353
IC354
IC355
IC356
OE
A
GND
VCC
Y
R371
R372
R373
R374
SDI
LRI
BCK
VSS
VDD
SDO
CTR1
CTR0
R379
R380
R377
R378
R375
R376
L335
VOUT
VDD
GND
CE
C372
C373
C374
C375

	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118 -02		OLLC10494	OLLC10494 -02		
IC301	OPEN	OPEN	OPEN	OPEN	CD4052 BNS-X	CD4052 BNS-X	OPEN	OPEN
R304	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	OPEN
R305	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	OPEN
R306	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	OPEN
R307	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	OPEN
R308	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	OPEN
R309	OPEN	OPEN	OPEN	OPEN	100k	100k	OPEN	OPEN
R310	OPEN	OPEN	OPEN	OPEN	100k	100k	OPEN	OPEN
R311	OPEN	OPEN	OPEN	OPEN	100k	100k	OPEN	OPEN
R312	OPEN	OPEN	OPEN	OPEN	100k	100k	OPEN	OPEN
R313	OPEN	OPEN	OPEN	OPEN	100k	100k	OPEN	OPEN
R314	OPEN	OPEN	OPEN	OPEN	22k	22k	OPEN	OPEN
R315	OPEN	OPEN	OPEN	OPEN	6.8k	6.8k	OPEN	OPEN
R324	0	0	0	0	OPEN	OPEN	0	0
R325	0	0	0	0	OPEN	OPEN	0	0
C301	OPEN	OPEN	OPEN	OPEN	47/16	47/16	OPEN	OPEN
C303	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN
C304	OPEN	OPEN	OPEN	OPEN	4.7/16	4.7/16	OPEN	OPEN
C305	OPEN	OPEN	OPEN	OPEN	100/16	100/16	OPEN	OPEN
Q301	OPEN	OPEN	OPEN	OPEN	RT1N441C-X	RT1N441C-X	OPEN	OPEN
Q302	OPEN	OPEN	OPEN	OPEN	RT1N441C-X	RT1N441C-X	OPEN	OPEN
R301	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	OPEN
R302	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	OPEN

c10447002_0214_2/6_0.0

ANALOG PWB CIRCUIT DIAGRAM (4/6) [W_DSP BLOCK] SHEET 6

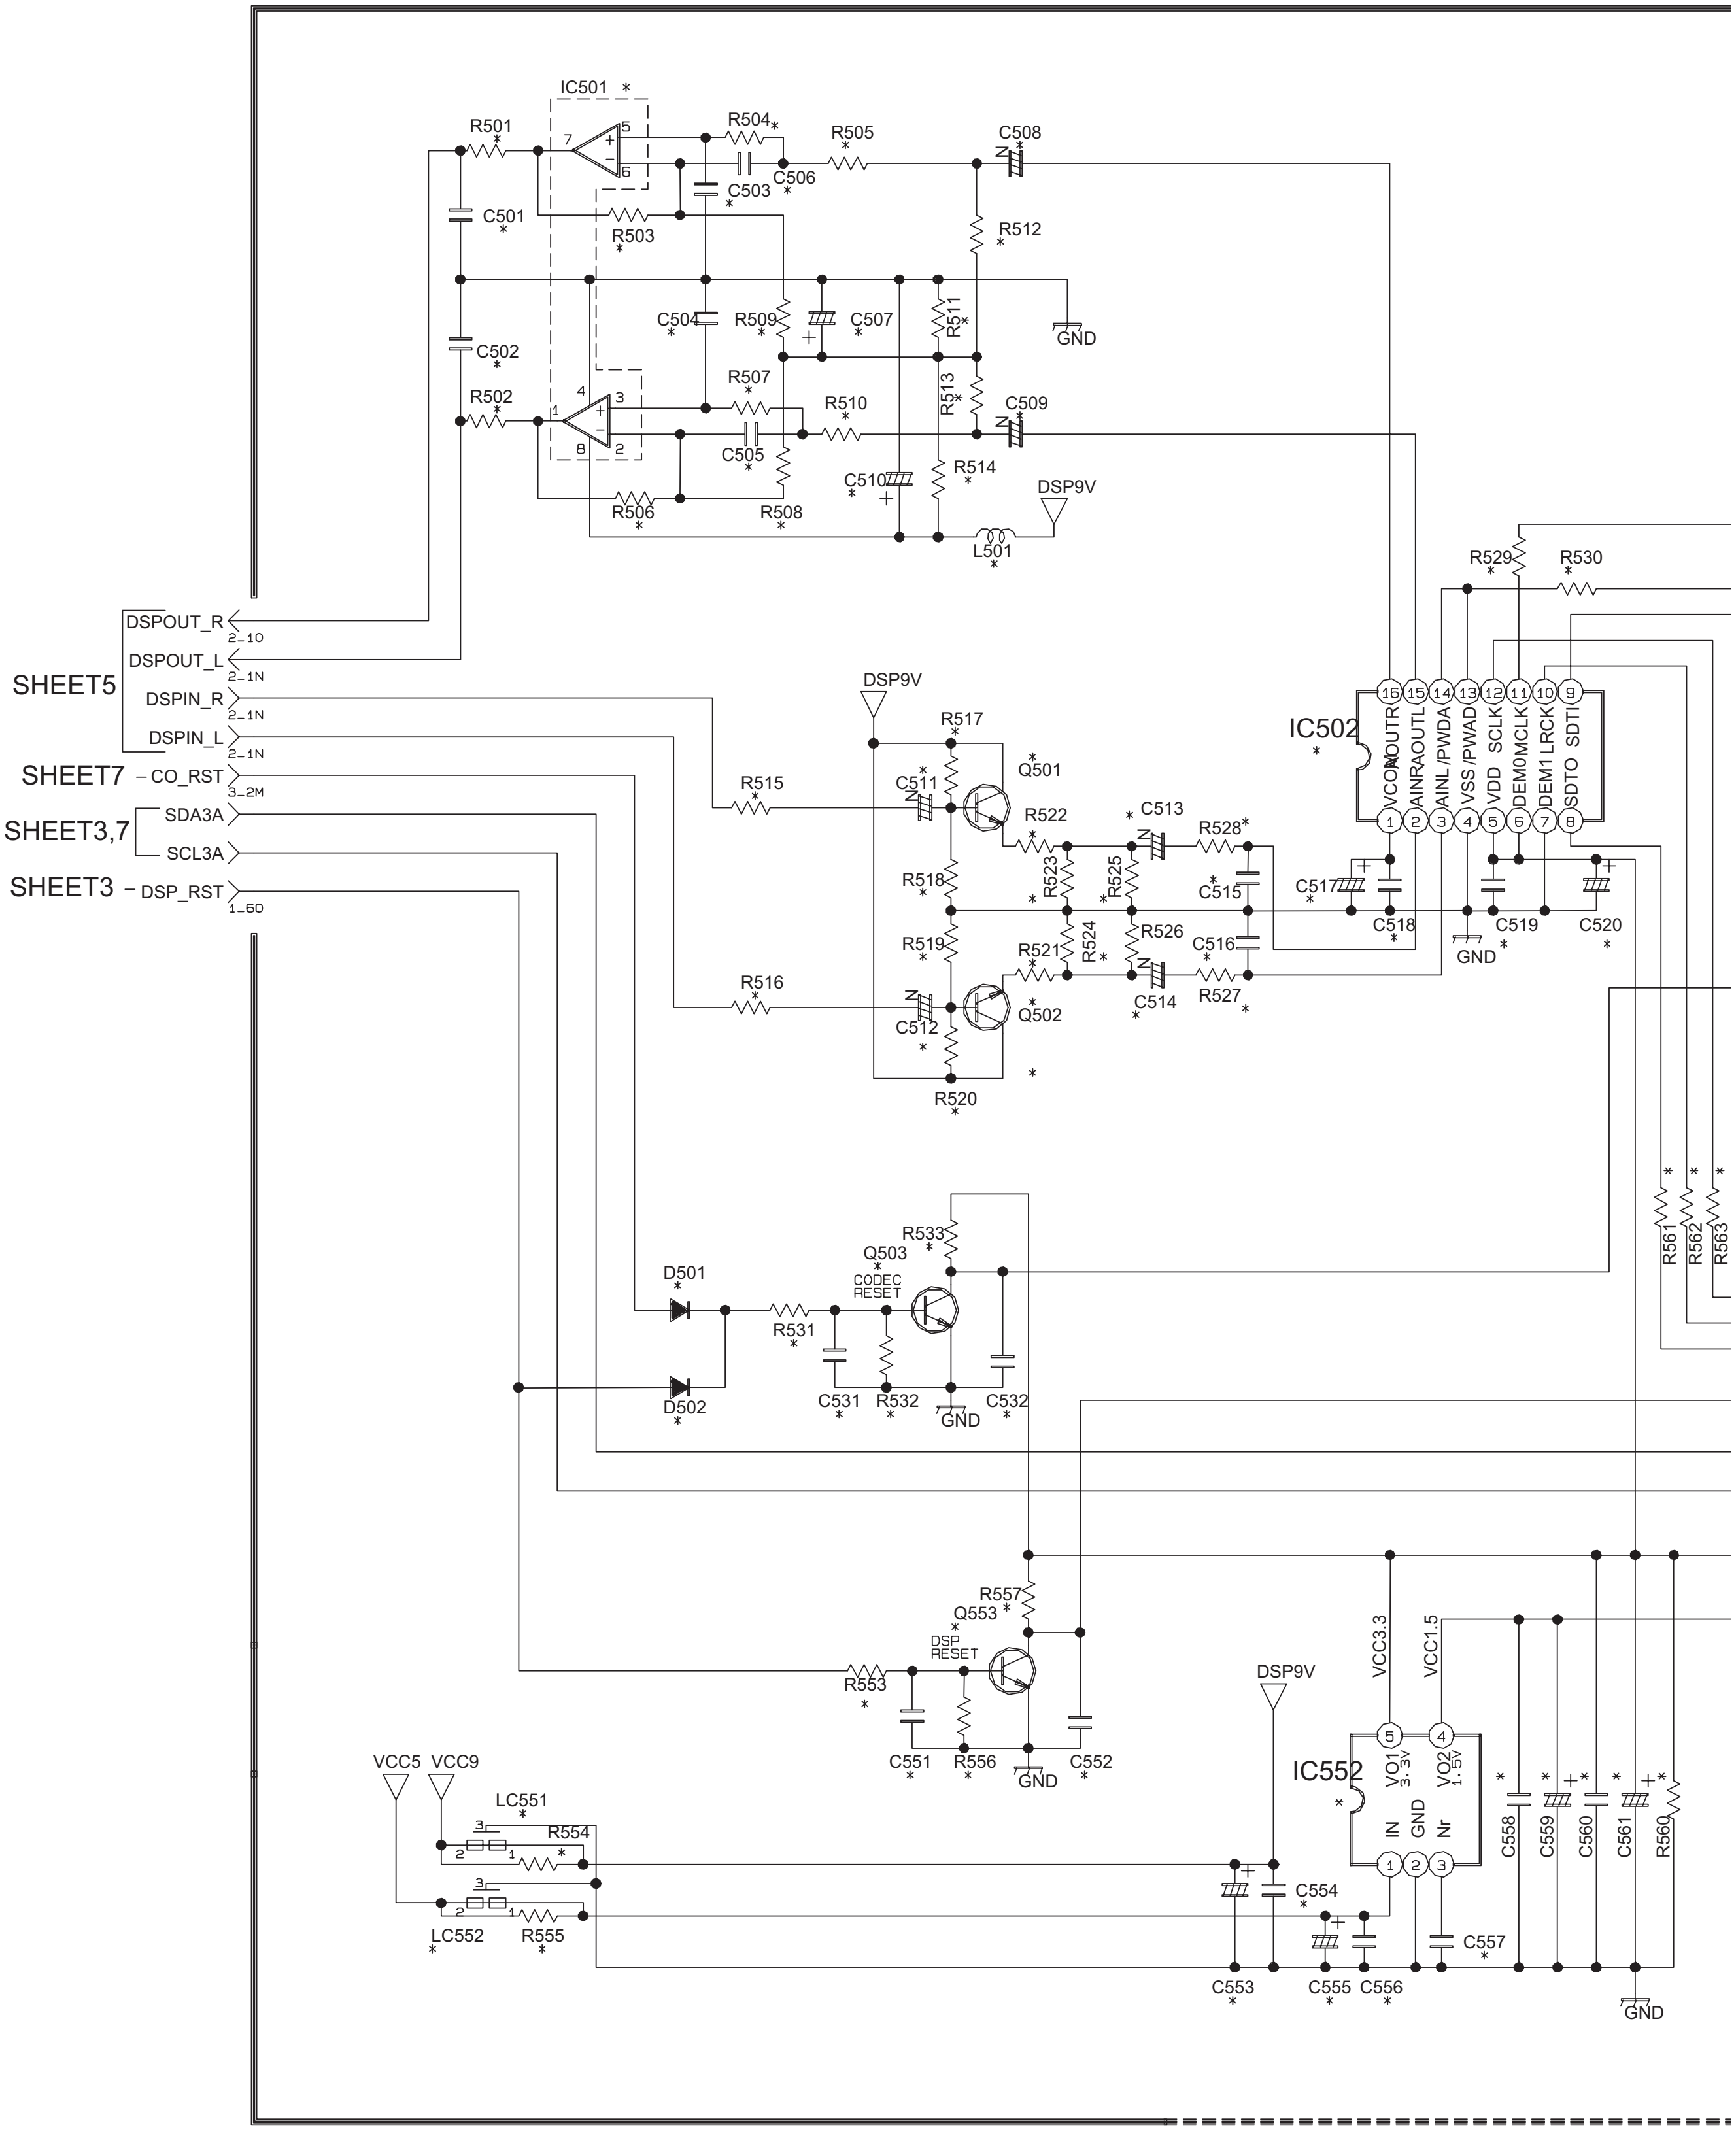
IC501 *
R501
R504
R505
C508
C503
C506
C501
R503
R512
C504
R509
C507
R511
GND
C502
R502
R507
R510
R513
C509
C505
R514
C510
DSP9V
R506
R508
L501
R529
R530
DSPOUT_R
DSPOUT_L
SHEET5
DSPIN_R
DSPIN_L
SHEET7
CO_RST
SHEET3,7
SDA3A
SCL3A
SHEET3
DSP_RST
IC502
VCOM
AOUTR
AINR
AOUTL
AINL/PWDA
VSS/PWAD
VDD
SCLK
DEM0
MCLK
DEM1
LRCK
SDTO
SDTI
R517
Q501
R515
C511
R522
C513
R528
R518
R523
R525
C515
C517
C518
C519
C520
R519
R521
R524
R526
C516
R516
C514
R527
C512
Q502
R520
R561
R562
R563
R533
Q503
CODEC RESET
D501
R531
D502
C531
R532
C532
R557
Q553
DSP RESET
R553
C551
R556
C552
VCC3.3
VCC1.5
IC552
VO1 3.3V
VO2 1.5V
IN
GND
Nr
C558
C559
C560
C561
R560
VCC5
VCC9
LC551
R554
LC552
R555
C554
C553
C555
C556
C557

ANALOG PWB ASS'Y (4/6)

SRA-1011A-M2

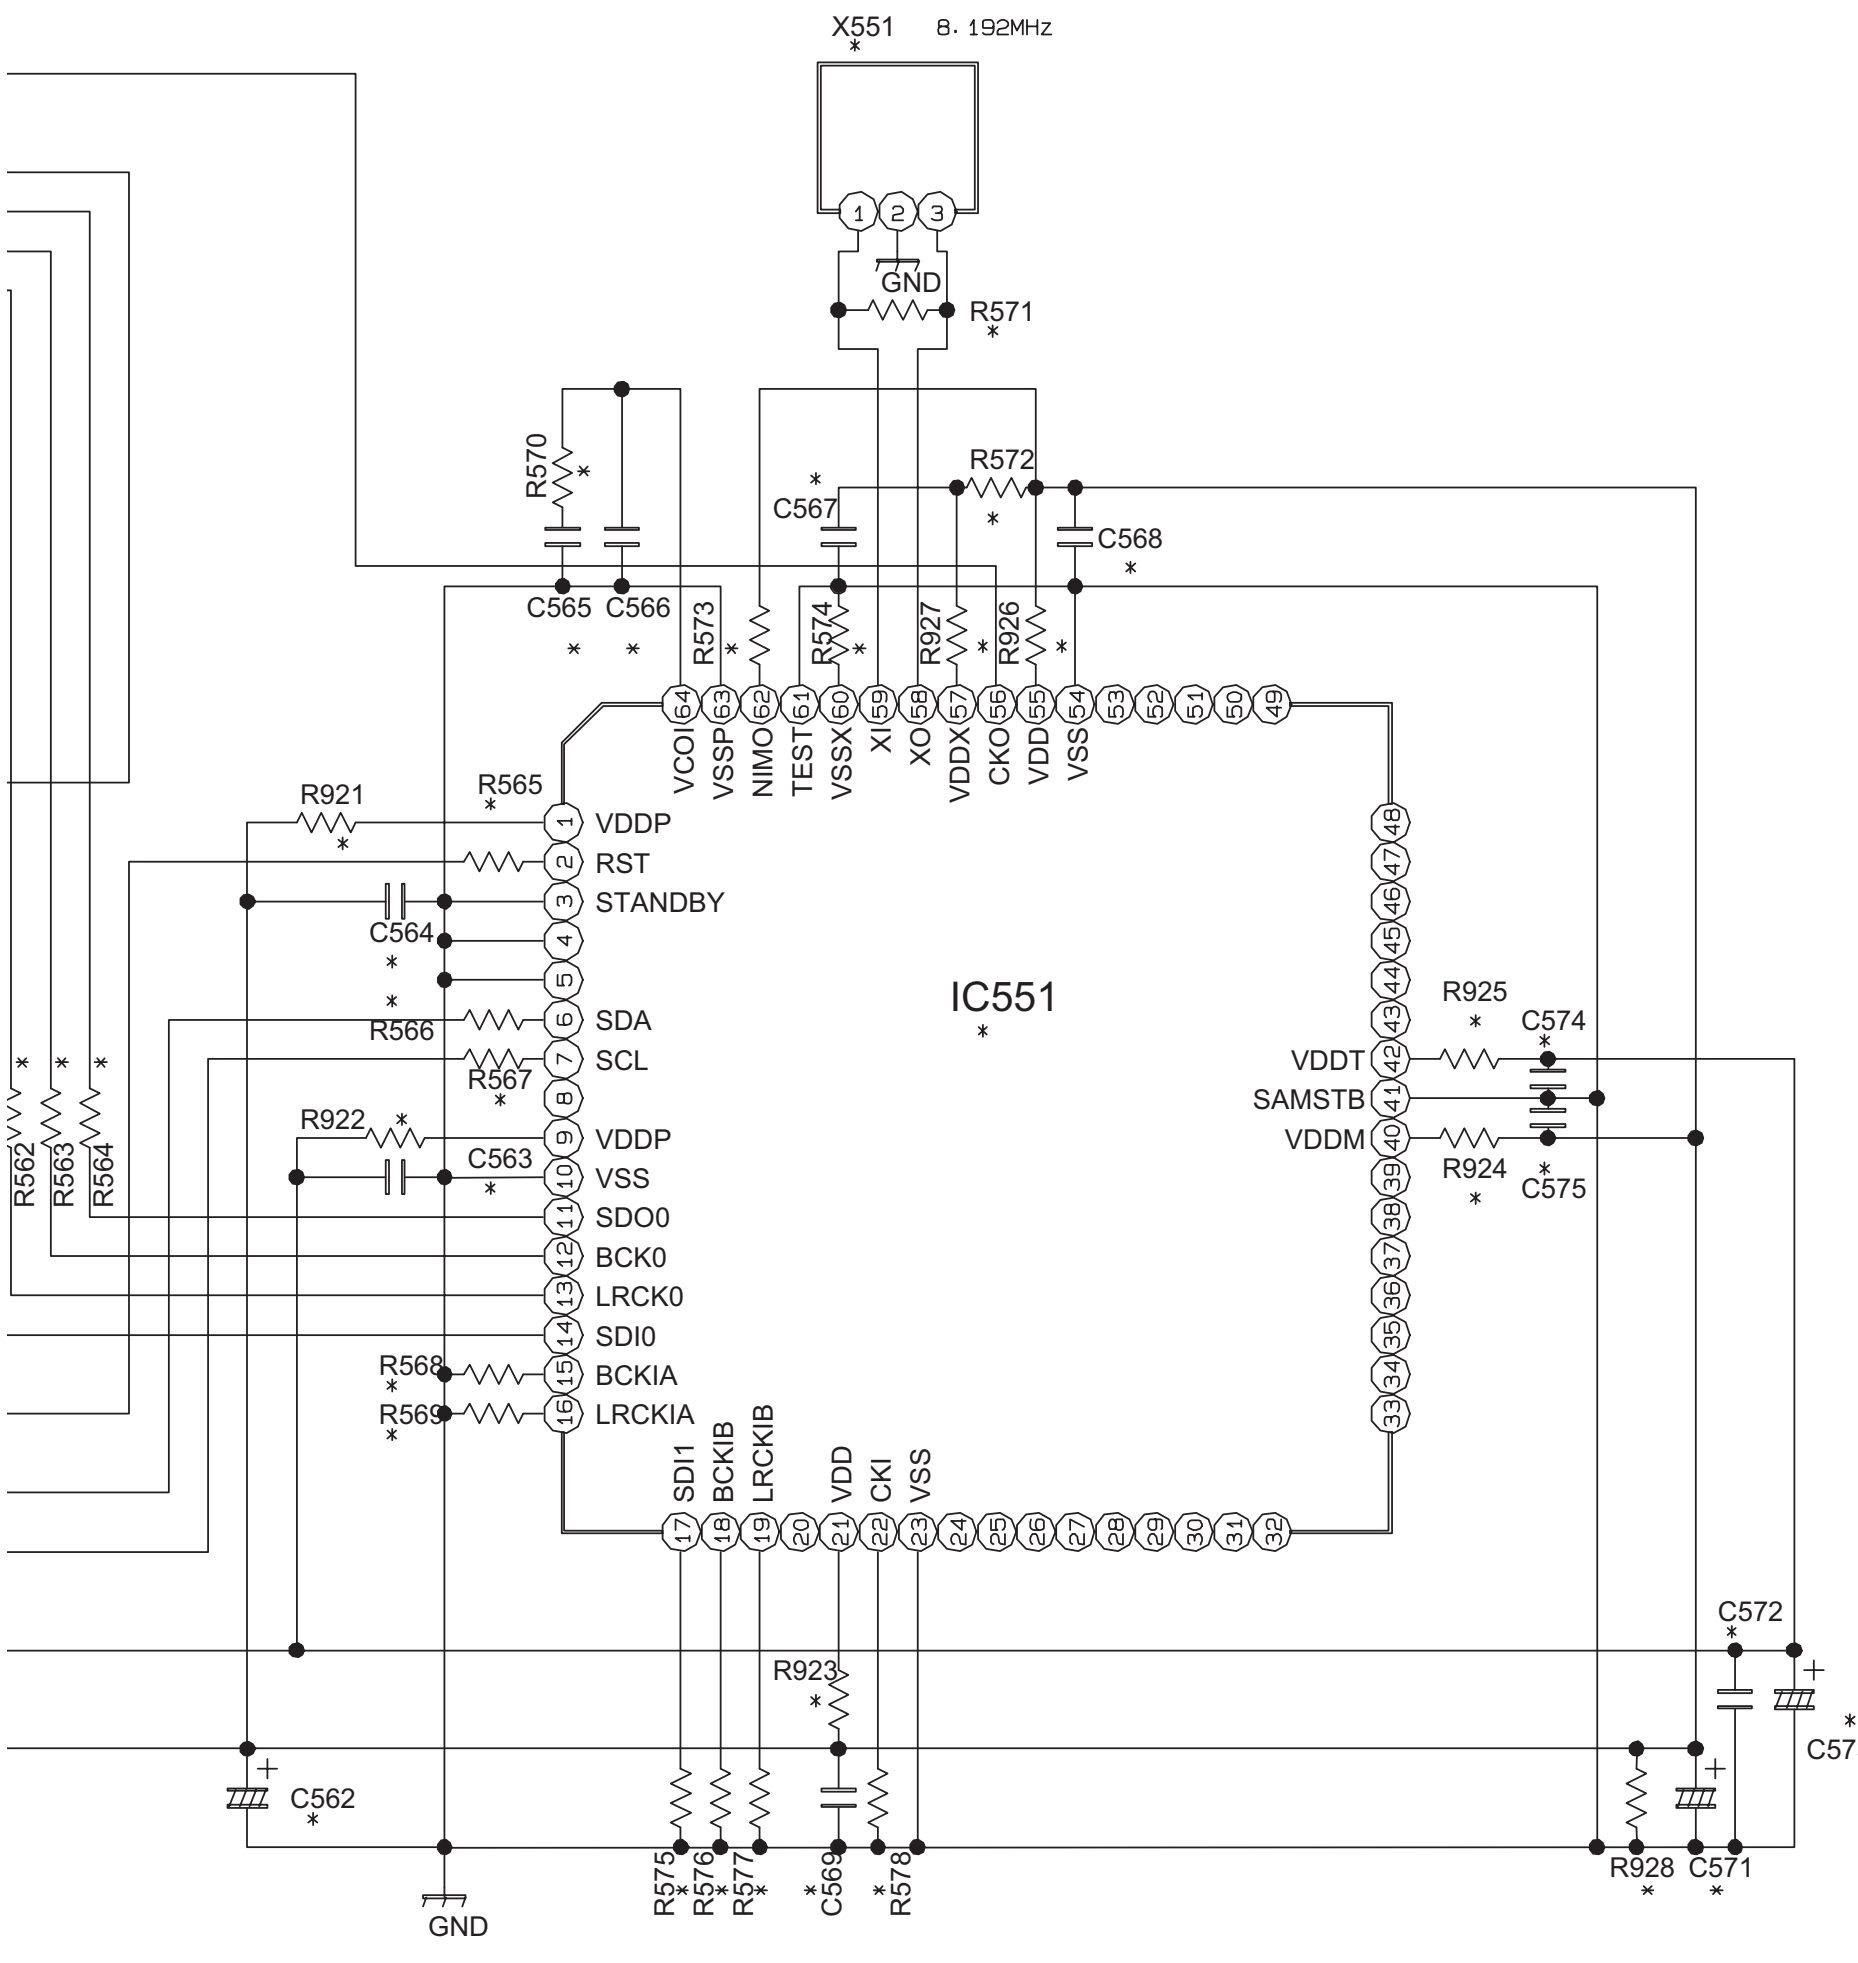

- NOTE -

0 : NRSA63J-0R0X

NPN : 2SC3928A/QR/-X

PNP : 2SA1530A/QR/-X

	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
IC501	OPEN	OPEN	OPEN	OPEN	HA17558AF-X	HA17558AF-X	OPEN	HA17558AF-X
IC502	OPEN	OPEN	OPEN	OPEN	AK4554VT-X	AK4554VT-X	OPEN	AK4554VT-X
IC551	OPEN	OPEN	OPEN	OPEN	JCC5067	JCC5067	OPEN	JCC5067
IC552	OPEN	OPEN	OPEN	OPEN	PQ2L3152MS-X	PQ2L3152MS-X	OPEN	PQ2L3152MS-X
LC551	OPEN	OPEN	OPEN	OPEN	NQR0470-007X	NQR0470-007X	OPEN	NQR0470-007X
LC552	OPEN	OPEN	OPEN	OPEN	NQR0470-007X	NQR0470-007X	OPEN	NQR0470-007X
D501	OPEN	OPEN	OPEN	OPEN	MA111-X	MA111-X	OPEN	MA111-X
D502	OPEN	OPEN	OPEN	OPEN	MA111-X	MA111-X	OPEN	MA111-X
Q501	OPEN	OPEN	OPEN	OPEN	2SC3928A/QR/-X	2SC3928A/QR/-X	OPEN	2SC3928A/QR/-X
Q502	OPEN	OPEN	OPEN	OPEN	2SC3928A/QR/-X	2SC3928A/QR/-X	OPEN	2SC3928A/QR/-X
Q503	OPEN	OPEN	OPEN	OPEN	2SC3928A/QR/-X	2SC3928A/QR/-X	OPEN	2SC3928A/QR/-X
Q551	OPEN	OPEN	OPEN	OPEN	2SK3019-X	2SK3019-X	OPEN	2SK3019-X
Q552	OPEN	OPEN	OPEN	OPEN	2SK3019-X	2SK3019-X	OPEN	2SK3019-X
Q553	OPEN	OPEN	OPEN	OPEN	2SC3928A/QR/-X	2SC3928A/QR/-X	OPEN	2SC3928A/QR/-X
R501	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R502	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R503	OPEN	OPEN	OPEN	OPEN	4.7k	4.7k	OPEN	4.7k
R504	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R505	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R506	OPEN	OPEN	OPEN	OPEN	4.7k	4.7k	OPEN	4.7k
R507	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R508	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R509	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R510	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R511	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R512	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R513	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R514	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R515	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R516	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R517	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R518	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R519	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R520	OPEN	OPEN	OPEN	OPEN	33k	33k	OPEN	33k
R521	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R522	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R523	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R524	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R525	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R526	OPEN	OPEN	OPEN	OPEN	1k	1k	OPEN	1k
R527	OPEN	OPEN	OPEN	OPEN	470	470	OPEN	470
R528	OPEN	OPEN	OPEN	OPEN	470	470	OPEN	470
R529	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R530	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R531	OPEN	OPEN	OPEN	OPEN	3.3k	3.3k	OPEN	3.3k
R532	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R533	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R551	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R552	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R553	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R554	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R555	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R556	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R557	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R558	OPEN	OPEN	OPEN	OPEN	68k	68k	OPEN	68k
R559	OPEN	OPEN	OPEN	OPEN	68k	68k	OPEN	68k
R560	OPEN	OPEN	OPEN	OPEN	6.8k	6.8k	OPEN	6.8k
R561	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R562	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R563	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R564	OPEN	OPEN	OPEN	OPEN	220	220	OPEN	220
R565	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R566	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R567	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R568	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R569	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R570	OPEN	OPEN	OPEN	OPEN	100	100	OPEN	100
R571	OPEN	OPEN	OPEN	OPEN	1M	1M	OPEN	1M
R572	OPEN	OPEN	OPEN	OPEN	4.7	4.7	OPEN	4.7
R573	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R574	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R575	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R576	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R577	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R578	OPEN	OPEN	OPEN	OPEN	10k	10k	OPEN	10k
R921	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R922	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R923	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R924	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R925	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R926	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R927	OPEN	OPEN	OPEN	OPEN	0	0	OPEN	0
R928	OPEN	OPEN	OPEN	OPEN	NRSA63J-222X	NRSA63J-222X	OPEN	NRSA63J-222X

	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118-02		OLLC10494	OLLC10494-02		
C501	OPEN	OPEN	OPEN	OPEN	NCB31CK-223X	NCB31CK-223X	OPEN	NCB31CK-223X
C502	OPEN	OPEN	OPEN	OPEN	NCB31CK-223X	NCB31CK-223X	OPEN	NCB31CK-223X
C503	OPEN	OPEN	OPEN	OPEN	0.0022	0.0022	OPEN	0.0022
C504	OPEN	OPEN	OPEN	OPEN	0.0022	0.0022	OPEN	0.0022
C505	OPEN	OPEN	OPEN	OPEN	0.0082	0.0082	OPEN	0.0082
C506	OPEN	OPEN	OPEN	OPEN	0.0082	0.0082	OPEN	0.0082
C507	OPEN	OPEN	OPEN	OPEN	NEHL1AM-107X	NEHL1AM-107X	OPEN	NEHL1AM-107X
C508	OPEN	OPEN	OPEN	OPEN	1/50	1/50	OPEN	1/50
C509	OPEN	OPEN	OPEN	OPEN	1/50	1/50	OPEN	1/50
C510	OPEN	OPEN	OPEN	OPEN	NEHL1CM-476X	NEHL1CM-476X	OPEN	NEHL1CM-476X
C511	OPEN	OPEN	OPEN	OPEN	NEHL1EM-475X	NEHL1EM-475X	OPEN	NEHL1EM-475X
C512	OPEN	OPEN	OPEN	OPEN	NEHL1EM-475X	NEHL1EM-475X	OPEN	NEHL1EM-475X
C513	OPEN	OPEN	OPEN	OPEN	NEHL1EM-475X	NEHL1EM-475X	OPEN	NEHL1EM-475X
C514	OPEN	OPEN	OPEN	OPEN	NEHL1EM-475X	NEHL1EM-475X	OPEN	NEHL1EM-475X
C515	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C516	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C517	OPEN	OPEN	OPEN	OPEN	NEHL1EM-475X	NEHL1EM-475X	OPEN	NEHL1EM-475X
C518	OPEN	OPEN	OPEN	OPEN	0.1/16	0.1/16	OPEN	0.1/16
C519	OPEN	OPEN	OPEN	OPEN	0.1/16	0.1/16	OPEN	0.1/16
C520	OPEN	OPEN	OPEN	OPEN	NEHL1CM-106X	NEHL1CM-106X	OPEN	NEHL1CM-106X
C531	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C532	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C551	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C552	OPEN	OPEN	OPEN	OPEN	1000p	1000p	OPEN	1000p
C553	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C554	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C555	OPEN	OPEN	OPEN	OPEN	NEHL1CM-106X	NEHL1CM-106X	OPEN	NEHL1CM-106X
C556	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C557	OPEN	OPEN	OPEN	OPEN	0.1/16	0.1/16	OPEN	0.1/16
C558	OPEN	OPEN	OPEN	OPEN	NCB30JK-225X	NCB30JK-225X	OPEN	NCB30JK-225X
C559	OPEN	OPEN	OPEN	OPEN	NEHL0JM-226X	NEHL0JM-226X	OPEN	NEHL0JM-226X
C560	OPEN	OPEN	OPEN	OPEN	NCB30JK-225X	NCB30JK-225X	OPEN	NCB30JK-225X
C561	OPEN	OPEN	OPEN	OPEN	NEHL0JM-226X	NEHL0JM-226X	OPEN	NEHL0JM-226X
C562	OPEN	OPEN	OPEN	OPEN	NEHL0JM-226X	NEHL0JM-226X	OPEN	NEHL0JM-226X
C563	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C564	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C565	OPEN	OPEN	OPEN	OPEN	0.1	0.1	OPEN	0.1
C566	OPEN	OPEN	OPEN	OPEN	0.1	0.1	OPEN	0.1
C567	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C568	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C569	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C571	OPEN	OPEN	OPEN	OPEN	NEHL0JM-226X	NEHL0JM-226X	OPEN	NEHL0JM-226X
C572	OPEN	OPEN	OPEN	OPEN	NCB31CK-105X	NCB31CK-105X	OPEN	NCB31CK-105X
C573	OPEN	OPEN	OPEN	OPEN	NEHL0JM-226X	NEHL0JM-226X	OPEN	NEHL0JM-226X
C574	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
C575	OPEN	OPEN	OPEN	OPEN	0.01	0.01	OPEN	0.01
L501	OPEN	OPEN	OPEN	OPEN	NRSA02J-0R0X	NRSA02J-0R0X	OPEN	NRSA02J-0R0X
X551	OPEN	OPEN	OPEN	OPEN	NAX0623-001X	NAX0623-001X	OPEN	NAX0623-001X
D501	OPEN	OPEN	OPEN	OPEN	1SS355W-X	1SS355W-X	OPEN	1SS355W-X
D502	OPEN	OPEN	OPEN	OPEN	1SS355W-X	1SS355W-X	OPEN	1SS355W-X

c10447004_0214_4/6_0.0

ANALOG PWB CIRCUIT DIAGRAM (5/6) [AUDIO BLOCK] SHEET 7

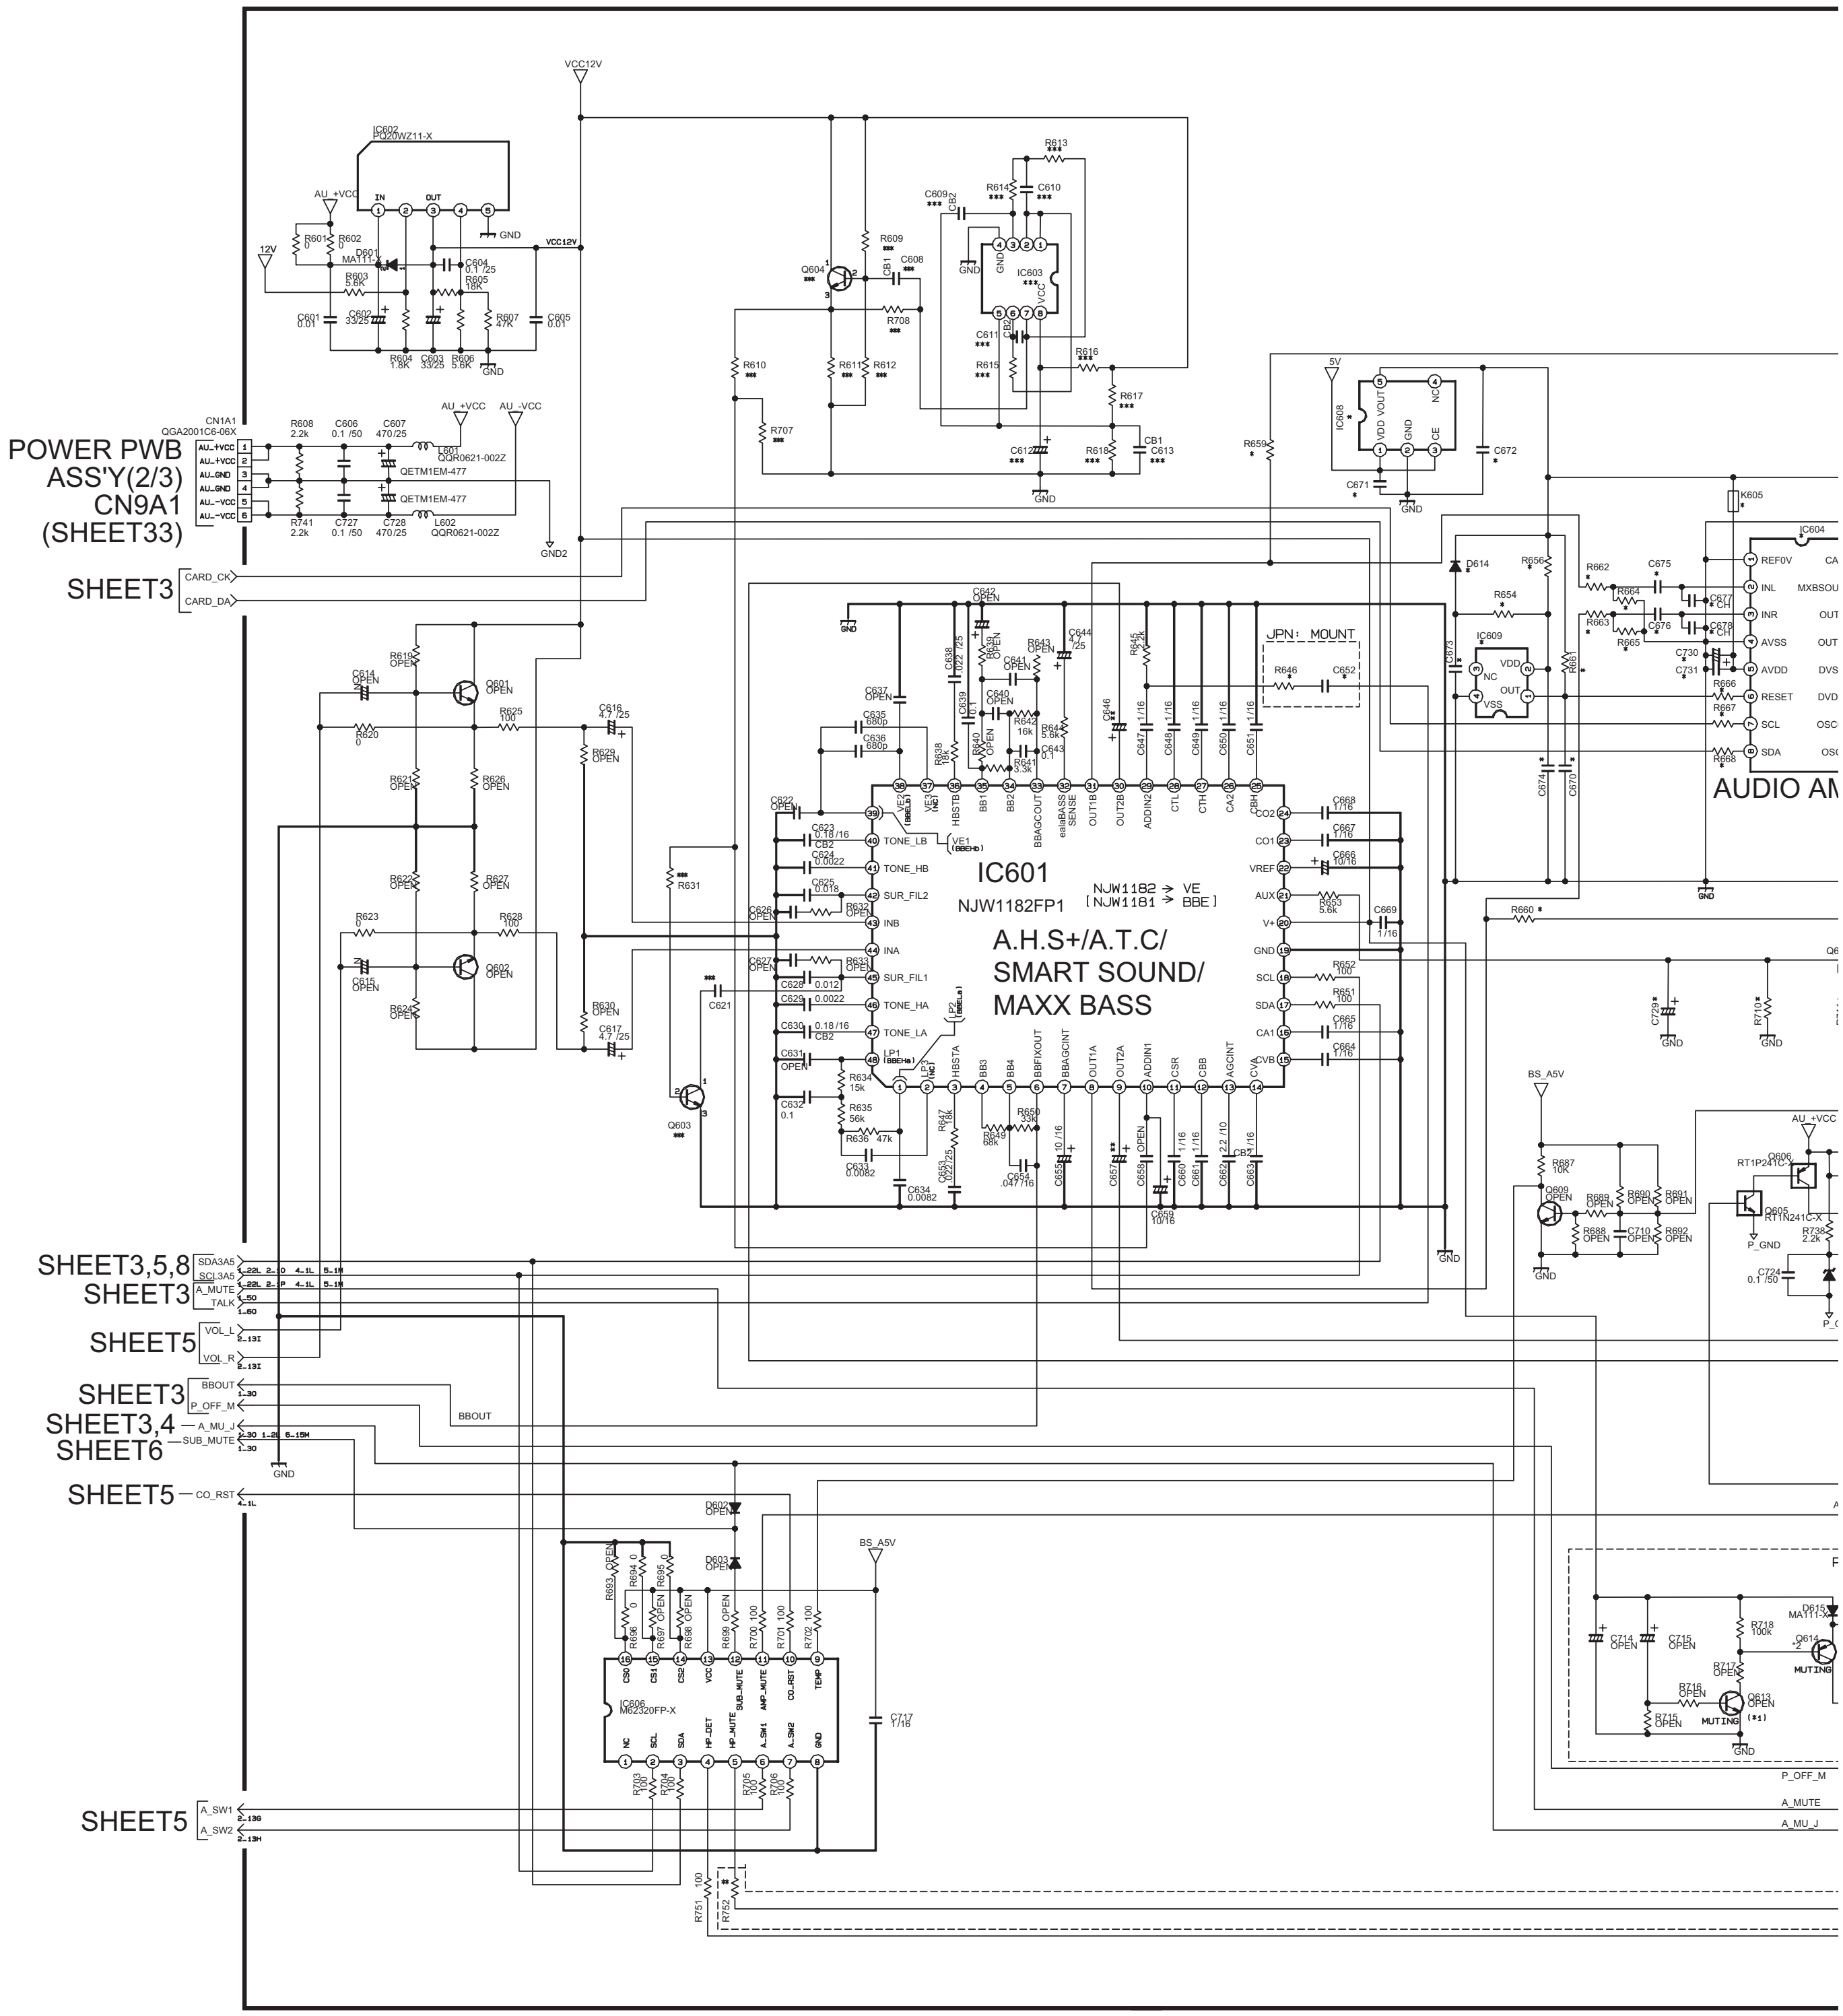
POWER PWB
ASS'Y(2/3)
CN9A1
(SHEET33)
SHEET3
SHEET3,5,8
SHEET3
SHEET5
SHEET3
SHEET3,4
SHEET6
SHEET5
SHEET5
CN1A1
QGA2001C6-06X
AU_+VCC
AU_-VCC
AU_GND
CARD_CK
CARD_DA
SDA3A5
SCL3A5
A_MUTE
TALK
VOL_L
VOL_R
BBOUT
P_OFF_M
A_MU_J
SUB_MUTE
GND
CO_RST
A_SW1
A_SW2
VCC12V
IC602
PQ20WZ11-X
IC603
IC601
NJW1182FP1
NJW1182 → VE
[NJW1181 → BBE]
A.H.S+/A.T.C/
SMART SOUND/
MAXX BASS
JPN : MOUNT
IC608
IC609
IC604
AUDIO AM
IC606
M62320FP-X
Q601
Q602
Q603
Q604
Q605
Q606
Q609
Q613
Q614
MUTING
BS_A5V
GND2
P_OFF_M
A_MUTE
A_MU_J

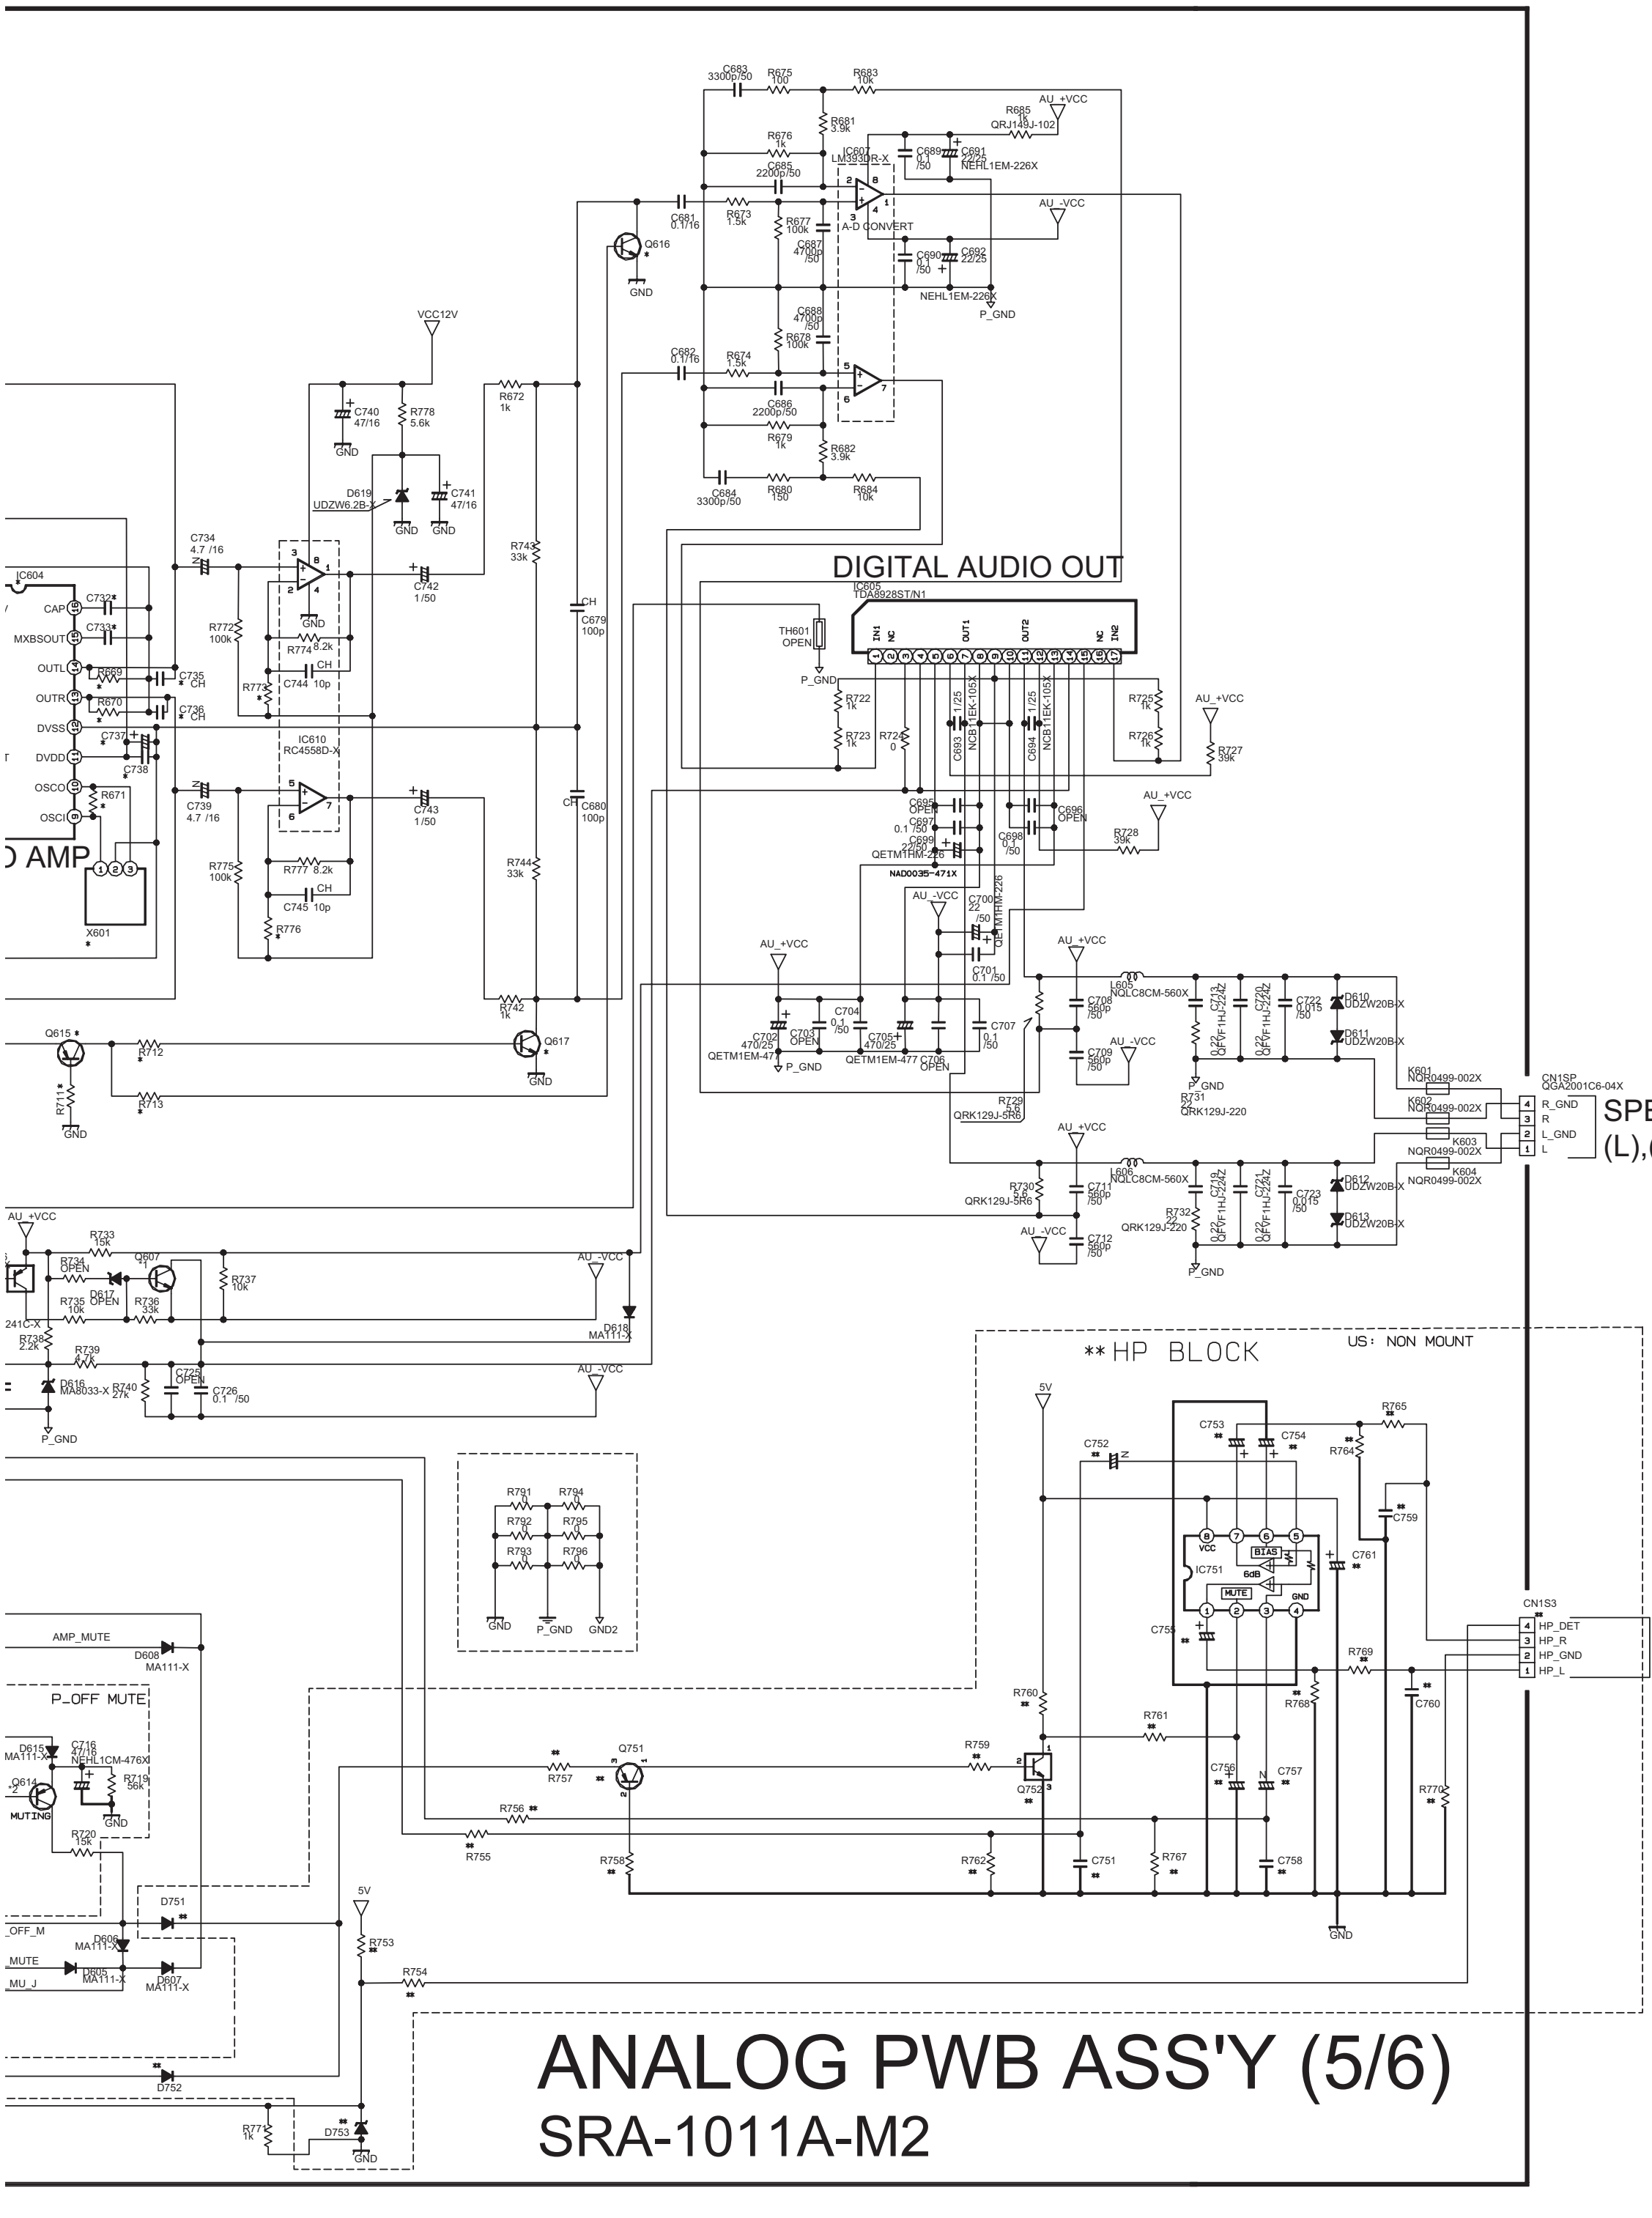
DIGITAL AUDIO OUT
IC609
TDA8928ST/N1
IC607
LM3393DR-X
A-D CONVERT
IC610
RC4558D-X
IC604
CAP
MXBSOUT
OUTL
OUTR
DVSS
DVDD
OSCO
OSCI
D AMP
X601
VCC12V
AU_+VCC
AU_-VCC
P_GND
GND
Q615
Q616
Q617
Q607
D617
D618
MA111-X
D616
MA8033-X
TH601
OPEN
L605
NQLC8CM-560X
L606
NQLC8CM-560X
D610
UDZW20B-X
D611
UDZW20B-X
D612
UDZW20B-X
D613
UDZW20B-X
K601
NQR0499-002X
K602
NQR0499-002X
K603
NQR0499-002X
K604
NQR0499-002X
CN1SP
QGA2001C6-04X
R_GND
R
L_GND
L
SPEAKER
(L),(R)
** HP BLOCK
US: NON MOUNT
IC751
BIAS
6dB
MUTE
VCC
GND
Q751
Q752
5V
CN1S3
HP_DET
HP_R
HP_GND
HP_L
OPEN
AMP_MUTE
D608
MA111-X
P_OFF MUTE
D615
MA111-X
Q614
MUTING
C716
47/16
NEHL1CM-476X
D751
D752
D753
D605
MA111-X
D606
MA111-X
D607
MA111-X
_OFF_M
_MUTE
_MU_J
R791
R792
R793
R794
R795
R796
P_GND
GND2

ANALOG PWB ASS'Y (5/6)

SRA-1011A-M2

	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC10494	OLLC10494 -02		
R654	OPEN	OPEN	OPEN	OPEN
R656	OPEN	OPEN	OPEN	OPEN
R659	OPEN	OPEN	OPEN	OPEN
R660	OPEN	OPEN	OPEN	OPEN
R661	10k	10k	10k	10k
R662	3.3k	3.3k	6.8k	6.8k
R663	3.3k	3.3k	6.8k	6.8k
R664	OPEN	OPEN	OPEN	OPEN
R665	OPEN	OPEN	OPEN	OPEN
R666	0	0	0	0
R667	100	100	100	100
R668	100	100	100	100
R669	OPEN	OPEN	OPEN	OPEN
R670	OPEN	OPEN	OPEN	OPEN
R671	1M	1M	1M	1M
R710	10k	10k	10k	10k
R711	5.6k	5.6k	5.6k	5.6k
R712	100	100	100	100
R713	100	100	100	100
R773	3.3k	3.3k	3.3k	3.3k
R776	3.3k	3.3k	3.3k	3.3k
C670	1/16	1/16	1/16	1/16
C671	1/16	1/16	1/16	1/16
C672	0.47/10	0.47/10	0.47/10	0.47/10
C673	OPEN	OPEN	OPEN	OPEN
C674	OPEN	OPEN	OPEN	OPEN
C675	2.2/6.3	2.2/6.3	2.2/6.3	2.2/6.3
C676	2.2/6.3	2.2/6.3	2.2/6.3	2.2/6.3
C677	33p	33p	33p	33p
C678	33p	33p	33p	33p
C729	22/6.3	22/6.3	22/6.3	22/6.3
C730	10/16	10/16	10/16	10/16
C731	0.1	0.1	0.1	0.1
C732	1/16	1/16	1/16	1/16
C733	0.015	0.015	0.015	0.015
C735	33p	33p	33p	33p
C736	33p	33p	33p	33p
C737	10/16	10/16	10/16	10/16
C738	0.1	0.1	0.1	0.1
D614	OPEN	OPEN	OPEN	OPEN
D619	UDZW6.2B-X	UDZW6.2B-X	UDZW6.2B-X	UDZW6.2B-X
K605	NQR0499-002X	NQR0499-002X	NQR0499-002X	NQR0499-002X
X601	NAX0857-001X	NAX0857-001X	NAX0857-001X	NAX0857-001X
Q615	2SA1530A/QR/-X	2SA1530A/QR/-X	2SA1530A/QR/-X	2SA1530A/QR/-X
Q616	2SC3928A/QR/-X	2SC3928A/QR/-X	2SC3928A/QR/-X	2SC3928A/QR/-X
Q617	2SC3928A/QR/-X	2SC3928A/QR/-X	2SC3928A/QR/-X	2SC3928A/QR/-X
IC604	MX3000CS-X	MX3000CS-X	MX3000CS-X	MX3000CS-X
IC608	MM3143DN-X	MM3143DN-X	MM3143DN-X	MM3143DN-X
IC609	OPEN	OPEN	OPEN	OPEN

	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A
	OLLC09896	OLLC10118	OLLC10118 -02	
R654	OPEN	OPEN	OPEN	OPEN
R656	OPEN	OPEN	OPEN	OPEN
R659	OPEN	0	0	0
R660	OPEN	0	0	0
R661	10k	OPEN	OPEN	OPEN
R662	6.8k	OPEN	OPEN	OPEN
R663	6.8k	OPEN	OPEN	OPEN
R664	OPEN	OPEN	OPEN	OPEN
R665	OPEN	OPEN	OPEN	OPEN
R666	0	OPEN	OPEN	OPEN
R667	100	OPEN	OPEN	OPEN
R668	100	OPEN	OPEN	OPEN
R669	OPEN	OPEN	OPEN	OPEN
R670	OPEN	OPEN	OPEN	OPEN
R671	1M	OPEN	OPEN	OPEN
R710	10k	OPEN	OPEN	OPEN
R711	5.6k	OPEN	OPEN	OPEN
R712	100	OPEN	OPEN	OPEN
R713	100	OPEN	OPEN	OPEN
R773	3.3k	10k	10k	10k
R776	3.3k	10k	10k	10k
C670	1/16	OPEN	OPEN	OPEN
C671	1/16	OPEN	OPEN	OPEN
C672	0.47/10	OPEN	OPEN	OPEN
C673	OPEN	OPEN	OPEN	OPEN
C674	OPEN	OPEN	OPEN	OPEN
C675	2.2/6.3	OPEN	OPEN	OPEN
C676	2.2/6.3	OPEN	OPEN	OPEN
C677	33p	OPEN	OPEN	OPEN
C678	33p	OPEN	OPEN	OPEN
C729	22/6.3	OPEN	OPEN	OPEN
C730	10/16	OPEN	OPEN	OPEN
C731	0.1	OPEN	OPEN	OPEN
C732	1/16	OPEN	OPEN	OPEN
C733	0.015	OPEN	OPEN	OPEN
C735	33p	OPEN	OPEN	OPEN
C736	33p	OPEN	OPEN	OPEN
C737	10/16	OPEN	OPEN	OPEN
C738	0.1	OPEN	OPEN	OPEN
D614	OPEN	OPEN	OPEN	OPEN
D619	UDZW6.2B-X	OPEN	OPEN	OPEN
K605	NQR0499-002X	OPEN	OPEN	OPEN
X601	NAX0857-001X	OPEN	OPEN	OPEN
Q615	2SA812A/5-6/-X	OPEN	OPEN	OPEN
Q616	2SC1623A/5-6/-X	OPEN	OPEN	OPEN
Q617	2SC1623A/5-6/-X	OPEN	OPEN	OPEN
IC604	MX3000CS-X	OPEN	OPEN	OPEN
IC608	MM3143DN-X	OPEN	OPEN	OPEN
IC609	OPEN	OPEN	OPEN	OPEN

ANALOG PWB CIRCUIT DIAGRAM (6/6) [POWER BLOCK] SHEET 8

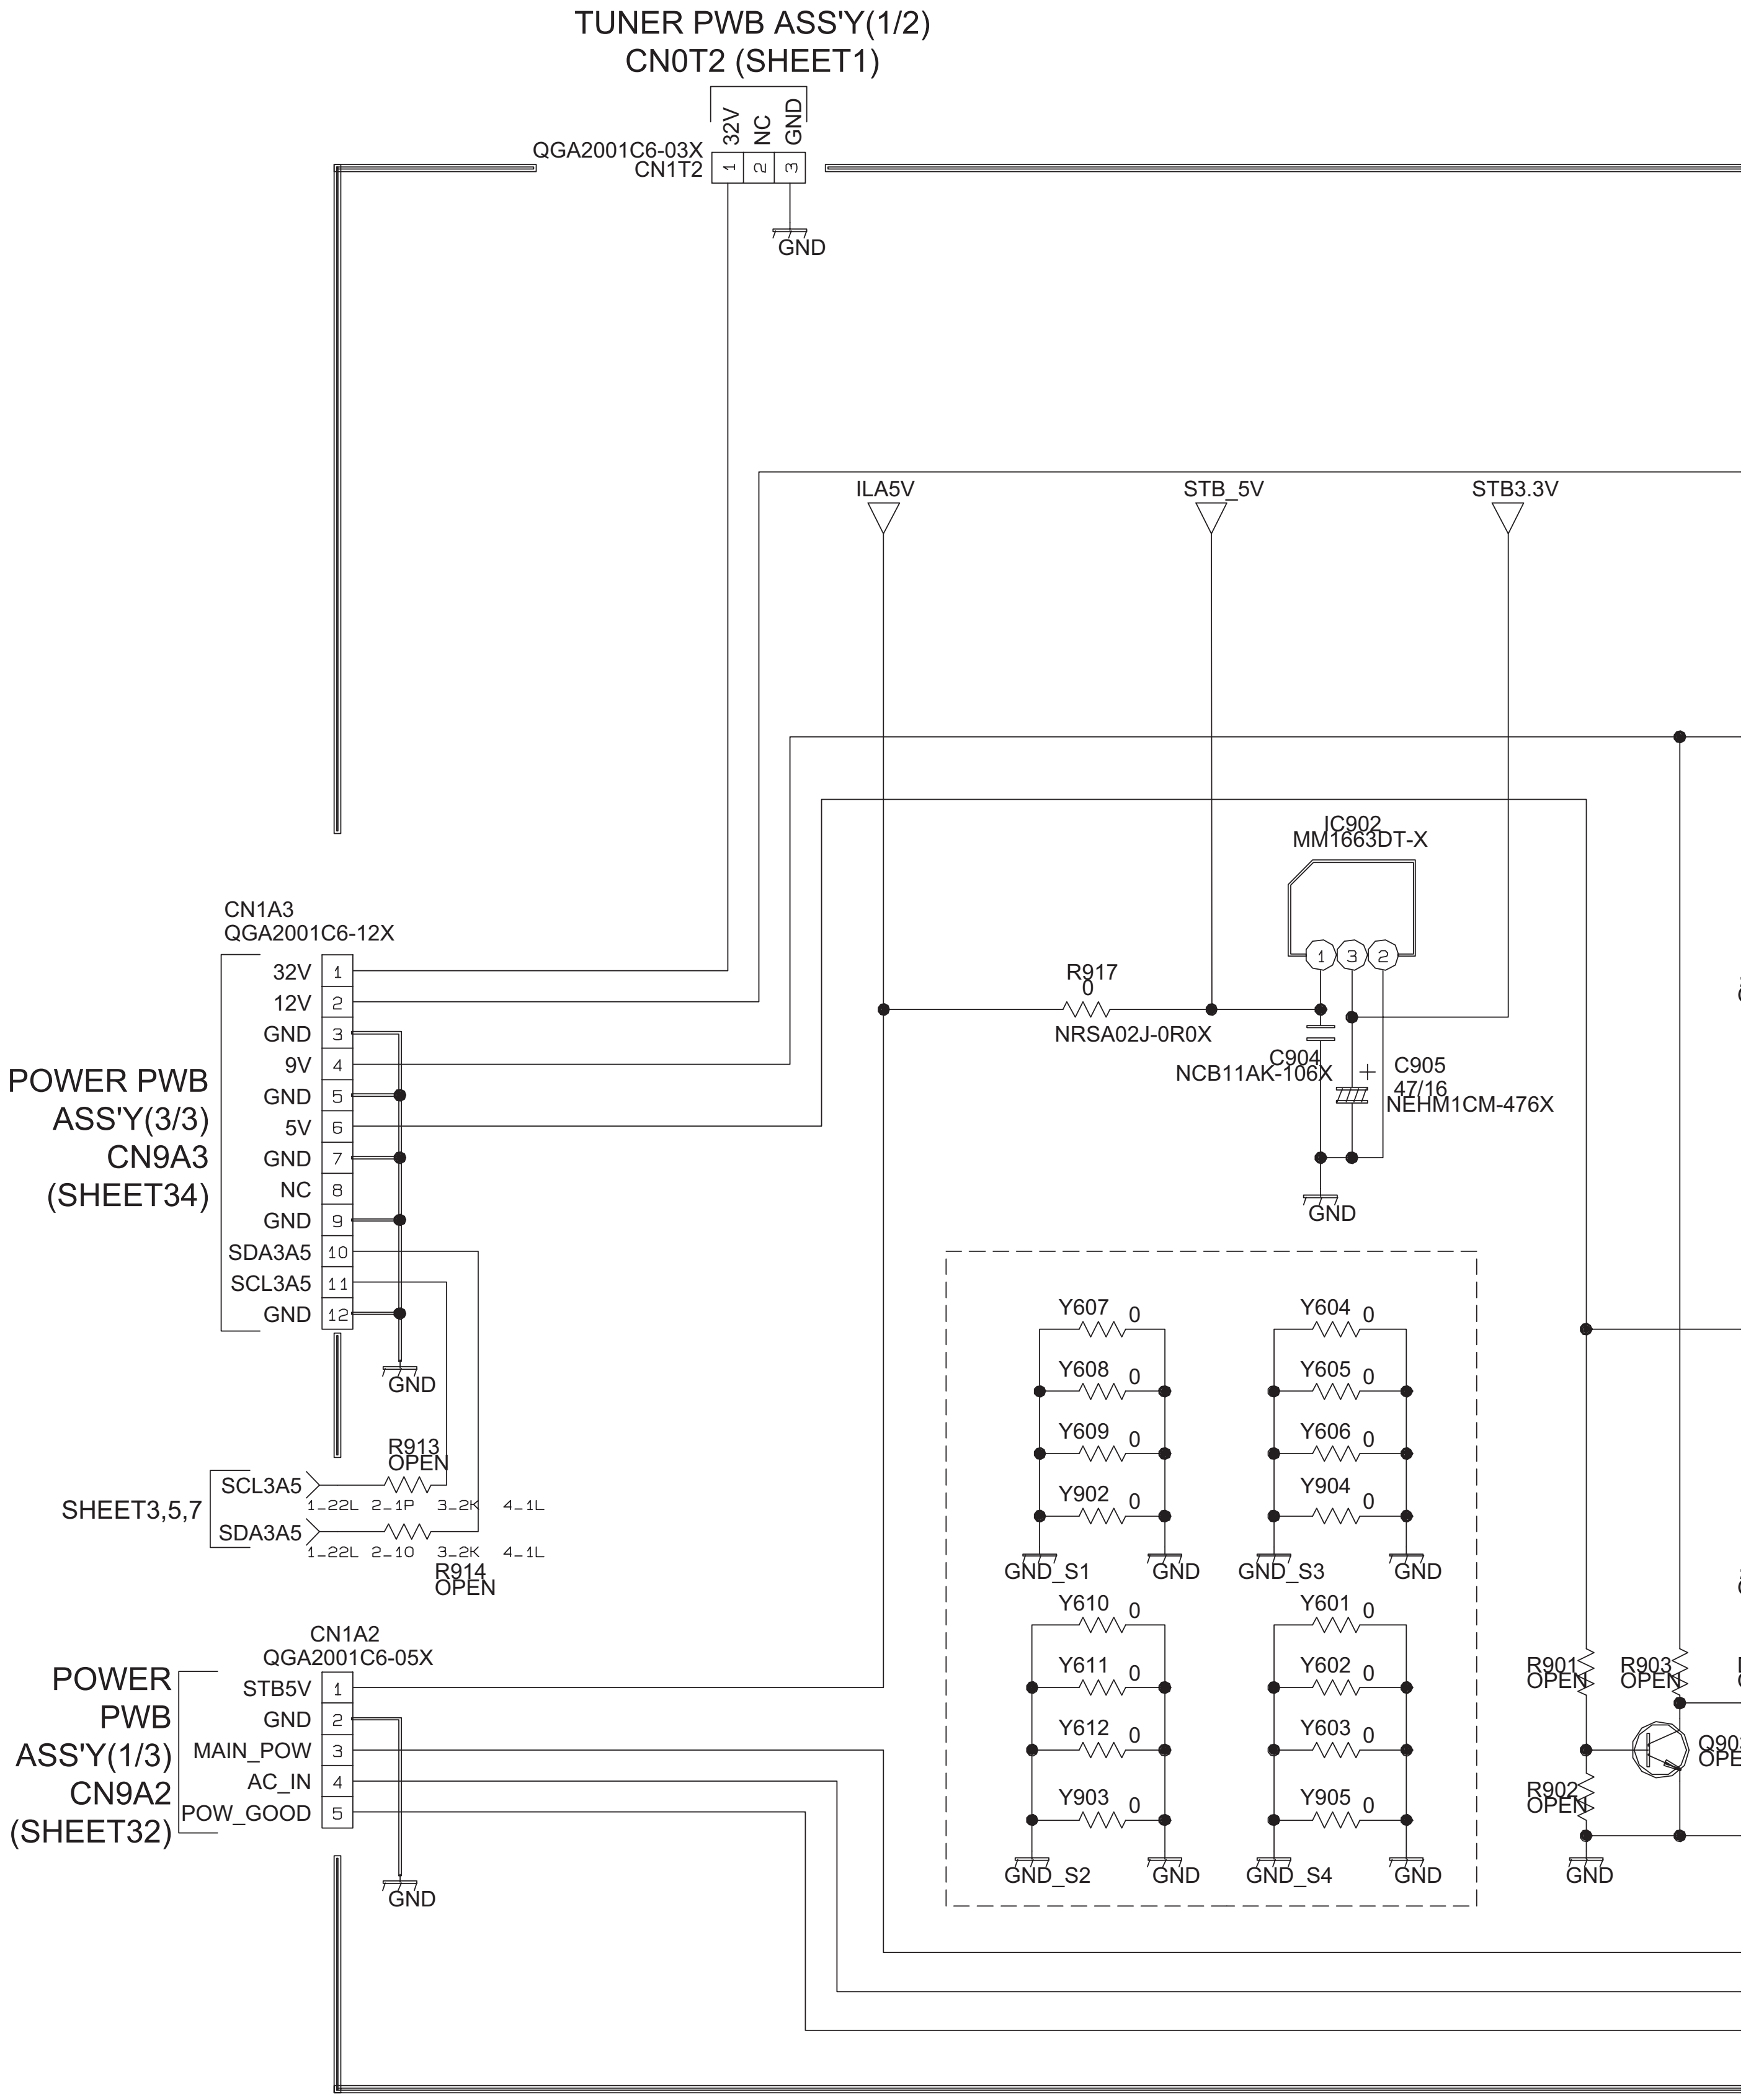

TUNER PWB ASS'Y(1/2)
CN0T2 (SHEET1)
QGA2001C6-03X
CN1T2
32V
NC
GND
1
2
3
GND
ILA5V
STB_5V
STB3.3V
IC902
MM1663DT-X
1
3
2
R917
0
NRSA02J-0R0X
C904
NCB11AK-106X
C905
47/16
NEHM1CM-476X
GND
CN1A3
QGA2001C6-12X
32V
12V
GND
9V
GND
5V
GND
NC
GND
SDA3A5
SCL3A5
GND
POWER PWB
ASS'Y(3/3)
CN9A3
(SHEET34)
GND
R913
OPEN
SCL3A5
SDA3A5
SHEET3,5,7
1_22L 2_1P 3_2K 4_1L
1_22L 2_10 3_2K 4_1L
R914
OPEN
Y607 0
Y608 0
Y609 0
Y902 0
Y604 0
Y605 0
Y606 0
Y904 0
GND_S1
GND
GND_S3
GND
Y610 0
Y611 0
Y612 0
Y903 0
Y601 0
Y602 0
Y603 0
Y905 0
GND_S2
GND
GND_S4
GND
R901
OPEN
R903
OPEN
R902
OPEN
Q90
OPE
GND
CN1A2
QGA2001C6-05X
STB5V
GND
MAIN_POW
AC_IN
POW_GOOD
POWER
PWB
ASS'Y(1/3)
CN9A2
(SHEET32)
GND

		DSP						
	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09896	OLLC10118	OLLC10118 -02		OLLC10494	OLLC10494 -02		
C919	OPEN	OPEN	OPEN	OPEN	NEX51CM -335X	NEX51CM -335X	OPEN	OPEN
C920	OPEN	OPEN	OPEN	OPEN	NEX50JM -156X	NEX50JM -156X	OPEN	OPEN
L905	OPEN	OPEN	OPEN	OPEN	NQL52EM -220X	NQL52EM -220X	OPEN	OPEN
L906	OPEN	OPEN	OPEN	OPEN	NQL52EM -220X	NQL52EM -220X	OPEN	OPEN

ANALOG PWB ASS'Y (6/6)

SRA-1011A-M2

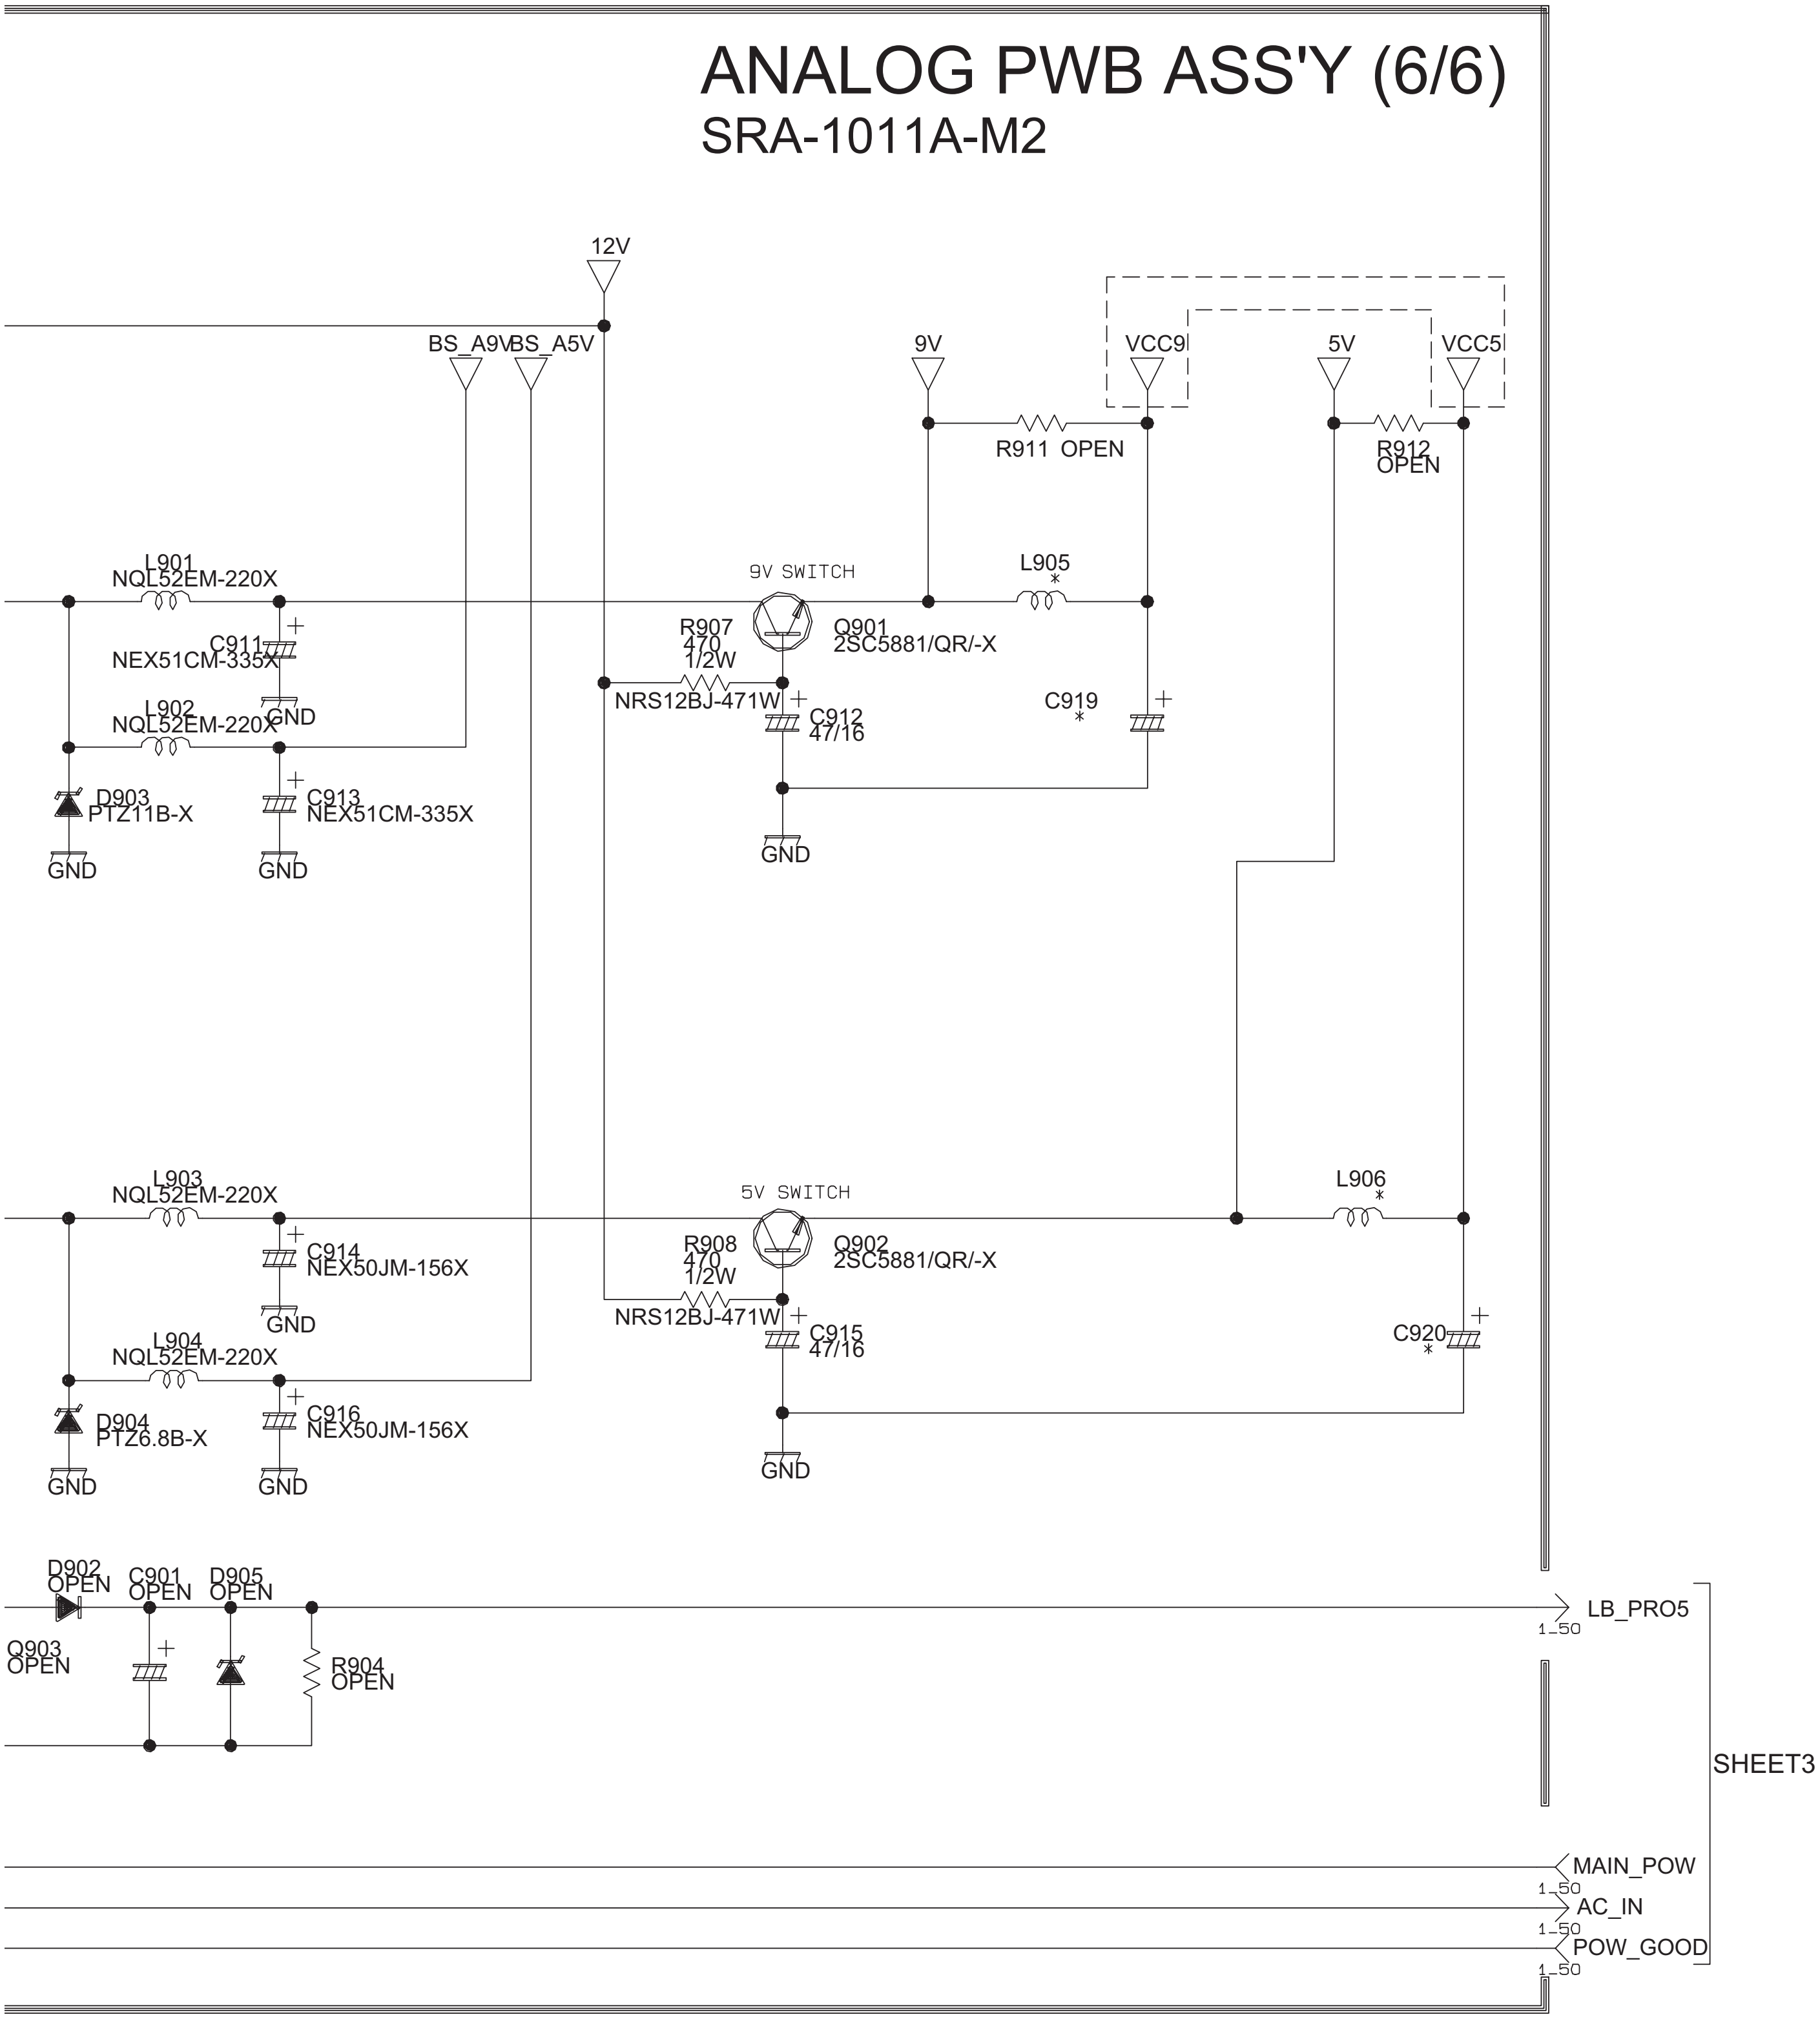
12V
BS_A9V
BS_A5V
9V
VCC9
5V
VCC5
R911 OPEN
R912
OPEN
L901
NQL52EM-220X
9V SWITCH
L905
*
R907
470
1/2W
Q901
2SC5881/QR/-X
C911
NEX51CM-335X
L902
NQL52EM-220X
GND
NRS12BJ-471W
C912
47/16
C919
*
D903
PTZ11B-X
C913
NEX51CM-335X
GND
GND
GND
L903
NQL52EM-220X
5V SWITCH
L906
*
R908
470
1/2W
Q902
2SC5881/QR/-X
C914
NEX50JM-156X
GND
L904
NQL52EM-220X
NRS12BJ-471W
C915
47/16
C920
*
D904
PTZ6.8B-X
C916
NEX50JM-156X
GND
GND
GND
D902
OPEN
C901
OPEN
D905
OPEN
Q903
OPEN
R904
OPEN
LB_PRO5
1_50
SHEET3
MAIN_POW
1_50
AC_IN
1_50
POW_GOOD
1_50

c10447005_0214_5/6_0.0

DIGITAL PWB CIRCUIT DIAGRAM (1/16) [CONNECTOR BASE BLOCK] SHEET 9

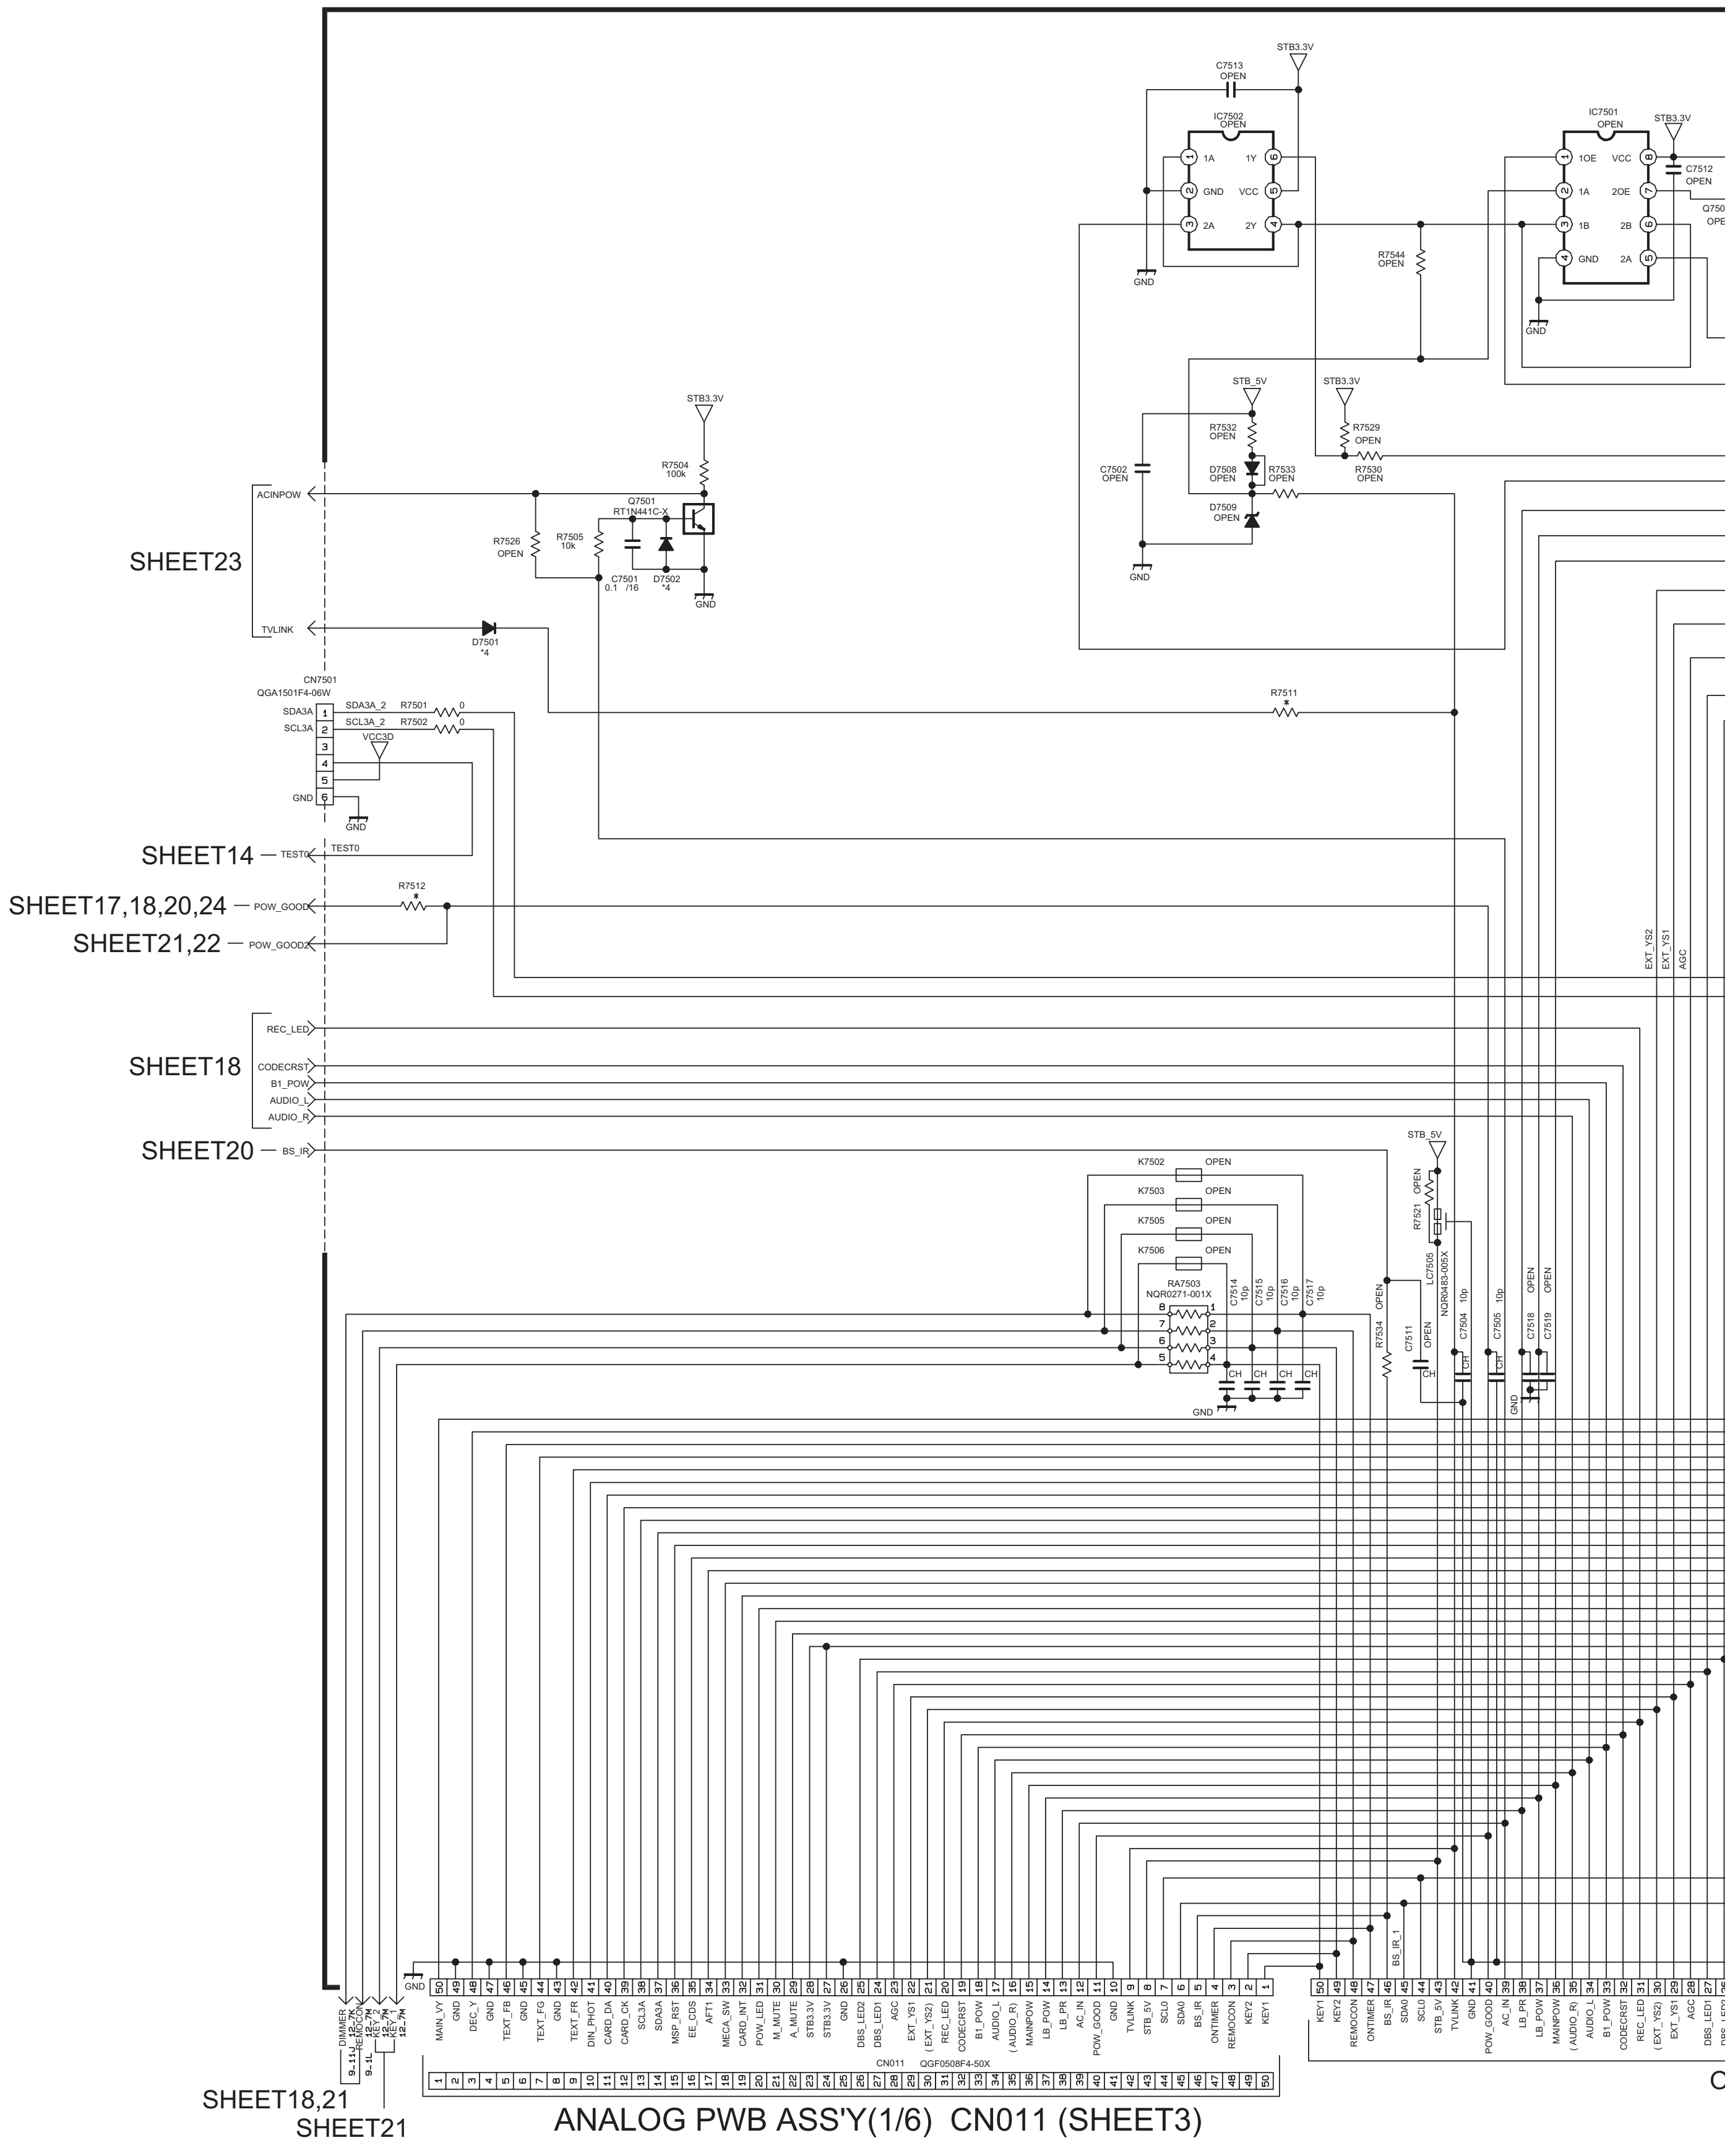

SHEET23
ACINPOW
TVLINK
STB3.3V
R7504 100k
Q7501 RT1N441C-X
R7526 OPEN
R7505 10k
C7501 0.1 /16
D7502 *4
GND
D7501 *4
CN7501 QGA1501F4-06W
SDA3A
SCL3A
SDA3A_2
SCL3A_2
R7501 0
R7502 0
VCC3D
GND
SHEET14
TEST0
SHEET17,18,20,24
POW_GOOD
R7512 *
SHEET21,22
POW_GOOD2
SHEET18
REC_LED
CODECRST
B1_POW
AUDIO_L
AUDIO_R
SHEET20
BS_IR
C7513 OPEN
IC7502 OPEN
1A
1Y
GND
VCC
2A
2Y
IC7501 OPEN
1OE
VCC
1A
2OE
1B
2B
GND
2A
C7512 OPEN
R7544 OPEN
STB_5V
R7532 OPEN
R7529 OPEN
C7502 OPEN
D7508 OPEN
R7533 OPEN
R7530 OPEN
D7509 OPEN
R7511 *
EXT_YS2
EXT_YS1
AGC
K7502 OPEN
K7503 OPEN
K7505 OPEN
K7506 OPEN
RA7503 NQR0271-001X
C7514 10p
C7515 10p
C7516 10p
C7517 10p
CH
R7521 OPEN
LC7505 NQR0483-005X
R7534 OPEN
C7511 OPEN
C7504 10p
C7505 10p
C7518 OPEN
C7519 OPEN
DIMMER
9.1L
12.7K
REMOCON
9.1L
12.7M
KEY_1
12.7M
KEY_2
12.7M
MAIN_VY
DEC_Y
TEXT_FB
TEXT_FG
TEXT_FR
DIN_PHOT
CARD_DA
CARD_CK
SCL3A
SDA3A
MSP_RST
EE_CDS
AFT1
MECA_SW
CARD_INT
POW_LED
M_MUTE
A_MUTE
STB3.3V
DBS_LED2
DBS_LED1
AGC
EXT_YS1
(EXT_YS2)
REC_LED
CODECRST
B1_POW
AUDIO_L
(AUDIO_R)
MAINPOW
LB_POW
LB_PR
AC_IN
POW_GOOD
TVLINK
STB_5V
SCL0
SDA0
BS_IR
ONTIMER
REMOCON
KEY2
KEY1
CN011 QGF0508F4-50X
BS_IR_1
SHEET18,21
SHEET21
ANALOG PWB ASS'Y(1/6) CN011 (SHEET3)

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
R7511	OPEN	0	0	0	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R7512	OPEN	0	0	0	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN

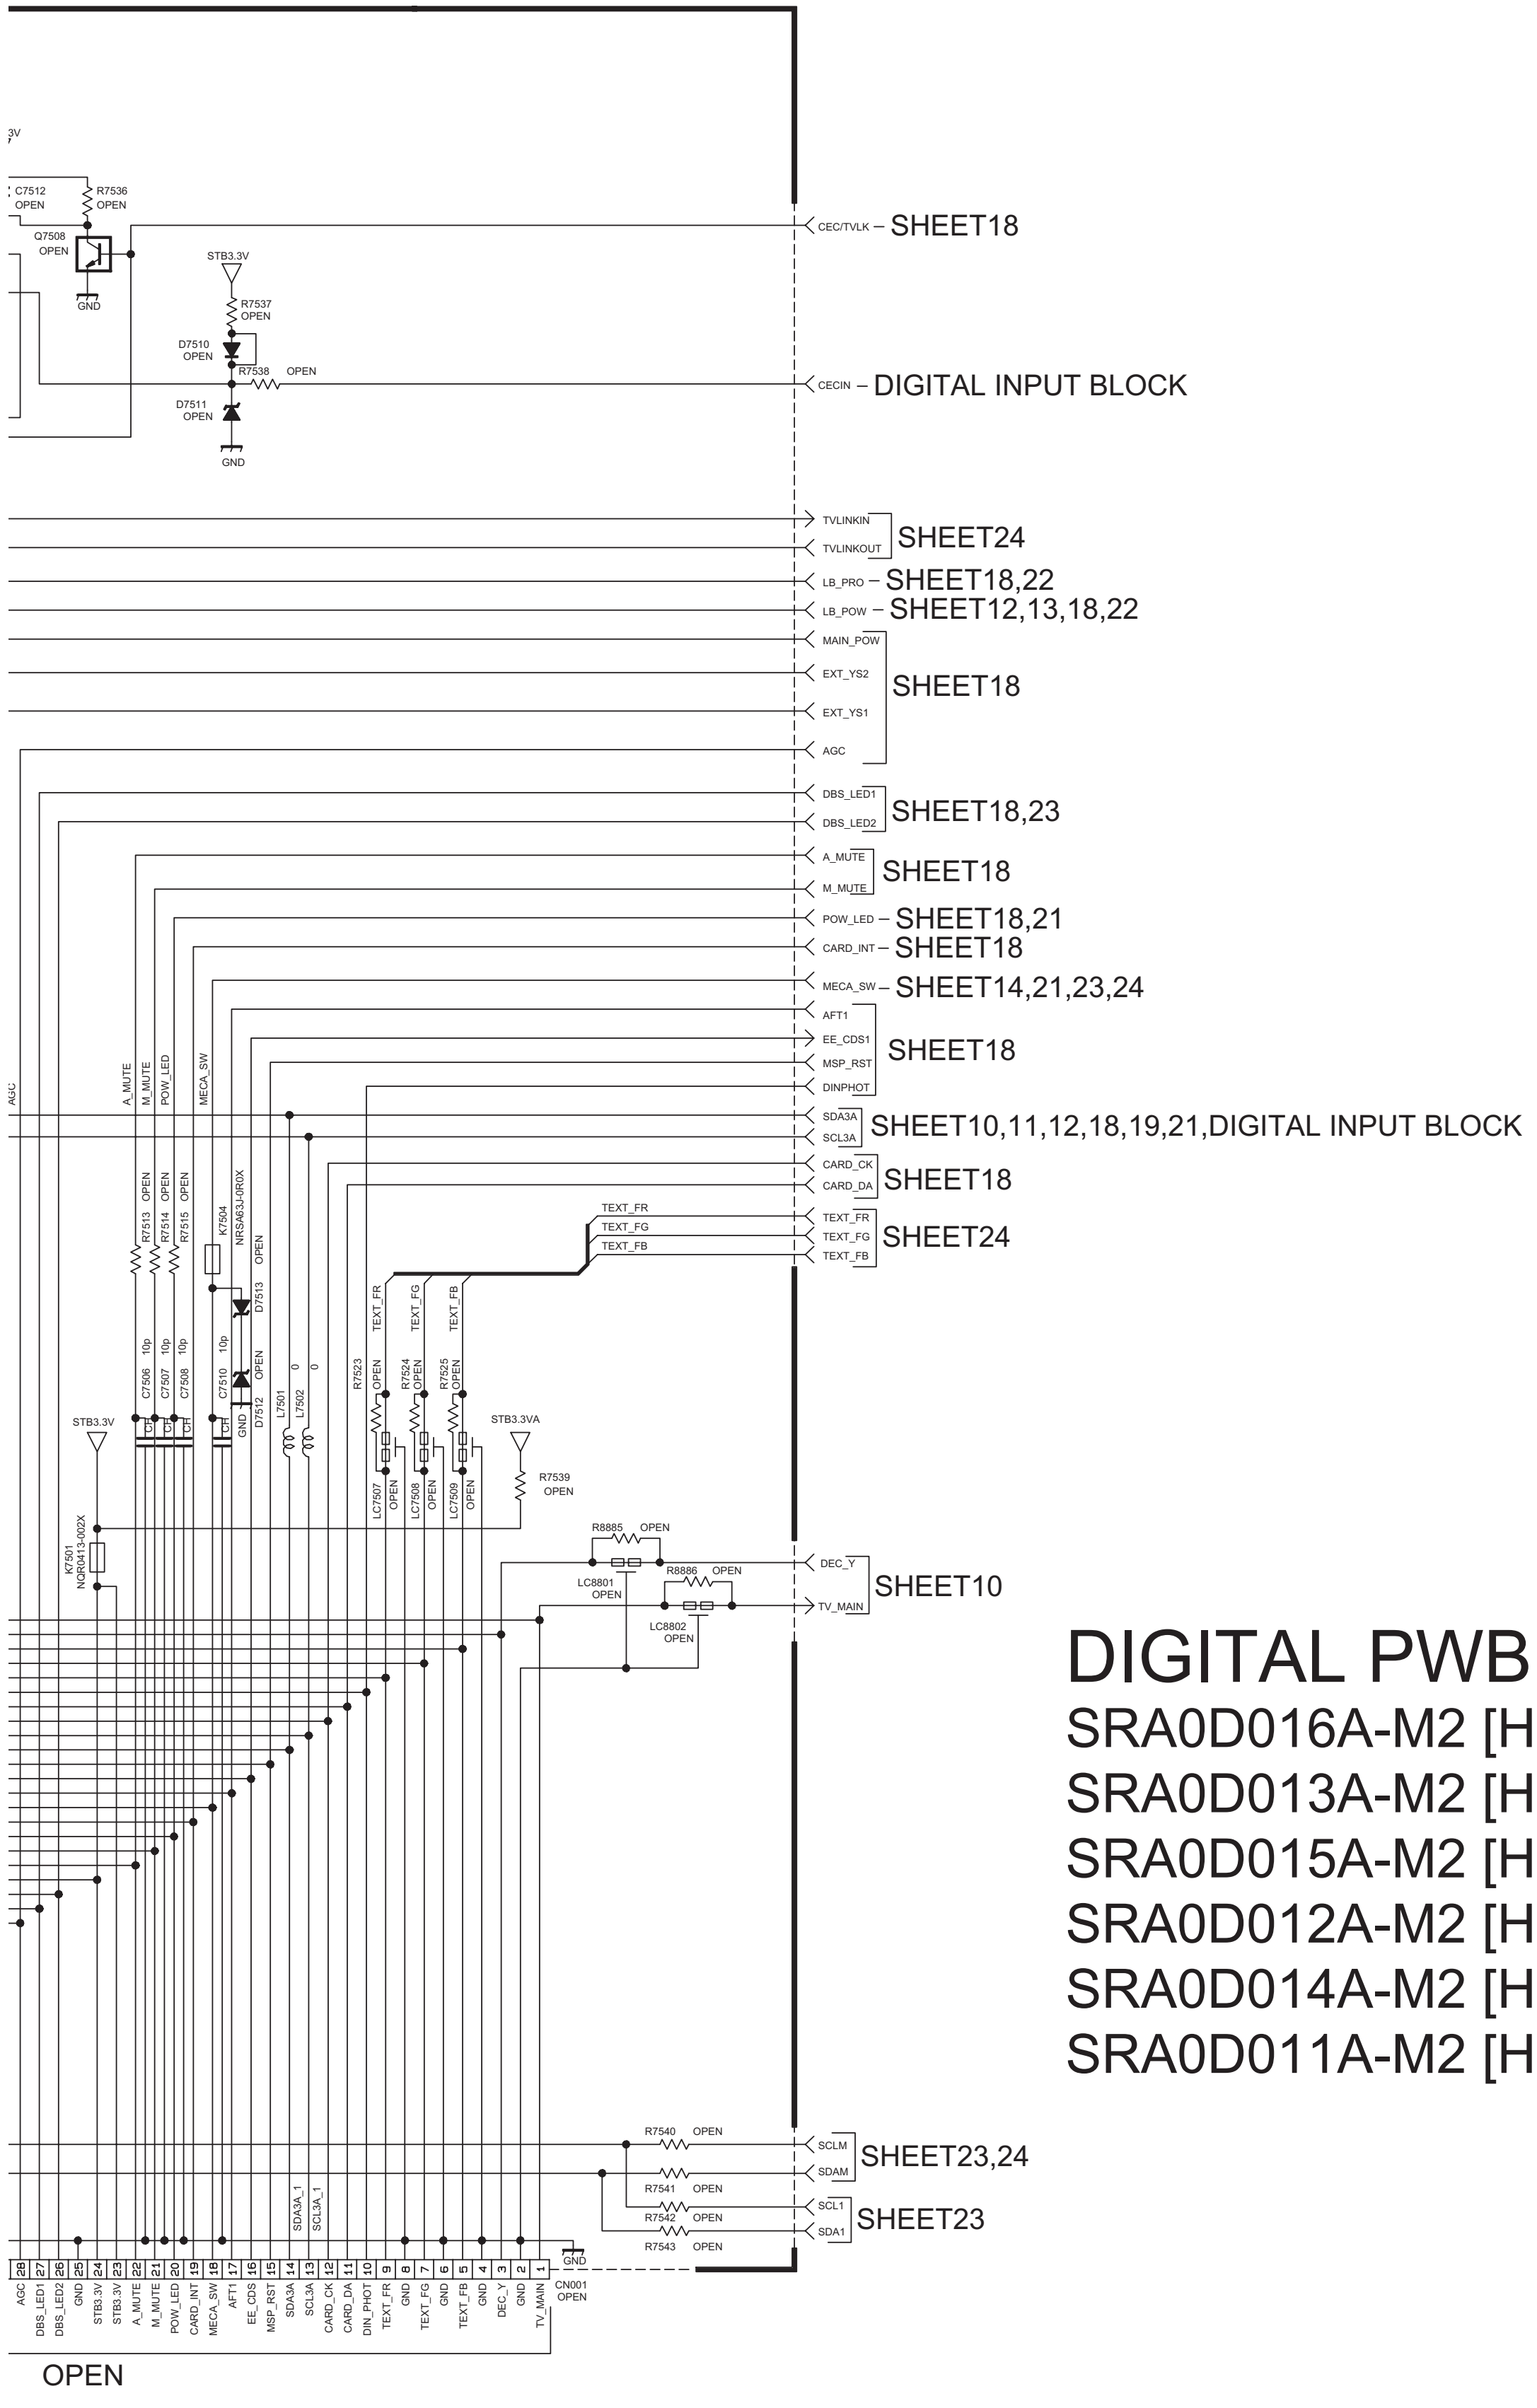
C7512 OPEN
R7536 OPEN
Q7508 OPEN
GND
STB3.3V
R7537 OPEN
D7510 OPEN
R7538 OPEN
D7511 OPEN
CEC/TVLK – SHEET18
CECIN – DIGITAL INPUT BLOCK
TVLINKIN
TVLINKOUT
SHEET24
LB_PRO – SHEET18,22
LB_POW – SHEET12,13,18,22
MAIN_POW
EXT_YS2
EXT_YS1
AGC
SHEET18
DBS_LED1
DBS_LED2
SHEET18,23
A_MUTE
M_MUTE
SHEET18
POW_LED – SHEET18,21
CARD_INT – SHEET18
MECA_SW – SHEET14,21,23,24
AFT1
EE_CDS1
MSP_RST
DINPHOT
SHEET18
SDA3A
SCL3A
SHEET10,11,12,18,19,21,DIGITAL INPUT BLOCK
CARD_CK
CARD_DA
SHEET18
TEXT_FR
TEXT_FG
TEXT_FB
SHEET24
R7513 OPEN
R7514 OPEN
R7515 OPEN
K7504 NRSA63J-0R0X
D7513 OPEN
C7506 10p
C7507 10p
C7508 10p
C7510 10p
D7512 OPEN
L7501 0
L7502 0
R7523 OPEN
R7524 OPEN
R7525 OPEN
LC7507 OPEN
LC7508 OPEN
LC7509 OPEN
STB3.3VA
R7539 OPEN
K7501 NQR0413-002X
R8885 OPEN
LC8801 OPEN
R8886 OPEN
LC8802 OPEN
DEC_Y
TV_MAIN
SHEET10
R7540 OPEN
SCLM
SDAM
SHEET23,24
R7541 OPEN
R7542 OPEN
R7543 OPEN
SCL1
SDA1
SHEET23
SDA3A_1
SCL3A_1
CN001 OPEN
AGC
DBS_LED1
DBS_LED2
GND
STB3.3V
STB3.3V
A_MUTE
M_MUTE
POW_LED
CARD_INT
MECA_SW
AFT1
EE_CDS
MSP_RST
SDA3A
SCL3A
CARD_CK
CARD_DA
DIN_PHOT
TEXT_FR
GND
TEXT_FG
GND
TEXT_FB
GND
DEC_Y
GND
TV_MAIN
OPEN

DIGITAL PWB ASS'Y (1/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

c10446011_0214_11/17_0.0

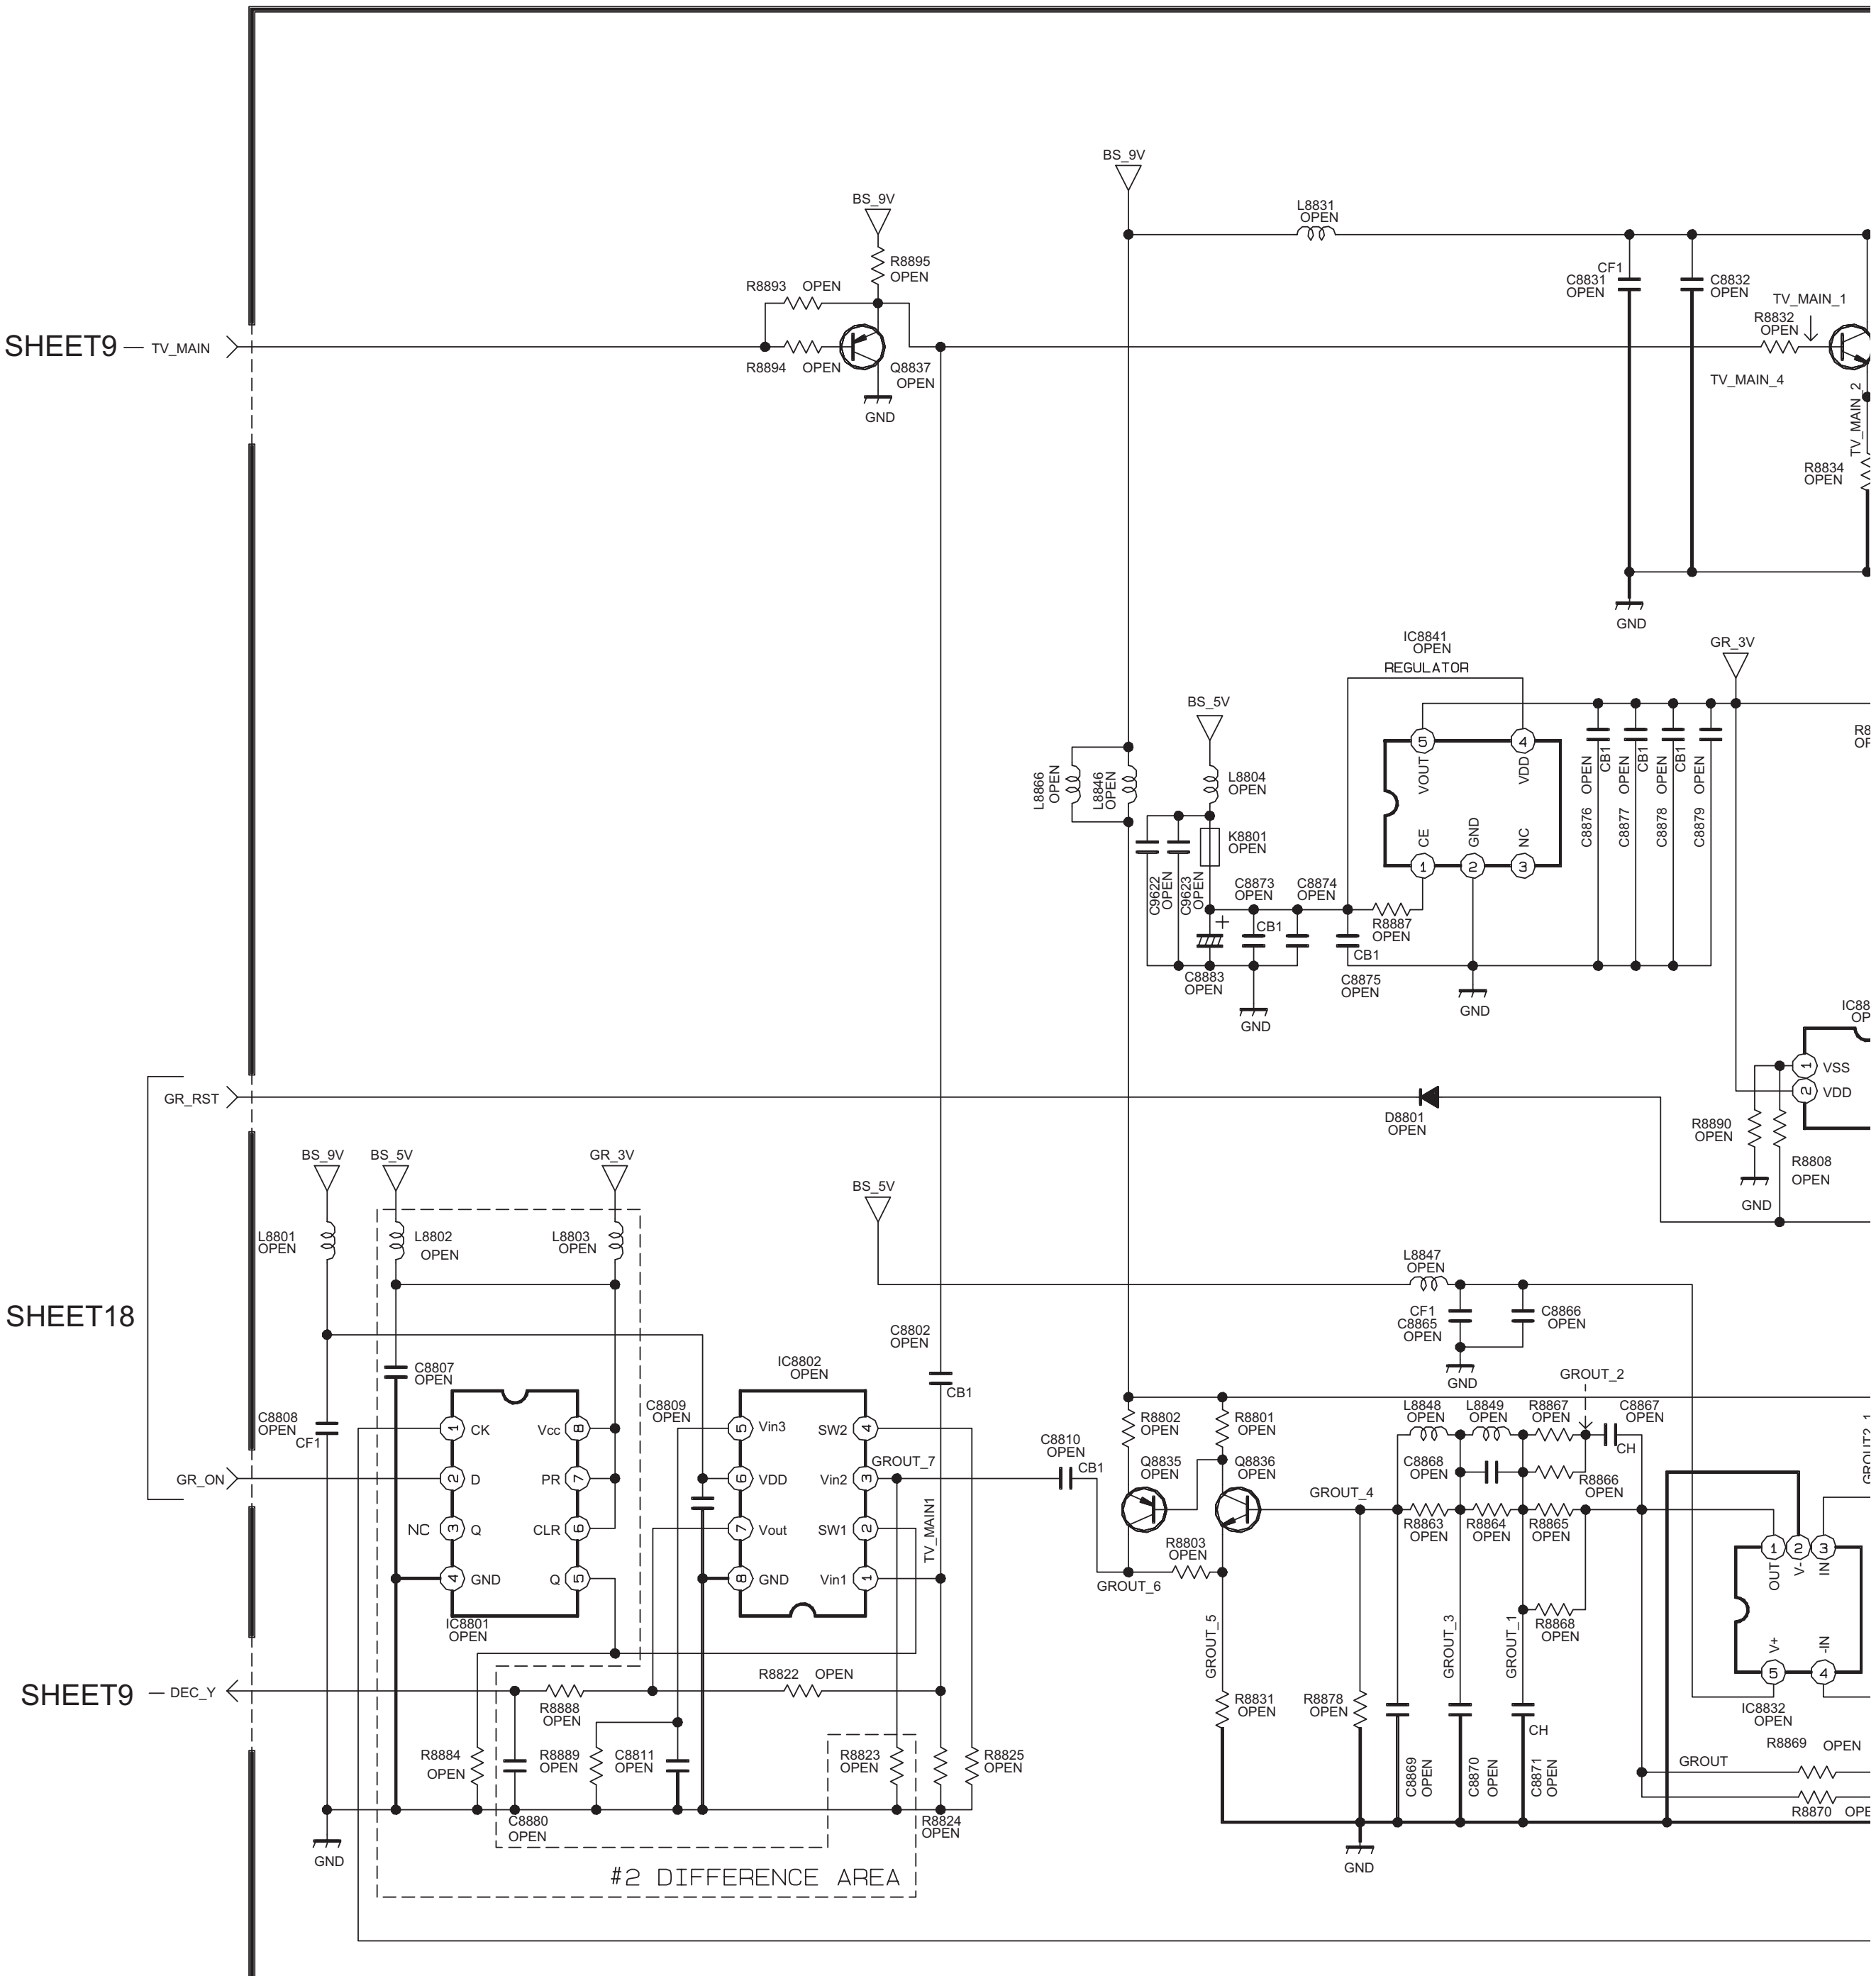
SHEET9 — TV_MAIN
SHEET18
SHEET9 — DEC_Y
GR_RST
GR_ON
BS_9V
BS_5V
GR_3V
GND
R8893 OPEN
R8894 OPEN
R8895 OPEN
Q8837 OPEN
L8831 OPEN
CF1
C8831 OPEN
C8832 OPEN
TV_MAIN_1
R8832 OPEN
TV_MAIN_4
TV_MAIN_2
R8834 OPEN
IC8841 OPEN
REGULATOR
VOUT
VDD
CE
GND
NC
C8876 OPEN
C8877 OPEN
C8878 OPEN
C8879 OPEN
CB1
L8866 OPEN
L8846 OPEN
L8804 OPEN
K8801 OPEN
C9622 OPEN
C9623 OPEN
C8873 OPEN
C8874 OPEN
R8887 OPEN
C8883 OPEN
C8875 OPEN
D8801 OPEN
R8890 OPEN
R8808 OPEN
VSS
L8801 OPEN
L8802 OPEN
L8803 OPEN
C8807 OPEN
C8808 OPEN
IC8801 OPEN
CK
D
Q
GND
Vcc
PR
CLR
C8809 OPEN
IC8802 OPEN
Vin3
Vout
SW2
Vin2
SW1
Vin1
GROUT_7
TV_MAIN1
C8802 OPEN
C8810 OPEN
R8822 OPEN
R8888 OPEN
R8884 OPEN
R8889 OPEN
C8811 OPEN
C8880 OPEN
R8823 OPEN
R8824 OPEN
R8825 OPEN
#2 DIFFERENCE AREA
L8847 OPEN
C8865 OPEN
C8866 OPEN
R8802 OPEN
R8801 OPEN
Q8835 OPEN
Q8836 OPEN
R8803 OPEN
GROUT_6
GROUT_4
GROUT_5
GROUT_3
GROUT_1
GROUT_2
L8848 OPEN
L8849 OPEN
R8867 OPEN
C8867 OPEN
CH
C8868 OPEN
R8866 OPEN
R8863 OPEN
R8864 OPEN
R8865 OPEN
R8868 OPEN
R8831 OPEN
R8878 OPEN
C8869 OPEN
C8870 OPEN
C8871 OPEN
IC8832 OPEN
OUT
V-
IN
V+
-IN
R8869 OPEN
R8870 OPEN
GROUT

DIGITAL PWB ASS'Y (2/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

*1:
*2:
*3:
*4:
*5:
LC1
LC2
LC3
PNP
NPN

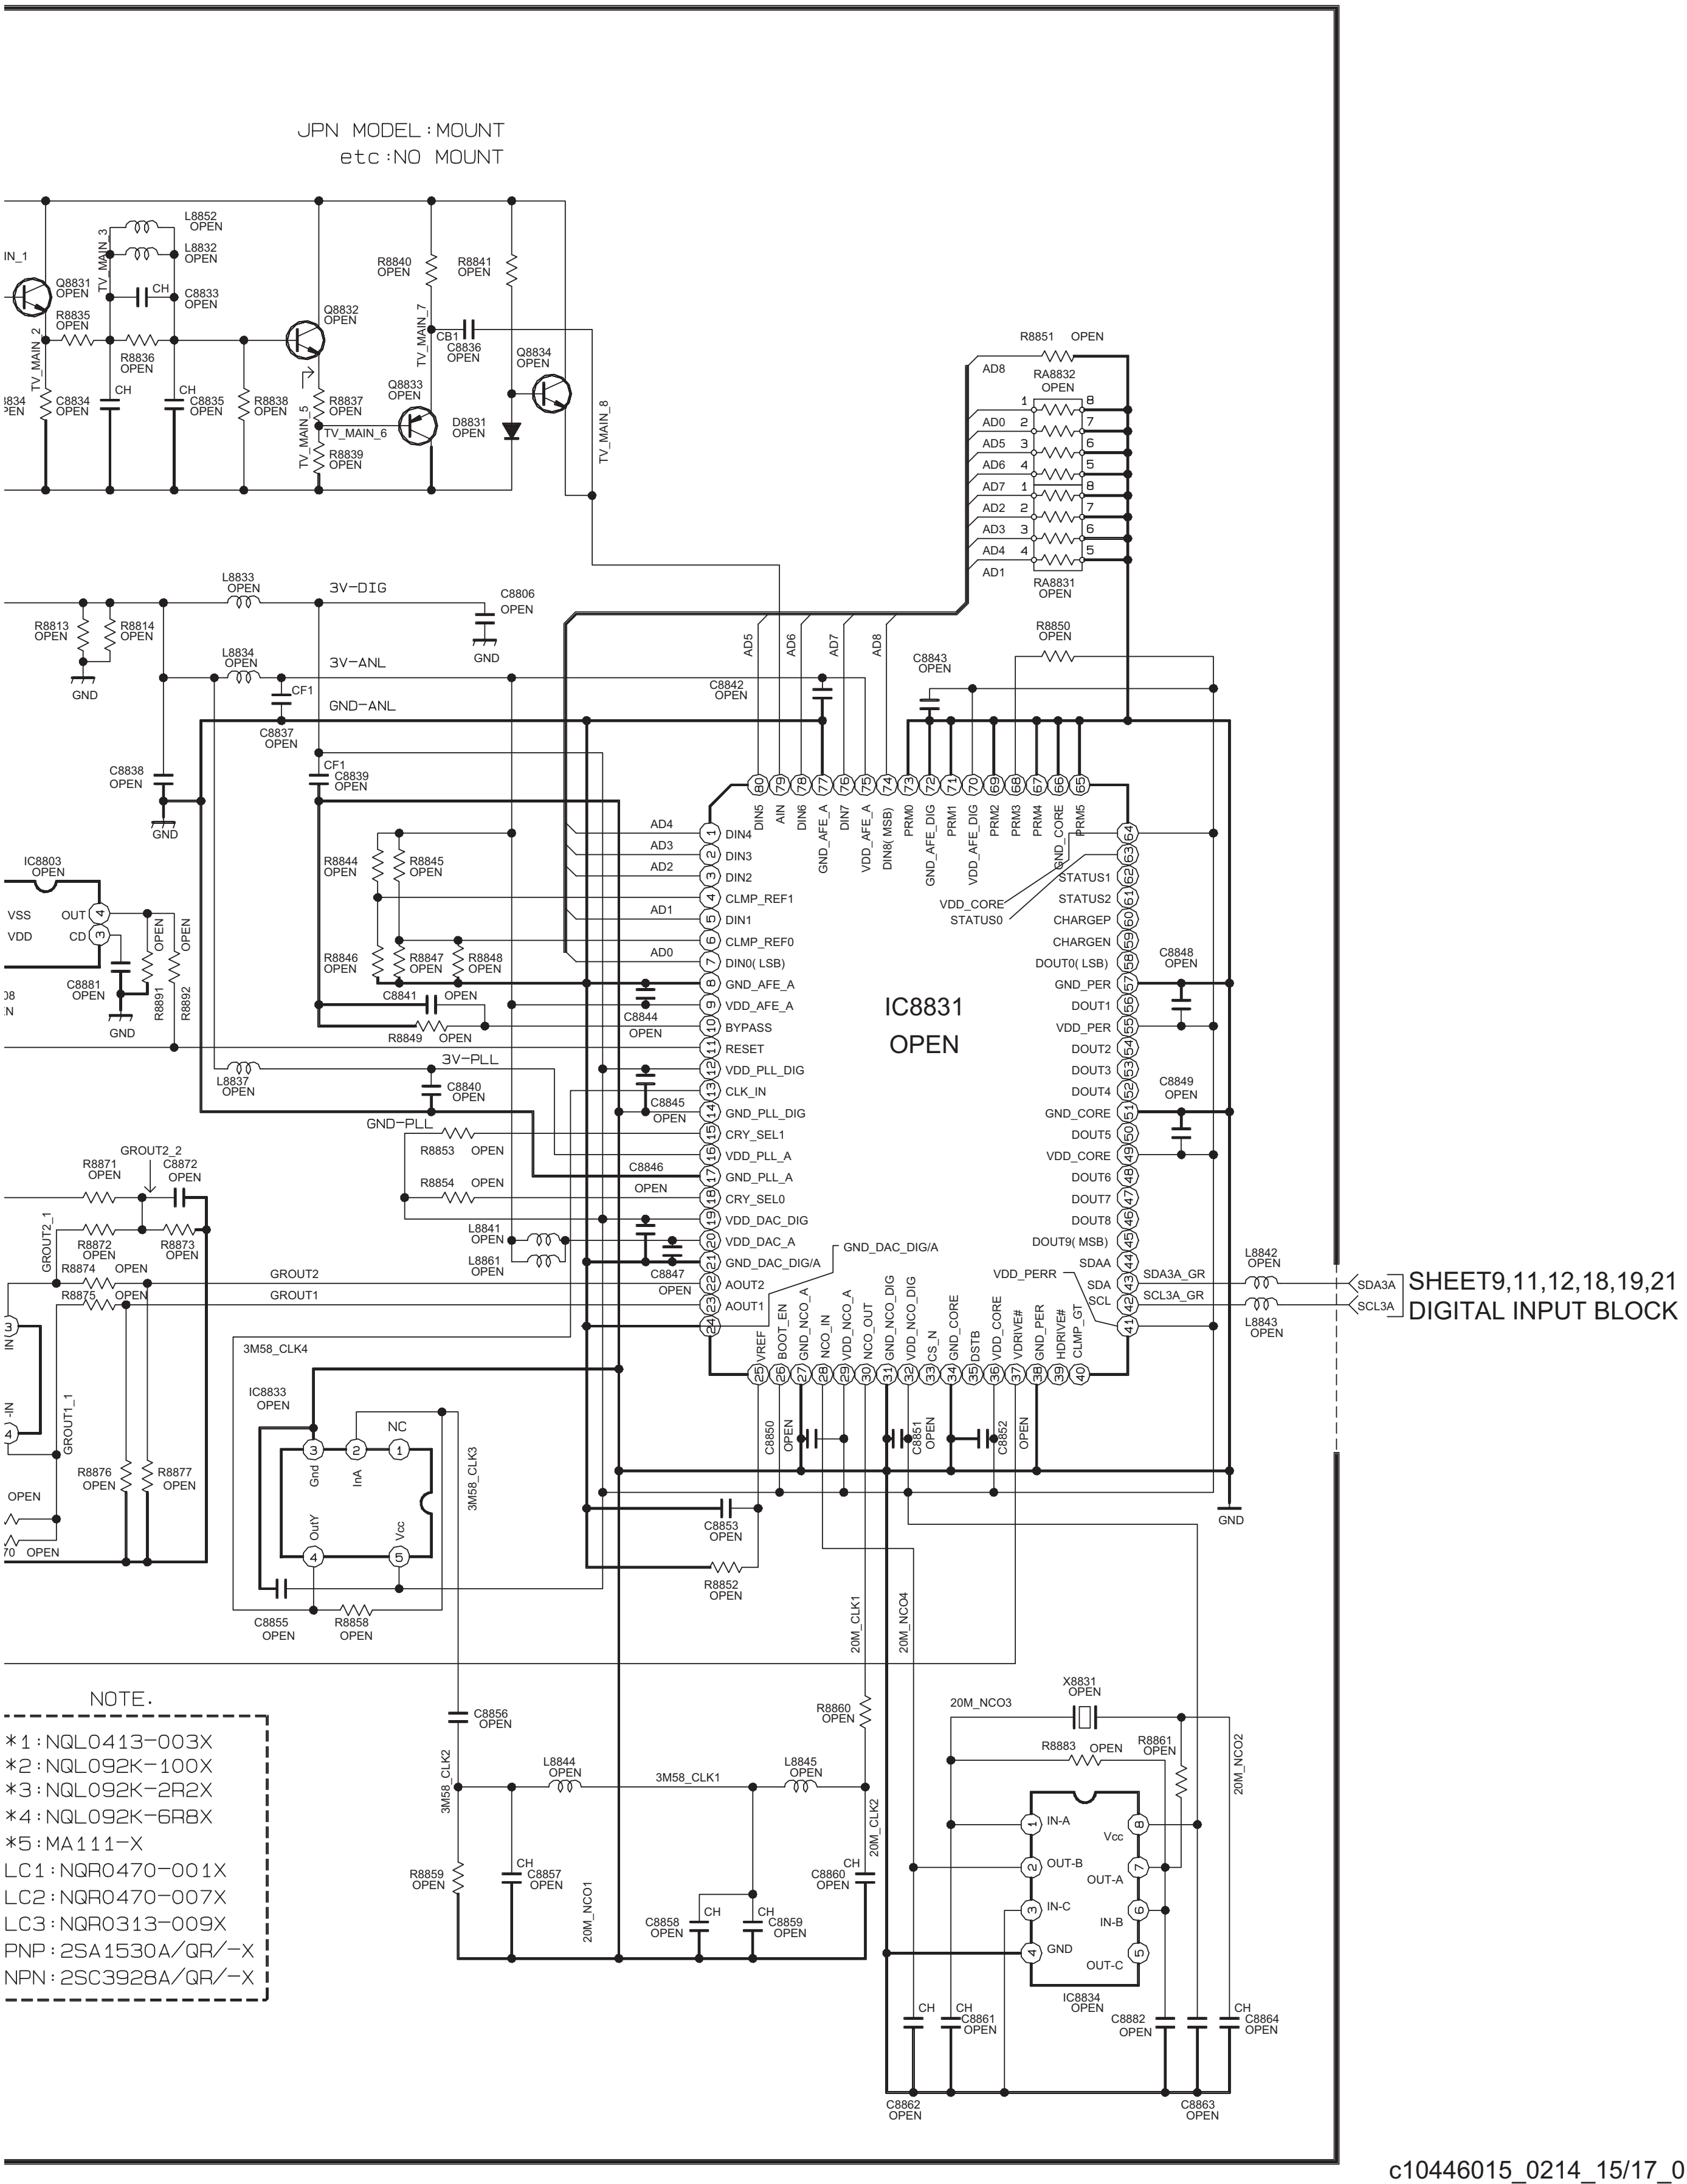
JPN MODEL:MOUNT
etc:NO MOUNT
IC8831
OPEN
IC8833
OPEN
IC8834
OPEN
IC8803
OPEN
3V-DIG
3V-ANL
GND-ANL
3V-PLL
GND-PLL
GROUT2
GROUT1
3M58_CLK4
3M58_CLK3
3M58_CLK2
3M58_CLK1
20M_CLK1
20M_CLK2
20M_NCO1
20M_NCO2
20M_NCO3
20M_NCO4
X8831
OPEN
SDA3A_GR
SCL3A_GR
SDA3A
SCL3A
SHEET9,11,12,18,19,21
DIGITAL INPUT BLOCK
GND

NOTE.

*1:NQL0413-003X
*2:NQL092K-100X
*3:NQL092K-2R2X
*4:NQL092K-6R8X
*5:MA111-X
LC1:NQR0470-001X
LC2:NQR0470-007X
LC3:NQR0313-009X
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X

c10446015_0214_15/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (3/16) [Y/C SEPARATOR BLOCK (OPTIONAL)] SHEET 11

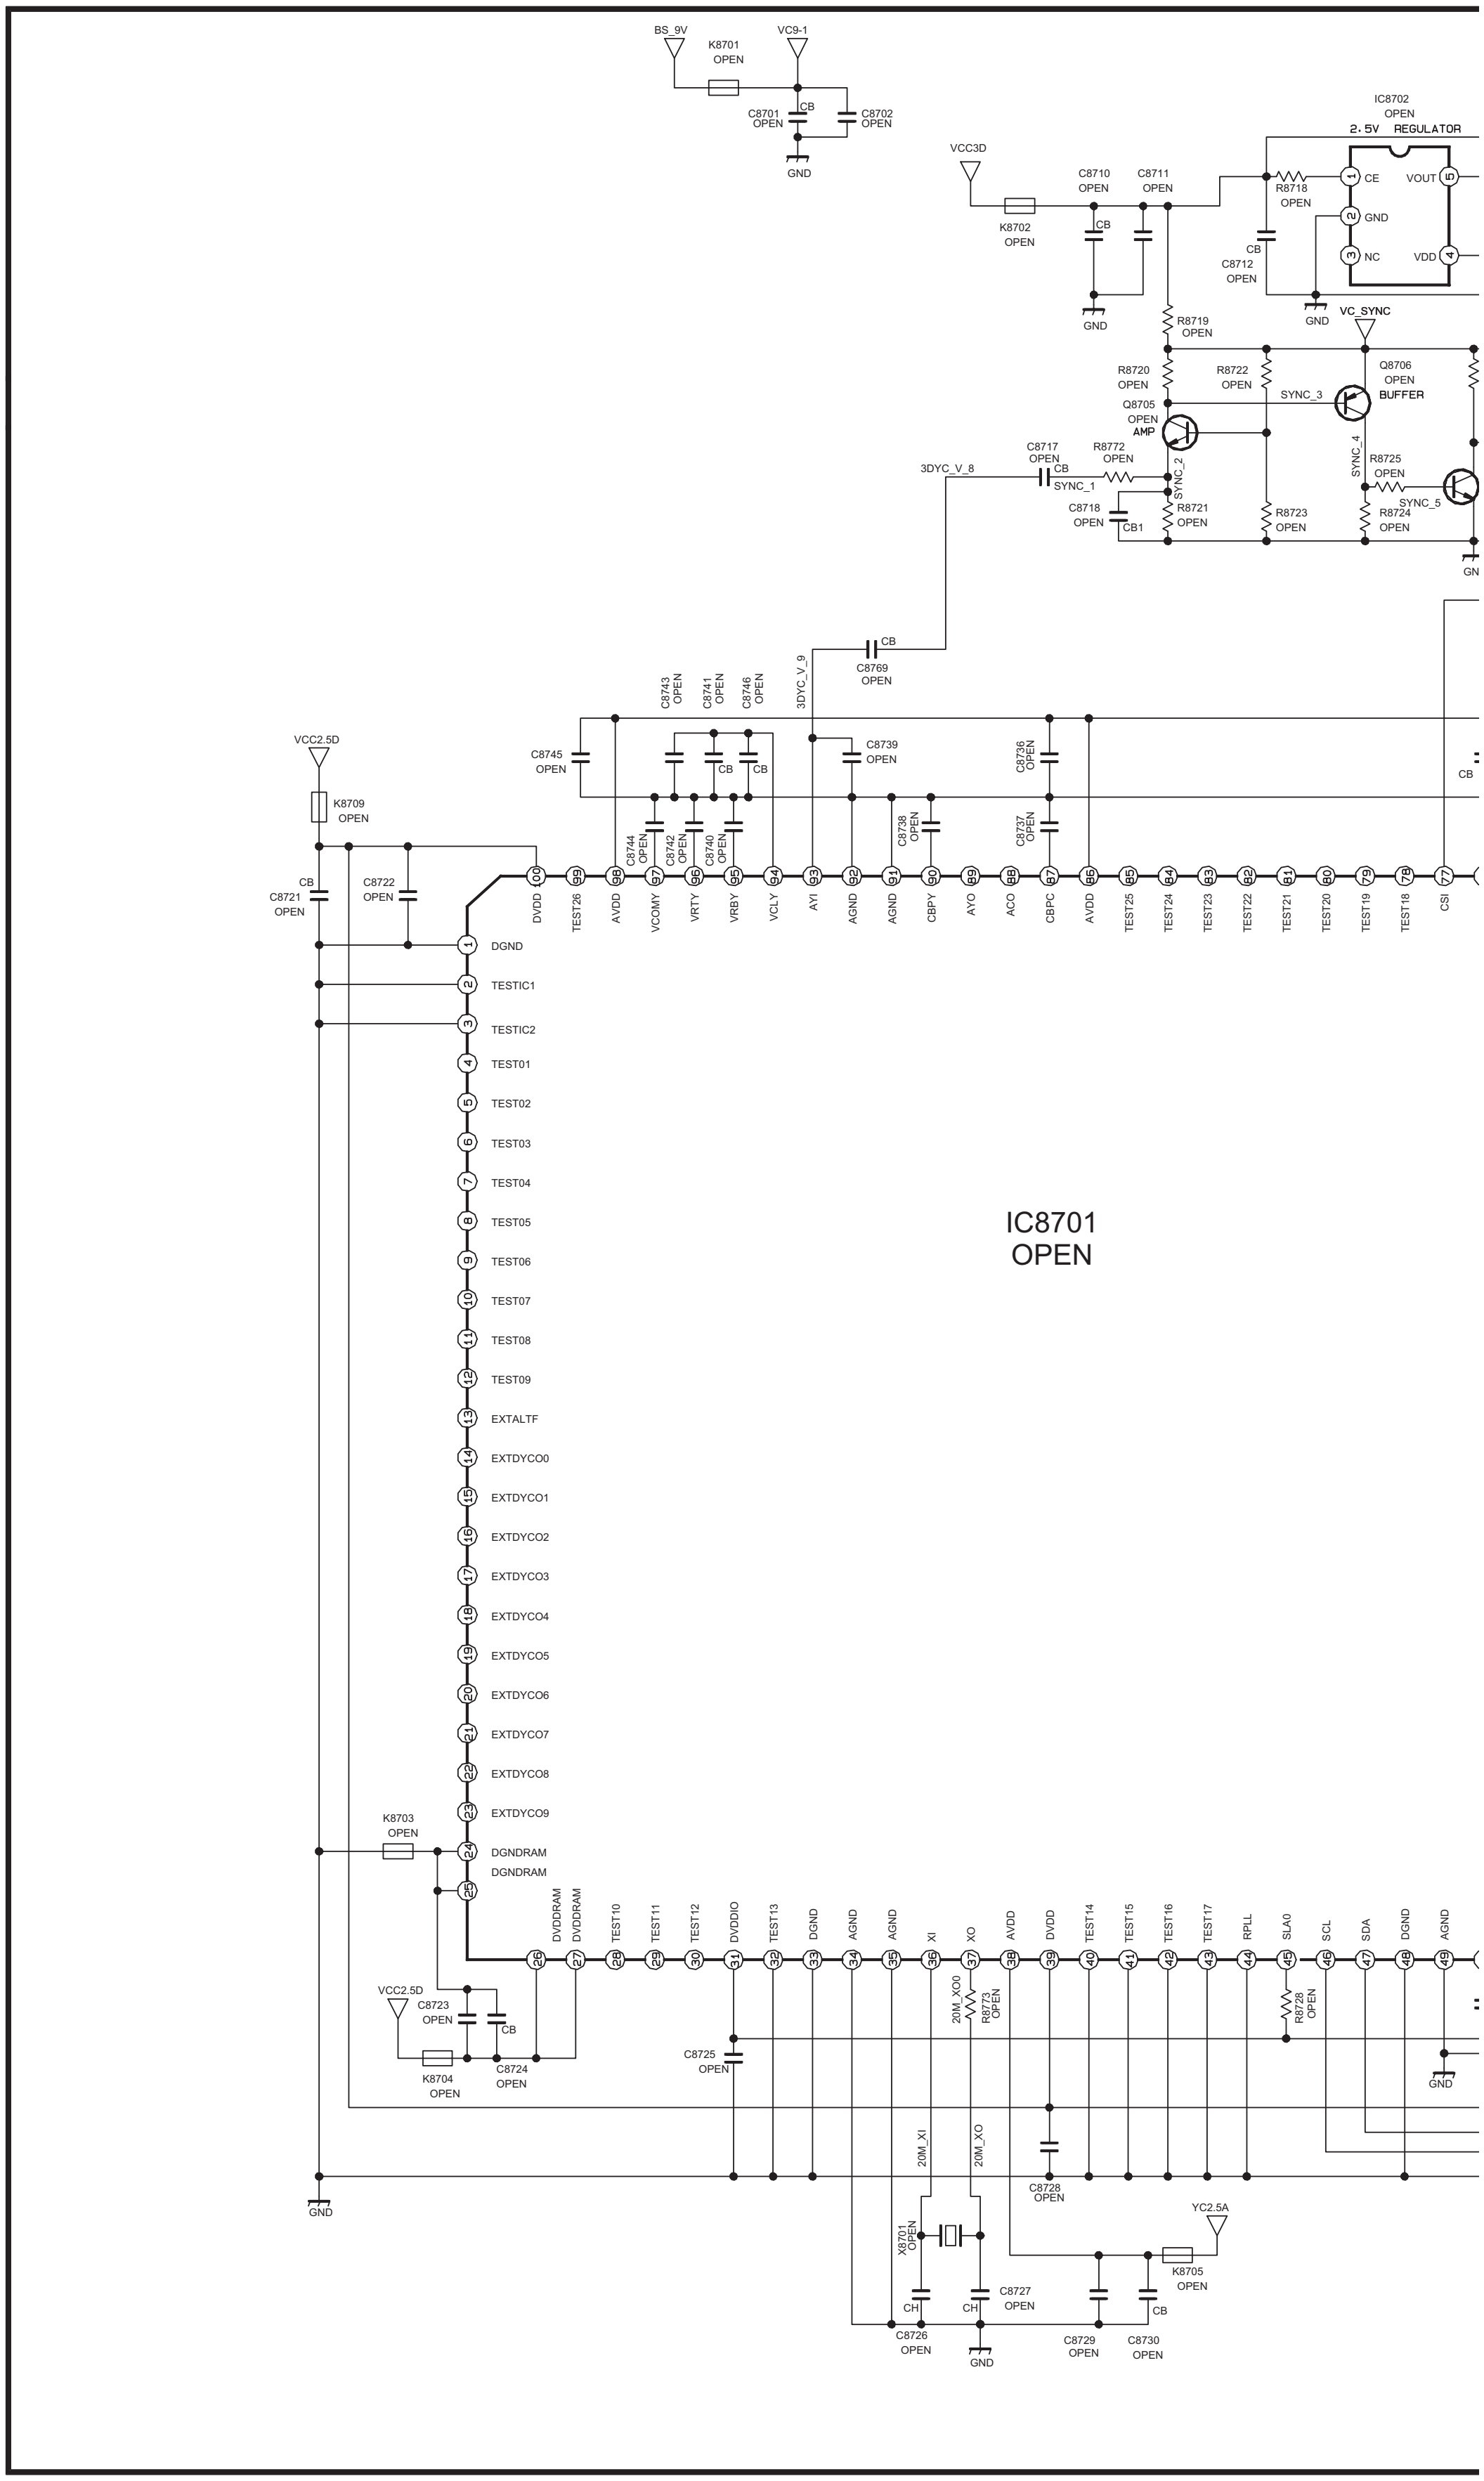
BS_9V
K8701
OPEN
VC9-1
C8701
OPEN
CB
C8702
OPEN
GND
IC8702
OPEN
2.5V REGULATOR
VCC3D
C8710
OPEN
C8711
OPEN
K8702
OPEN
CB
R8718
OPEN
CB
C8712
OPEN
CE
VOUT
GND
NC
VDD
GND
GND
VC_SYNC
R8719
OPEN
R8720
OPEN
R8722
OPEN
SYNC_3
Q8706
OPEN
BUFFER
Q8705
OPEN
AMP
C8717
OPEN
CB
R8772
OPEN
3DYC_V_8
SYNC_1
SYNC_2
SYNC_4
R8725
OPEN
SYNC_5
C8718
OPEN
CB1
R8721
OPEN
R8723
OPEN
R8724
OPEN
GN
CB
C8769
OPEN
C8743
OPEN
C8741
OPEN
C8746
OPEN
3DYC_V_9
VCC2.5D
C8745
OPEN
CB
CB
C8739
OPEN
C8736
OPEN
CB
K8709
OPEN
C8744
OPEN
C8742
OPEN
C8740
OPEN
C8738
OPEN
C8737
OPEN
CB
C8721
OPEN
C8722
OPEN
DVDD
TEST26
AVDD
VCOMY
VRTY
VRBY
VCLY
AYI
AGND
AGND
CBPY
AYO
ACO
CBPC
AVDD
TEST25
TEST24
TEST23
TEST22
TEST21
TEST20
TEST19
TEST18
CSI
DGND
TESTIC1
TESTIC2
TEST01
TEST02
TEST03
TEST04
TEST05
TEST06
TEST07
TEST08
TEST09
EXTALTF
EXTDYCO0
EXTDYCO1
EXTDYCO2
EXTDYCO3
EXTDYCO4
EXTDYCO5
EXTDYCO6
EXTDYCO7
EXTDYCO8
EXTDYCO9
DGNDRAM
DGNDRAM
IC8701
OPEN
K8703
OPEN
DVDDRAM
DVDDRAM
TEST10
TEST11
TEST12
DVDDIO
TEST13
DGND
AGND
AGND
XI
XO
AVDD
DVDD
TEST14
TEST15
TEST16
TEST17
RPLL
SLA0
SCL
SDA
DGND
AGND
VCC2.5D
C8723
OPEN
CB
K8704
OPEN
C8724
OPEN
C8725
OPEN
20M_XO0
R8773
OPEN
R8726
OPEN
GND
20M_XI
20M_XO
C8728
OPEN
YC2.5A
X8701
OPEN
K8705
OPEN
C8727
OPEN
CH
CH
CB
GND
C8726
OPEN
GND
C8729
OPEN
C8730
OPEN
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

DIGITAL PWB ASS'Y (3/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

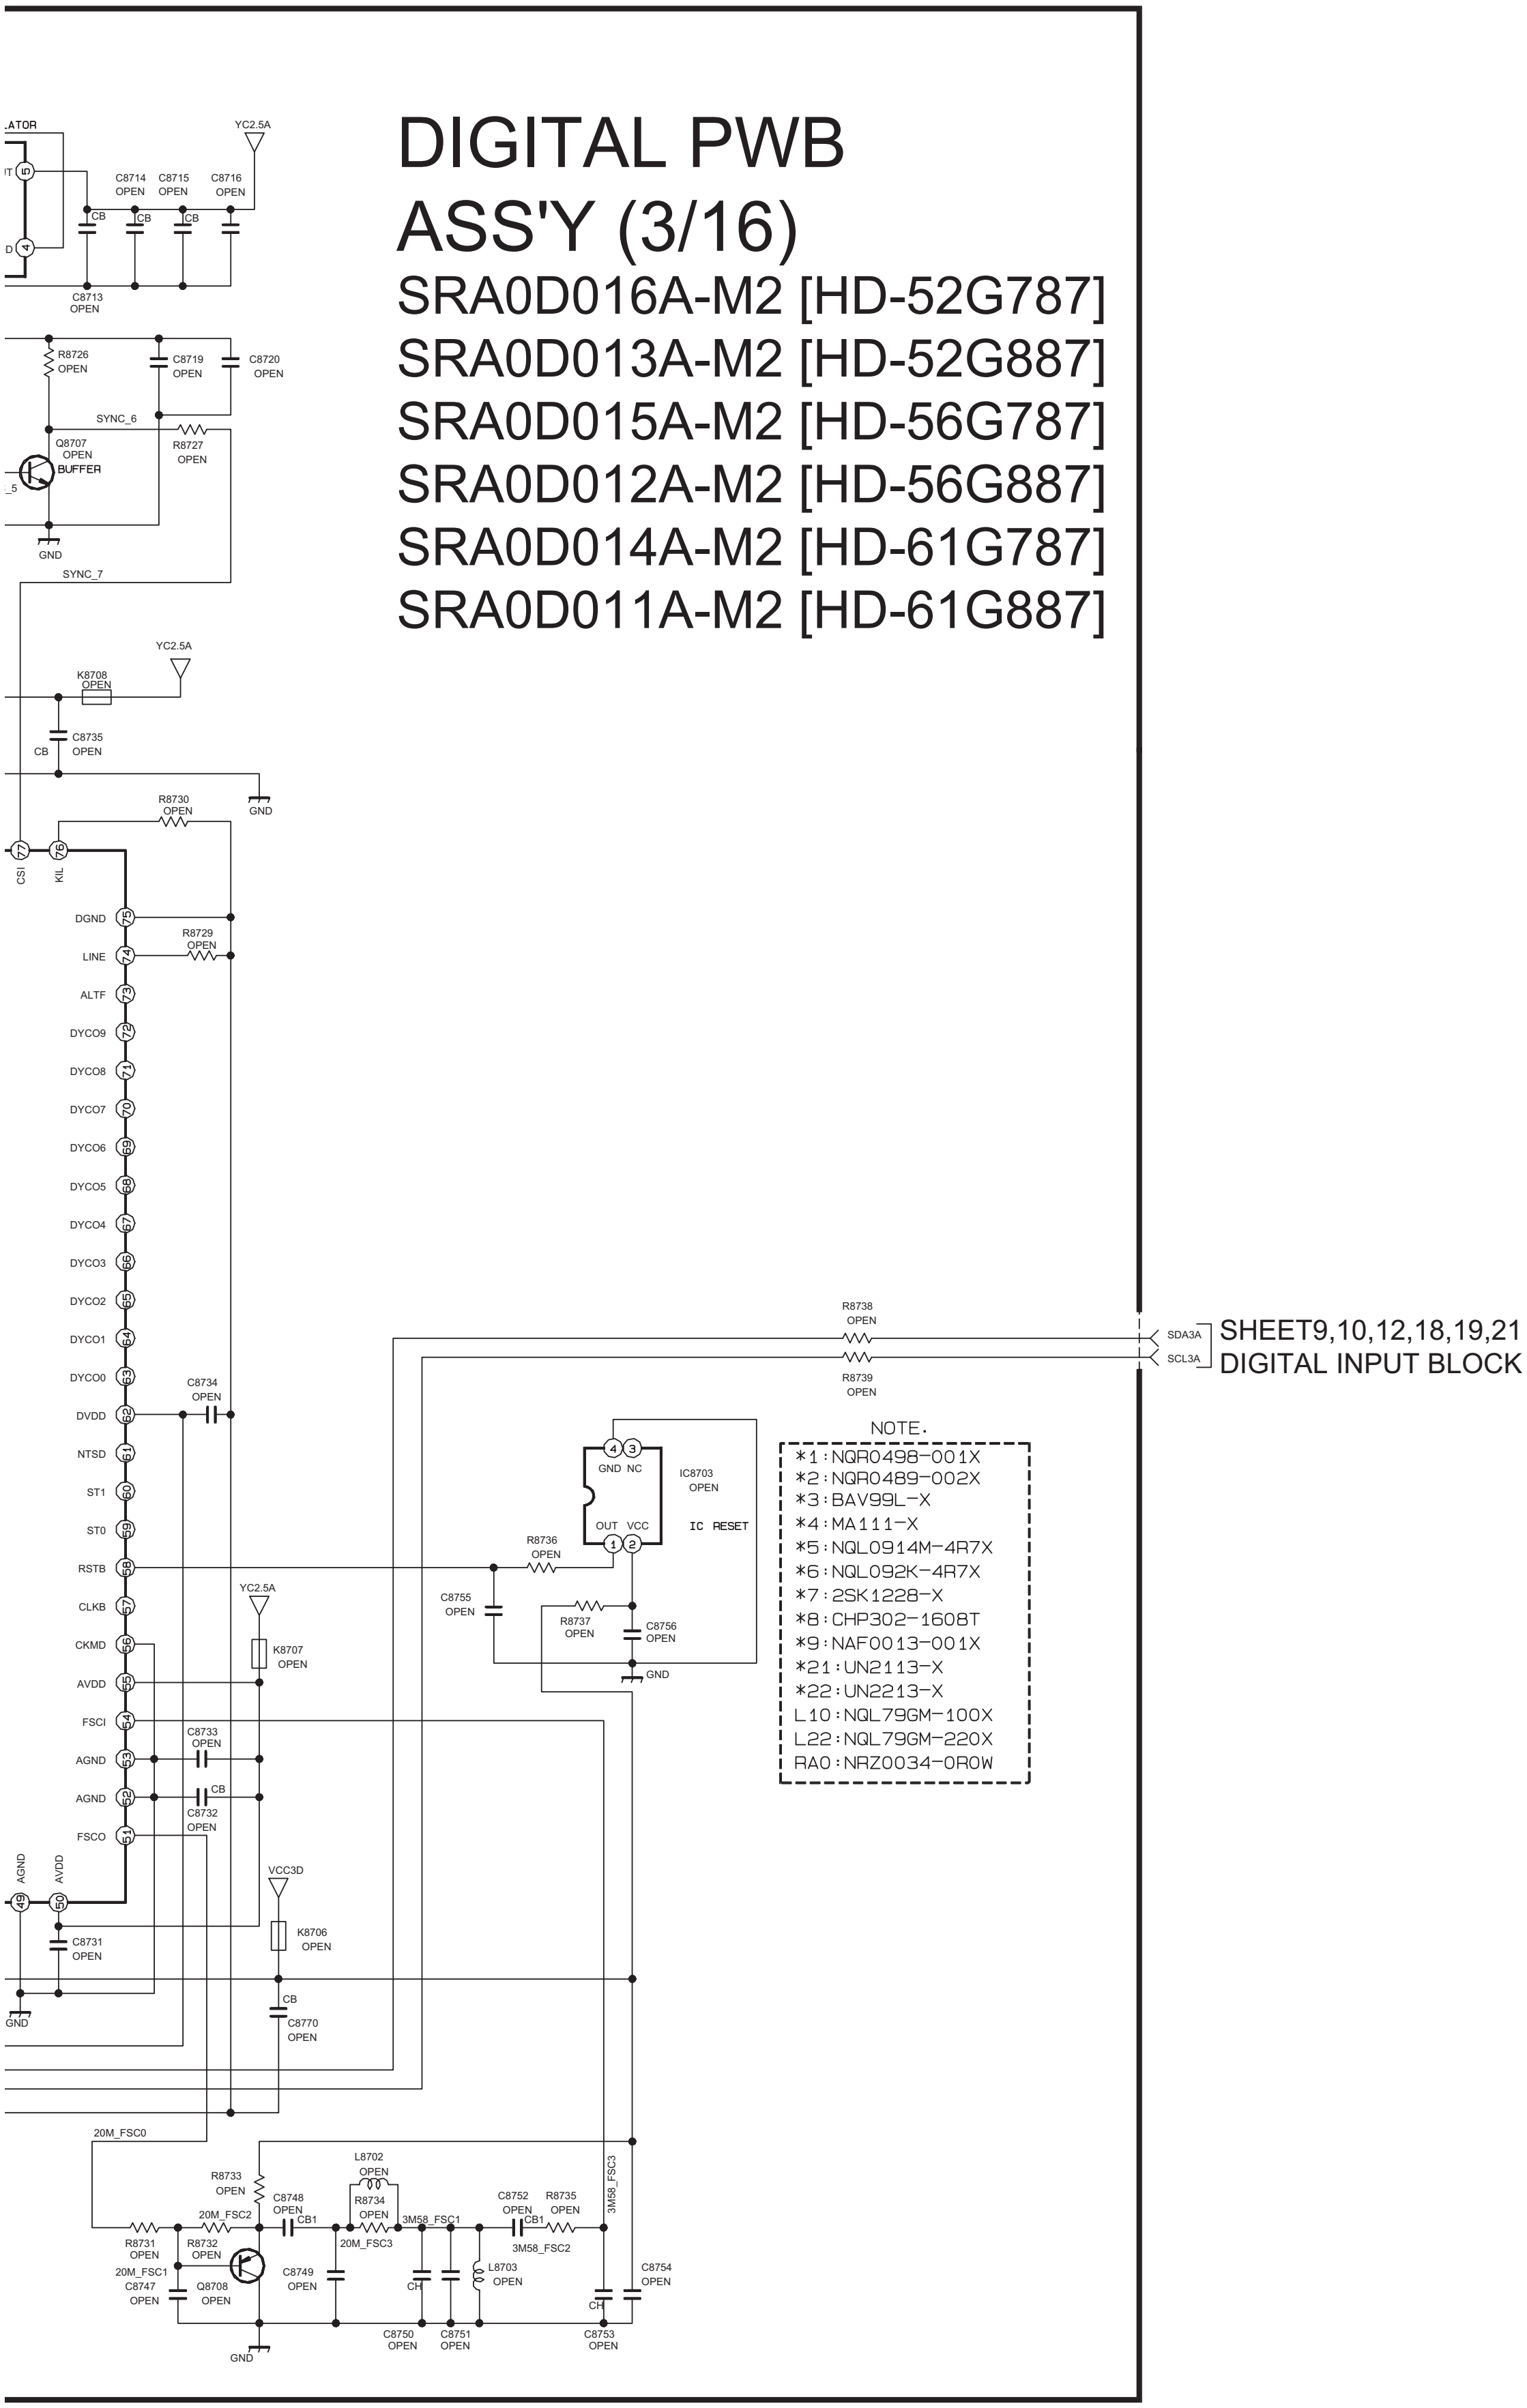

LATOR
YC2.5A
C8714 OPEN
C8715 OPEN
C8716 OPEN
CB
C8713 OPEN
R8726 OPEN
C8719 OPEN
C8720 OPEN
SYNC_6
Q8707 OPEN
BUFFER
R8727 OPEN
GND
SYNC_7
K8708 OPEN
C8735 OPEN
R8730 OPEN
CSI
KIL
DGND
R8729 OPEN
LINE
ALTF
DYCO9
DYCO8
DYCO7
DYCO6
DYCO5
DYCO4
DYCO3
DYCO2
DYCO1
DYCO0
C8734 OPEN
DVDD
NTSD
ST1
ST0
RSTB
CLKB
CKMD
AVDD
FSCI
AGND
FSCO
C8733 OPEN
C8732 OPEN
K8707 OPEN
VCC3D
K8706 OPEN
C8731 OPEN
C8770 OPEN
R8738 OPEN
R8739 OPEN
SDA3A
SCL3A
SHEET9,10,12,18,19,21
DIGITAL INPUT BLOCK
IC8703 OPEN
GND NC
OUT VCC
IC RESET
R8736 OPEN
C8755 OPEN
R8737 OPEN
C8756 OPEN
20M_FSC0
R8733 OPEN
C8748 OPEN
L8702 OPEN
R8734 OPEN
20M_FSC2
CB1
3M58_FSC1
C8752 OPEN
R8735 OPEN
3M58_FSC3
R8731 OPEN
R8732 OPEN
20M_FSC1
C8747 OPEN
Q8708 OPEN
C8749 OPEN
20M_FSC3
L8703 OPEN
3M58_FSC2
C8754 OPEN
CH
C8750 OPEN
C8751 OPEN
C8753 OPEN

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*3:BAV99L-X
*4:MA111-X
*5:NQL0914M-4R7X
*6:NQL092K-4R7X
*7:2SK1228-X
*8:CHP302-1608T
*9:NAF0013-001X
*21:UN2113-X
*22:UN2213-X
L10:NQL79GM-100X
L22:NQL79GM-220X
RA0:NRZ0034-0R0W

c10446014_0214_14/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (4/16) [A/D CONVERTER BLOCK] SHEET 12

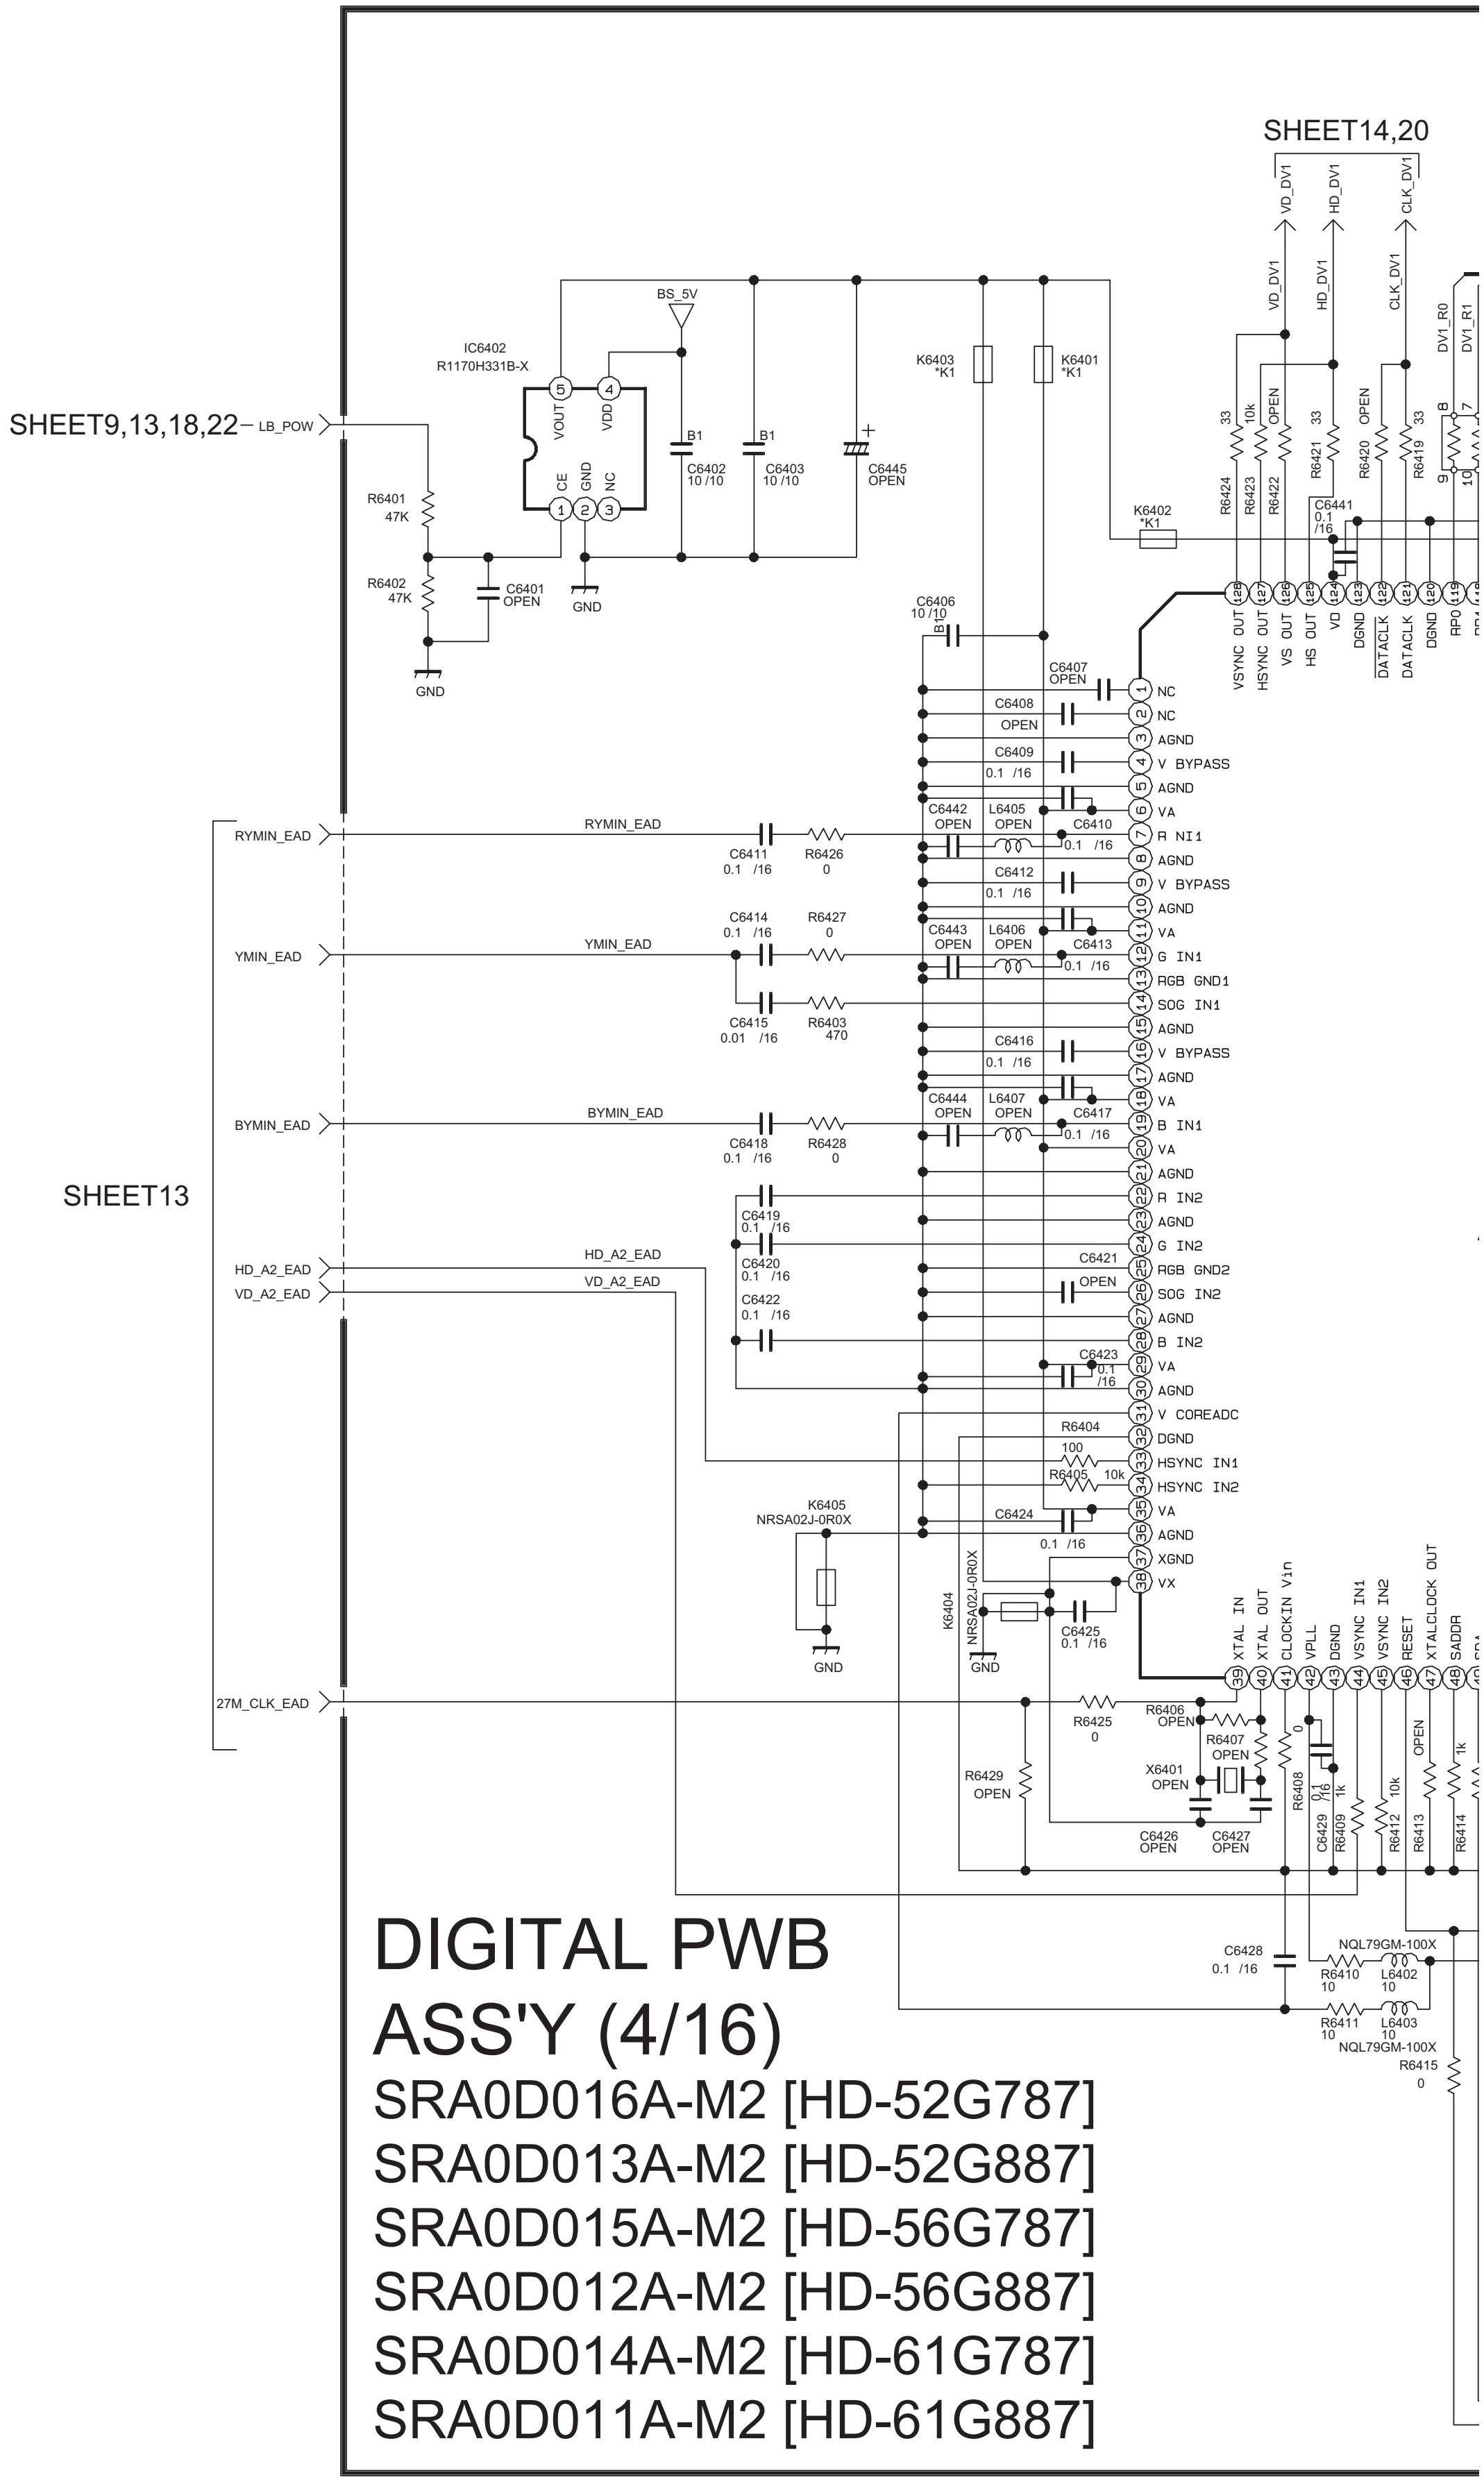
SHEET14,20
VD_DV1
HD_DV1
CLK_DV1
DV1_R0
DV1_R1
BS_5V
IC6402
R1170H331B-X
VOUT
VDD
CE
GND
NC
SHEET9,13,18,22
LB_POW
R6401
47K
R6402
47K
C6401
OPEN
GND
C6402
10 /10
C6403
10 /10
C6445
OPEN
B1
K6403
*K1
K6401
*K1
K6402
*K1
R6424
33
R6423
10k
R6422
OPEN
R6421
33
R6420
OPEN
R6419
33
C6441
0.1
/16
C6406
10 /10
C6407
OPEN
C6408
OPEN
C6409
0.1 /16
C6442
OPEN
L6405
OPEN
C6410
0.1 /16
C6412
0.1 /16
C6443
OPEN
L6406
OPEN
C6413
0.1 /16
C6416
0.1 /16
C6444
OPEN
L6407
OPEN
C6417
0.1 /16
C6421
OPEN
C6423
0.1
/16
C6424
0.1 /16
C6425
0.1 /16
R6404
100
R6405
10k
K6404
NRSA02J-0R0X
K6405
NRSA02J-0R0X
VSYNC OUT
HSYNC OUT
VS OUT
HS OUT
VD
DGND
DATACLK
DATACLK
DGND
RP0
NC
NC
AGND
V BYPASS
AGND
VA
R NI1
AGND
V BYPASS
AGND
VA
G IN1
RGB GND1
SOG IN1
AGND
V BYPASS
AGND
VA
B IN1
VA
AGND
R IN2
AGND
G IN2
RGB GND2
SOG IN2
AGND
B IN2
VA
AGND
V COREADC
DGND
HSYNC IN1
HSYNC IN2
VA
AGND
XGND
VX
XTAL IN
XTAL OUT
CLOCKIN Vin
VPLL
DGND
VSYNC IN1
VSYNC IN2
RESET
XTALCLOCK OUT
SADDR
RYMIN_EAD
YMIN_EAD
BYMIN_EAD
HD_A2_EAD
VD_A2_EAD
27M_CLK_EAD
SHEET13
C6411
0.1 /16
R6426
0
C6414
0.1 /16
R6427
0
C6415
0.01 /16
R6403
470
C6418
0.1 /16
R6428
0
C6419
0.1 /16
C6420
0.1 /16
C6422
0.1 /16
R6425
0
R6406
OPEN
R6407
OPEN
X6401
OPEN
R6429
OPEN
C6426
OPEN
C6427
OPEN
R6408
0
C6429
0.1
/16
R6409
1k
R6412
10k
R6413
OPEN
R6414
1k
C6428
0.1 /16
NQL79GM-100X
R6410
10
L6402
10
R6411
10
L6403
10
NQL79GM-100X
R6415
0

DIGITAL PWB
ASS'Y (4/16)
SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

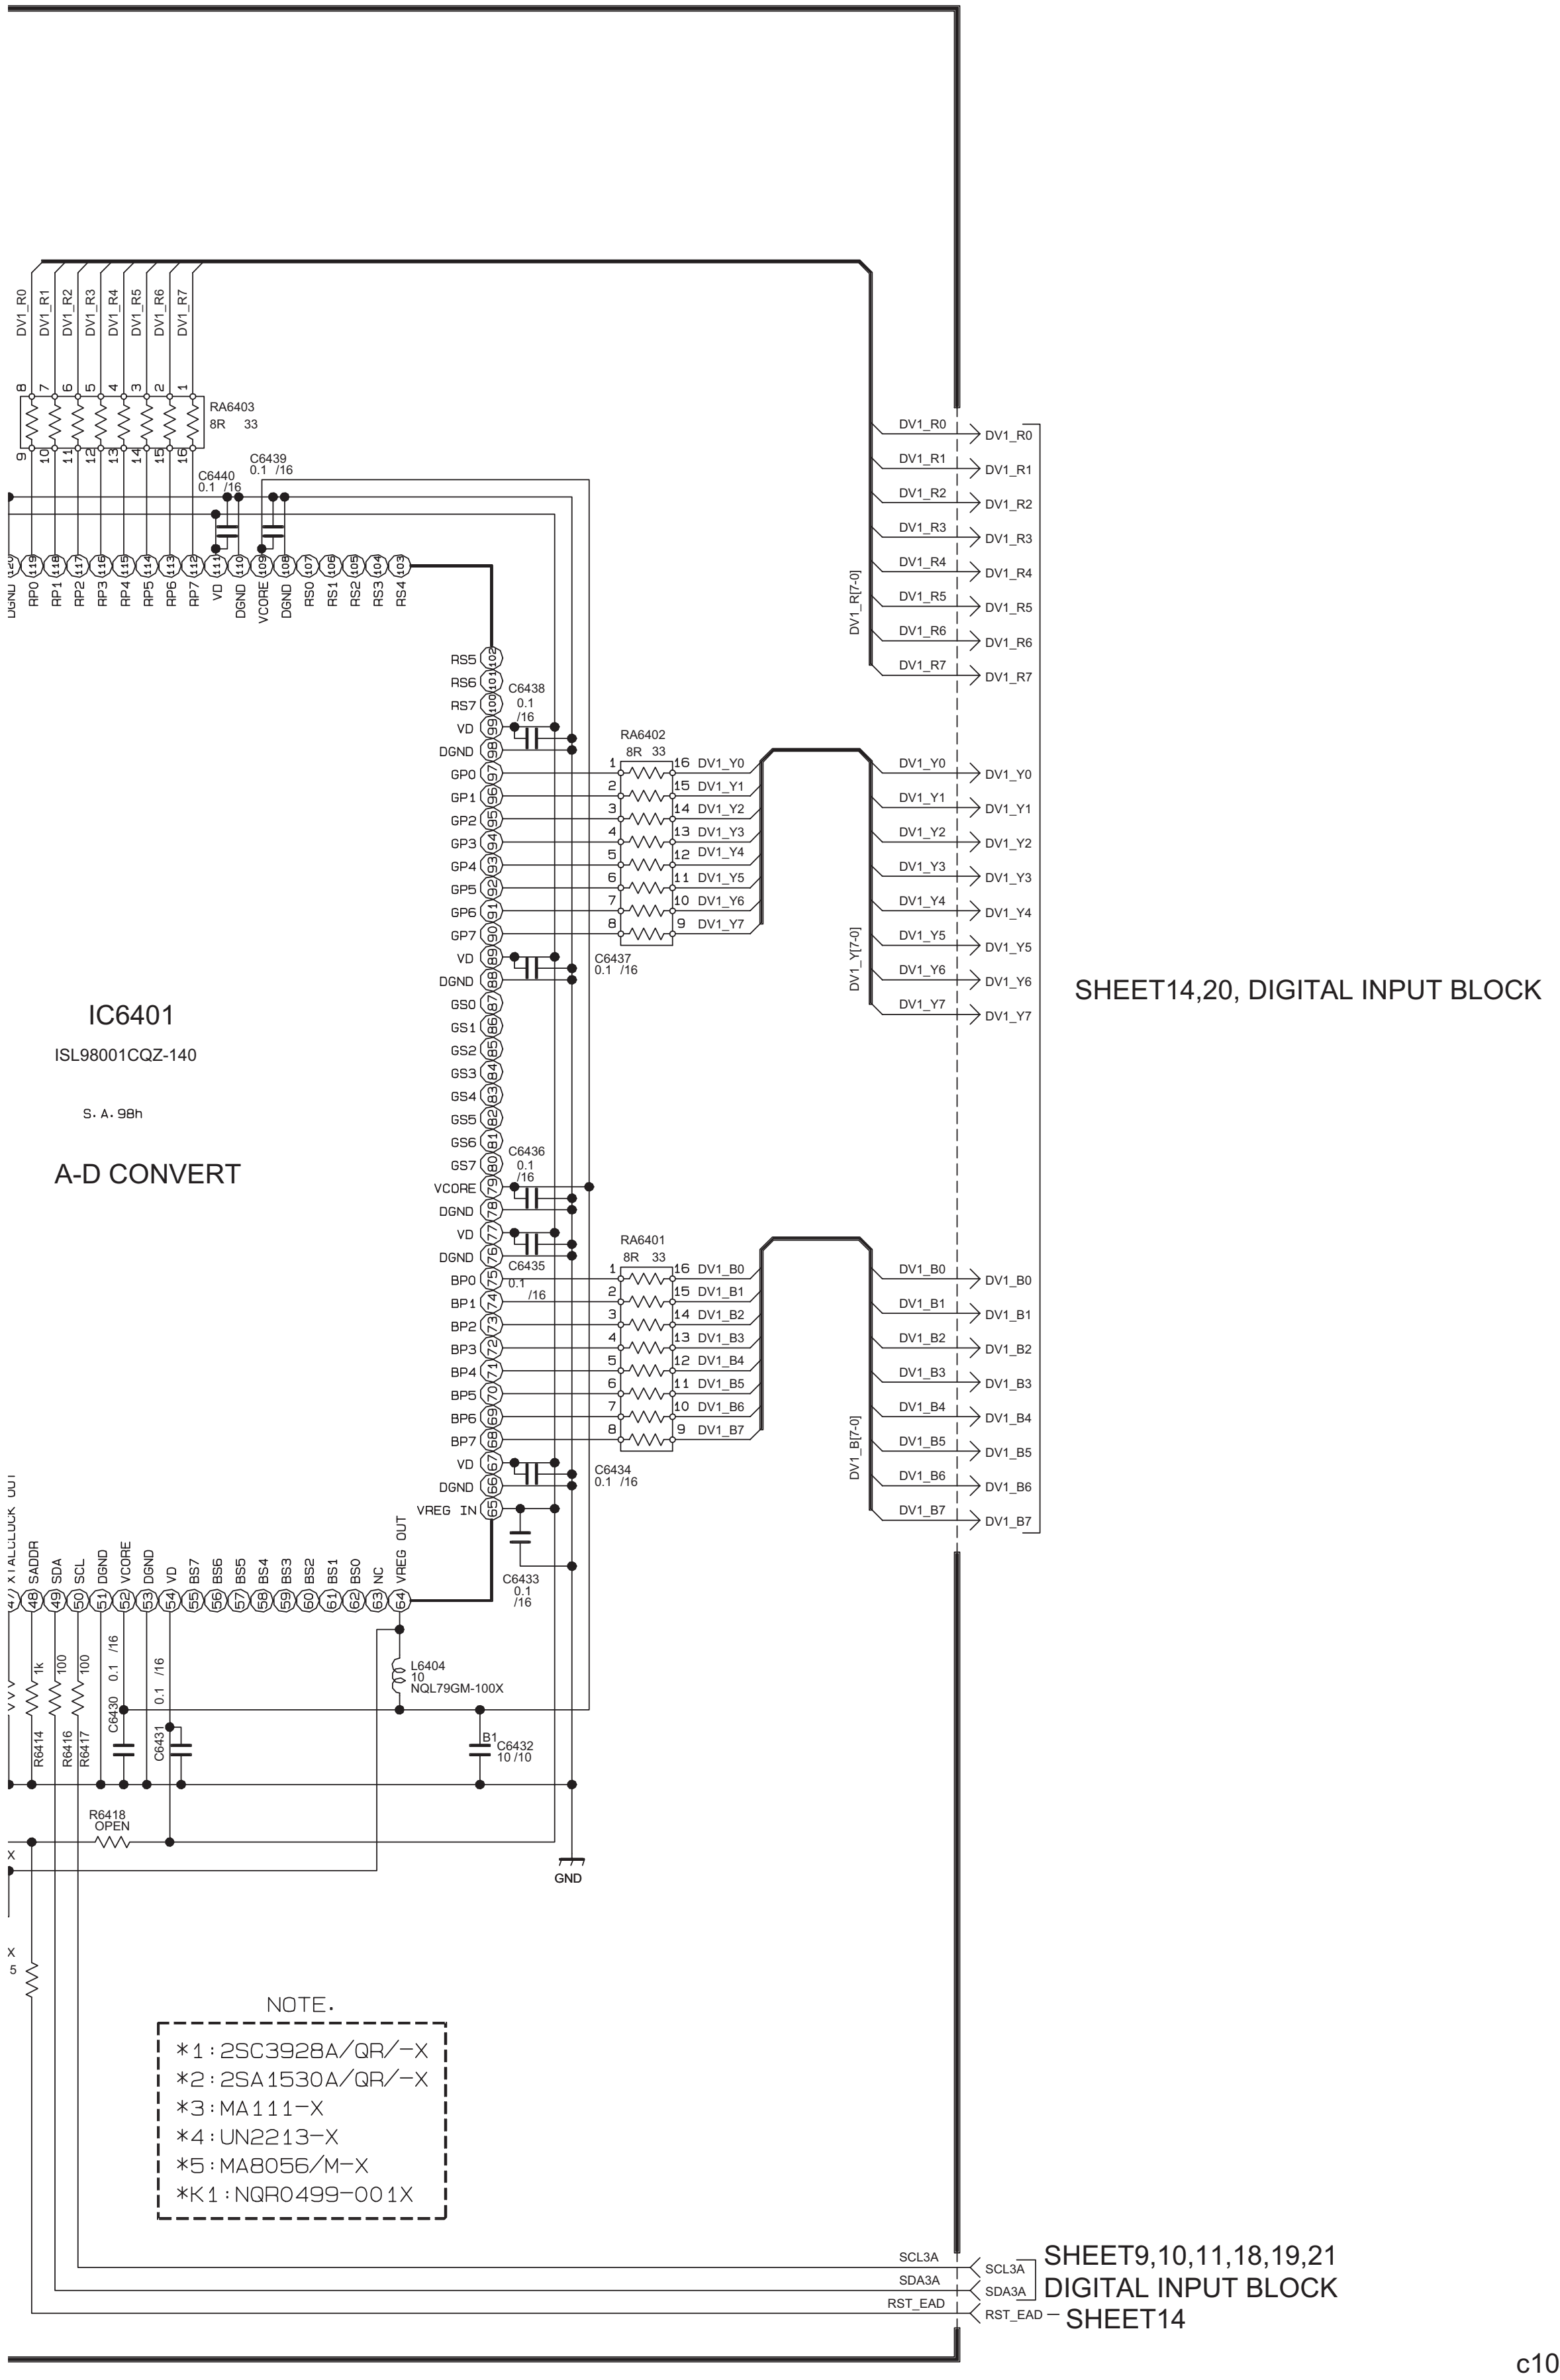
IC6401
ISL98001CQZ-140
S.A.98h
A-D CONVERT
RA6403 8R 33
RA6402 8R 33
RA6401 8R 33
C6440 0.1 /16
C6439 0.1 /16
C6438 0.1 /16
C6437 0.1 /16
C6436 0.1 /16
C6435 0.1 /16
C6434 0.1 /16
C6433 0.1 /16
C6432 10 /10
C6430 0.1 /16
C6431 0.1 /16
L6404 10 NQL79GM-100X
R6414 1k
R6416 100
R6417 100
R6418 OPEN
GND
DV1_R0
DV1_R1
DV1_R2
DV1_R3
DV1_R4
DV1_R5
DV1_R6
DV1_R7
DV1_R[7-0]
DV1_Y0
DV1_Y1
DV1_Y2
DV1_Y3
DV1_Y4
DV1_Y5
DV1_Y6
DV1_Y7
DV1_Y[7-0]
DV1_B0
DV1_B1
DV1_B2
DV1_B3
DV1_B4
DV1_B5
DV1_B6
DV1_B7
DV1_B[7-0]
RS5 RS6 RS7 VD DGND
GP0 GP1 GP2 GP3 GP4 GP5 GP6 GP7
GS0 GS1 GS2 GS3 GS4 GS5 GS6 GS7
VCORE DGND VD DGND
BP0 BP1 BP2 BP3 BP4 BP5 BP6 BP7
VD DGND VREG IN
RP0 RP1 RP2 RP3 RP4 RP5 RP6 RP7 VD DGND VCORE DGND RS0 RS1 RS2 RS3 RS4
XTALCLOCK OUT SADDR SDA SCL DGND VCORE DGND VD BS7 BS6 BS5 BS4 BS3 BS2 BS1 BS0 NC VREG OUT
SHEET14,20, DIGITAL INPUT BLOCK
SCL3A
SDA3A
RST_EAD
SHEET9,10,11,18,19,21
DIGITAL INPUT BLOCK
SHEET14
NOTE.
*1:2SC3928A/QR/-X
*2:2SA1530A/QR/-X
*3:MA111-X
*4:UN2213-X
*5:MA8056/M-X
*K1:NQR0499-001X

c10446015_0214_17/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (5/16) [INPUT I/F BLOCK (ANALOG)] SHEET 13

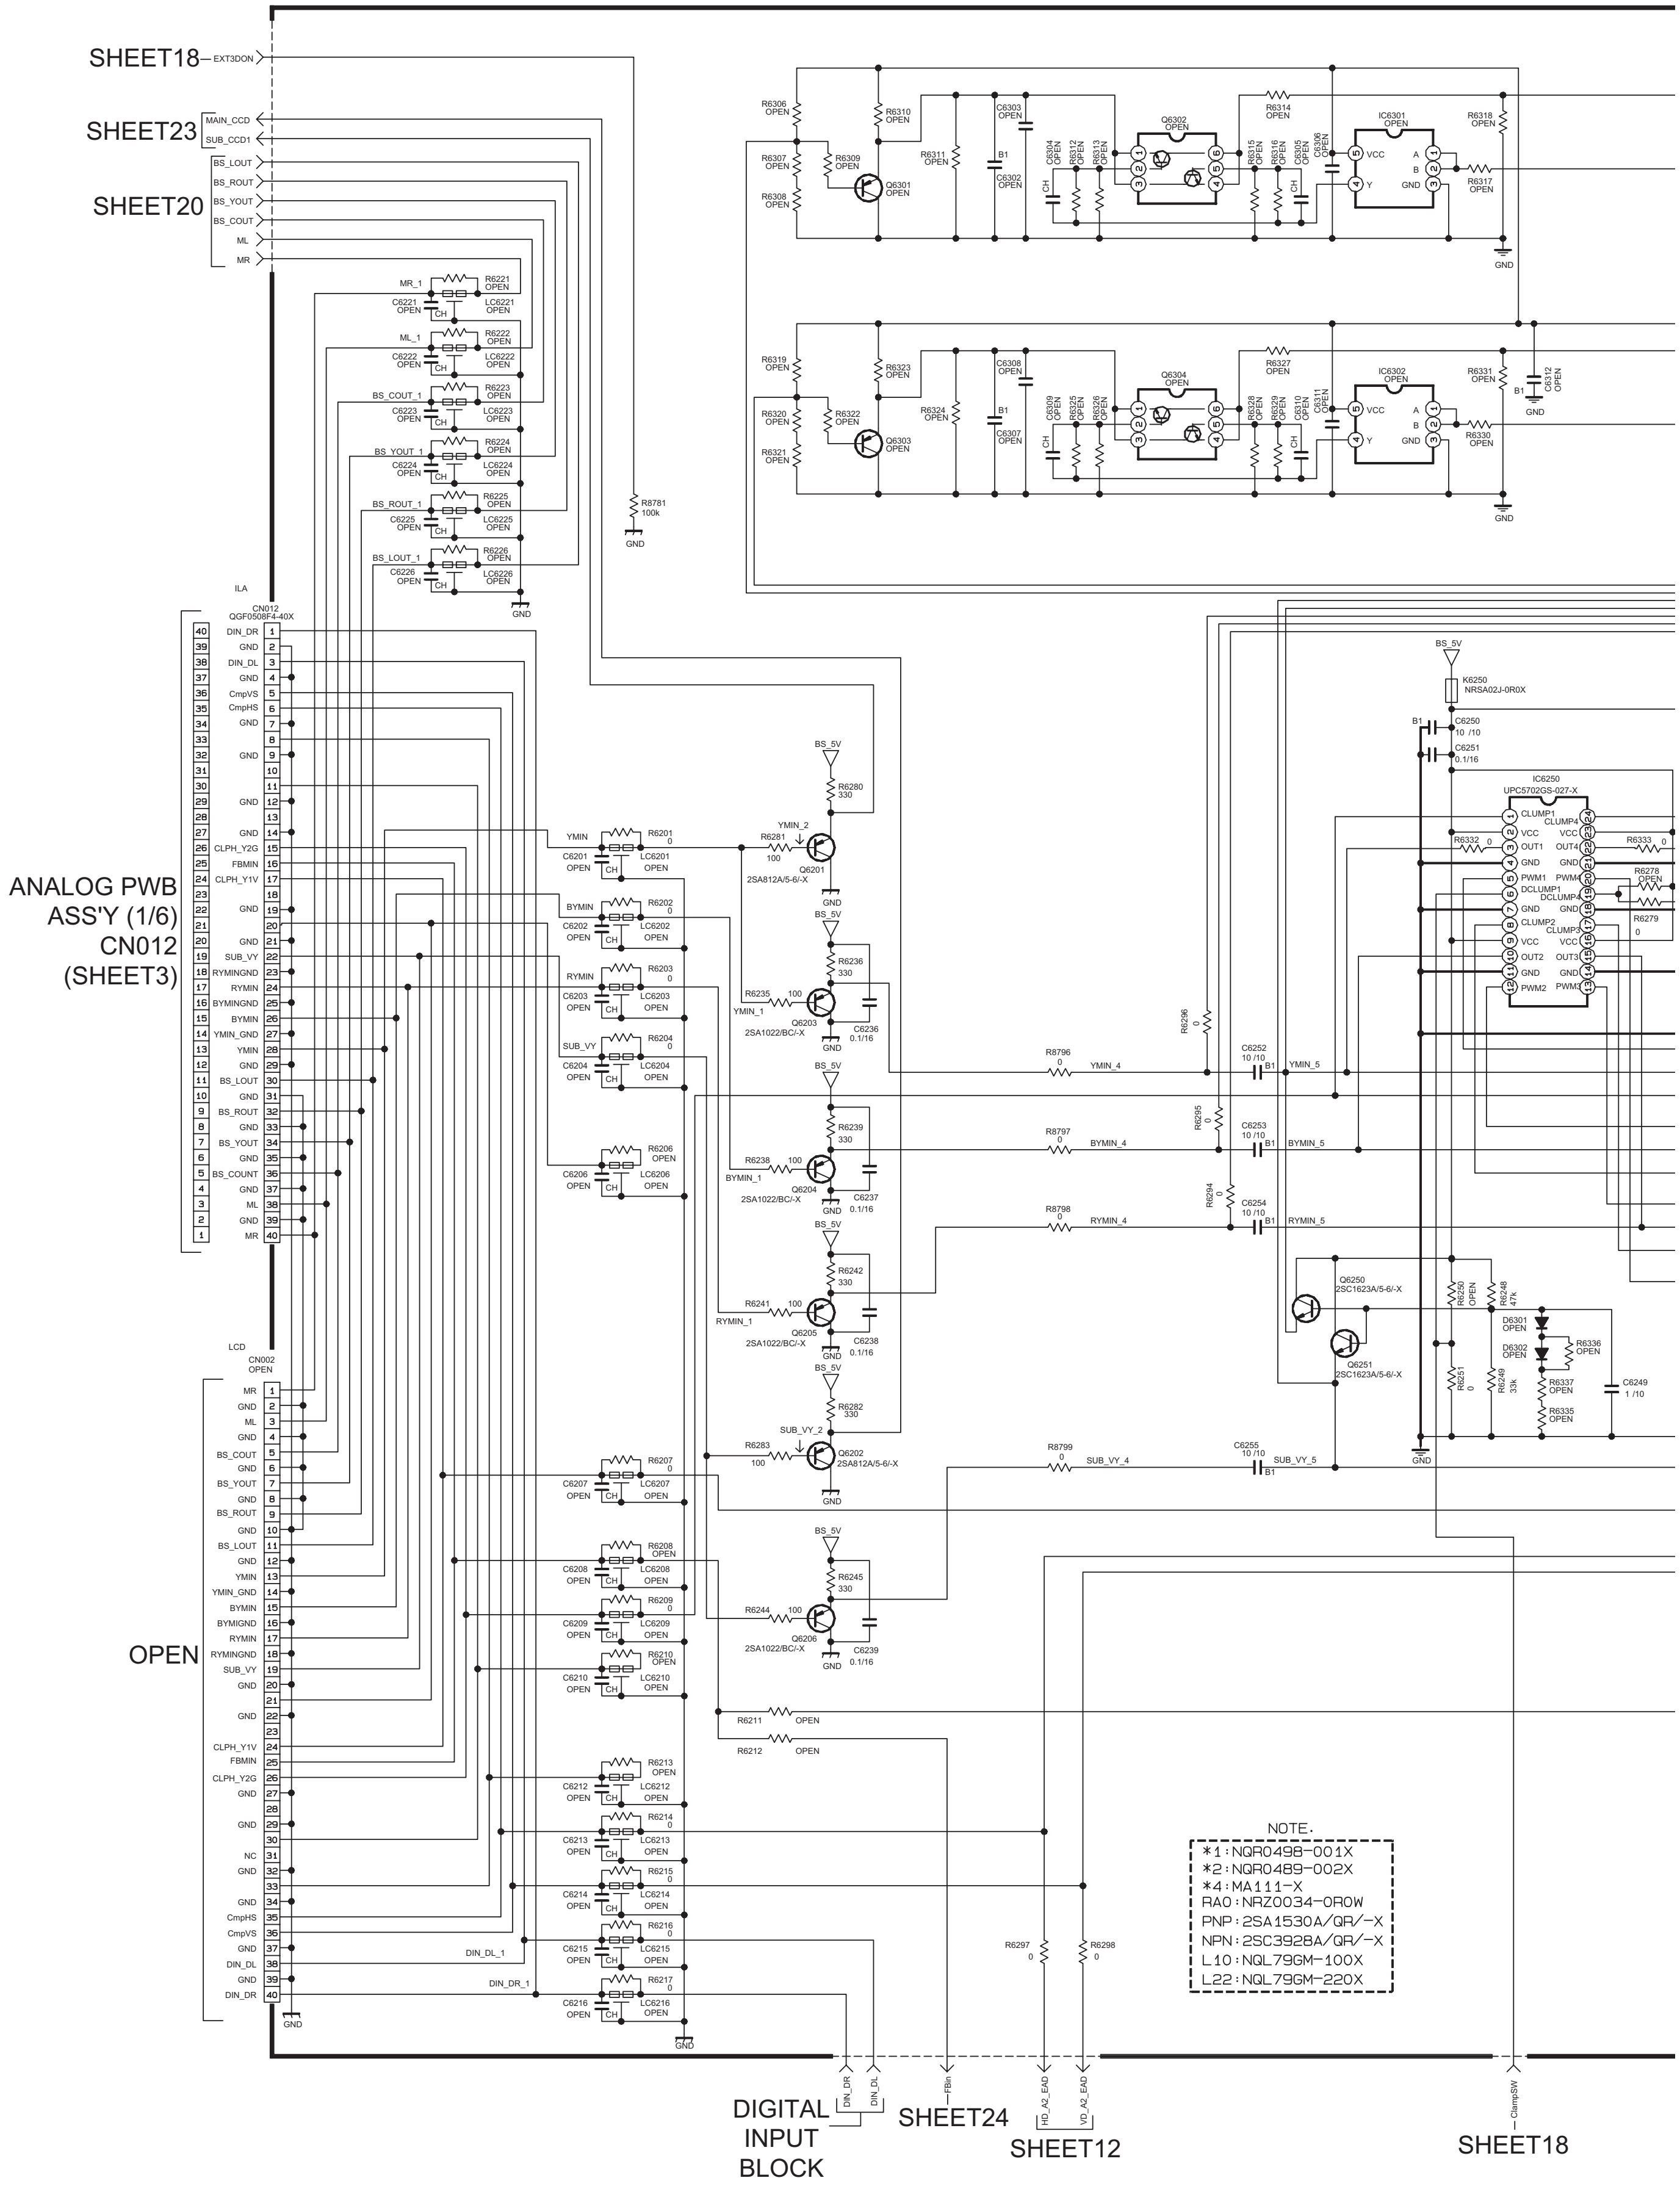
SHEET18
EXT3DON
SHEET23
MAIN_CCD
SUB_CCD1
SHEET20
BS_LOUT
BS_ROUT
BS_YOUT
BS_COUT
ML
MR
ANALOG PWB ASS'Y (1/6) CN012 (SHEET3)
ILA
CN012
QGF0508F4-40X
DIN_DR
DIN_DL
CmpVS
CmpHS
CLPH_Y2G
FBMIN
CLPH_Y1V
SUB_VY
RYMINGND
RYMIN
BYMINGND
BYMIN
YMIN_GND
YMIN
GND
OPEN
LCD
CN002
OPEN
NC
MR_1
ML_1
BS_COUT_1
BS_YOUT_1
BS_ROUT_1
BS_LOUT_1
R8781
100k
Q6301
Q6302
Q6303
Q6304
IC6301
IC6302
VCC
Y
GND
A
B
BS_5V
K6250
NRSA02J-0R0X
C6250
10 /10
C6251
0.1/16
IC6250
UPC5702GS-027-X
CLUMP1
CLUMP2
CLUMP3
CLUMP4
OUT1
OUT2
OUT3
OUT4
PWM1
PWM2
PWM3
PWM4
DCLUMP1
DCLUMP4
YMIN_2
Q6201
2SA812A/5-6/-X
Q6202
2SA812A/5-6/-X
Q6203
2SA1022/BC/-X
Q6204
2SA1022/BC/-X
Q6205
2SA1022/BC/-X
Q6206
2SA1022/BC/-X
YMIN_1
BYMIN_1
RYMIN_1
SUB_VY_2
YMIN_4
BYMIN_4
RYMIN_4
SUB_VY_4
YMIN_5
BYMIN_5
RYMIN_5
SUB_VY_5
C6252
C6253
C6254
C6255
R8796
R8797
R8798
R8799
Q6250
2SC1623A/5-6/-X
Q6251
2SC1623A/5-6/-X
D6301
D6302
C6249
1 /10
R6211
R6212
R6297
R6298
DIN_DL_1
DIN_DR_1
DIGITAL INPUT BLOCK
DIN_DR
DIN_DL
SHEET24
FBin
SHEET12
HD_A2_EAD
VD_A2_EAD
SHEET18
ClampSW

NOTE.
*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

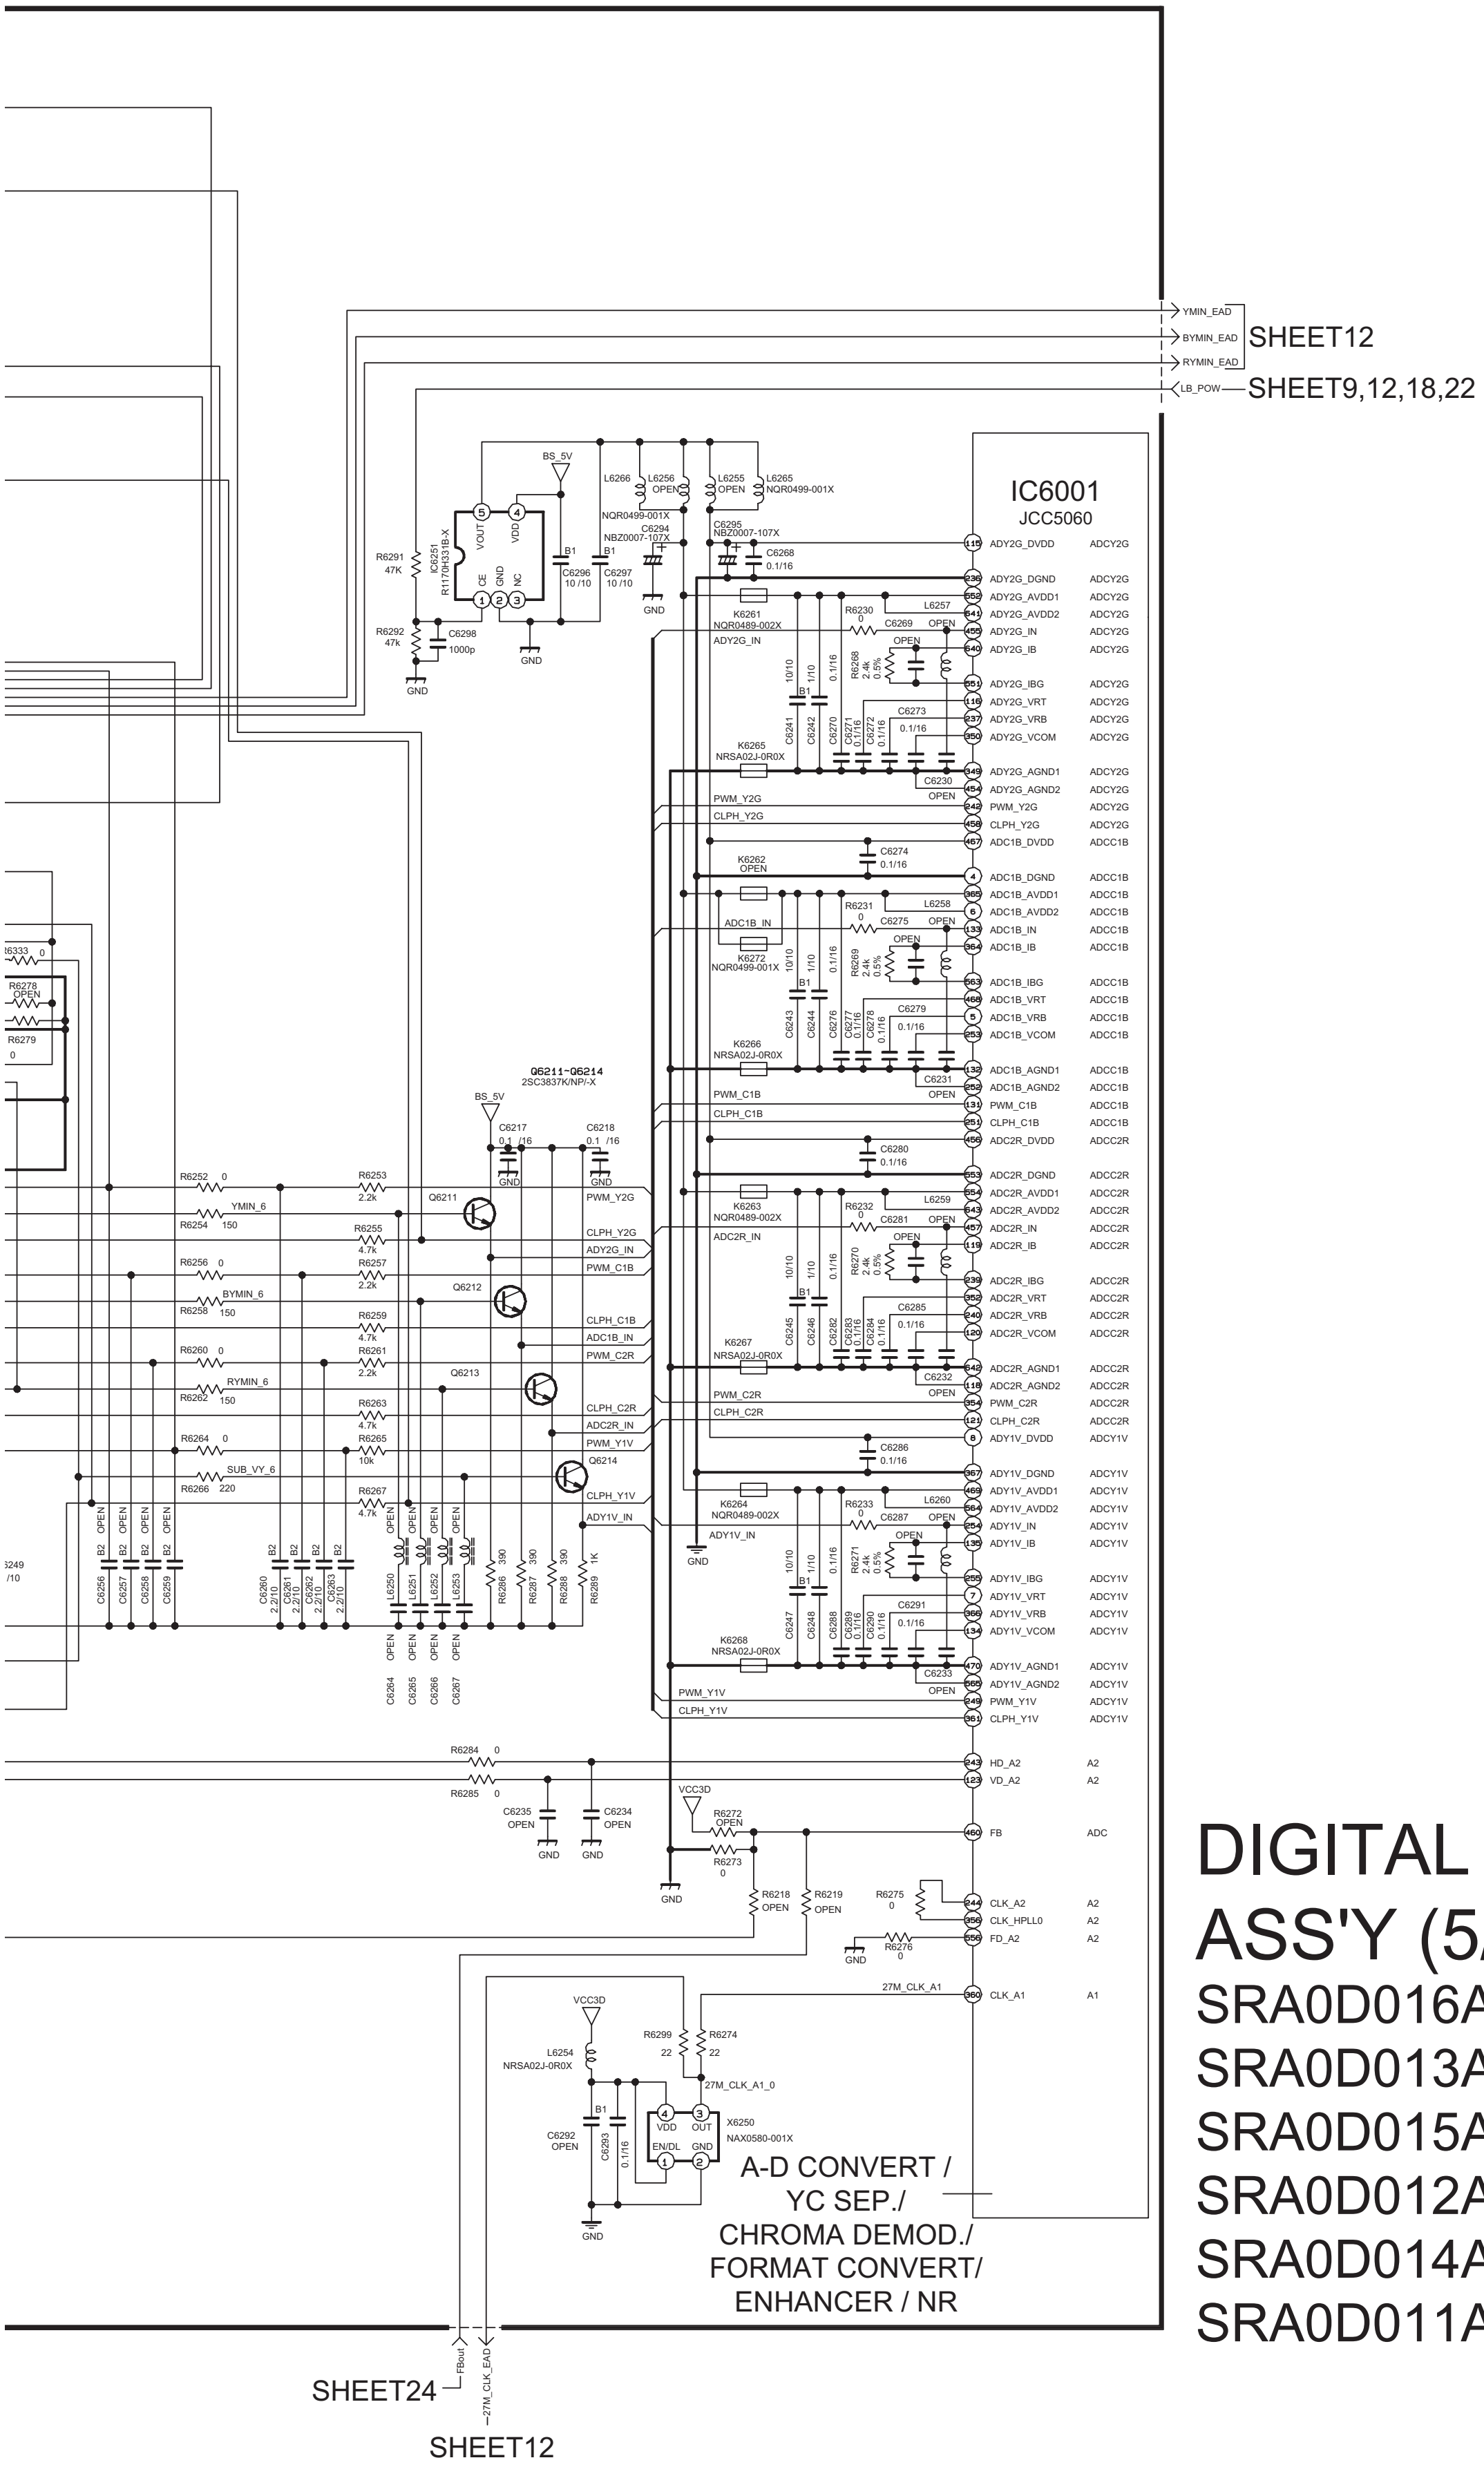
YMIN_EAD
BYMIN_EAD
RYMIN_EAD
SHEET12
LB_POW
SHEET9,12,18,22
IC6001
JCC5060
BS_5V
R6291 47K
R6292 47k
IC6251 R1170H331B-X
VOUT
VDD
CE
GND
NC
C6298 1000p
C6296 10 /10
C6297 10 /10
L6266
L6256 OPEN
L6255 OPEN
L6265 NQR0499-001X
NQR0499-001X
C6294 NBZ0007-107X
C6295 NBZ0007-107X
C6268 0.1/16
K6261 NQR0489-002X
ADY2G_IN
R6230 0
C6269 OPEN
L6257
R6268 2.4k 0.5%
C6273 0.1/16
K6265 NRSA02J-0R0X
C6230 OPEN
PWM_Y2G
CLPH_Y2G
C6274 0.1/16
K6262 OPEN
ADC1B_IN
R6231 0
C6275 OPEN
L6258
K6272 NQR0499-001X
R6269 2.4k 0.5%
C6279 0.1/16
K6266 NRSA02J-0R0X
C6231 OPEN
PWM_C1B
CLPH_C1B
C6280 0.1/16
K6263 NQR0489-002X
ADC2R_IN
R6232 0
C6281 OPEN
L6259
R6270 2.4k 0.5%
C6285 0.1/16
K6267 NRSA02J-0R0X
C6232 OPEN
PWM_C2R
CLPH_C2R
C6286 0.1/16
K6264 NQR0489-002X
ADY1V_IN
R6233 0
C6287 OPEN
L6260
R6271 2.4k 0.5%
C6291 0.1/16
K6268 NRSA02J-0R0X
C6233 OPEN
PWM_Y1V
CLPH_Y1V
ADY2G_DVDD
ADY2G_DGND
ADY2G_AVDD1
ADY2G_AVDD2
ADY2G_IN
ADY2G_IB
ADY2G_IBG
ADY2G_VRT
ADY2G_VRB
ADY2G_VCOM
ADY2G_AGND1
ADY2G_AGND2
PWM_Y2G
CLPH_Y2G
ADC1B_DVDD
ADC1B_DGND
ADC1B_AVDD1
ADC1B_AVDD2
ADC1B_IN
ADC1B_IB
ADC1B_IBG
ADC1B_VRT
ADC1B_VRB
ADC1B_VCOM
ADC1B_AGND1
ADC1B_AGND2
PWM_C1B
CLPH_C1B
ADC2R_DVDD
ADC2R_DGND
ADC2R_AVDD1
ADC2R_AVDD2
ADC2R_IN
ADC2R_IB
ADC2R_IBG
ADC2R_VRT
ADC2R_VRB
ADC2R_VCOM
ADC2R_AGND1
ADC2R_AGND2
PWM_C2R
CLPH_C2R
ADY1V_DVDD
ADY1V_DGND
ADY1V_AVDD1
ADY1V_AVDD2
ADY1V_IN
ADY1V_IB
ADY1V_IBG
ADY1V_VRT
ADY1V_VRB
ADY1V_VCOM
ADY1V_AGND1
ADY1V_AGND2
PWM_Y1V
CLPH_Y1V
ADCY2G
ADCC1B
ADCC2R
ADCY1V
HD_A2
VD_A2
FB
ADC
CLK_A2
CLK_HPLL0
FD_A2
CLK_A1
A2
A1
Q6211-Q6214
2SC3837K/NP/-X
Q6211
Q6212
Q6213
Q6214
C6217 0.1 /16
C6218 0.1 /16
R6252 0
R6253 2.2k
YMIN_6
R6254 150
R6255 4.7k
R6256 0
R6257 2.2k
BYMIN_6
R6258 150
R6259 4.7k
R6260 0
R6261 2.2k
RYMIN_6
R6262 150
R6263 4.7k
R6264 0
R6265 10k
SUB_VY_6
R6266 220
R6267 4.7k
ADY2G_IN
PWM_C1B
CLPH_C1B
ADC1B_IN
PWM_C2R
CLPH_C2R
ADC2R_IN
PWM_Y1V
CLPH_Y1V
ADY1V_IN
C6256
C6257
C6258
C6259
C6260
C6261
C6262
C6263
L6250
L6251
L6252
L6253
R6286 390
R6287 390
R6288 390
R6289 1K
C6264
C6265
C6266
C6267
R6333 0
R6278 OPEN
R6279 0
R6284 0
R6285 0
C6235 OPEN
C6234 OPEN
VCC3D
R6272 OPEN
R6273 0
R6218 OPEN
R6219 OPEN
R6275 0
R6276 0
27M_CLK_A1
VCC3D
R6299 22
R6274 22
L6254 NRSA02J-0R0X
27M_CLK_A1_0
X6250 NAX0580-001X
VDD
OUT
EN/DL
GND
C6292 OPEN
C6293 0.1/16
GND
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
FBout
27M_CLK_EAD
SHEET24
SHEET12

DIGITAL PWB ASS'Y (5/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

c10446001_0214_1/17_0.0

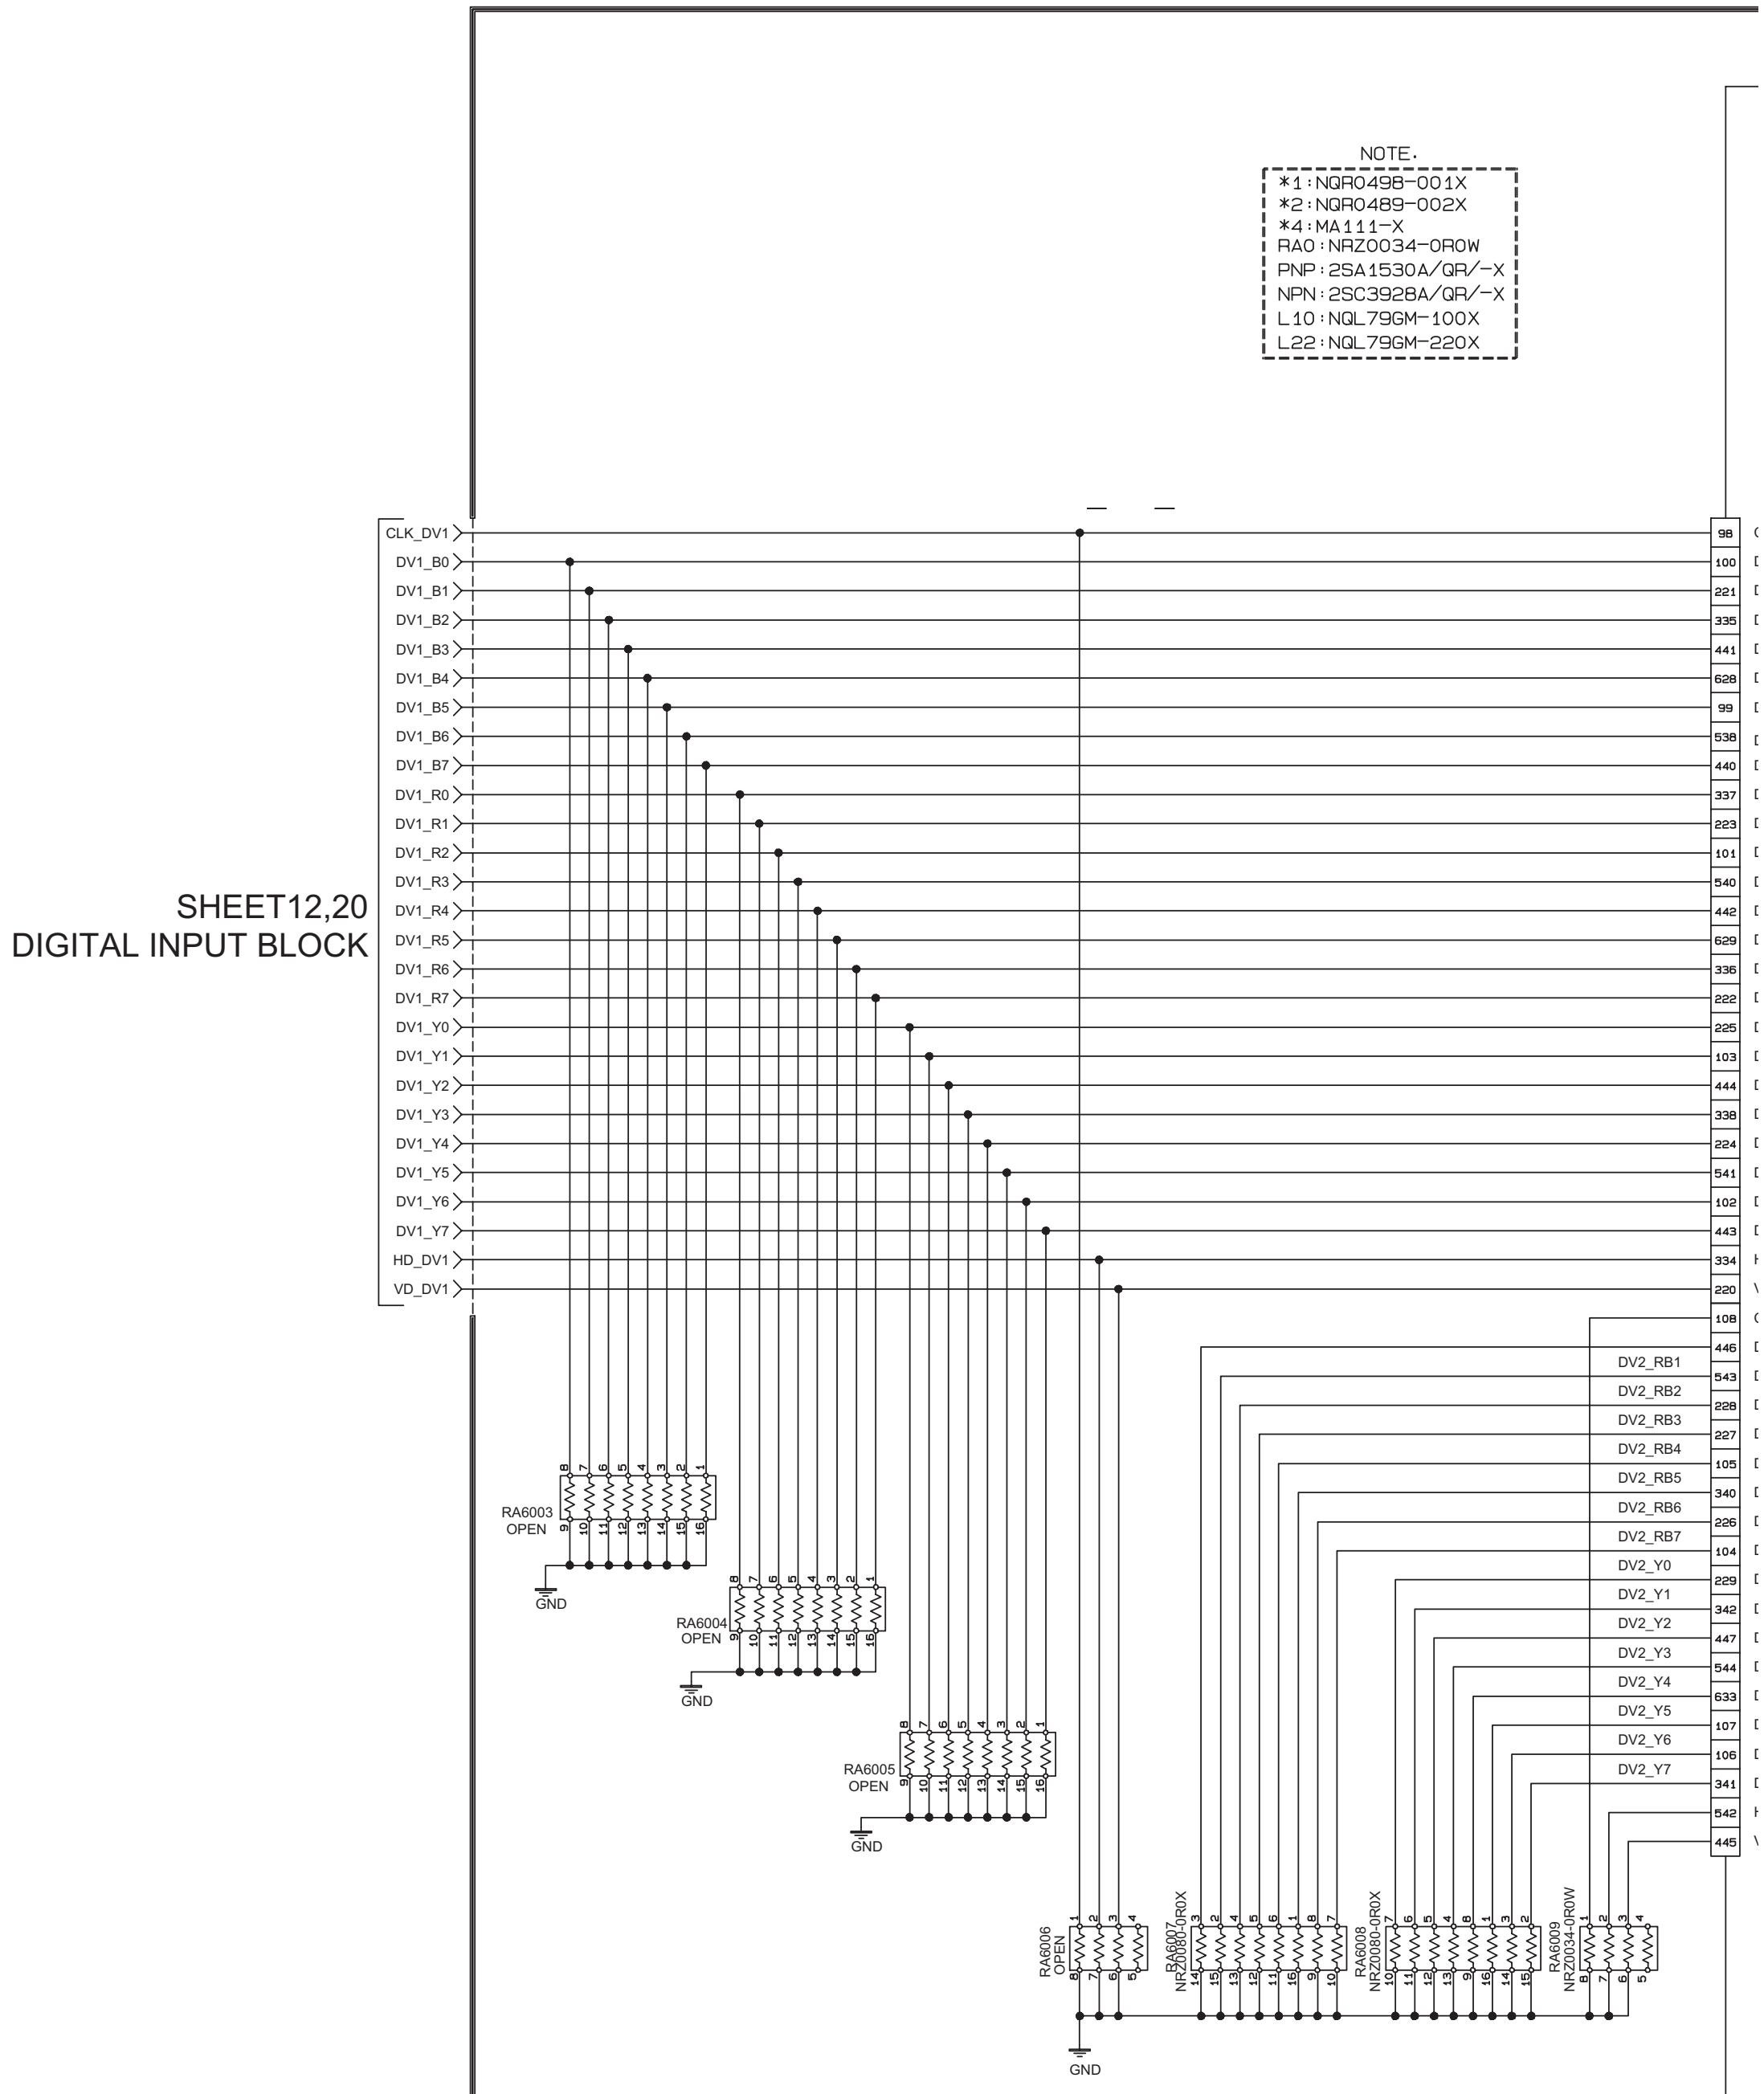
NOTE.
*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X
SHEET12,20
DIGITAL INPUT BLOCK
CLK_DV1
DV1_B0
DV1_B1
DV1_B2
DV1_B3
DV1_B4
DV1_B5
DV1_B6
DV1_B7
DV1_R0
DV1_R1
DV1_R2
DV1_R3
DV1_R4
DV1_R5
DV1_R6
DV1_R7
DV1_Y0
DV1_Y1
DV1_Y2
DV1_Y3
DV1_Y4
DV1_Y5
DV1_Y6
DV1_Y7
HD_DV1
VD_DV1
98
100
221
335
441
628
99
538
440
337
223
101
540
442
629
336
222
225
103
444
338
224
541
102
443
334
220
108
446
543
228
227
105
340
226
104
229
342
447
544
633
107
106
341
542
445
DV2_RB1
DV2_RB2
DV2_RB3
DV2_RB4
DV2_RB5
DV2_RB6
DV2_RB7
DV2_Y0
DV2_Y1
DV2_Y2
DV2_Y3
DV2_Y4
DV2_Y5
DV2_Y6
DV2_Y7
RA6003
OPEN
RA6004
OPEN
RA6005
OPEN
GND
GND
GND
RA6006
OPEN
RA6007
NRZ0080-0R0X
RA6008
NRZ0080-0R0X
RA6009
NRZ0034-0R0W
GND

DIGITAL PWB ASS'Y (6/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

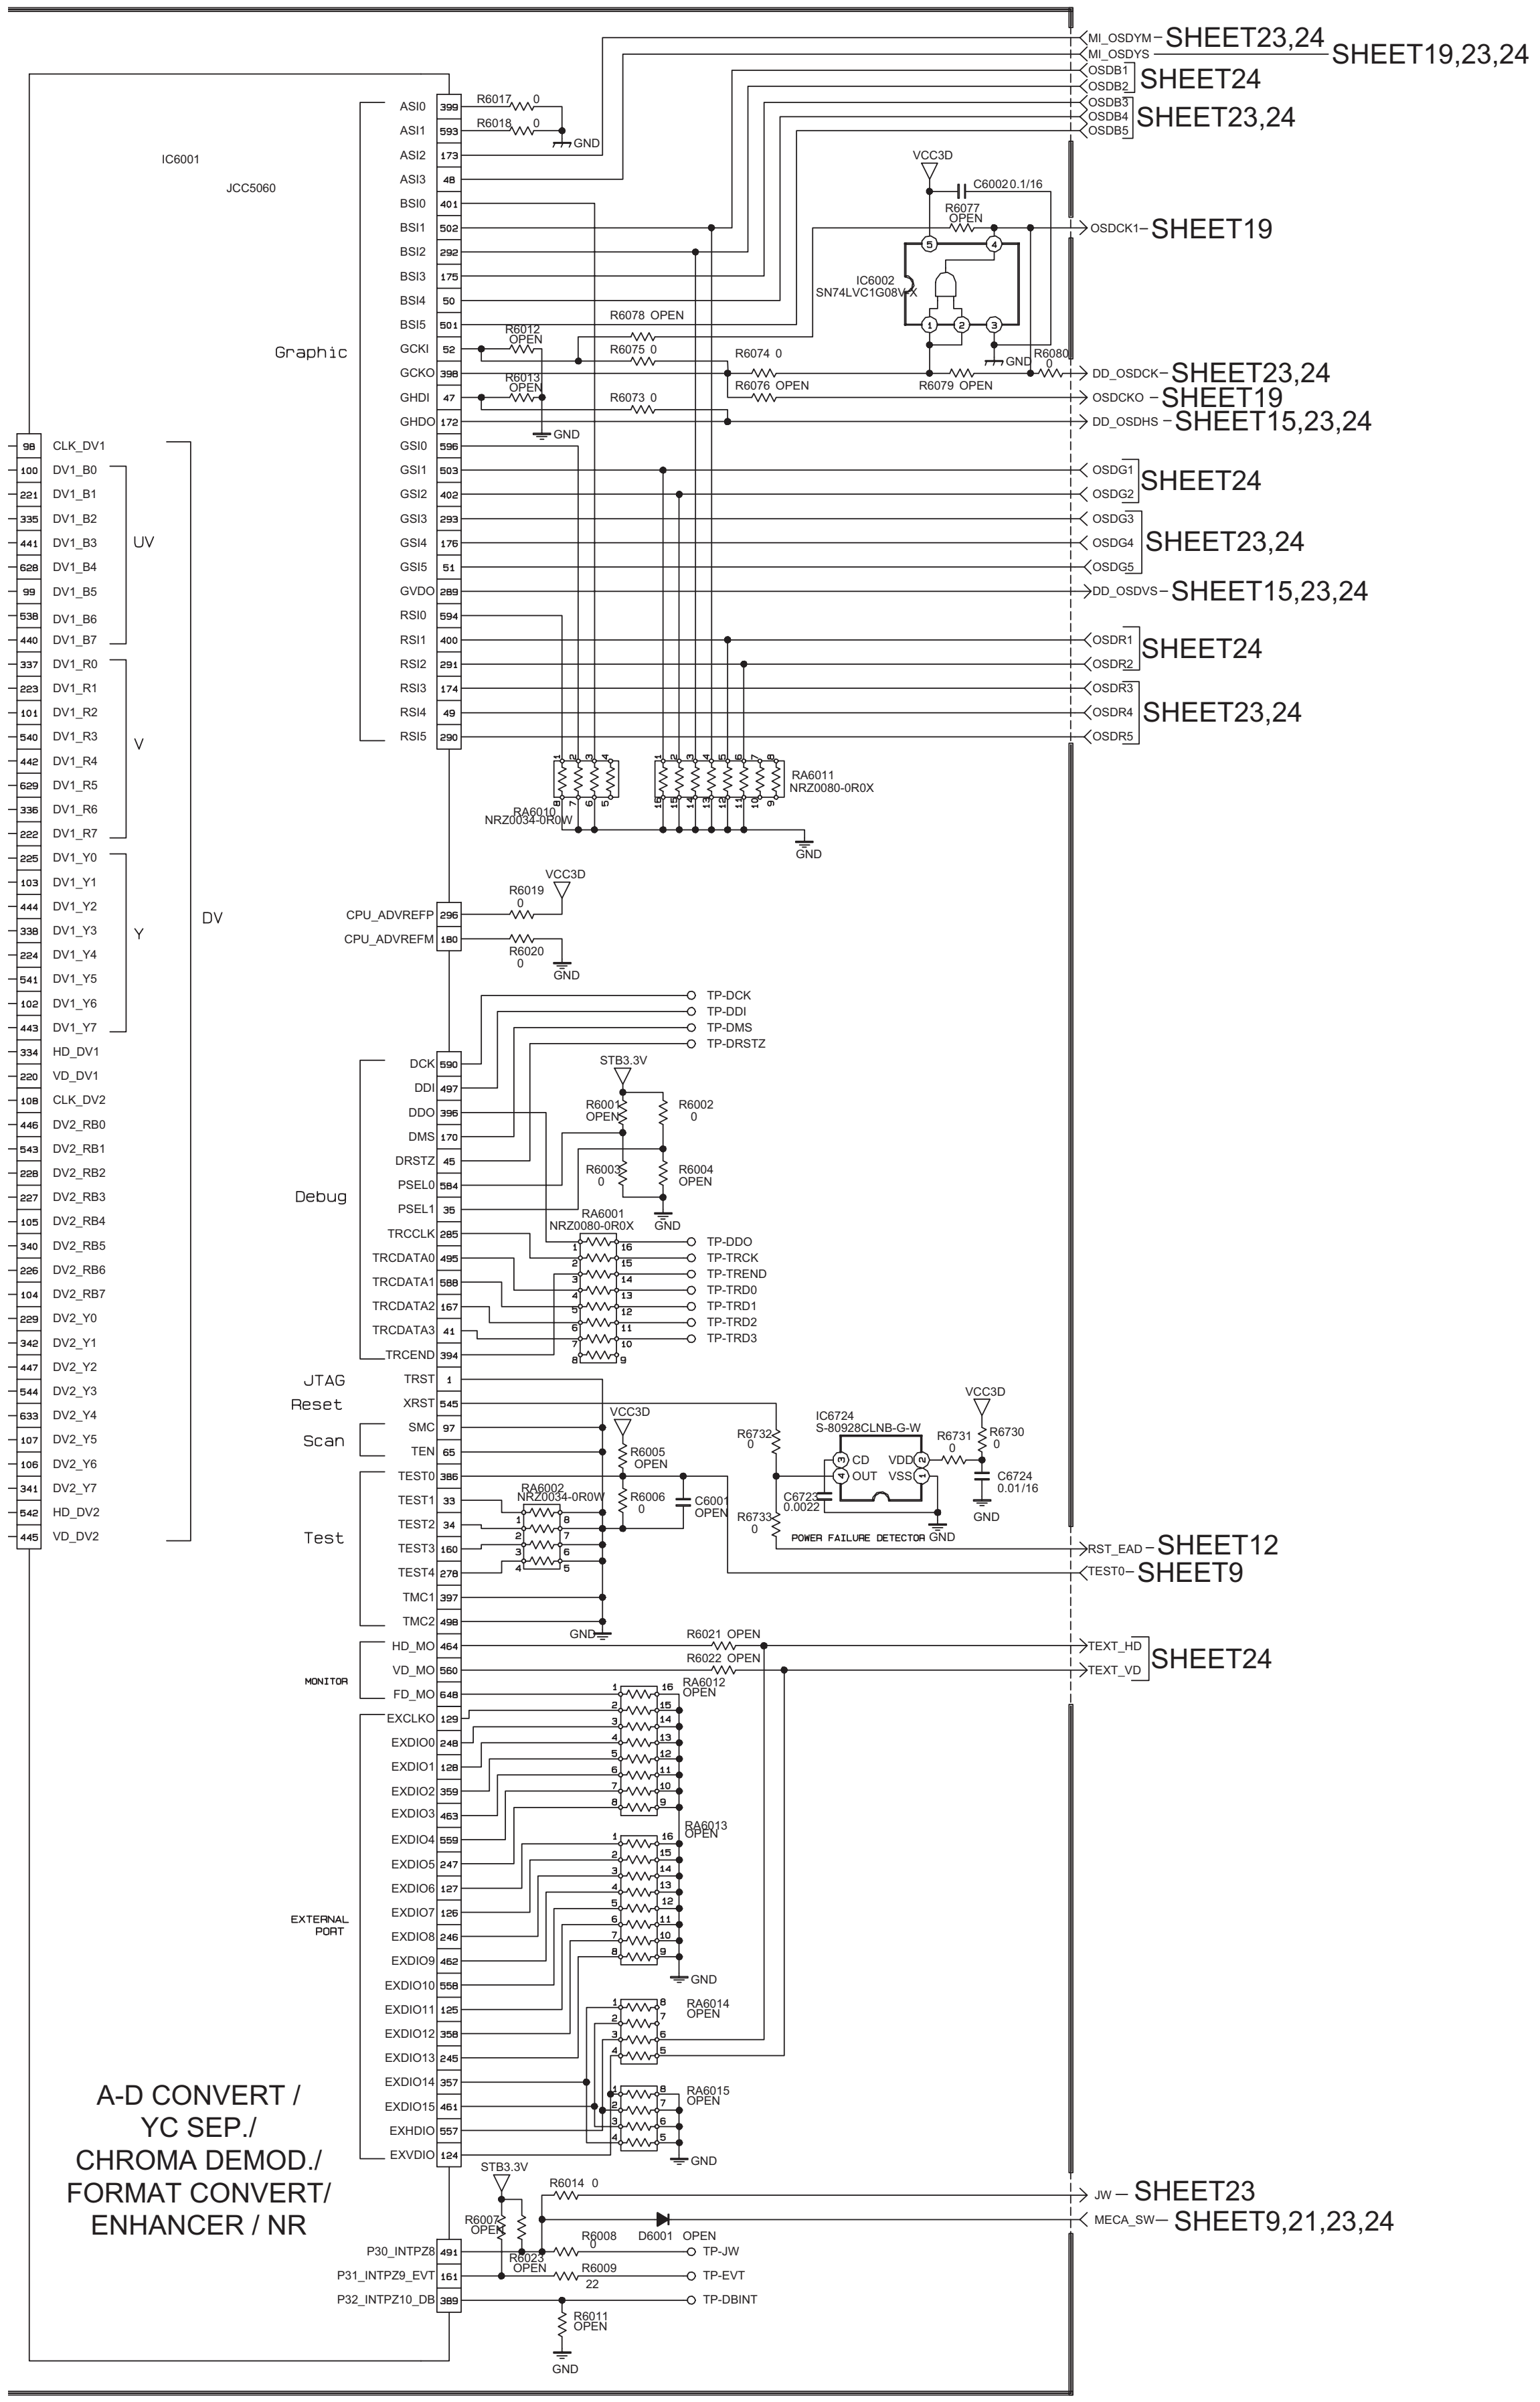
IC6001
JCC5060
Graphic
ASI0 399
ASI1 593
ASI2 173
ASI3 48
BSI0 401
BSI1 502
BSI2 292
BSI3 175
BSI4 50
BSI5 501
GCKI 52
GCKO 398
GHDI 47
GHDO 172
GSI0 596
GSI1 503
GSI2 402
GSI3 293
GSI4 176
GSI5 51
GVDO 289
RSI0 594
RSI1 400
RSI2 291
RSI3 174
RSI4 49
RSI5 290
R6017 0
R6018 0
GND
R6012 OPEN
R6013 OPEN
R6078 OPEN
R6075 0
R6073 0
R6074 0
R6076 OPEN
R6079 OPEN
R6080 0
R6077 OPEN
VCC3D
C6002 0.1/16
IC6002
SN74LVC1G08V-X
MI_OSDYM
SHEET23,24
MI_OSDYS
SHEET19,23,24
OSDB1
OSDB2
SHEET24
OSDB3
OSDB4
OSDB5
SHEET23,24
OSDCK1
SHEET19
DD_OSDCK
SHEET23,24
OSDCKO
SHEET19
DD_OSDHS
SHEET15,23,24
OSDG1
OSDG2
SHEET24
OSDG3
OSDG4
OSDG5
SHEET23,24
DD_OSDVS
SHEET15,23,24
OSDR1
OSDR2
SHEET24
OSDR3
OSDR4
OSDR5
SHEET23,24
RA6010
NRZ0034-0R0W
RA6011
NRZ0080-0R0X
CLK_DV1 98
DV1_B0 100
DV1_B1 221
DV1_B2 335
DV1_B3 441
DV1_B4 628
DV1_B5 99
DV1_B6 538
DV1_B7 440
UV
DV1_R0 337
DV1_R1 223
DV1_R2 101
DV1_R3 540
DV1_R4 442
DV1_R5 629
DV1_R6 336
DV1_R7 222
V
DV1_Y0 225
DV1_Y1 103
DV1_Y2 444
DV1_Y3 338
DV1_Y4 224
DV1_Y5 541
DV1_Y6 102
DV1_Y7 443
Y
DV
HD_DV1 334
VD_DV1 220
CLK_DV2 108
DV2_RB0 446
DV2_RB1 543
DV2_RB2 228
DV2_RB3 227
DV2_RB4 105
DV2_RB5 340
DV2_RB6 226
DV2_RB7 104
DV2_Y0 229
DV2_Y1 342
DV2_Y2 447
DV2_Y3 544
DV2_Y4 633
DV2_Y5 107
DV2_Y6 106
DV2_Y7 341
HD_DV2 542
VD_DV2 445
CPU_ADVREFP 296
CPU_ADVREFM 180
R6019 0
R6020 0
Debug
DCK 590
DDI 497
DDO 396
DMS 170
DRSTZ 45
PSEL0 584
PSEL1 35
TRCCLK 285
TRCDATA0 495
TRCDATA1 588
TRCDATA2 167
TRCDATA3 41
TRCEND 394
TP-DCK
TP-DDI
TP-DMS
TP-DRSTZ
STB3.3V
R6001 OPEN
R6002 0
R6003 0
R6004 OPEN
RA6001
NRZ0080-0R0X
TP-DDO
TP-TRCK
TP-TREND
TP-TRD0
TP-TRD1
TP-TRD2
TP-TRD3
JTAG
TRST 1
Reset
XRST 545
Scan
SMC 97
TEN 65
Test
TEST0 386
TEST1 33
TEST2 34
TEST3 160
TEST4 278
TMC1 397
TMC2 498
RA6002
NRZ0034-0R0W
R6005 OPEN
R6006 0
C6001 OPEN
IC6724
S-80928CLNB-G-W
CD
OUT
VDD
VSS
R6732 0
R6733 0
R6731 0
R6730 0
C6723 0.0022
C6724 0.01/16
POWER FAILURE DETECTOR
RST_EAD
SHEET12
TEST0
SHEET9
MONITOR
HD_MO 464
VD_MO 560
FD_MO 648
R6021 OPEN
R6022 OPEN
TEXT_HD
TEXT_VD
SHEET24
EXTERNAL PORT
EXCLKO 129
EXDIO0 248
EXDIO1 128
EXDIO2 359
EXDIO3 463
EXDIO4 559
EXDIO5 247
EXDIO6 127
EXDIO7 126
EXDIO8 246
EXDIO9 462
EXDIO10 558
EXDIO11 125
EXDIO12 358
EXDIO13 245
EXDIO14 357
EXDIO15 461
EXHDIO 557
EXVDIO 124
RA6012 OPEN
RA6013 OPEN
RA6014 OPEN
RA6015 OPEN
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
P30_INTPZ8 491
P31_INTPZ9_EVT 161
P32_INTPZ10_DB 389
R6014 0
R6007 OPEN
R6023 OPEN
R6008 0
R6009 22
R6011 OPEN
D6001 OPEN
JW
SHEET23
MECA_SW
SHEET9,21,23,24
TP-JW
TP-EVT
TP-DBINT

c10446002_0214_2/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (7/16) [ANALOG RGB OUT BLOCK] SHEET 15

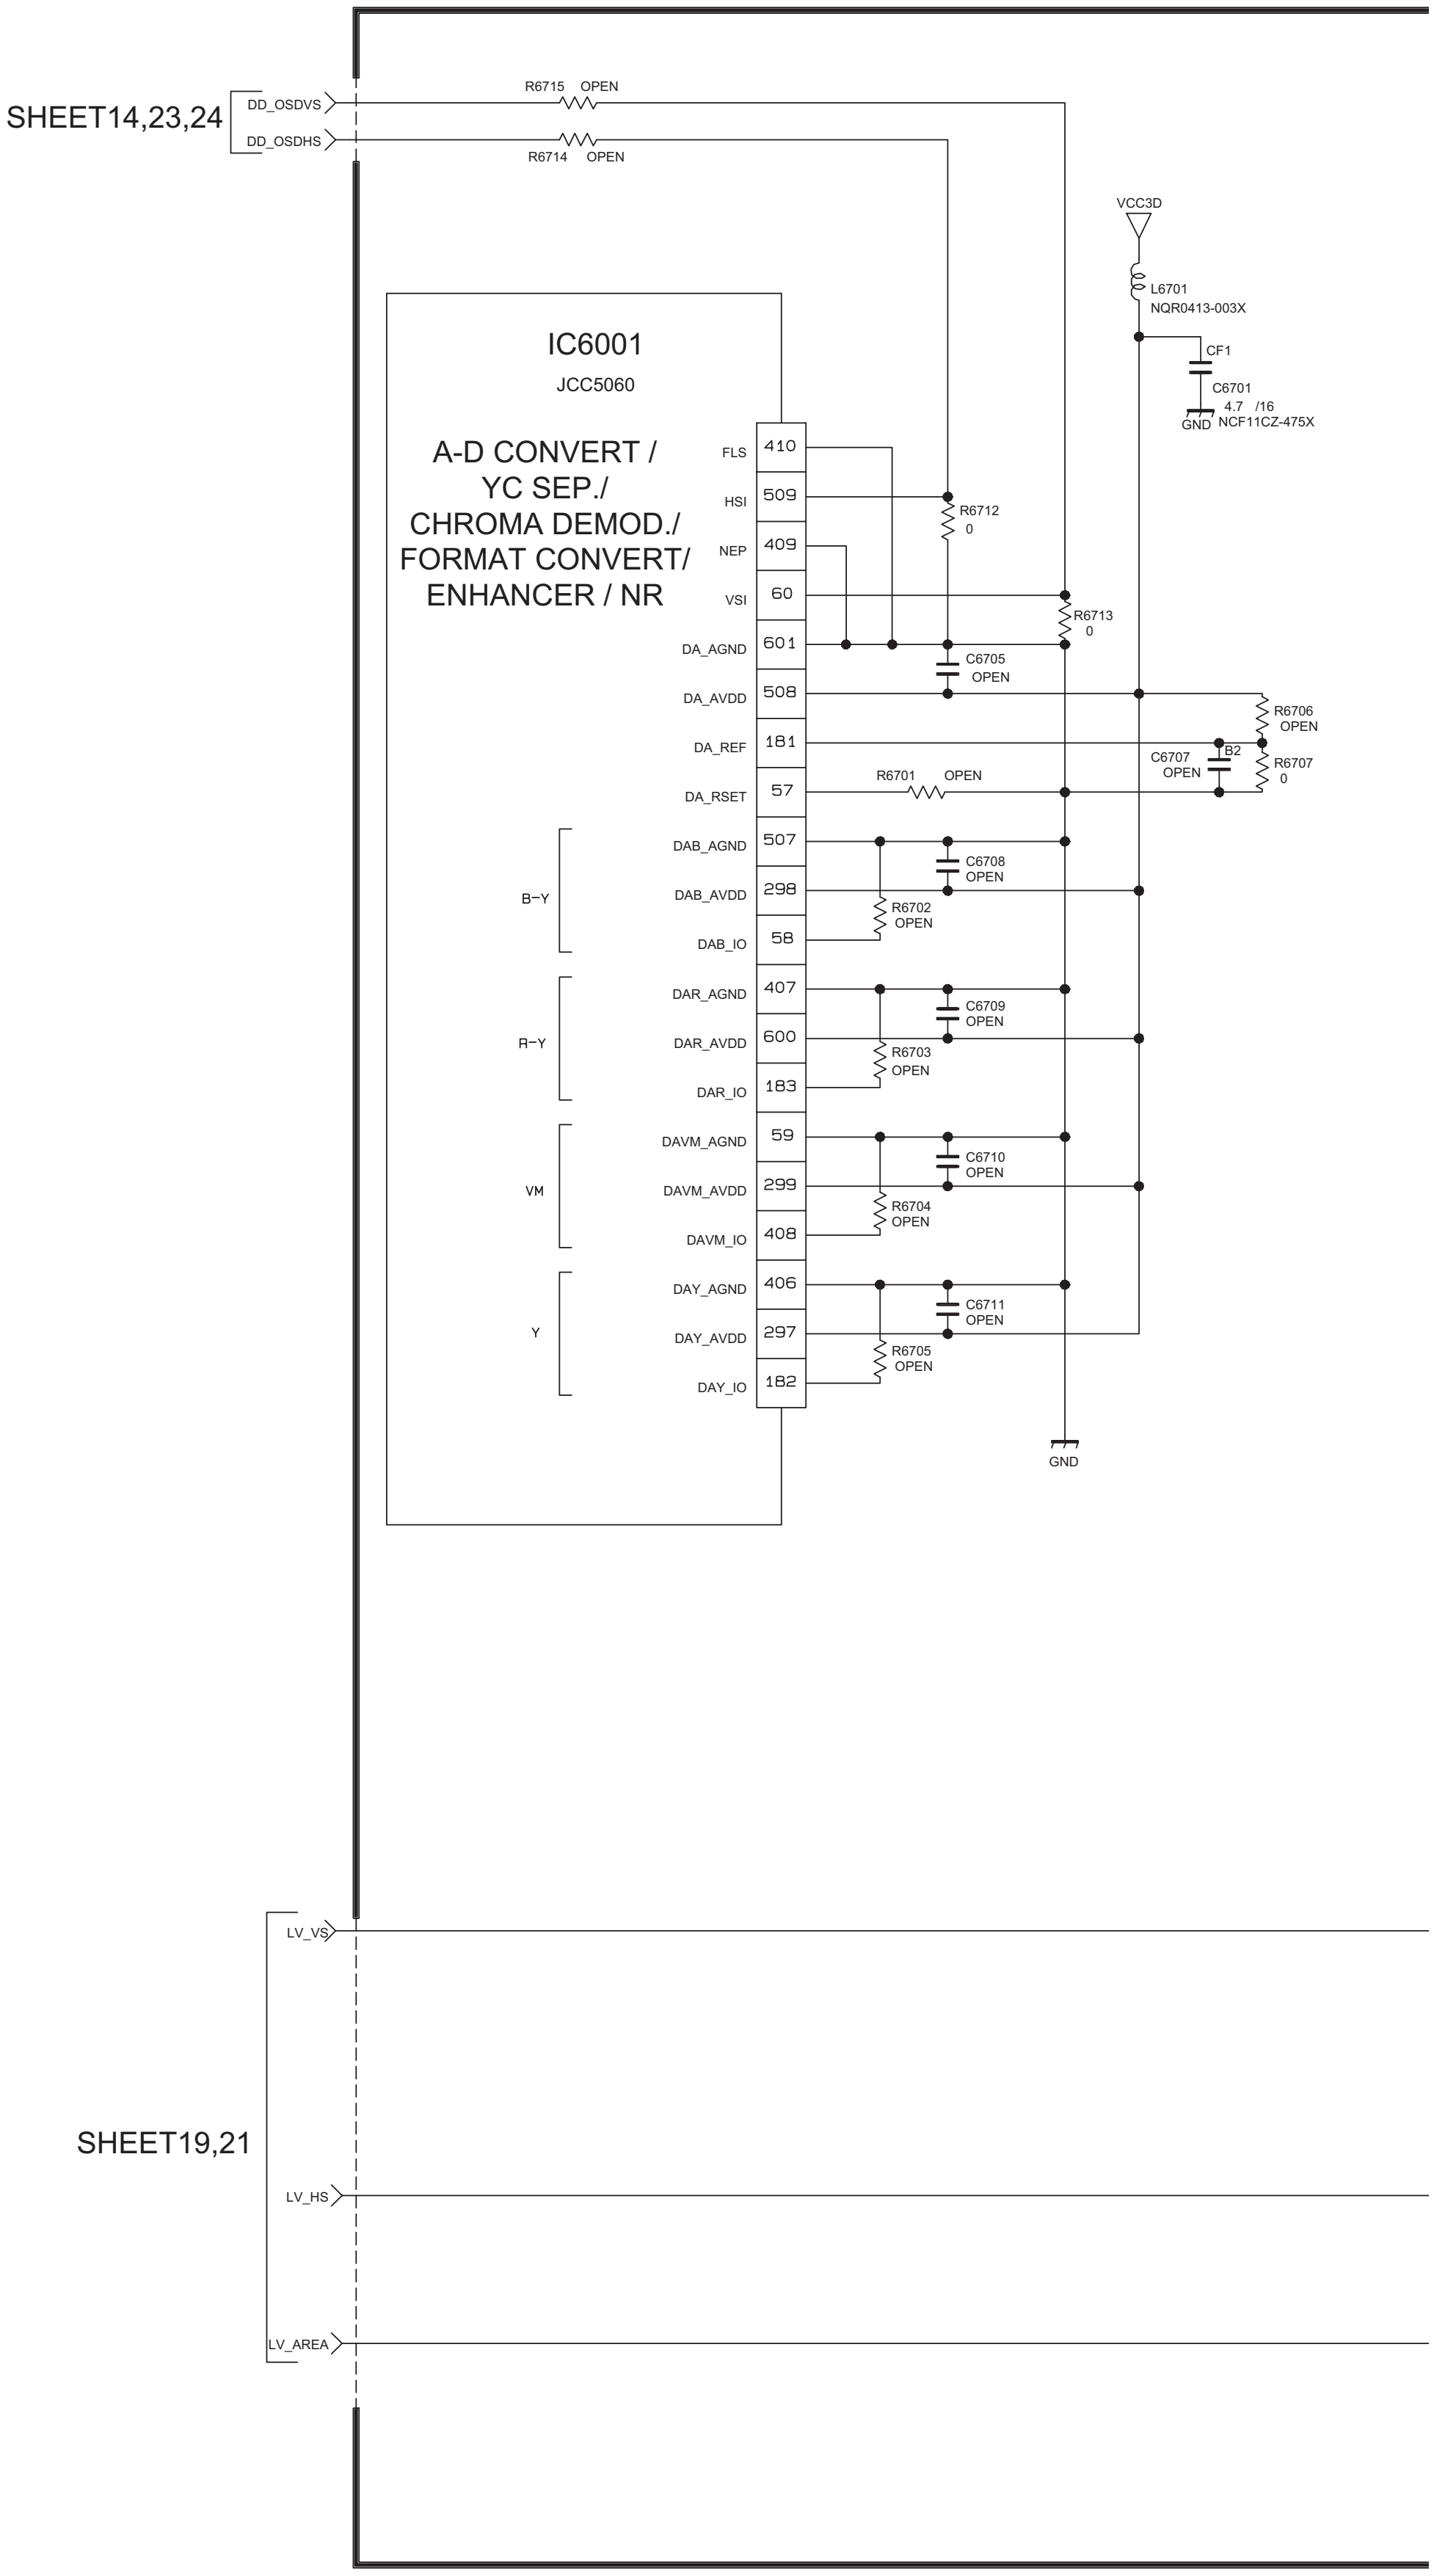

SHEET14,23,24
DD_OSDVS
DD_OSDHS
R6715 OPEN
R6714 OPEN
VCC3D
L6701
NQR0413-003X
CF1
C6701
4.7 /16
GND
NCF11CZ-475X
IC6001
JCC5060
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
FLS 410
HSI 509
NEP 409
VSI 60
DA_AGND 601
DA_AVDD 508
DA_REF 181
DA_RSET 57
DAB_AGND 507
DAB_AVDD 298
DAB_IO 58
DAR_AGND 407
DAR_AVDD 600
DAR_IO 183
DAVM_AGND 59
DAVM_AVDD 299
DAVM_IO 408
DAY_AGND 406
DAY_AVDD 297
DAY_IO 182
B-Y
R-Y
VM
Y
R6712
0
R6713
0
C6705
OPEN
R6706
OPEN
C6707
OPEN
B2
R6707
0
R6701 OPEN
C6708
OPEN
R6702
OPEN
C6709
OPEN
R6703
OPEN
C6710
OPEN
R6704
OPEN
C6711
OPEN
R6705
OPEN
GND
LV_VS
SHEET19,21
LV_HS
LV_AREA

DIGITAL PWB ASS'Y (7/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

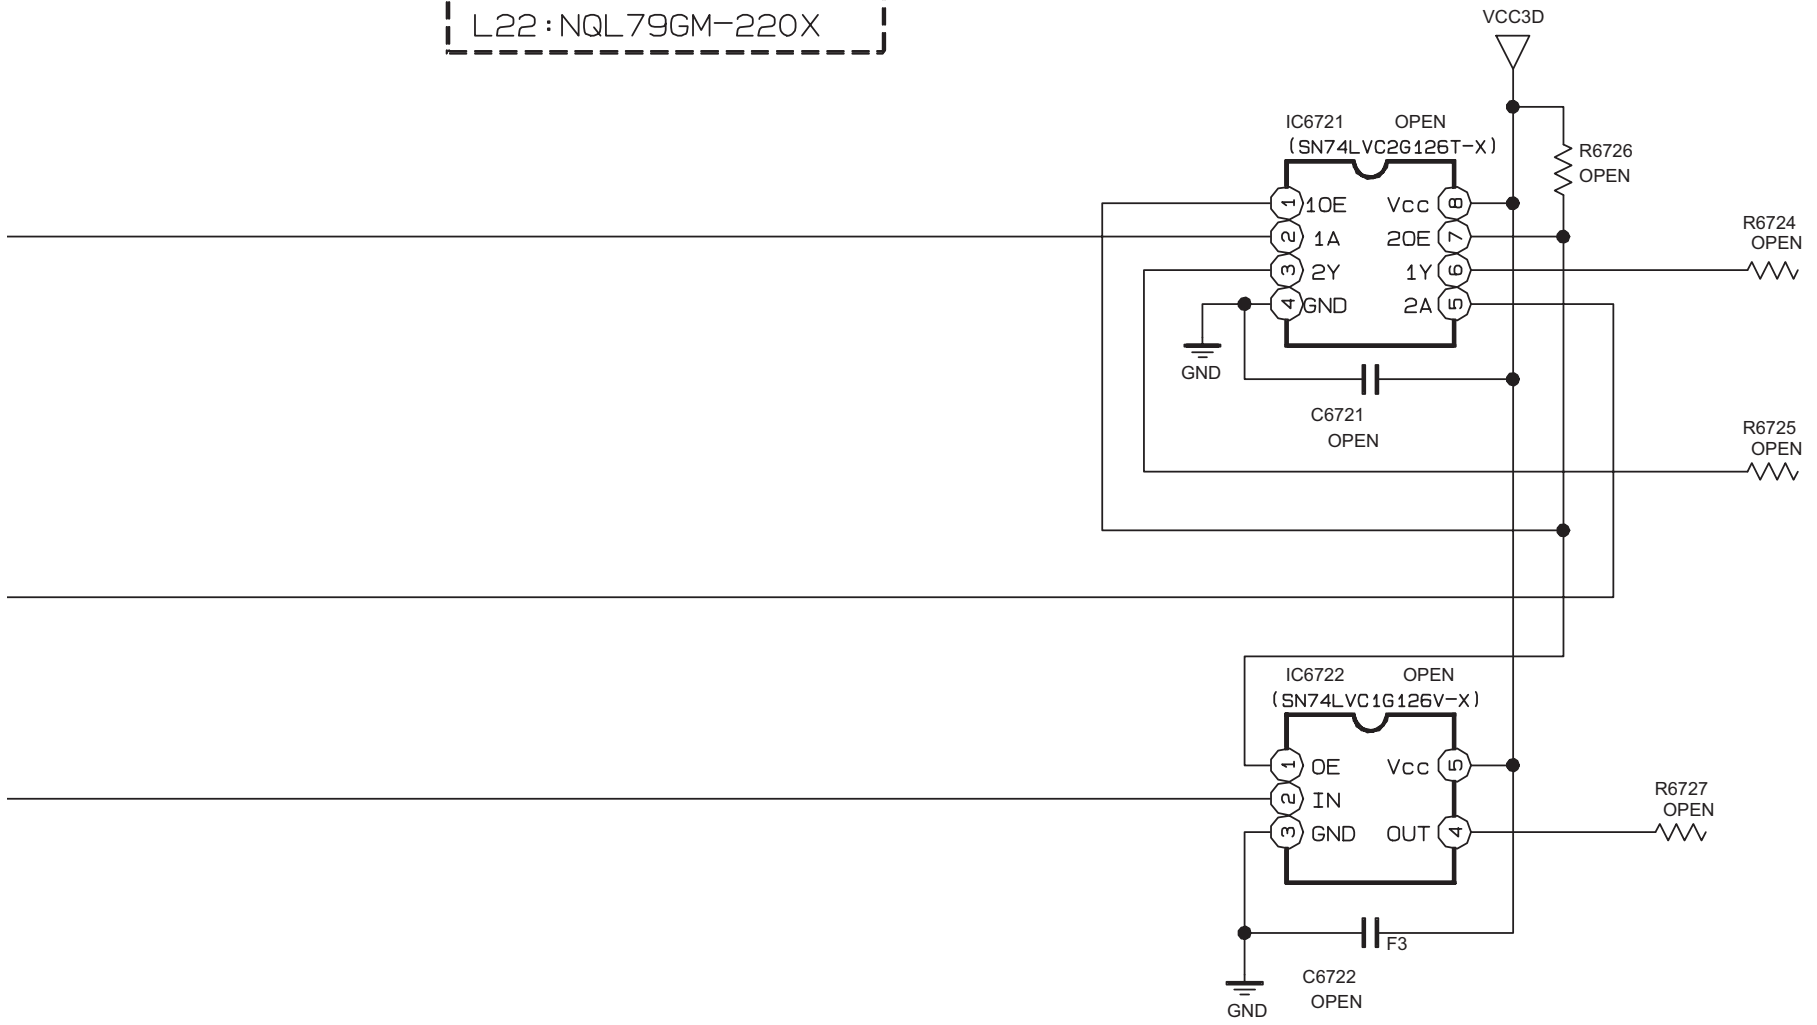
VCC3D
IC6721
OPEN
(SN74LVC2G126T-X)
R6726
OPEN
1OE
1A
2Y
GND
Vcc
2OE
1Y
2A
1
2
3
4
8
7
6
5
R6724
OPEN
GND
C6721
OPEN
R6725
OPEN
IC6722
OPEN
(SN74LVC1G126V-X)
OE
IN
GND
Vcc
OUT
1
2
3
5
4
R6727
OPEN
F3
C6722
OPEN
GND

c10446005_0214_5/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (8/16) [DDR BLOCK] SHEET 16

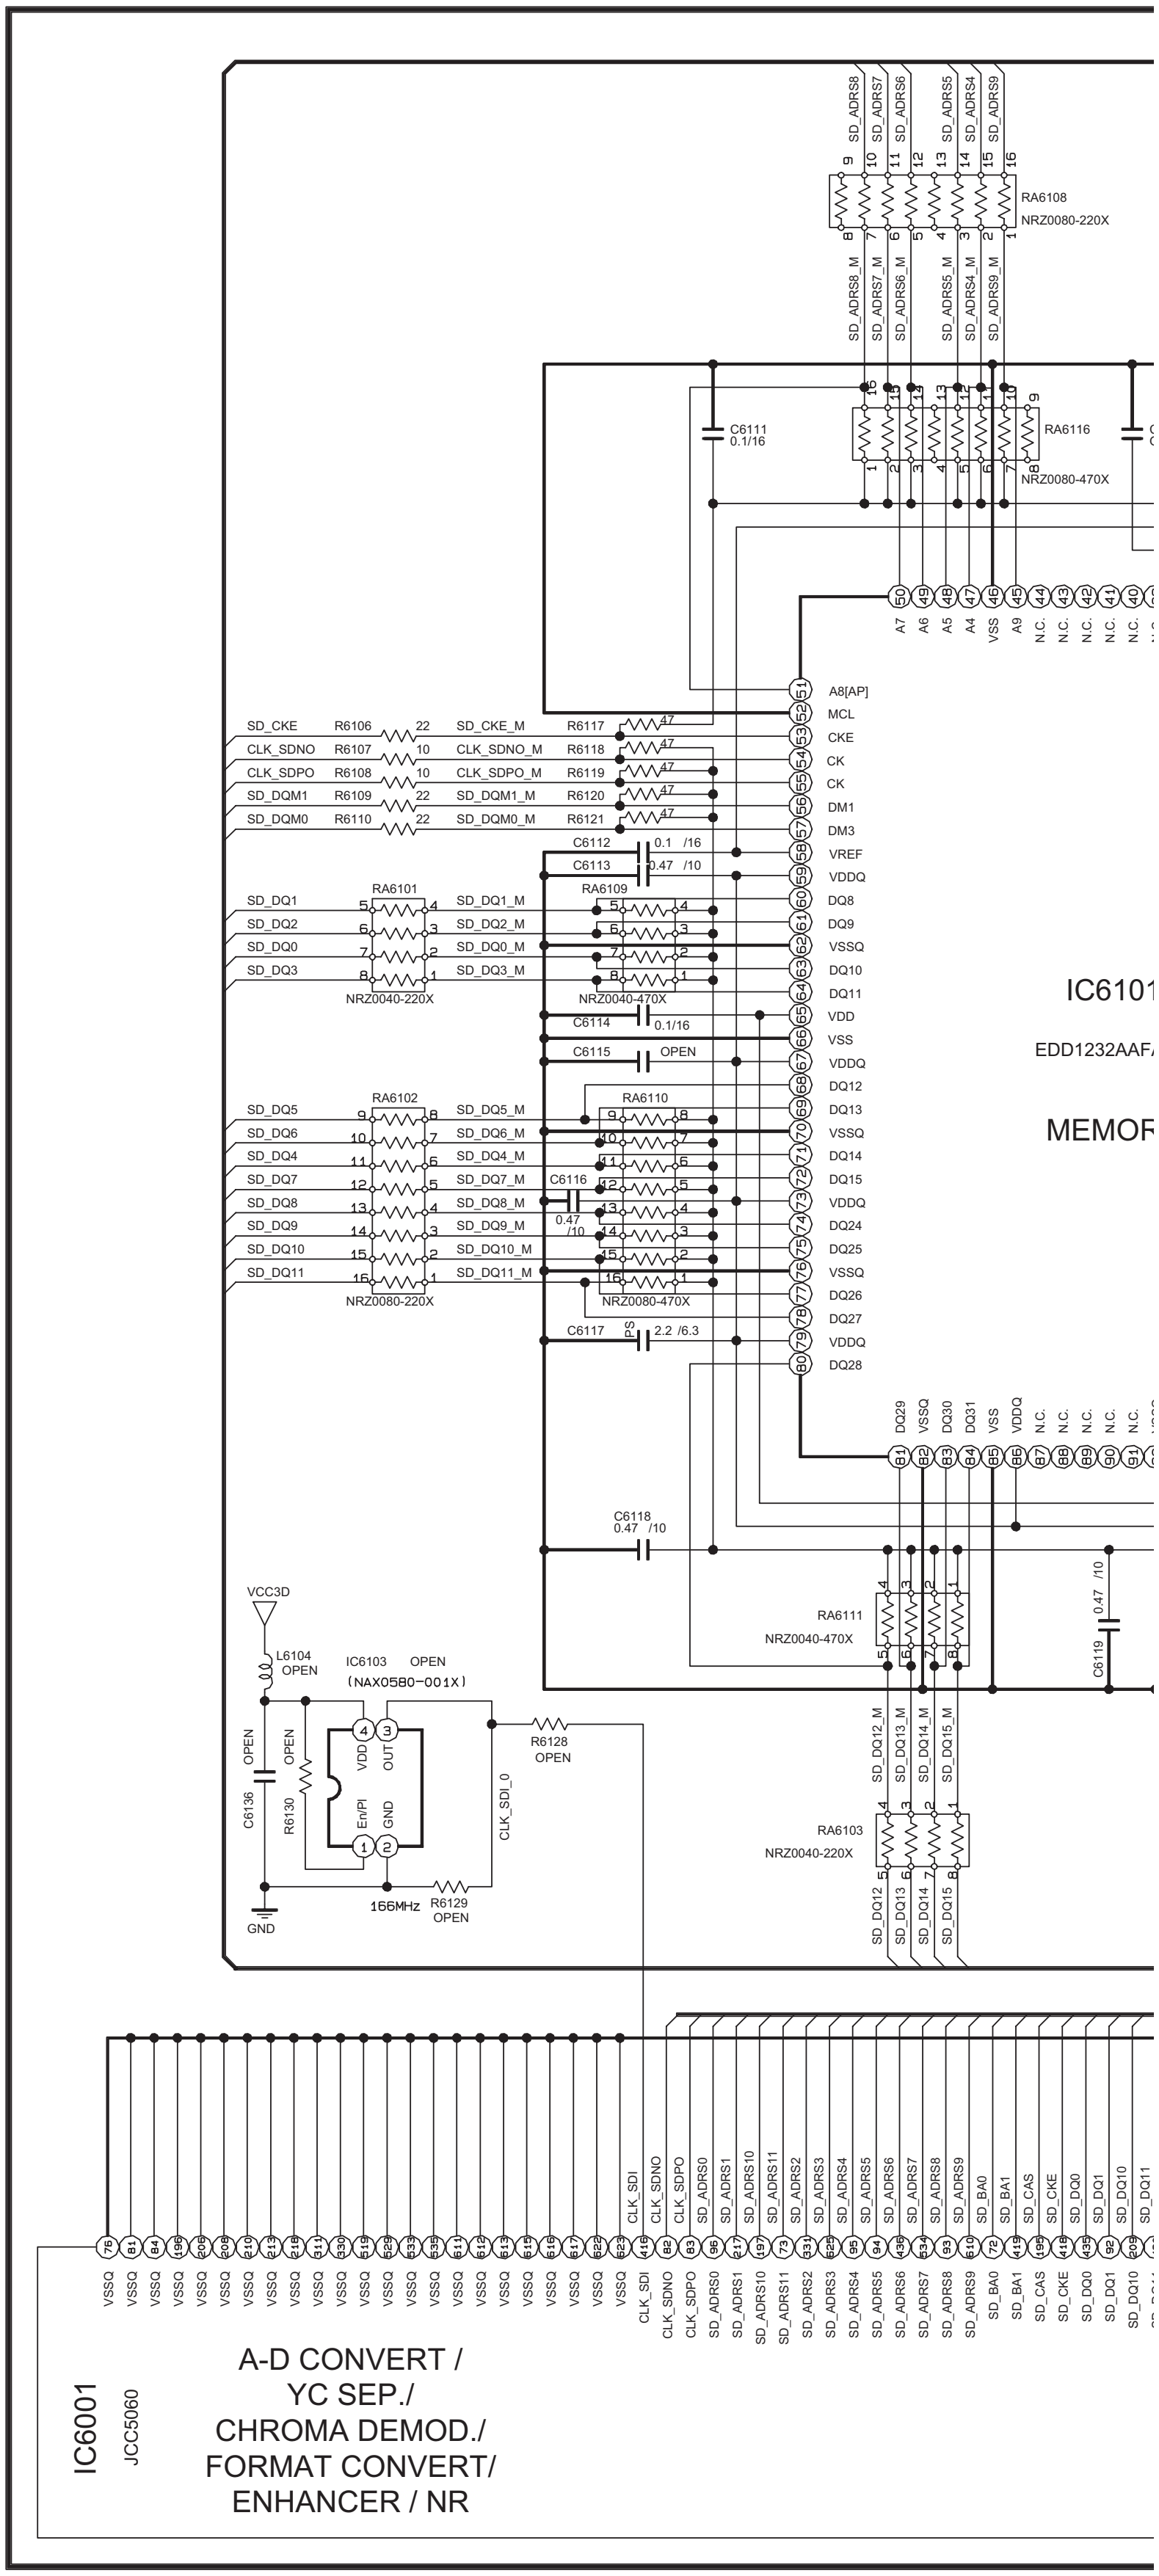

IC6101
EDD1232AAF
MEMOR
RA6108
NRZ0080-220X
RA6116
NRZ0080-470X
C6111
0.1/16
SD_ADRS8
SD_ADRS7
SD_ADRS6
SD_ADRS5
SD_ADRS4
SD_ADRS9
SD_ADRS8_M
SD_ADRS7_M
SD_ADRS6_M
SD_ADRS5_M
SD_ADRS4_M
SD_ADRS9_M
A7
A6
A5
A4
VSS
A9
N.C.
A8[AP]
MCL
CKE
CK
DM1
DM3
VREF
VDDQ
DQ8
DQ9
VSSQ
DQ10
DQ11
VDD
DQ12
DQ13
DQ14
DQ15
DQ24
DQ25
DQ26
DQ27
DQ28
DQ29
DQ30
DQ31
SD_CKE
CLK_SDNO
CLK_SDPO
SD_DQM1
SD_DQM0
R6106
R6107
R6108
R6109
R6110
SD_CKE_M
CLK_SDNO_M
CLK_SDPO_M
SD_DQM1_M
SD_DQM0_M
R6117
R6118
R6119
R6120
R6121
C6112
0.1 /16
C6113
0.47 /10
RA6101
RA6109
SD_DQ1
SD_DQ2
SD_DQ0
SD_DQ3
SD_DQ1_M
SD_DQ2_M
SD_DQ0_M
SD_DQ3_M
NRZ0040-220X
NRZ0040-470X
C6114
0.1/16
C6115
OPEN
RA6102
RA6110
SD_DQ5
SD_DQ6
SD_DQ4
SD_DQ7
SD_DQ8
SD_DQ9
SD_DQ10
SD_DQ11
SD_DQ5_M
SD_DQ6_M
SD_DQ4_M
SD_DQ7_M
SD_DQ8_M
SD_DQ9_M
SD_DQ10_M
SD_DQ11_M
C6116
0.47 /10
NRZ0080-220X
NRZ0080-470X
C6117
2.2 /6.3
C6118
0.47 /10
C6119
0.47 /10
RA6111
NRZ0040-470X
RA6103
NRZ0040-220X
SD_DQ12_M
SD_DQ13_M
SD_DQ14_M
SD_DQ15_M
SD_DQ12
SD_DQ13
SD_DQ14
SD_DQ15
VCC3D
L6104
OPEN
IC6103 OPEN
(NAX0580-001X)
VDD
OUT
En/PI
GND
R6128
OPEN
CLK_SDI_0
C6136
OPEN
R6130
OPEN
166MHz
R6129
OPEN
GND
IC6001
JCC5060
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
VSSQ
CLK_SDI
CLK_SDNO
CLK_SDPO
SD_ADRS0
SD_ADRS1
SD_ADRS10
SD_ADRS11
SD_ADRS2
SD_ADRS3
SD_ADRS4
SD_ADRS5
SD_ADRS6
SD_ADRS7
SD_ADRS8
SD_ADRS9
SD_BA0
SD_BA1
SD_CAS
SD_CKE
SD_DQ0
SD_DQ1
SD_DQ10
SD_DQ11

DIGITAL
PWB ASS'Y (8/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

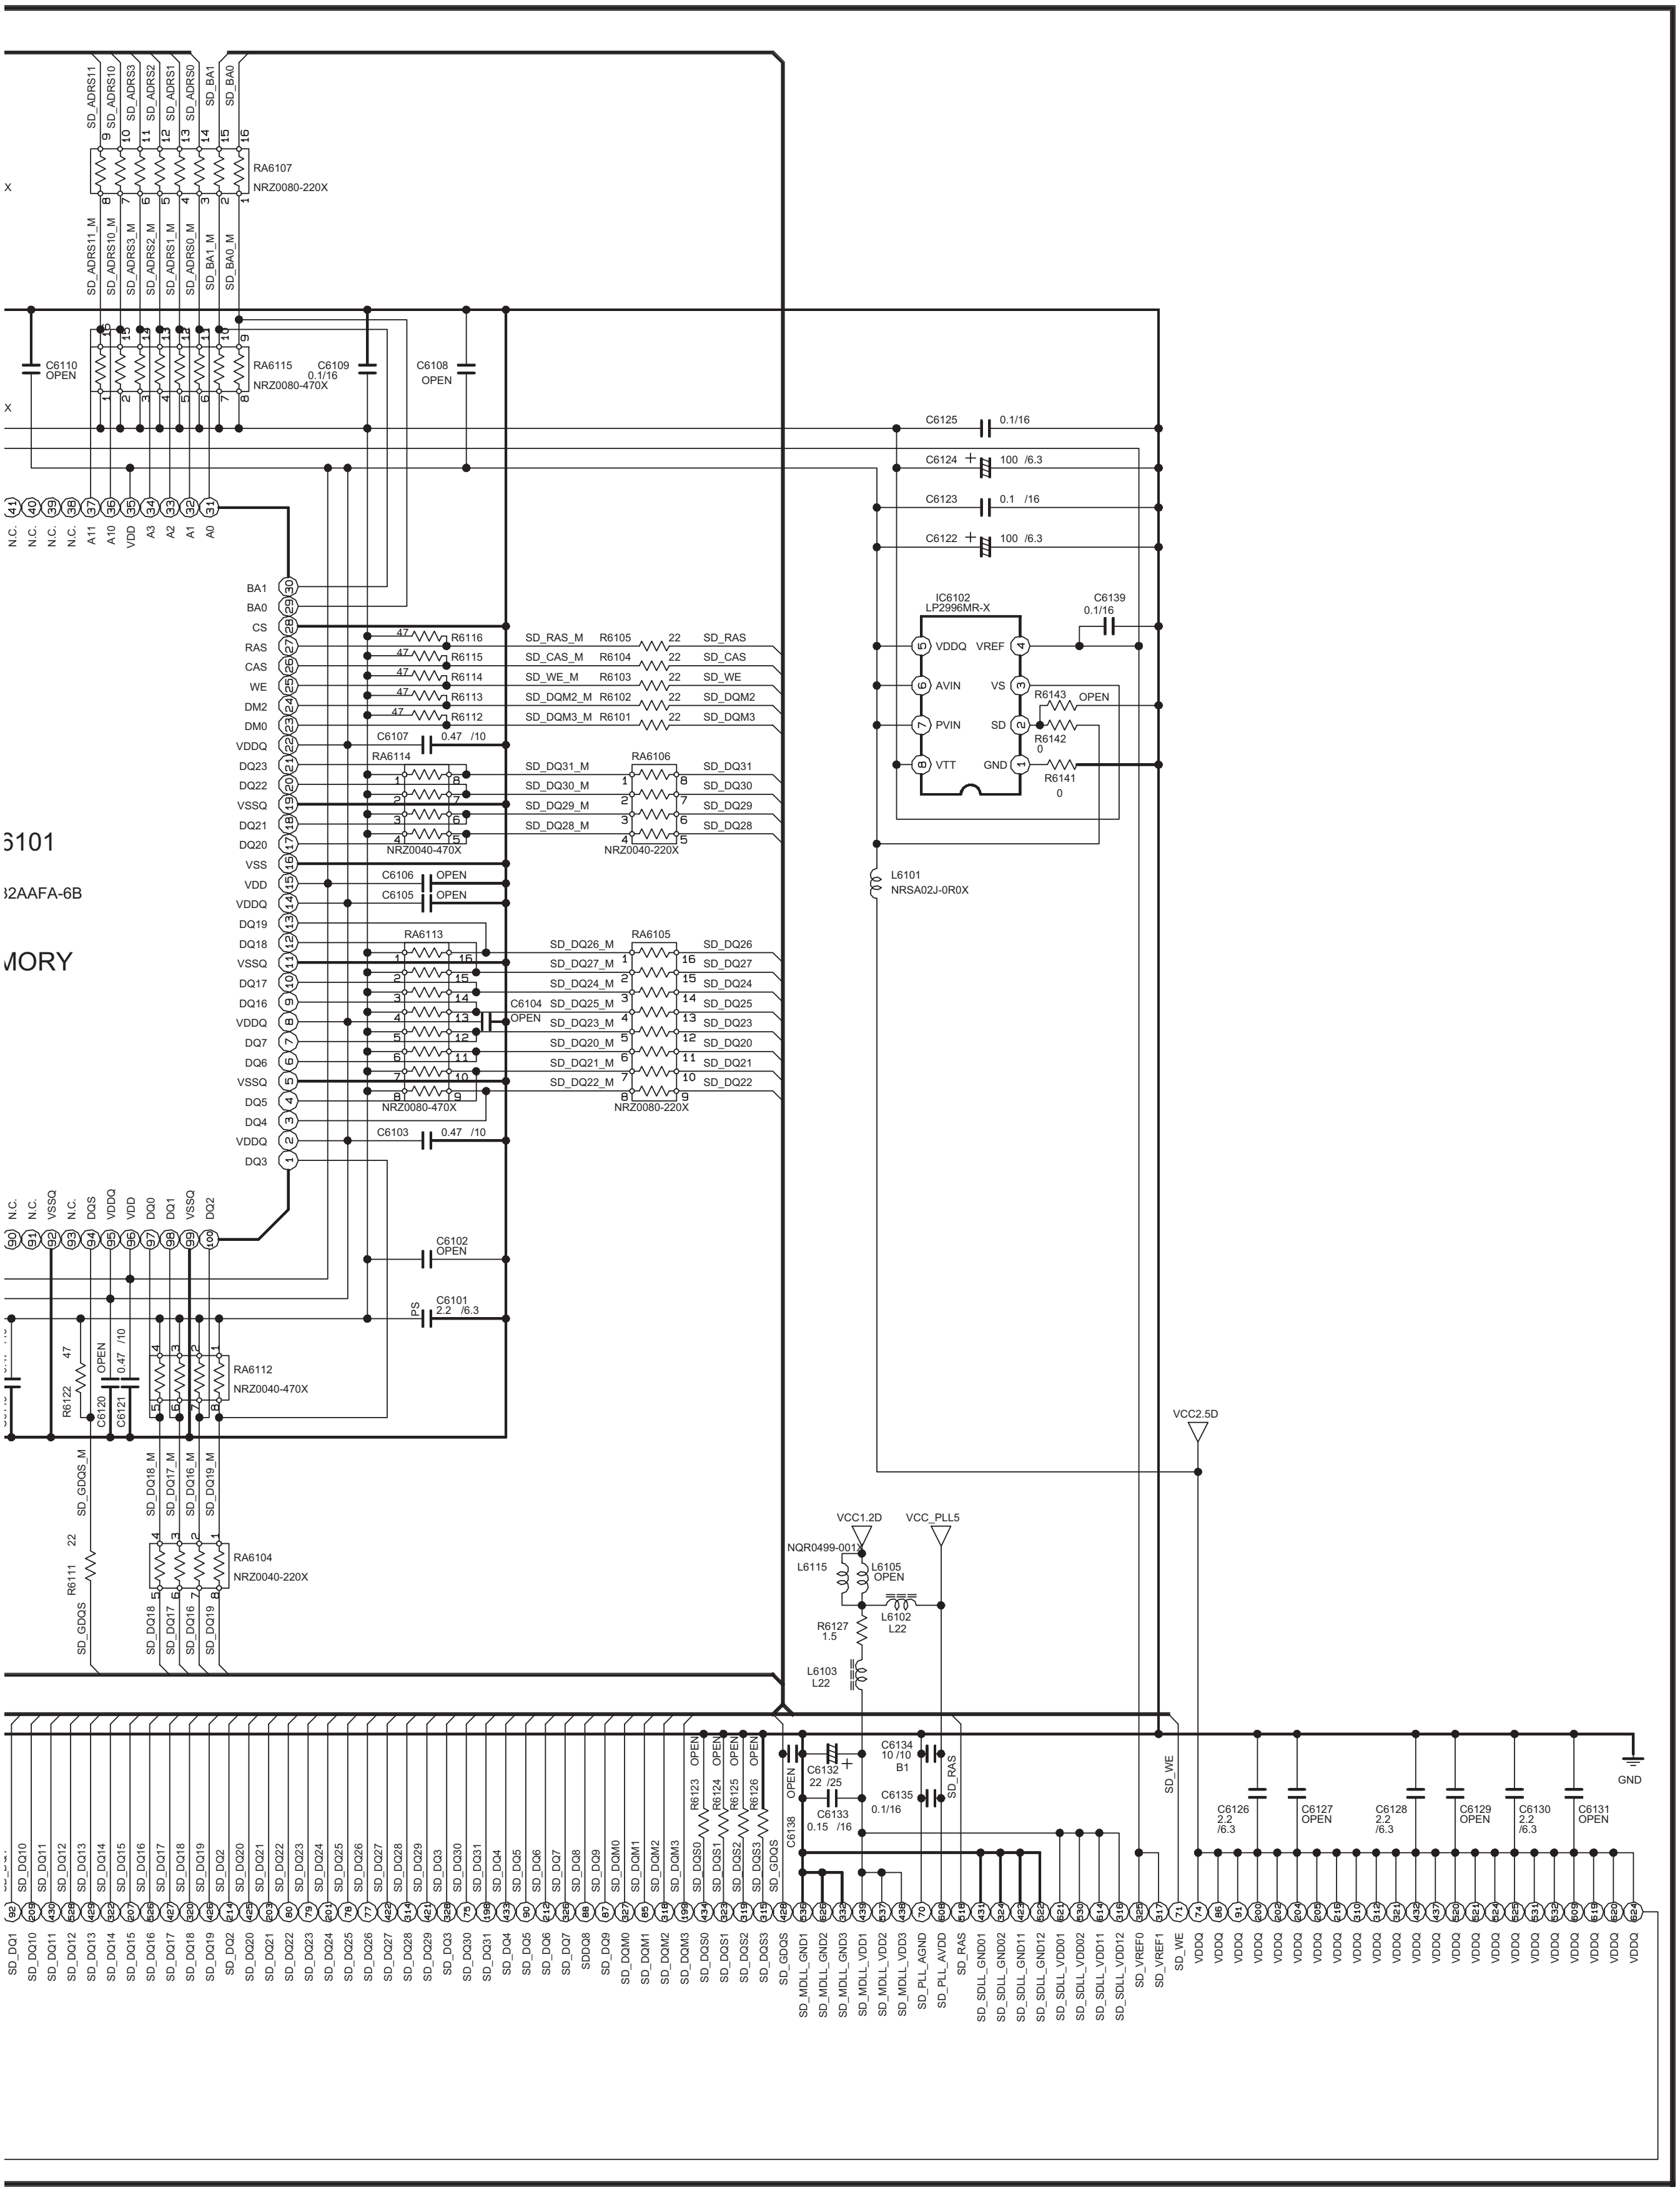
RA6107
NRZ0080-220X
RA6115
NRZ0080-470X
C6110
OPEN
C6109
0.1/16
C6108
OPEN
C6125 0.1/16
C6124 100 /6.3
C6123 0.1 /16
C6122 100 /6.3
IC6102
LP2996MR-X
C6139
0.1/16
VDDQ
VREF
AVIN
VS
PVIN
SD
VTT
GND
R6143 OPEN
R6142 0
R6141 0
L6101
NRSA02J-0R0X
6101
32AAFA-6B
MORY
R6116
R6115
R6114
R6113
R6112
SD_RAS_M R6105 22 SD_RAS
SD_CAS_M R6104 22 SD_CAS
SD_WE_M R6103 22 SD_WE
SD_DQM2_M R6102 22 SD_DQM2
SD_DQM3_M R6101 22 SD_DQM3
C6107 0.47 /10
RA6114
NRZ0040-470X
RA6106
NRZ0040-220X
SD_DQ31_M SD_DQ31
SD_DQ30_M SD_DQ30
SD_DQ29_M SD_DQ29
SD_DQ28_M SD_DQ28
C6106 OPEN
C6105 OPEN
RA6113
NRZ0080-470X
RA6105
NRZ0080-220X
C6104
OPEN
SD_DQ26_M SD_DQ26
SD_DQ27_M SD_DQ27
SD_DQ24_M SD_DQ24
SD_DQ25_M SD_DQ25
SD_DQ23_M SD_DQ23
SD_DQ20_M SD_DQ20
SD_DQ21_M SD_DQ21
SD_DQ22_M SD_DQ22
C6103 0.47 /10
C6102
OPEN
C6101
2.2 /6.3
RA6112
NRZ0040-470X
R6122 47
C6120 OPEN
C6121 0.47 /10
SD_GDQS_M
R6111 22
SD_GDQS
RA6104
NRZ0040-220X
VCC2.5D
VCC1.2D
VCC_PLL5
NQR0499-001X
L6115
L6105
OPEN
L6102
L22
R6127
1.5
L6103
L22
C6134
10 /10
B1
C6132
22 /25
C6135
0.1/16
C6133
0.15 /16
C6138
R6123 OPEN
R6124 OPEN
R6125 OPEN
R6126 OPEN
OPEN
SD_RAS
SD_WE
GND
C6126
2.2
/6.3
C6127
OPEN
C6128
2.2
/6.3
C6129
OPEN
C6130
2.2
/6.3
C6131
OPEN

DIGITAL PWB CIRCUIT DIAGRAM (9/16) [FLASH MEMORY BLOCK] SHEET 17

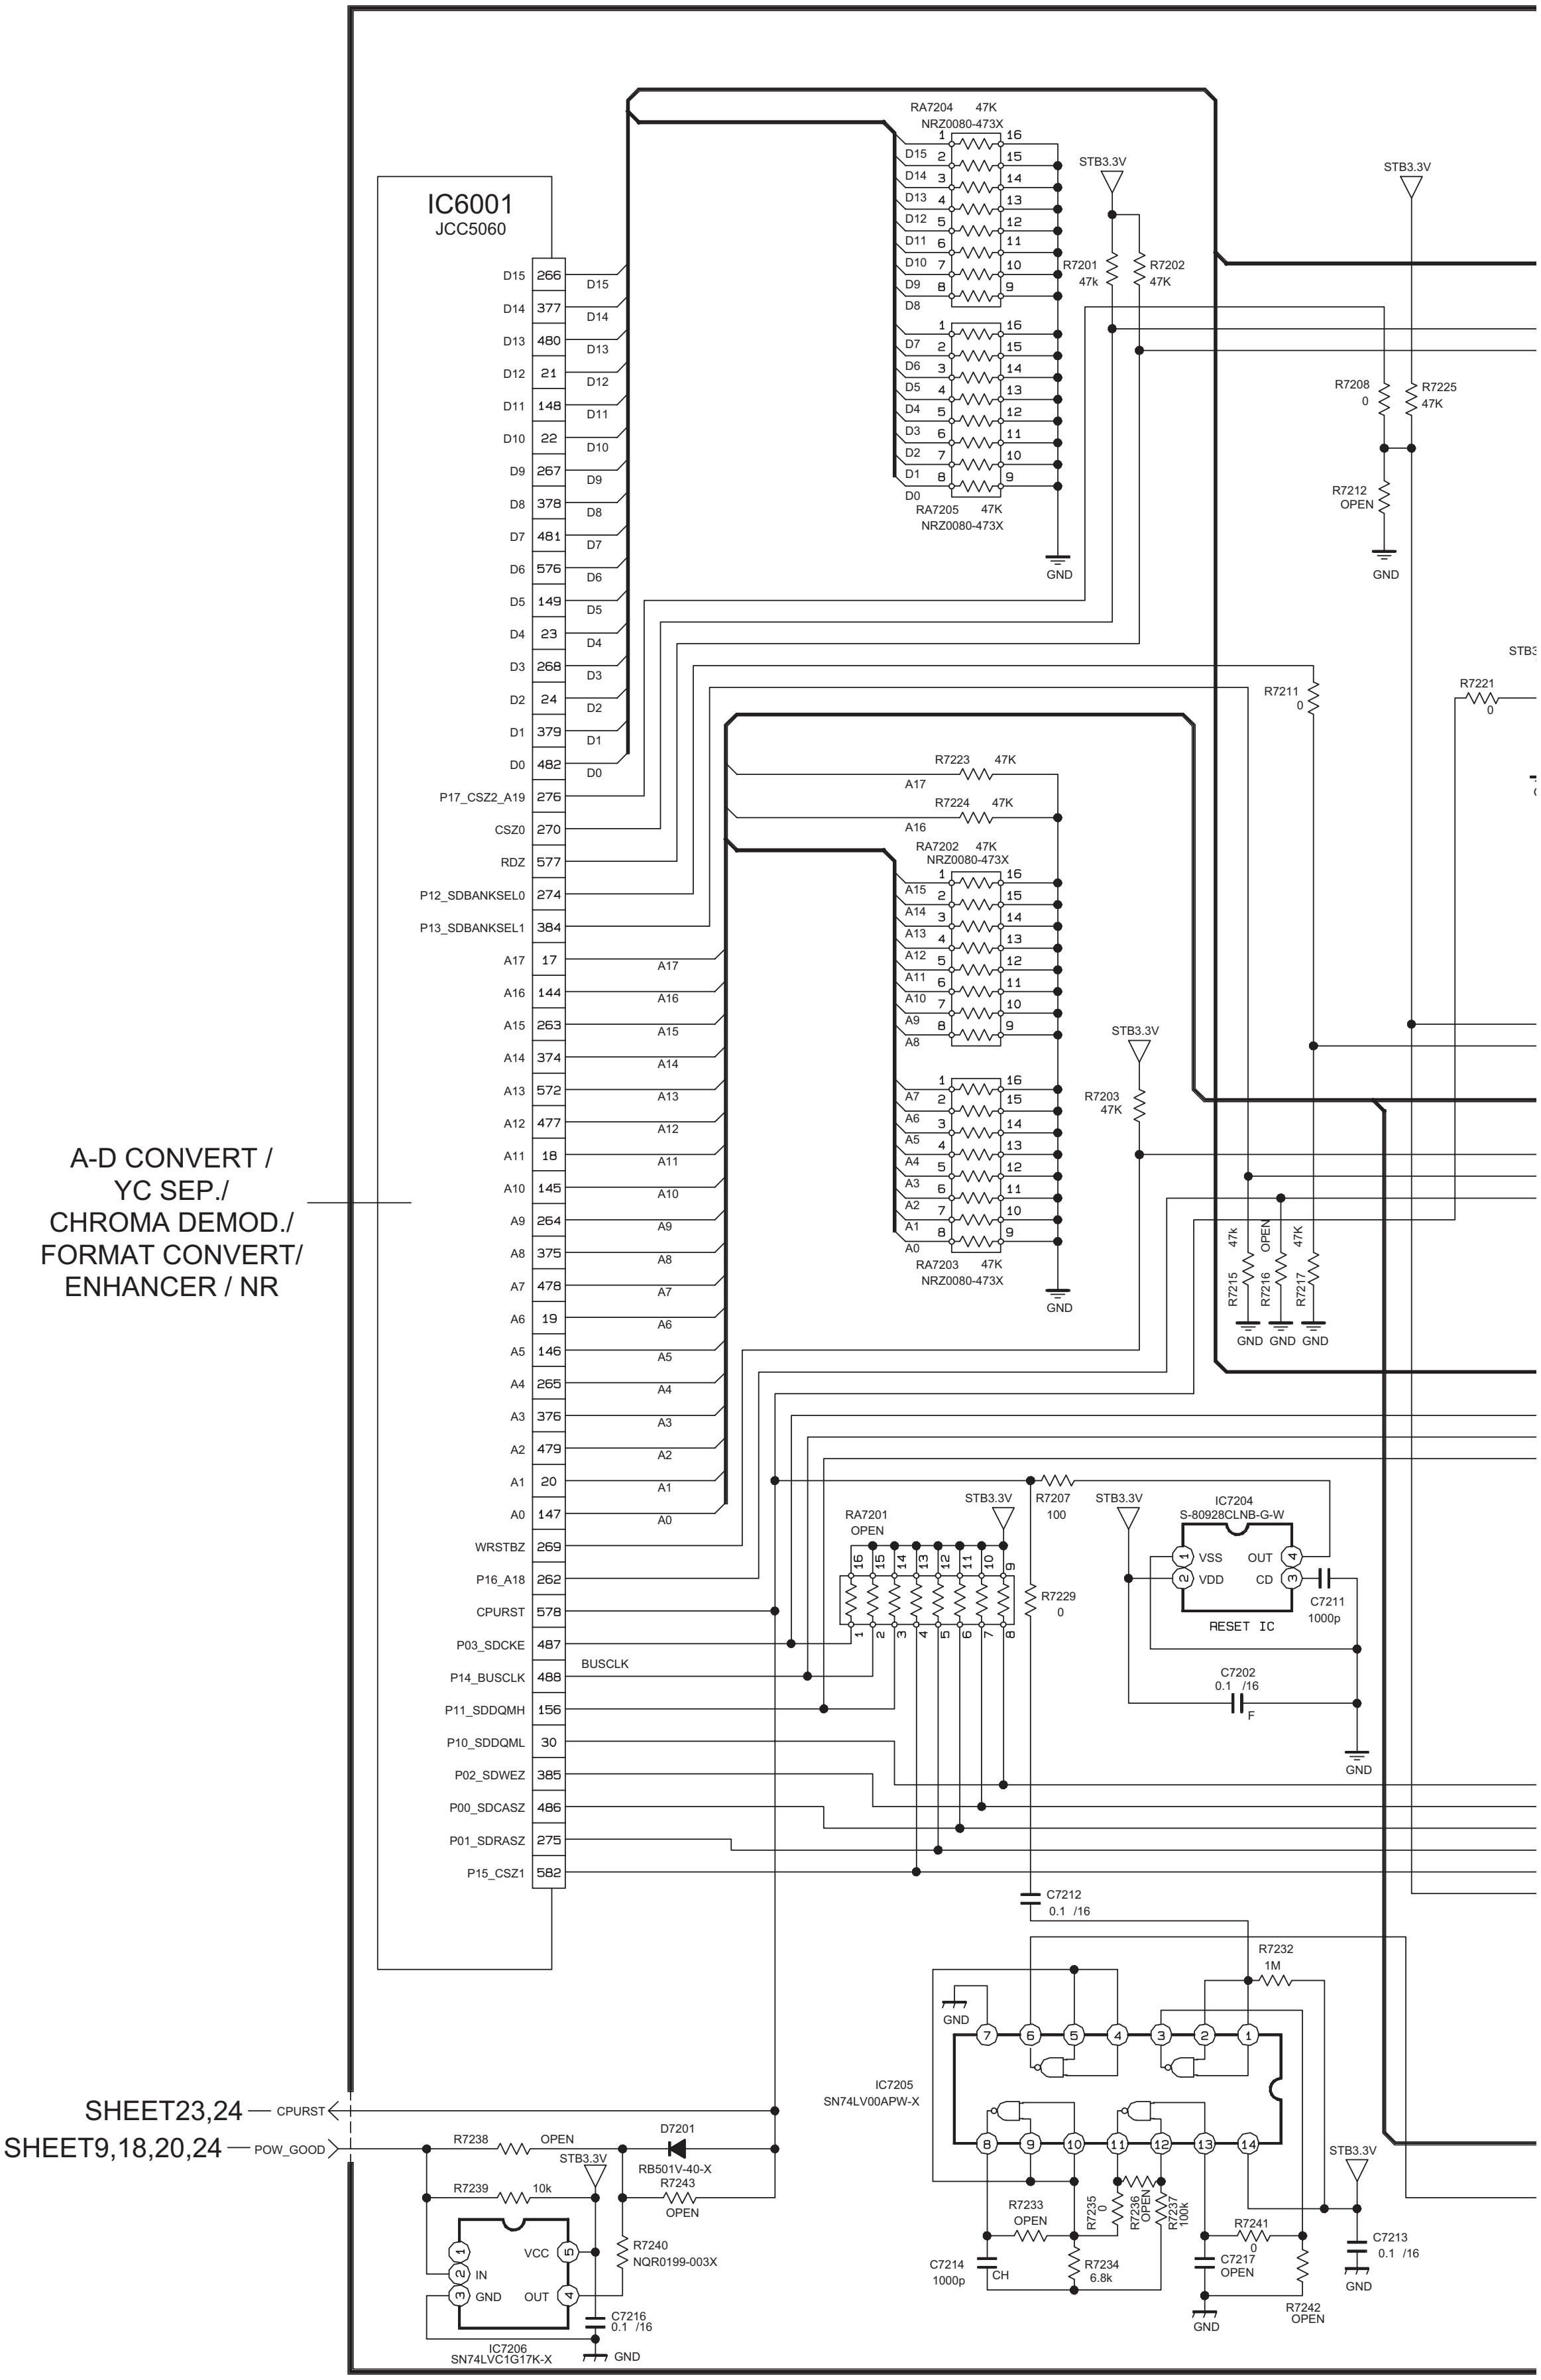

IC6001
JCC5060
D15 266
D14 377
D13 480
D12 21
D11 148
D10 22
D9 267
D8 378
D7 481
D6 576
D5 149
D4 23
D3 268
D2 24
D1 379
D0 482
P17_CSZ2_A19 276
CSZ0 270
RDZ 577
P12_SDBANKSEL0 274
P13_SDBANKSEL1 384
A17 17
A16 144
A15 263
A14 374
A13 572
A12 477
A11 18
A10 145
A9 264
A8 375
A7 478
A6 19
A5 146
A4 265
A3 376
A2 479
A1 20
A0 147
WRSTBZ 269
P16_A18 262
CPURST 578
P03_SDCKE 487
P14_BUSCLK 488
BUSCLK
P11_SDDQMH 156
P10_SDDQML 30
P02_SDWEZ 385
P00_SDCASZ 486
P01_SDRASZ 275
P15_CSZ1 582
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
RA7204 47K
NRZ0080-473X
RA7205 47K
NRZ0080-473X
RA7202 47K
NRZ0080-473X
RA7203 47K
NRZ0080-473X
RA7201
OPEN
R7223 47K
R7224 47K
STB3.3V
R7201 47k
R7202 47K
R7203 47K
R7208 0
R7225 47K
R7212 OPEN
R7211 0
R7221 0
R7215 47k
R7216 OPEN
R7217 47K
R7207 100
R7229 0
GND
IC7204
S-80928CLNB-G-W
VSS
VDD
OUT
CD
RESET IC
C7211 1000p
C7202 0.1 /16
F
C7212 0.1 /16
R7232 1M
IC7205
SN74LV00APW-X
R7233 OPEN
R7235 0
R7236 OPEN
R7237 100k
R7234 6.8k
C7214 1000p
CH
R7241 0
C7217 OPEN
R7242 OPEN
C7213 0.1 /16
SHEET23,24
CPURST
SHEET9,18,20,24
POW_GOOD
R7238 OPEN
D7201
RB501V-40-X
R7239 10k
R7243 OPEN
R7240
NQR0199-003X
IN
GND
VCC
OUT
C7216 0.1 /16
IC7206
SN74LVC1G17K-X

DIGITAL PWB ASS'Y (9/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

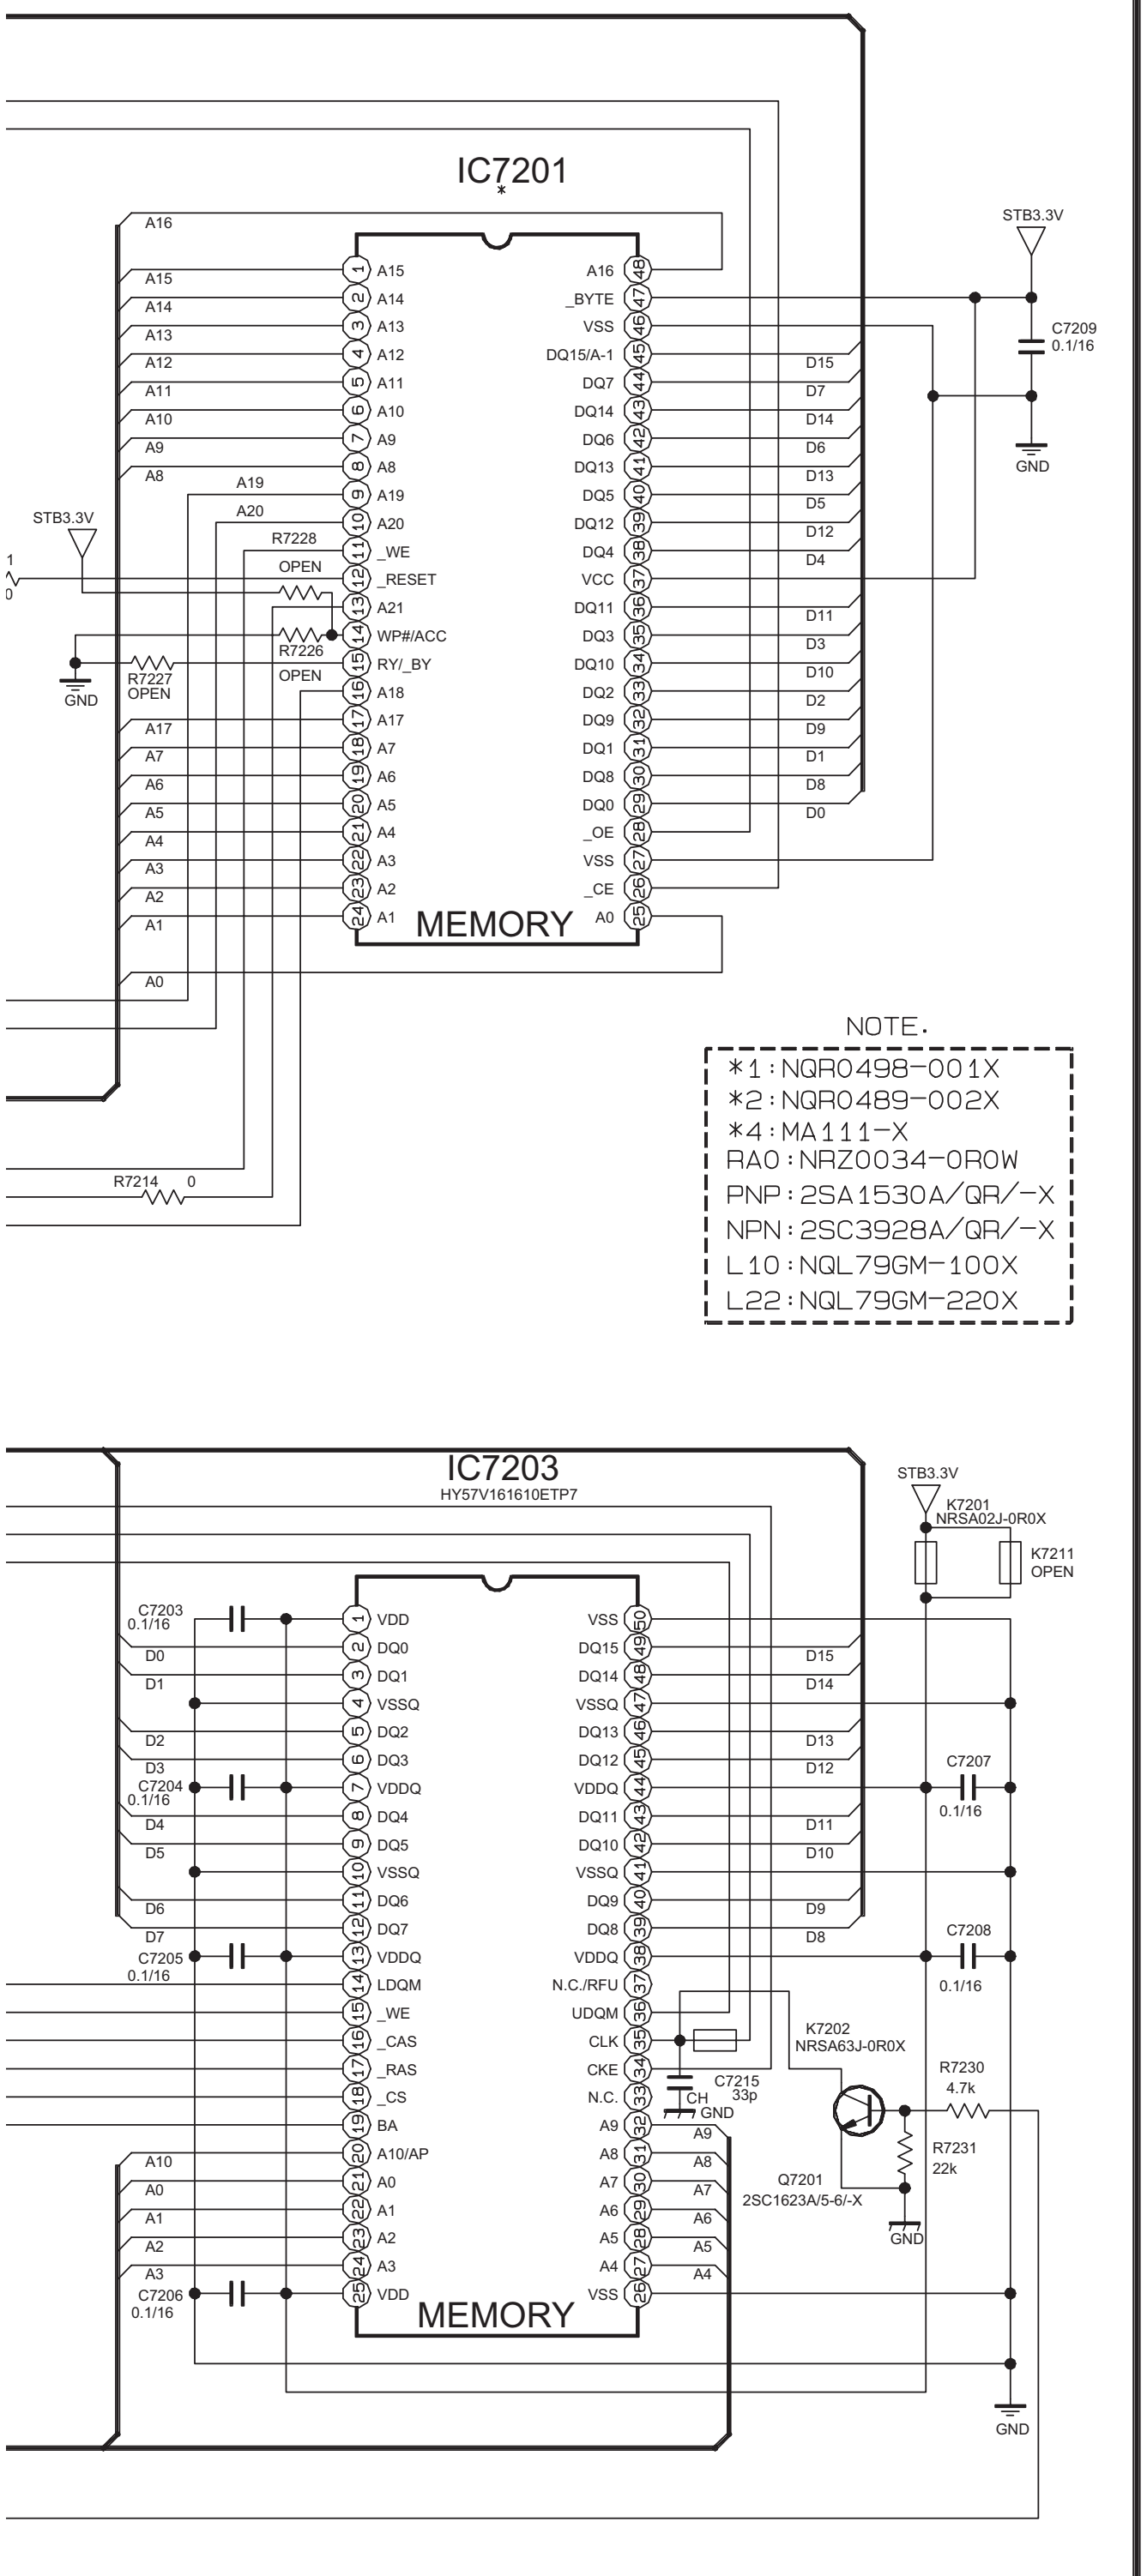
IC7201
*
MEMORY
A15
A14
A13
A12
A11
A10
A9
A8
A19
A20
_WE
_RESET
A21
WP#/ACC
RY/_BY
A18
A17
A7
A6
A5
A4
A3
A2
A1
A16
_BYTE
VSS
DQ15/A-1
DQ7
DQ14
DQ6
DQ13
DQ5
DQ12
DQ4
VCC
DQ11
DQ3
DQ10
DQ2
DQ9
DQ1
DQ8
DQ0
_OE
_CE
A0
STB3.3V
C7209
0.1/16
GND
R7228
OPEN
R7226
OPEN
R7227
OPEN
R7214
0
IC7203
HY57V161610ETP7
MEMORY
VDD
VDDQ
VSSQ
LDQM
_CAS
_RAS
_CS
BA
A10/AP
UDQM
CLK
CKE
N.C.
N.C./RFU
C7203
0.1/16
C7204
0.1/16
C7205
0.1/16
C7206
0.1/16
C7207
0.1/16
C7208
0.1/16
K7201
NRSA02J-0R0X
K7211
OPEN
K7202
NRSA63J-0R0X
C7215
33p
CH
R7230
4.7k
R7231
22k
Q7201
2SC1623A/5-6/-X

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
IC7201	39VF800A 7IEKD52	39VF800A 7IEKD53	39VF800A 7IEKD54	39VF800A 7IEKD52	39VF800A 7IEKD53	39VF800A 7IEKD54	39VF800A 7IEKD66	39VF800A 7IEKD67	39VF800A 7IEKD68	39VF800A 7IEKD66	39VF800A 7IEKD67	39VF800A 7IEKD68	39VF800A 7IEKD92	39VF800A 7IEKD93

c10446008_0214_8/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (10/16) [DIST INTERFACE BLOCK] SHEET 18

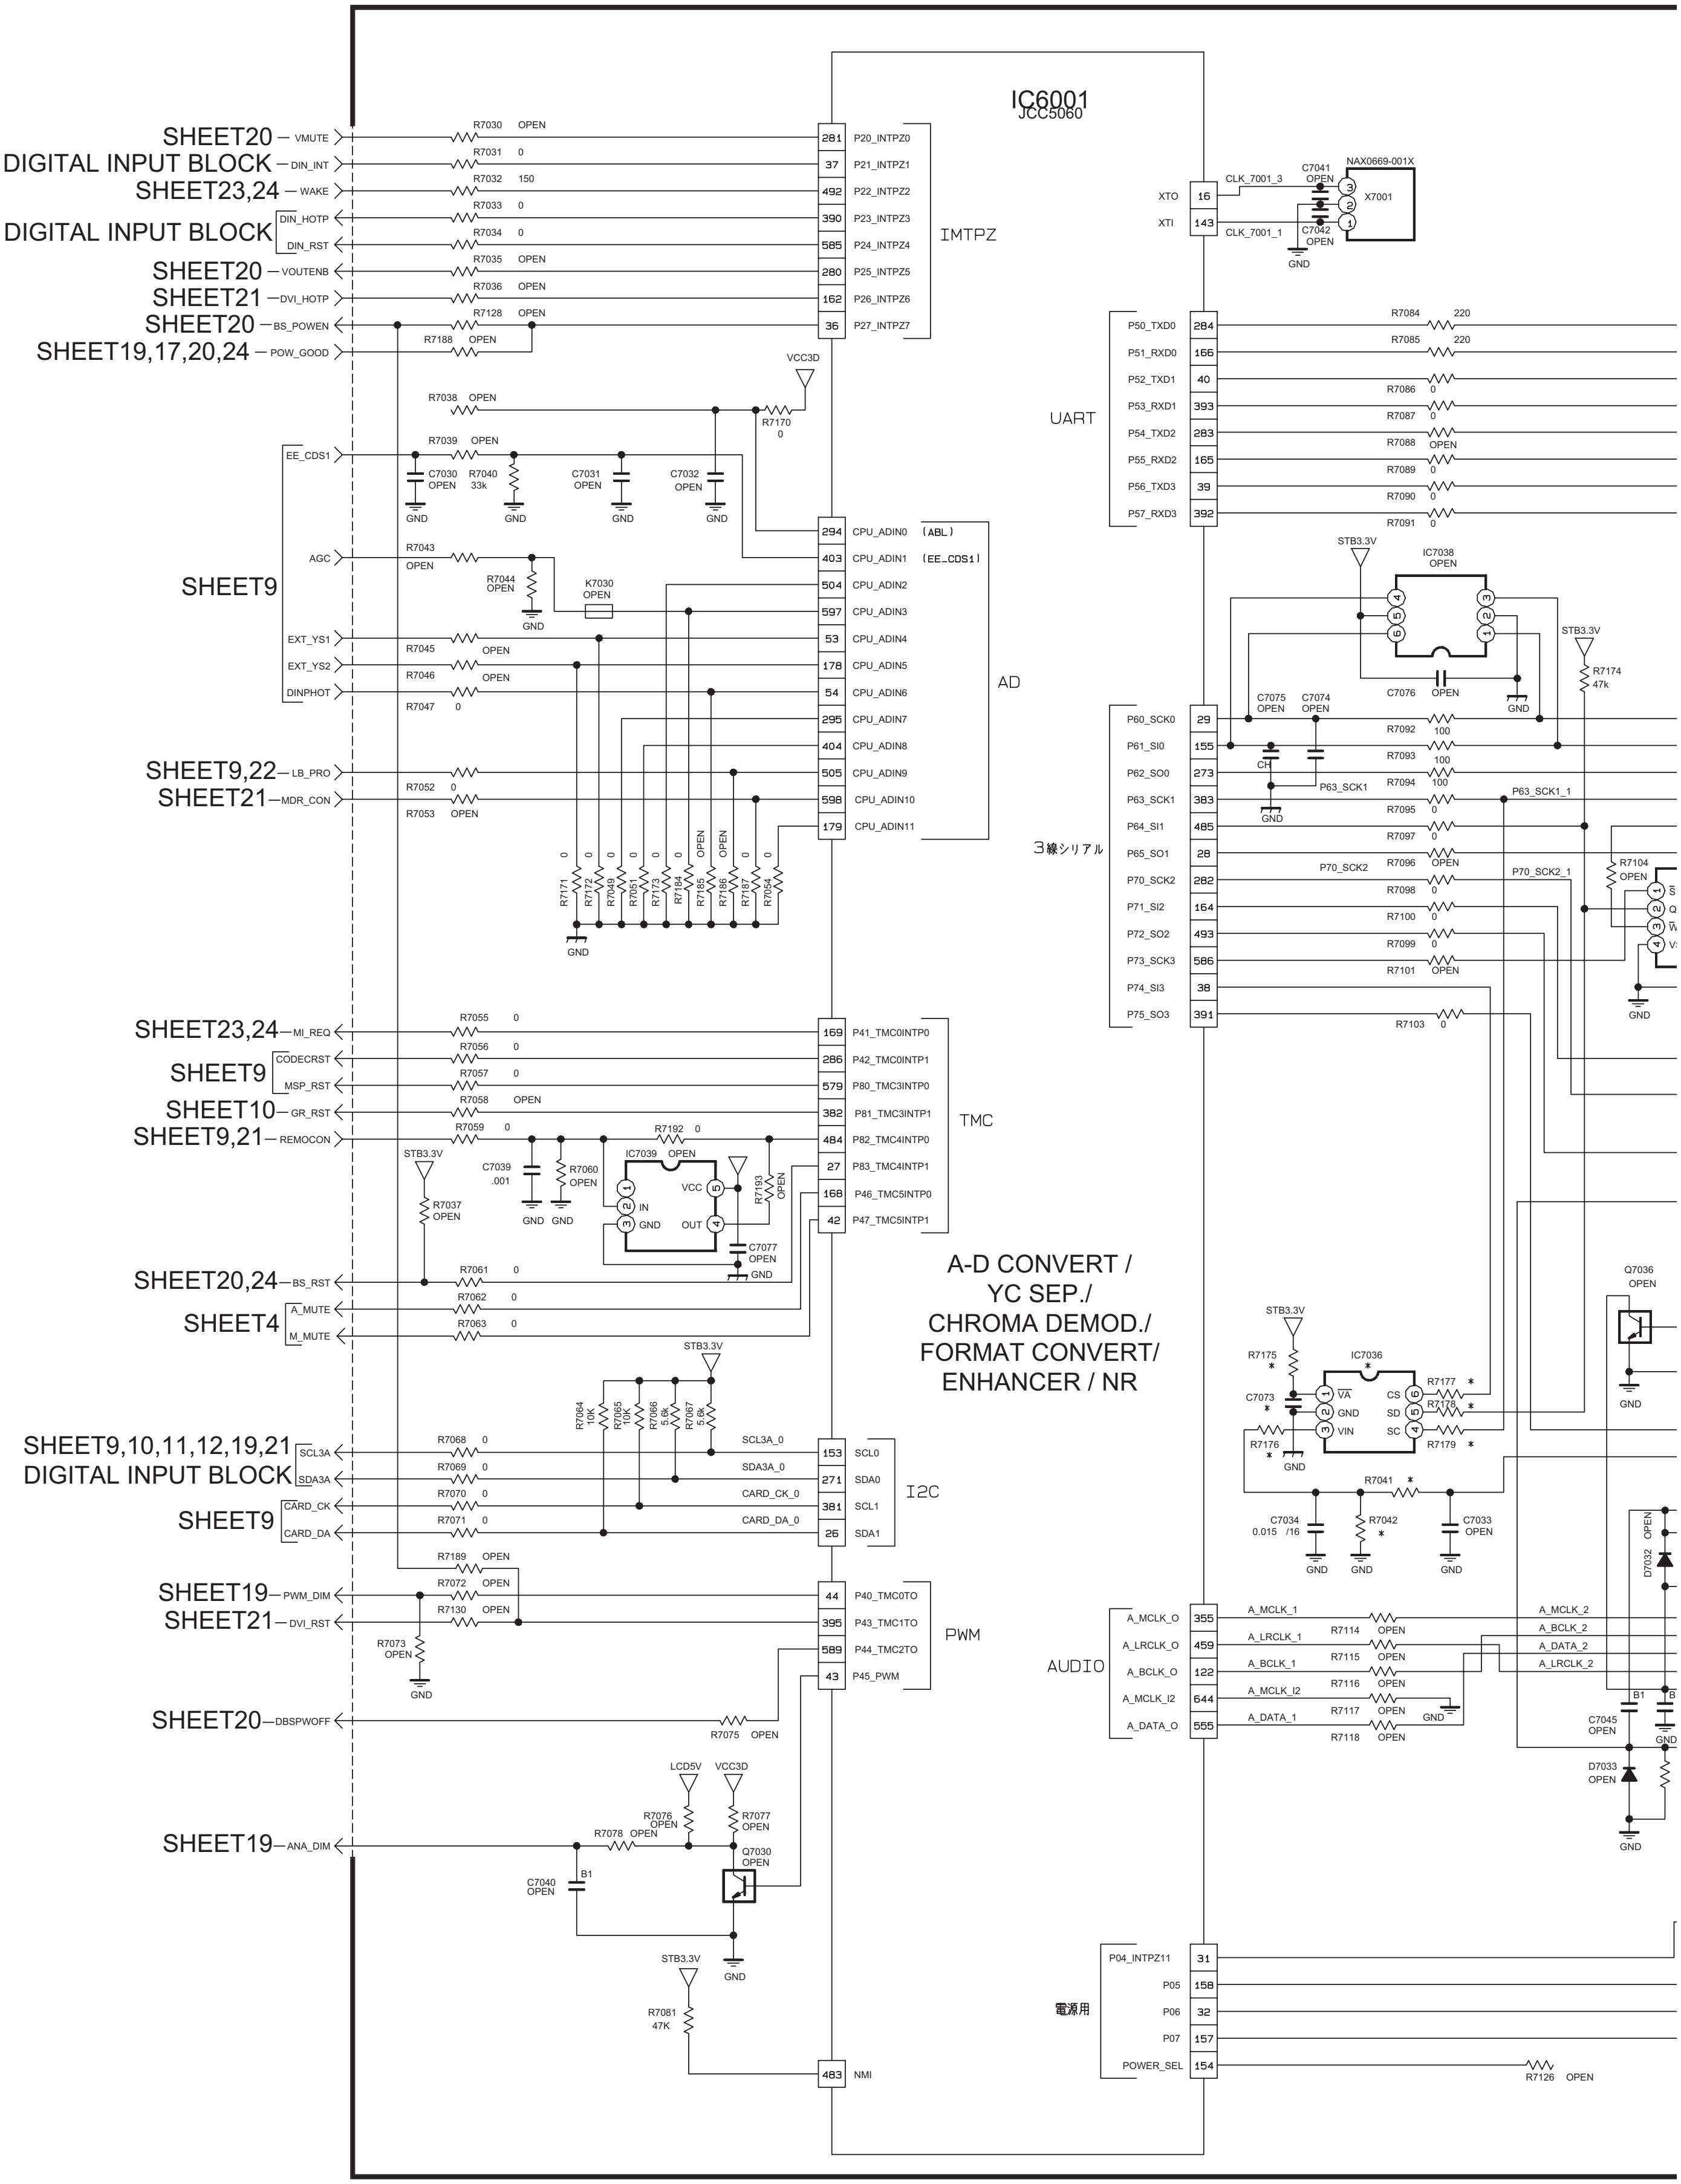
IC6001
JCC5060
SHEET20 — VMUTE
DIGITAL INPUT BLOCK — DIN_INT
SHEET23,24 — WAKE
DIGITAL INPUT BLOCK
DIN_HOTP
DIN_RST
SHEET20 — VOUTENB
SHEET21 — DVI_HOTP
SHEET20 — BS_POWEN
SHEET19,17,20,24 — POW_GOOD
R7030 OPEN
R7031 0
R7032 150
R7033 0
R7034 0
R7035 OPEN
R7036 OPEN
R7128 OPEN
R7188 OPEN
P20_INTPZ0
P21_INTPZ1
P22_INTPZ2
P23_INTPZ3
P24_INTPZ4
P25_INTPZ5
P26_INTPZ6
P27_INTPZ7
IMTPZ
XTO
XTI
CLK_7001_3
CLK_7001_1
C7041 OPEN
C7042 OPEN
NAX0669-001X
X7001
GND
VCC3D
R7038 OPEN
R7170 0
R7039 OPEN
EE_CDS1
C7030 OPEN
R7040 33k
C7031 OPEN
C7032 OPEN
SHEET9
AGC
R7043 OPEN
R7044 OPEN
K7030 OPEN
EXT_YS1
EXT_YS2
DINPHOT
R7045 OPEN
R7046 OPEN
R7047 0
CPU_ADIN0 (ABL)
CPU_ADIN1 (EE_CDS1)
CPU_ADIN2
CPU_ADIN3
CPU_ADIN4
CPU_ADIN5
CPU_ADIN6
CPU_ADIN7
CPU_ADIN8
CPU_ADIN9
CPU_ADIN10
CPU_ADIN11
AD
SHEET9,22 — LB_PRO
SHEET21 — MDR_CON
R7052 0
R7053 OPEN
R7171 R7172 R7049 R7051 R7173 R7184 R7185 R7186 R7187 R7054
UART
P50_TXD0
P51_RXD0
P52_TXD1
P53_RXD1
P54_TXD2
P55_RXD2
P56_TXD3
P57_RXD3
R7084 220
R7085 220
R7086 0
R7087 0
R7088 OPEN
R7089 0
R7090 0
R7091 0
STB3.3V
IC7038 OPEN
R7174 47k
C7075 OPEN
C7074 OPEN
C7076 OPEN
3線シリアル
P60_SCK0
P61_SI0
P62_SO0
P63_SCK1
P64_SI1
P65_SO1
P70_SCK2
P71_SI2
P72_SO2
P73_SCK3
P74_SI3
P75_SO3
R7092 100
R7093 100
R7094 100
R7095 0
R7097 0
R7096 OPEN
R7098 0
R7100 0
R7099 0
R7101 OPEN
R7103 0
R7104 OPEN
P63_SCK1
P63_SCK1_1
P70_SCK2
P70_SCK2_1
CH
SHEET23,24 — MI_REQ
SHEET9
CODECRST
MSP_RST
SHEET10 — GR_RST
SHEET9,21 — REMOCON
R7055 0
R7056 0
R7057 0
R7058 OPEN
R7059 0
R7192 0
R7037 OPEN
C7039 .001
R7060 OPEN
IC7039 OPEN
IN
GND
OUT
VCC
R7193 OPEN
C7077 OPEN
P41_TMC0INTP0
P42_TMC0INTP1
P80_TMC3INTP0
P81_TMC3INTP1
P82_TMC4INTP0
P83_TMC4INTP1
P46_TMC5INTP0
P47_TMC5INTP1
TMC
A-D CONVERT / YC SEP./ CHROMA DEMOD./ FORMAT CONVERT/ ENHANCER / NR
SHEET20,24 — BS_RST
SHEET4
A_MUTE
M_MUTE
R7061 0
R7062 0
R7063 0
Q7036 OPEN
R7175 *
IC7036 *
C7073 *
R7176 *
R7177 *
R7178 *
R7179 *
VA
GND
VIN
CS
SD
SC
R7041 *
C7034 0.015 /16
R7042 *
C7033 OPEN
SHEET9,10,11,12,19,21
DIGITAL INPUT BLOCK
SCL3A
SDA3A
SHEET9
CARD_CK
CARD_DA
R7068 0
R7069 0
R7070 0
R7071 0
R7064 10K
R7065 10K
R7066 5.6k
R7067 5.6k
SCL3A_0
SDA3A_0
CARD_CK_0
CARD_DA_0
SCL0
SDA0
SCL1
SDA1
I2C
SHEET19 — PWM_DIM
SHEET21 — DVI_RST
R7189 OPEN
R7072 OPEN
R7130 OPEN
R7073 OPEN
P40_TMC0TO
P43_TMC1TO
P44_TMC2TO
P45_PWM
PWM
SHEET20 — DBSPWOFF
R7075 OPEN
AUDIO
A_MCLK_O
A_LRCLK_O
A_BCLK_O
A_MCLK_I2
A_DATA_O
A_MCLK_1
A_LRCLK_1
A_BCLK_1
A_DATA_1
R7114 OPEN
R7115 OPEN
R7116 OPEN
R7117 OPEN
R7118 OPEN
A_MCLK_2
A_BCLK_2
A_DATA_2
A_LRCLK_2
D7032 OPEN
C7045 OPEN
D7033 OPEN
B1
LCD5V
VCC3D
R7076 OPEN
R7077 OPEN
R7078 OPEN
SHEET19 — ANA_DIM
Q7030 OPEN
C7040 OPEN
R7081 47K
NMI
電源用
P04_INTPZ11
P05
P06
P07
POWER_SEL
R7126 OPEN

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
C7073	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	NCB31CK -104X	OPEN	OPEN
IC7036	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	ADC081S021 CIS-X	OPEN	OPEN
R7041	22k	22k	22k	22k	22k	22k	22k	22k	22k	22k	22k	22k	OPEN	OPEN
R7042	33k	33k	33k	33k	33k	33k	33k	33k	33k	33k	33k	33k	OPEN	OPEN
R7175	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN
R7176	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN
R7177	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN
R7178	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN
R7179	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN

DIGITAL
PWB ASS'Y (10/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

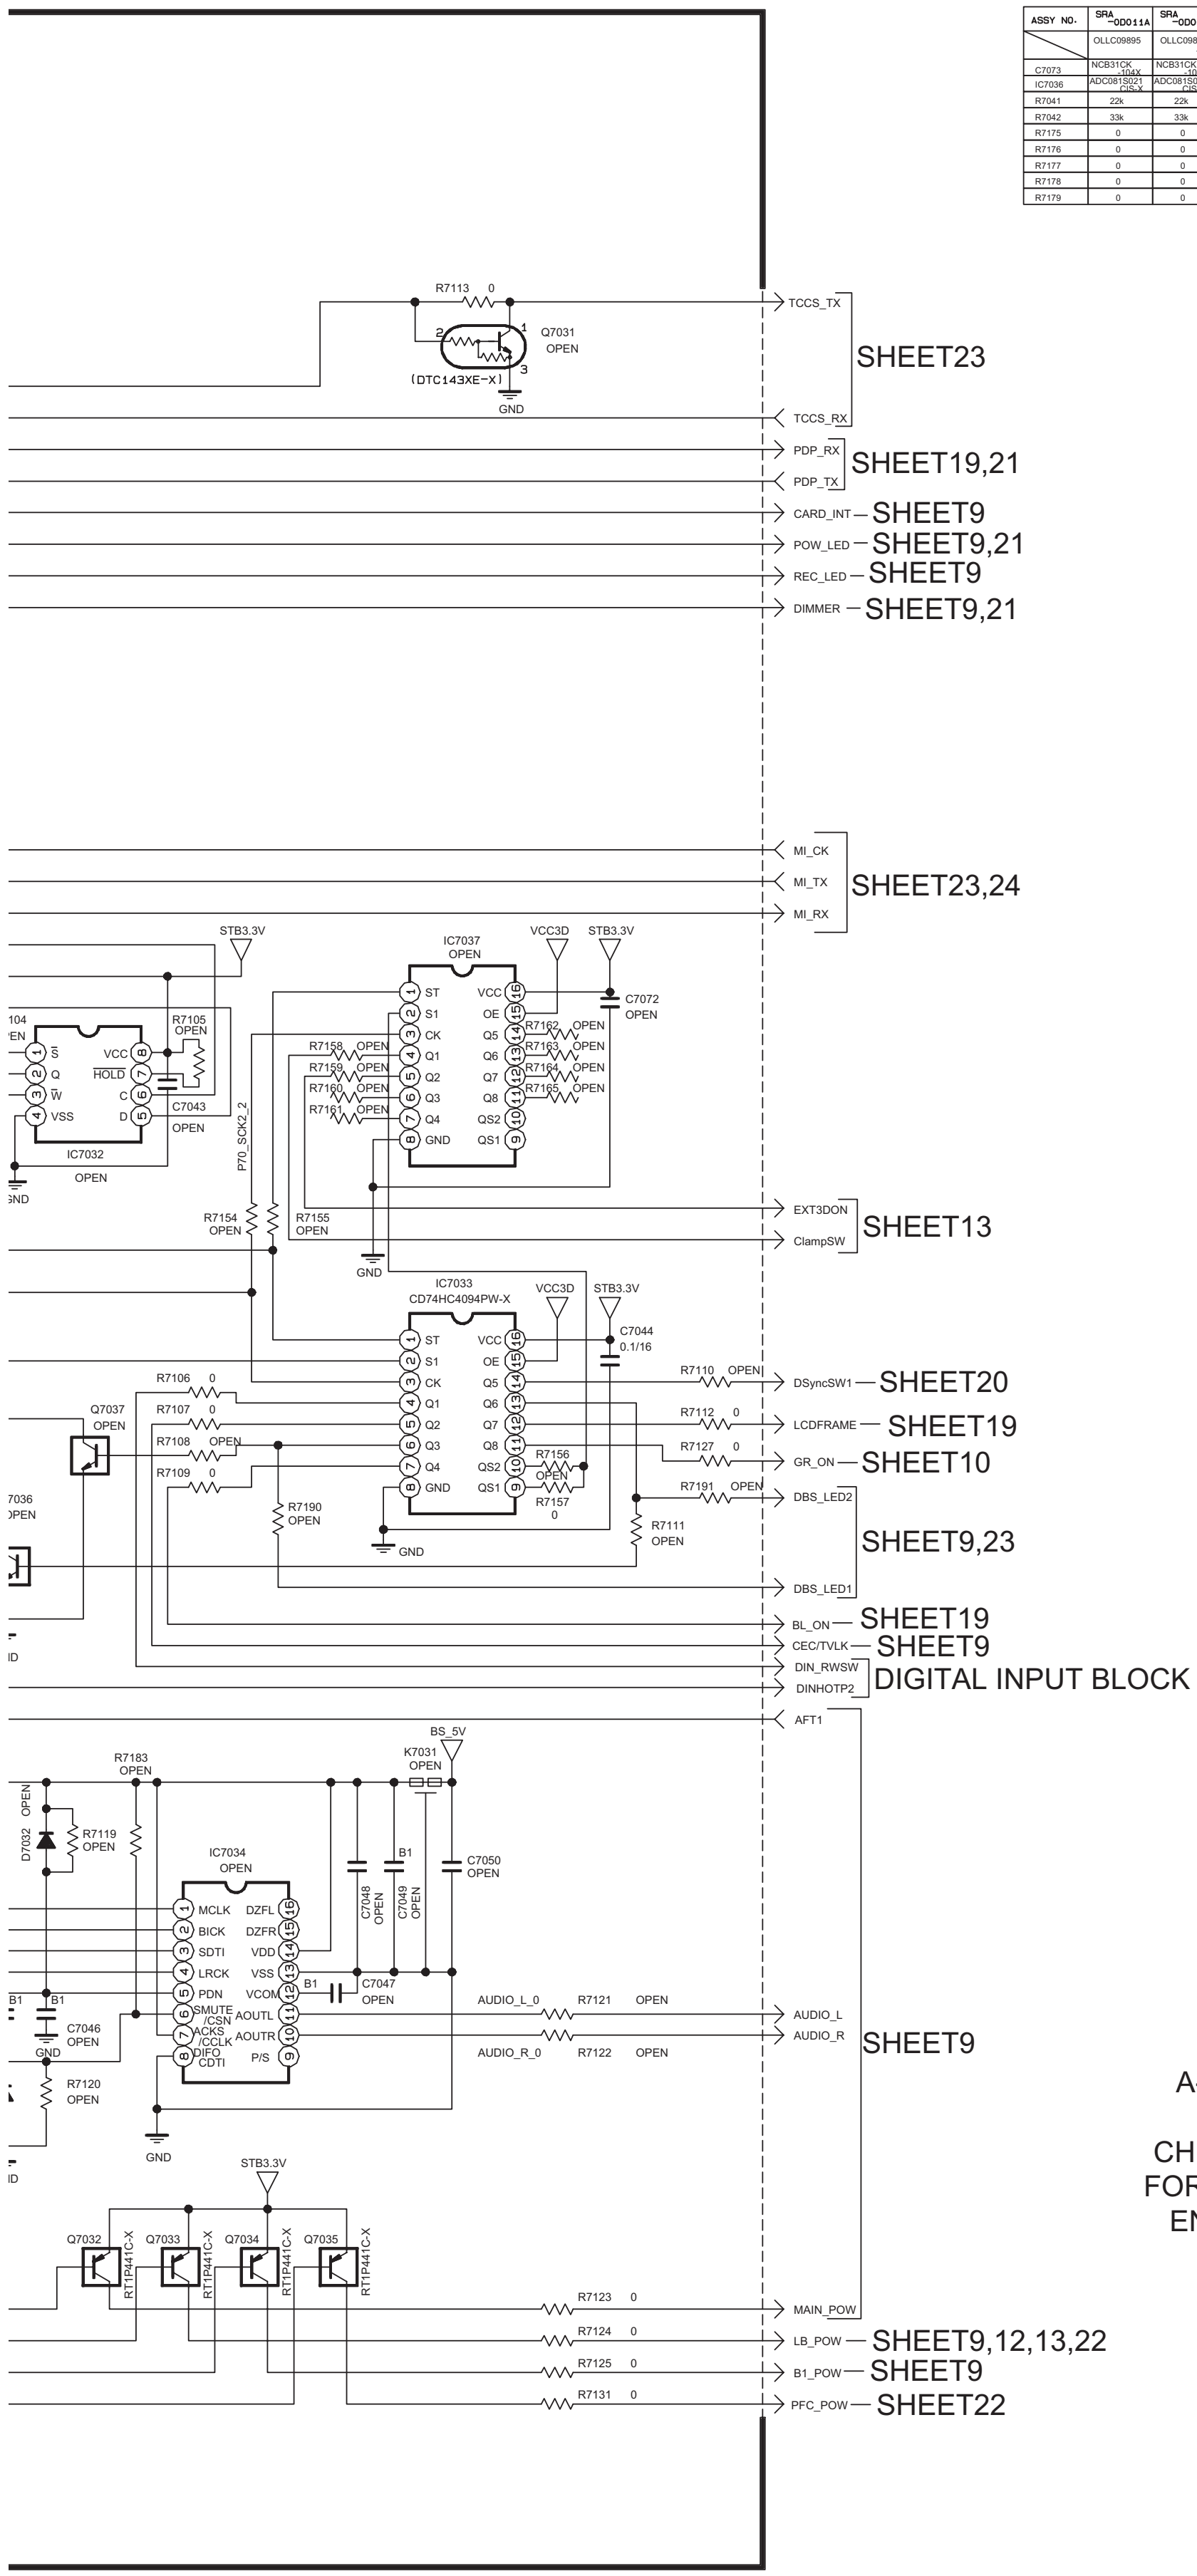
R7113 0
Q7031
OPEN
(DTC143XE-X)
GND
TCCS_TX
TCCS_RX
SHEET23
PDP_RX
PDP_TX
SHEET19,21
CARD_INT
SHEET9
POW_LED
SHEET9,21
REC_LED
SHEET9
DIMMER
SHEET9,21
MI_CK
MI_TX
MI_RX
SHEET23,24
STB3.3V
IC7037
OPEN
VCC3D
STB3.3V
ST
S1
CK
Q1
Q2
Q3
Q4
GND
VCC
OE
Q5
Q6
Q7
Q8
QS2
QS1
C7072
OPEN
R7162 OPEN
R7163 OPEN
R7164 OPEN
R7165 OPEN
R7158 OPEN
R7159 OPEN
R7160 OPEN
R7161 OPEN
R7105
OPEN
S̄
Q
HOLD
W̄
VCC
C
VSS
D
C7043
OPEN
IC7032
OPEN
GND
P70_SCK2_2
R7154
OPEN
R7155
OPEN
GND
EXT3DON
ClampSW
SHEET13
IC7033
CD74HC4094PW-X
VCC3D
STB3.3V
C7044
0.1/16
R7106 0
R7107 0
R7108 OPEN
R7109 0
Q7037
OPEN
R7190
OPEN
R7156
OPEN
R7157
0
GND
R7110 OPEN
DSyncSW1
SHEET20
R7112 0
LCDFRAME
SHEET19
R7127 0
GR_ON
SHEET10
R7191 OPEN
DBS_LED2
R7111
OPEN
DBS_LED1
SHEET9,23
BL_ON
SHEET19
CEC/TVLK
SHEET9
DIN_RWSW
DINHOTP2
DIGITAL INPUT BLOCK
AFT1
R7183
OPEN
BS_5V
K7031
OPEN
D7032
OPEN
R7119
OPEN
IC7034
OPEN
B1
C7050
OPEN
C7048
OPEN
C7049
OPEN
MCLK
BICK
SDTI
LRCK
PDN
SMUTE/CSN
ACKS/CCLK
DIFO/CDTI
DZFL
DZFR
VDD
VSS
VCOM
AOUTL
AOUTR
P/S
B1
C7047
OPEN
B1
B1
C7046
OPEN
GND
R7120
OPEN
GND
AUDIO_L_0
R7121 OPEN
AUDIO_R_0
R7122 OPEN
AUDIO_L
AUDIO_R
SHEET9
STB3.3V
Q7032
Q7033
Q7034
Q7035
RT1P441C-X
RT1P441C-X
RT1P441C-X
RT1P441C-X
R7123 0
MAIN_POW
R7124 0
LB_POW
SHEET9,12,13,22
R7125 0
B1_POW
SHEET9
R7131 0
PFC_POW
SHEET22

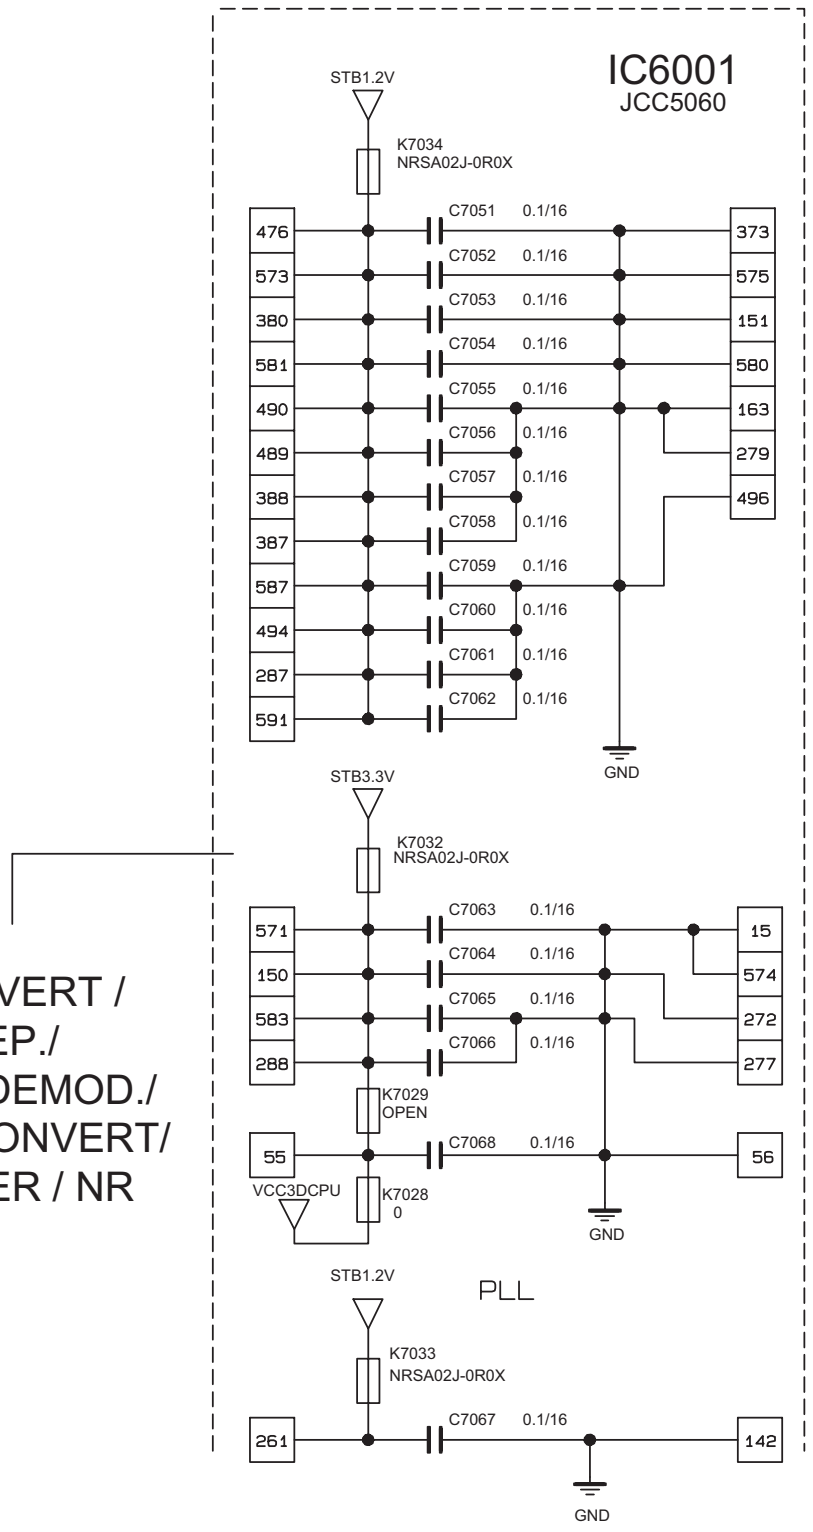
IC6001
JCC5060
STB1.2V
K7034
NRSA02J-0R0X
476
573
380
581
490
489
388
387
587
494
287
591
C7051 0.1/16
C7052 0.1/16
C7053 0.1/16
C7054 0.1/16
C7055 0.1/16
C7056 0.1/16
C7057 0.1/16
C7058 0.1/16
C7059 0.1/16
C7060 0.1/16
C7061 0.1/16
C7062 0.1/16
373
575
151
580
163
279
496
GND
STB3.3V
K7032
NRSA02J-0R0X
571
150
583
288
C7063 0.1/16
C7064 0.1/16
C7065 0.1/16
C7066 0.1/16
15
574
272
277
K7029
OPEN
55
C7068 0.1/16
56
VCC3DCPU
K7028
0
GND
STB1.2V
PLL
K7033
NRSA02J-0R0X
261
C7067 0.1/16
142
GND

A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR

c10446009_0214_9/17_0.0

DIGITAL PWB CIRCUIT DIAGRAM (11/16) [LVDS BLOCK] SHEET 19

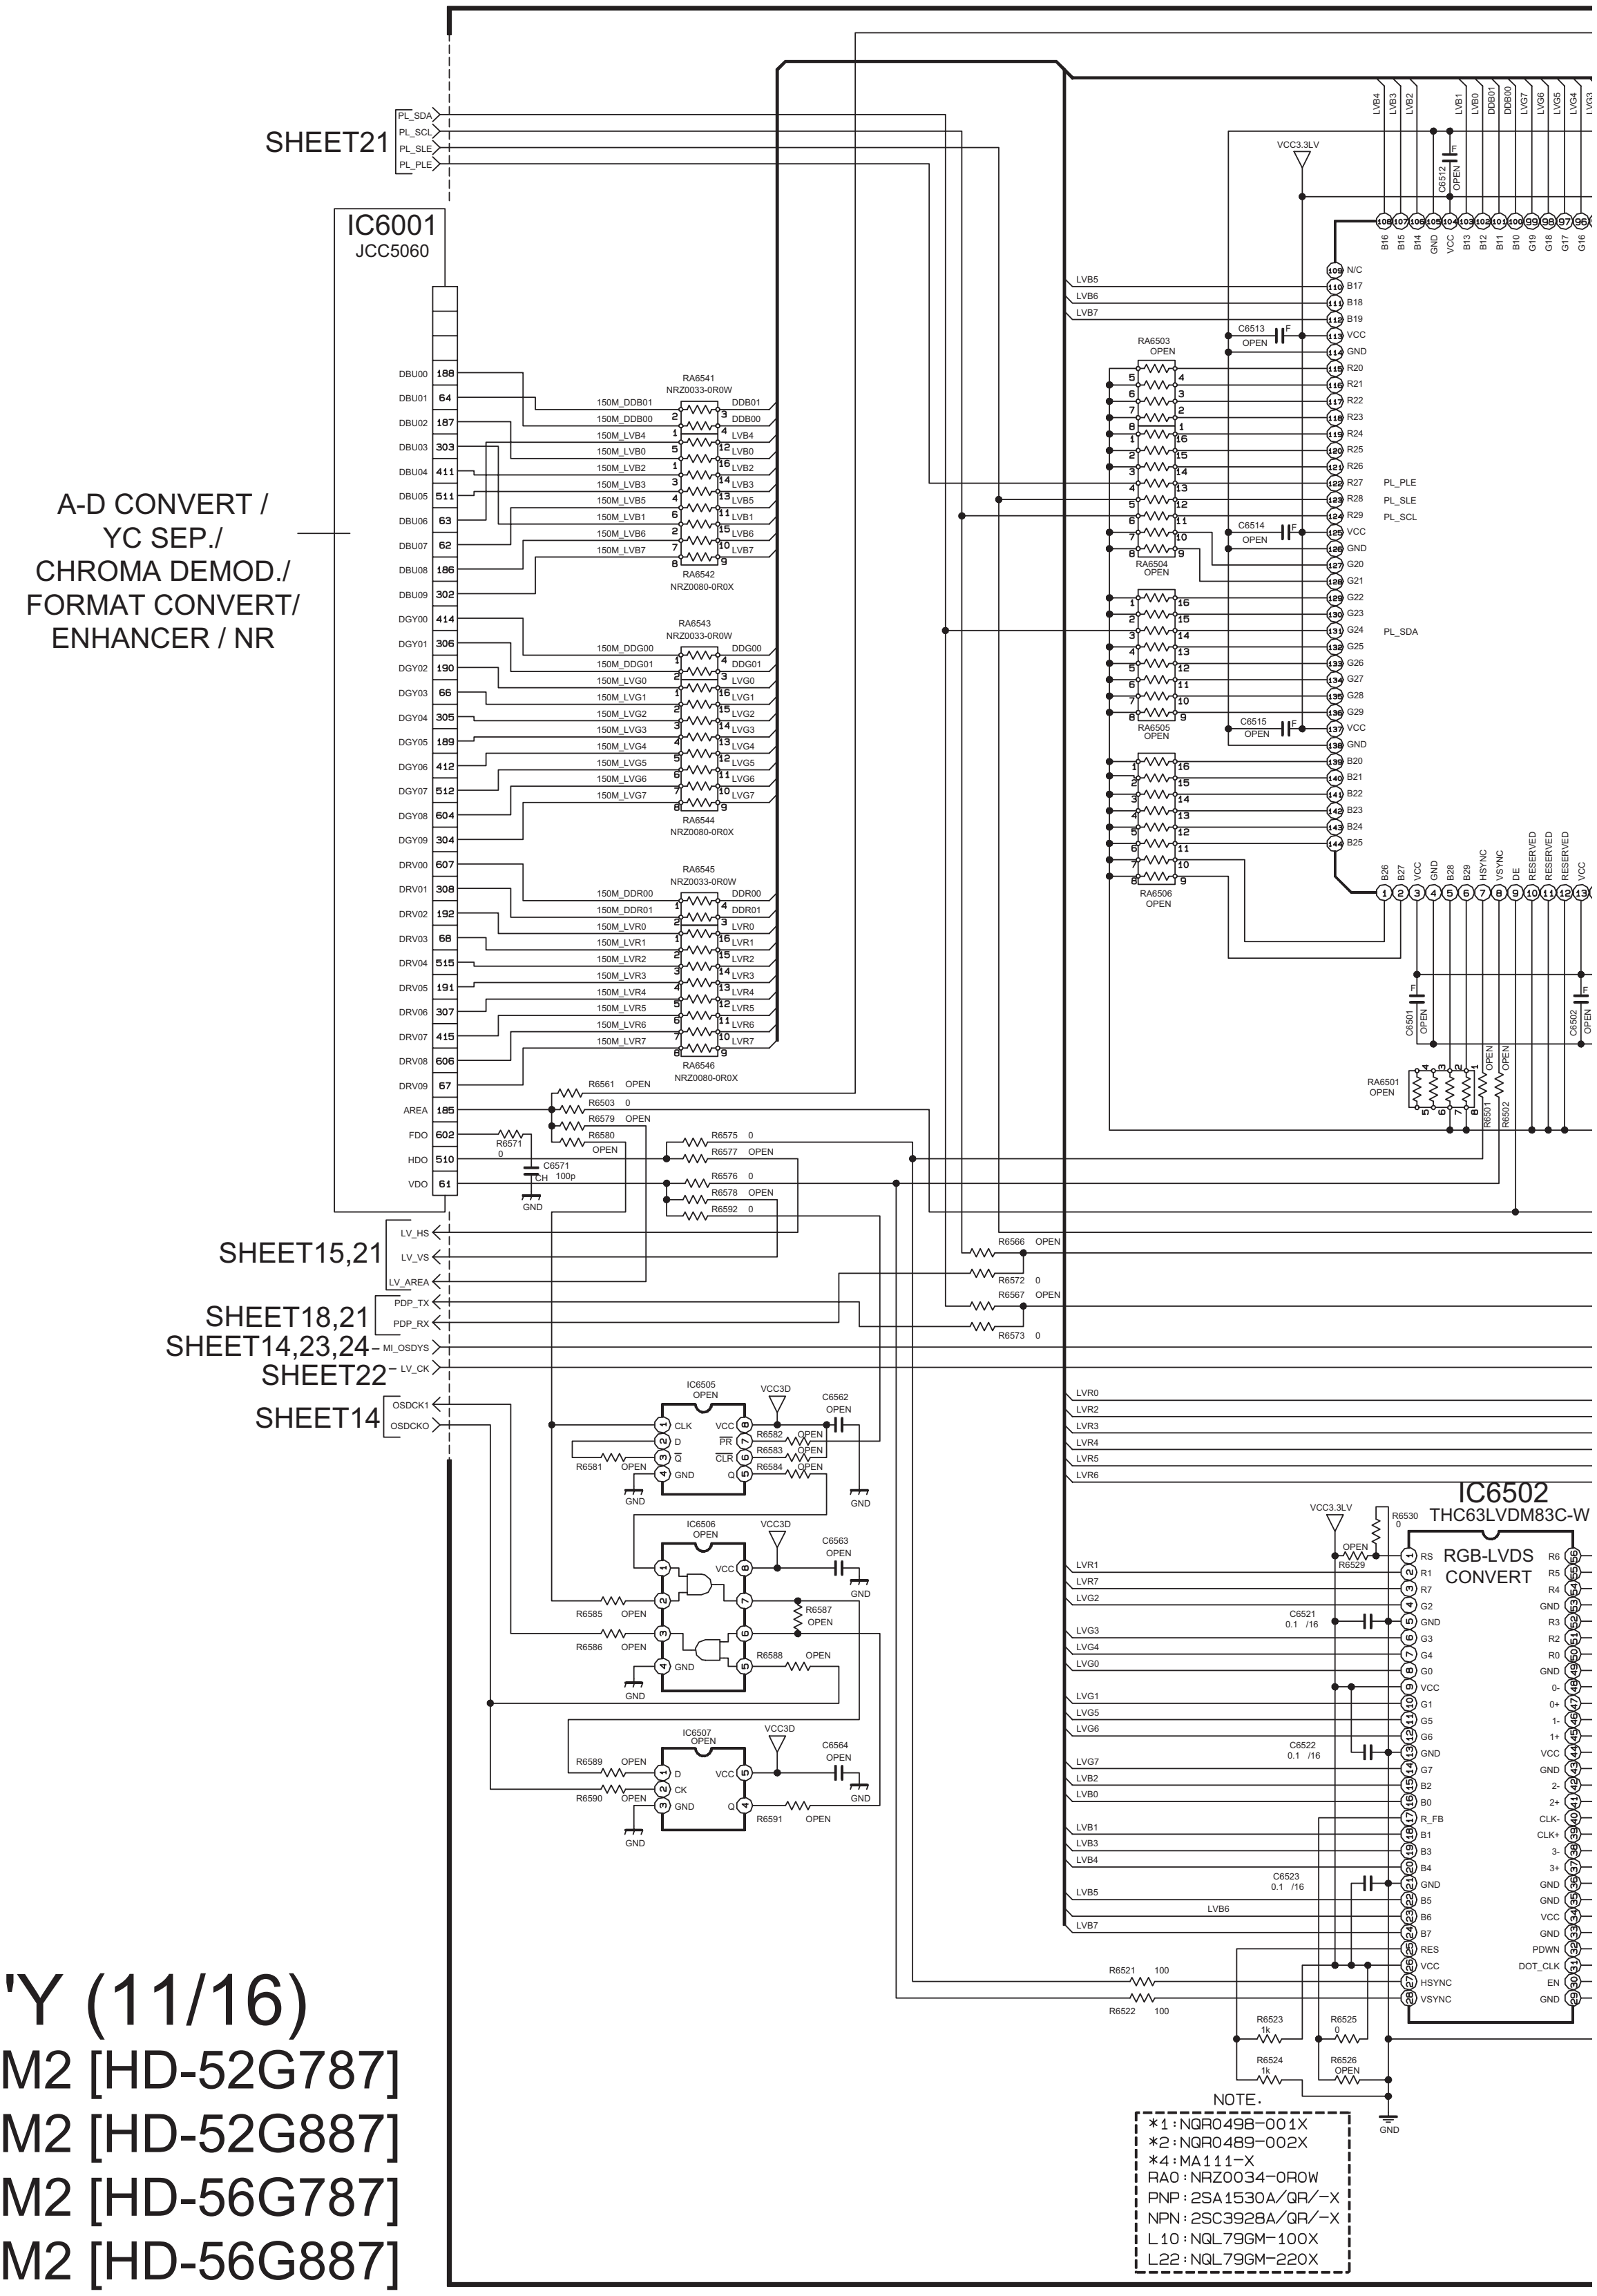

SHEET21
PL_SDA
PL_SCL
PL_SLE
PL_PLE
IC6001
JCC5060
A-D CONVERT /
YC SEP./
CHROMA DEMOD./
FORMAT CONVERT/
ENHANCER / NR
RA6541
NRZ0033-0R0W
RA6542
NRZ0080-0R0X
RA6543
NRZ0033-0R0W
RA6544
NRZ0080-0R0X
RA6545
NRZ0033-0R0W
RA6546
NRZ0080-0R0X
SHEET15,21
LV_HS
LV_VS
LV_AREA
SHEET18,21
PDP_TX
PDP_RX
SHEET14,23,24
MI_OSDYS
SHEET22
LV_CK
SHEET14
OSDCK1
OSDCKO
IC6505
IC6506
IC6507
VCC3D
VCC3.3LV
RA6503
RA6504
RA6505
RA6506
RA6501
IC6502
THC63LVDM83C-W
RGB-LVDS
CONVERT
R6521 100
R6522 100
R6523 1k
R6524 1k
R6525 0
R6526 OPEN
GND

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

DIGITAL
PWB ASS'Y (11/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

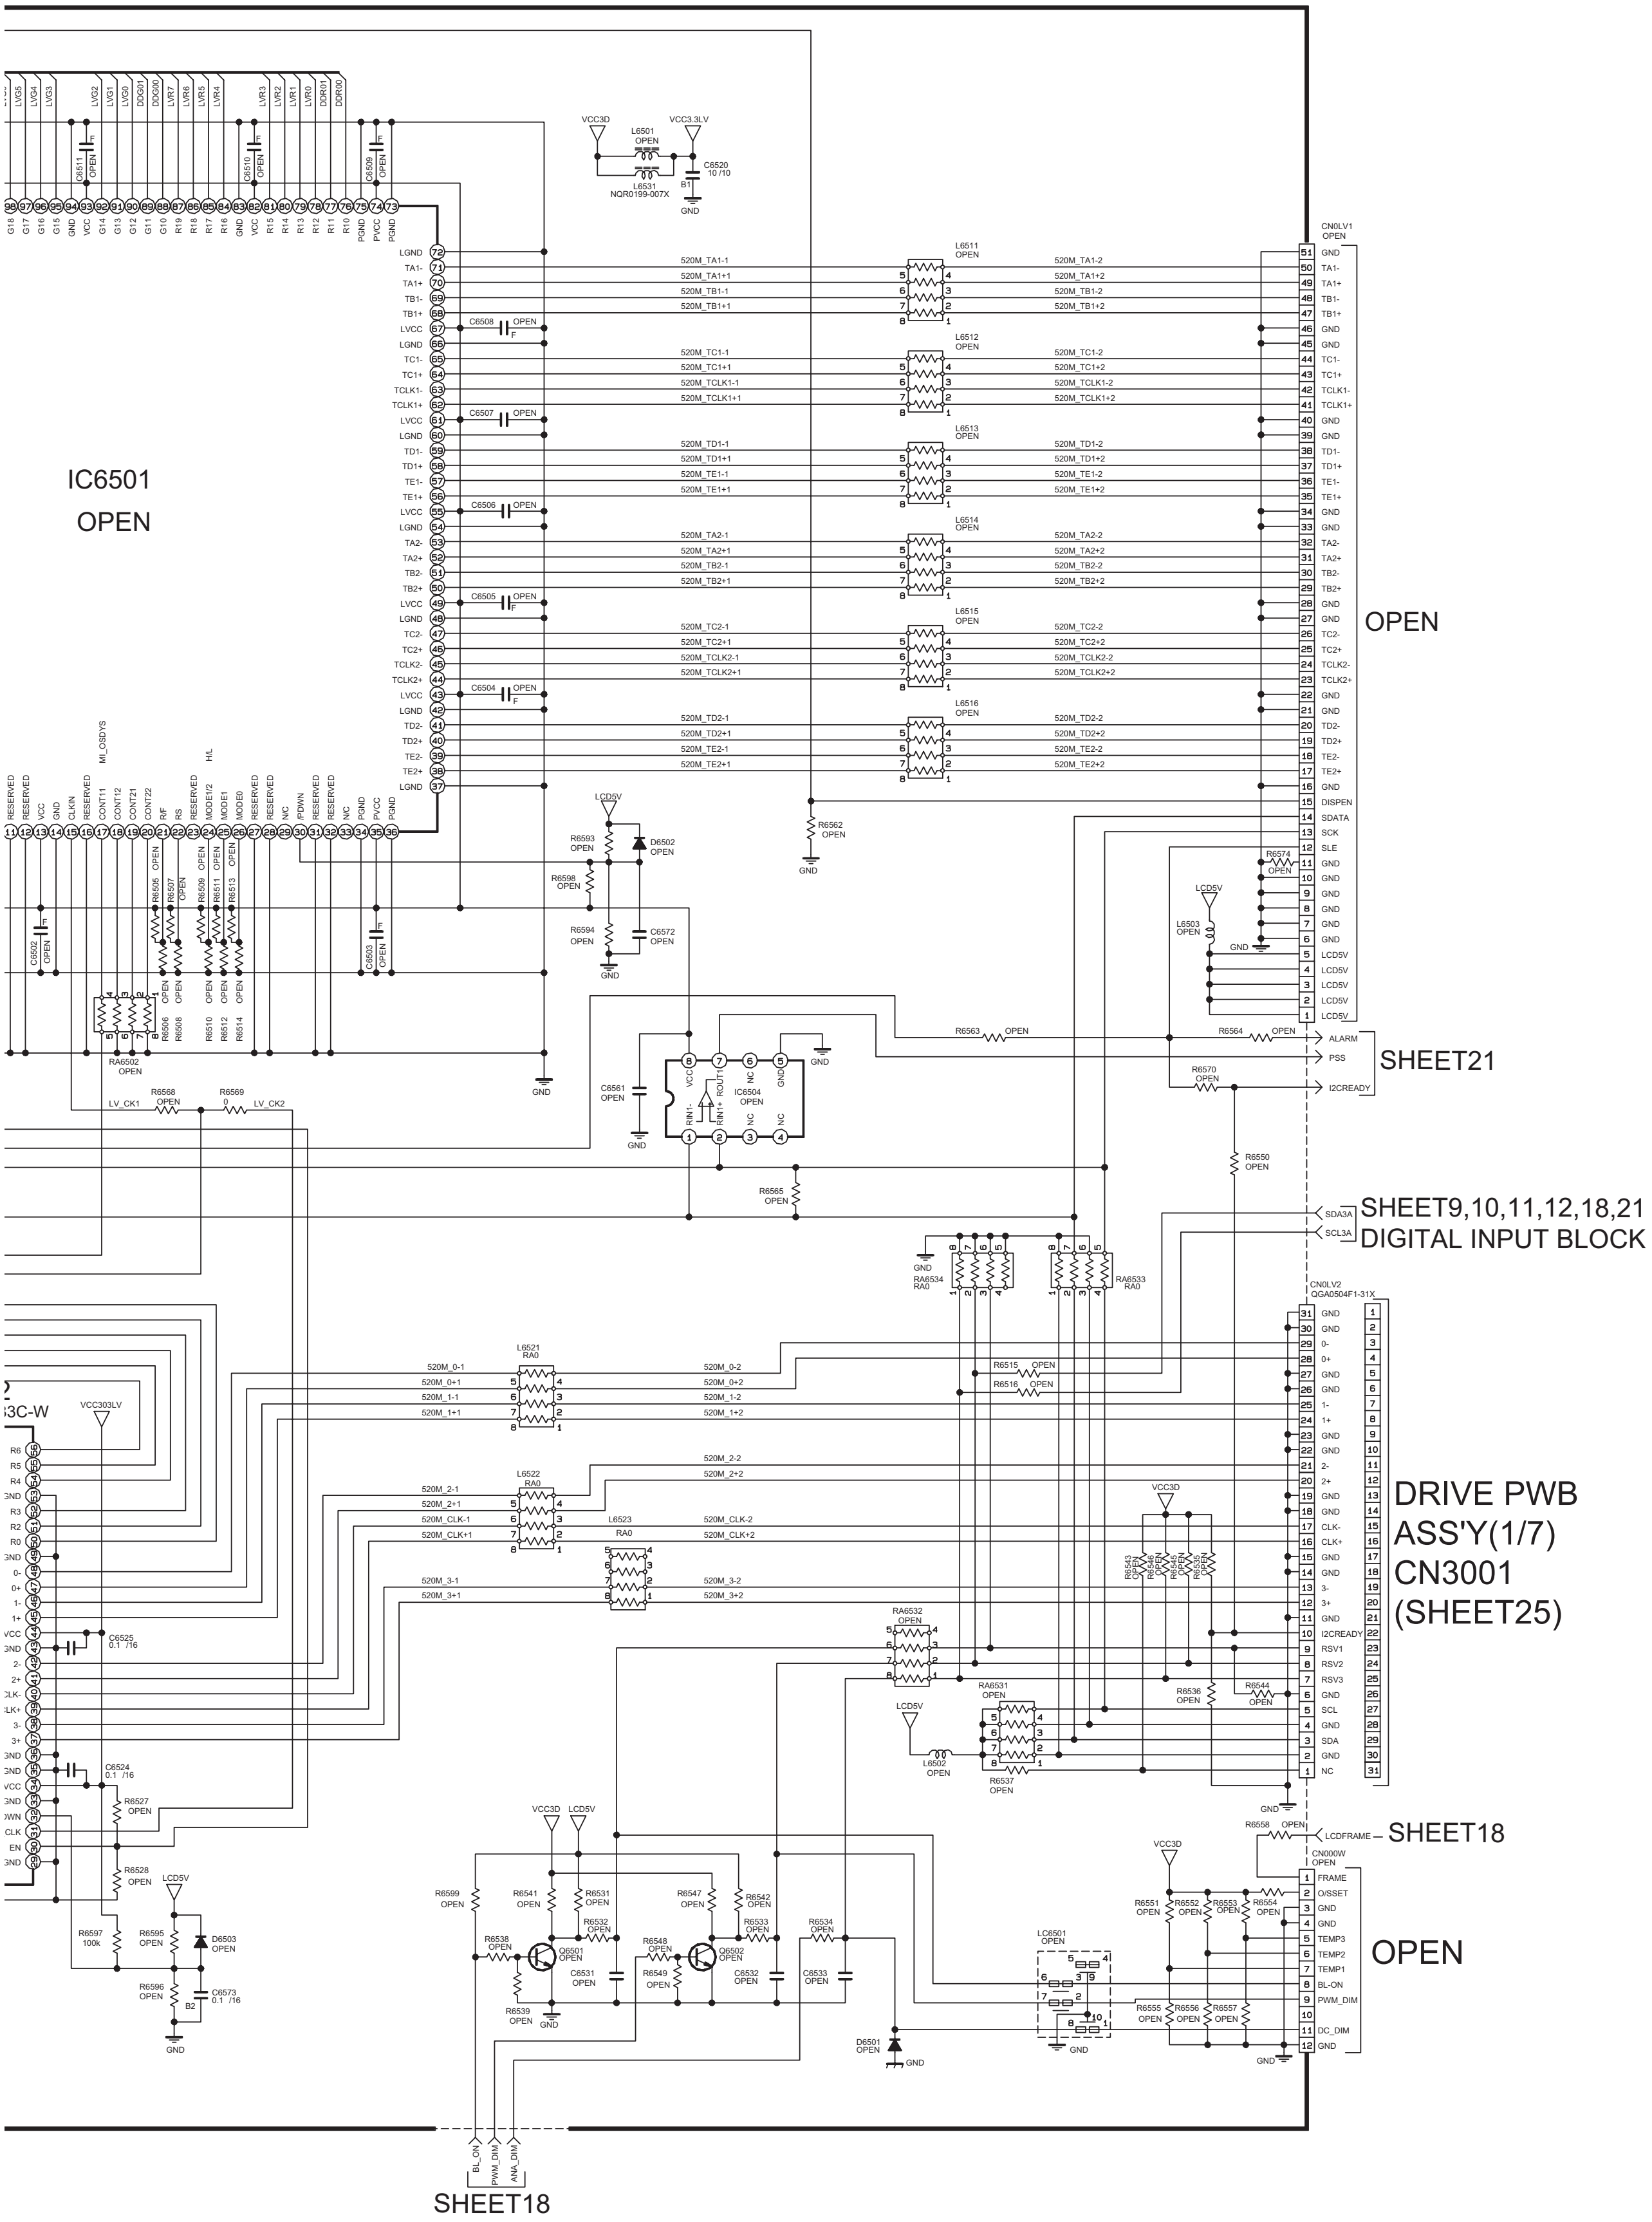
IC6501
OPEN
OPEN
SHEET21
SHEET9,10,11,12,18,21
DIGITAL INPUT BLOCK
DRIVE PWB
ASS'Y(1/7)
CN3001
(SHEET25)
OPEN
SHEET18
SHEET18
CN0LV1
OPEN
CN0LV2
QGA0504F1-31X
CN000W
OPEN
IC6504
OPEN
L6501
OPEN
L6531
NQR0199-007X
C6520
10 /10
VCC3D
VCC3.3LV
LCD5V
VCC303LV
ALARM
PSS
I2CREADY
SDA3A
SCL3A
LCDFRAME
BL_ON
PWM_DIM
ANA_DIM
FRAME
O/SSET
TEMP3
TEMP2
TEMP1
BL-ON
PWM_DIM
DC_DIM
GND
R6563 OPEN
R6564 OPEN
R6570 OPEN
R6550 OPEN
R6565 OPEN
R6562 OPEN
R6568 OPEN
R6569 0
LV_CK1
LV_CK2
RA6502 OPEN
RA6534 RA0
RA6533 RA0
RA6532 OPEN
RA6531 OPEN
L6502 OPEN
R6537 OPEN
R6536 OPEN
R6544 OPEN
R6515 OPEN
R6516 OPEN
L6521 RA0
L6522 RA0
L6523 RA0
L6511 OPEN
L6512 OPEN
L6513 OPEN
L6514 OPEN
L6515 OPEN
L6516 OPEN
L6503 OPEN
R6574 OPEN
D6502 OPEN
D6503 OPEN
D6501 OPEN
Q6501 OPEN
Q6502 OPEN
C6525 0.1 /16
C6524 0.1 /16
C6573 0.1 /16
R6597 100k
LC6501 OPEN

DIGITAL PWB CIRCUIT DIAGRAM (12/16) [DTV INTERFACE BLOCK] SHEET 20

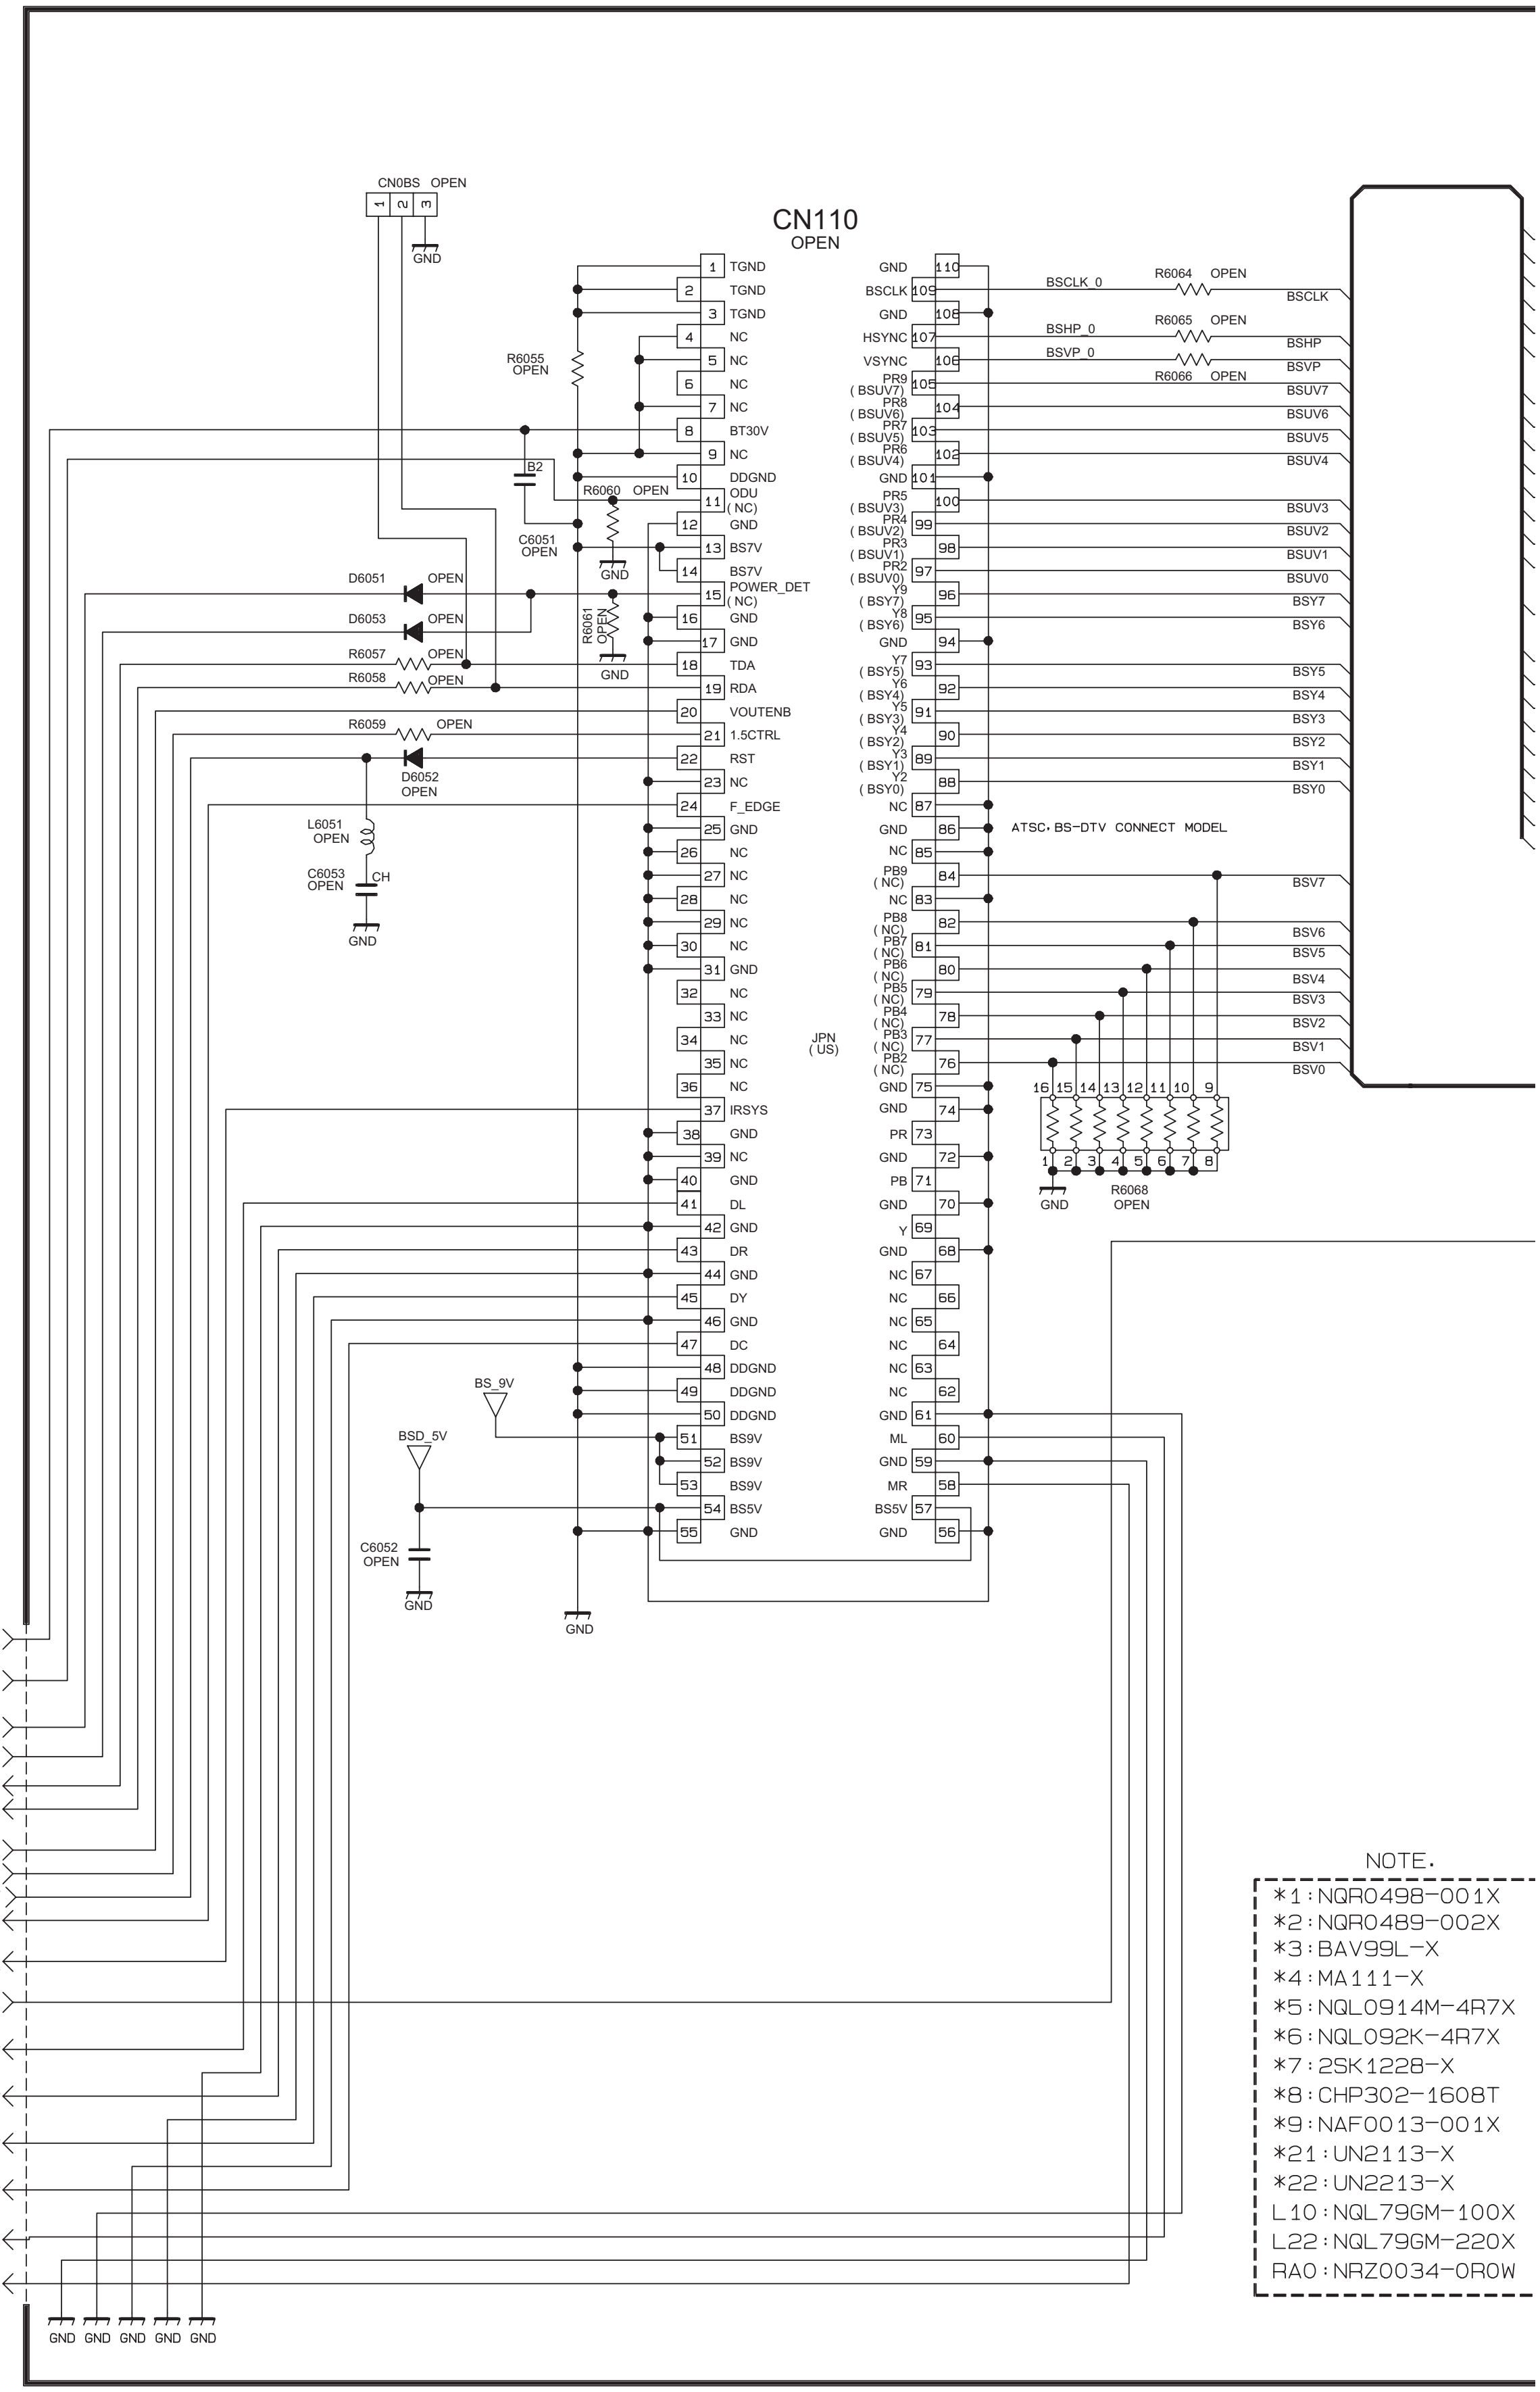

CN0BS OPEN
GND
CN110
OPEN
1 TGND
2 TGND
3 TGND
4 NC
5 NC
6 NC
7 NC
8 BT30V
9 NC
10 DDGND
11 ODU (NC)
12 GND
13 BS7V
14 BS7V
15 POWER_DET (NC)
16 GND
17 GND
18 TDA
19 RDA
20 VOUTENB
21 1.5CTRL
22 RST
23 NC
24 F_EDGE
25 GND
26 NC
27 NC
28 NC
29 NC
30 NC
31 GND
32 NC
33 NC
34 NC
35 NC
36 NC
37 IRSYS
38 GND
39 NC
40 GND
41 DL
42 GND
43 DR
44 GND
45 DY
46 GND
47 DC
48 DDGND
49 DDGND
50 DDGND
51 BS9V
52 BS9V
53 BS9V
54 BS5V
55 GND
110 GND
109 BSCLK
108 GND
107 HSYNC
106 VSYNC
105 PR9 (BSUV7)
104 PR8 (BSUV6)
103 PR7 (BSUV5)
102 PR6 (BSUV4)
101 GND
100 PR5 (BSUV3)
99 PR4 (BSUV2)
98 PR3 (BSUV1)
97 PR2 (BSUV0)
96 Y9 (BSY7)
95 Y8 (BSY6)
94 GND
93 Y7 (BSY5)
92 Y6 (BSY4)
91 Y5 (BSY3)
90 Y4 (BSY2)
89 Y3 (BSY1)
88 Y2 (BSY0)
87 NC
86 GND
85 NC
84 PB9 (NC)
83 NC
82 PB8 (NC)
81 PB7 (NC)
80 PB6 (NC)
79 PB5 (NC)
78 PB4 (NC)
77 PB3 (NC)
76 PB2 (NC)
75 GND
74 GND
73 PR
72 GND
71 PB
70 GND
69 Y
68 GND
67 NC
66 NC
65 NC
64 NC
63 NC
62 NC
61 GND
60 ML
59 GND
58 MR
57 BS5V
56 GND
JPN (US)
R6055 OPEN
B2
C6051 OPEN
R6060 OPEN
R6061 OPEN
D6051 OPEN
D6053 OPEN
R6057 OPEN
R6058 OPEN
R6059 OPEN
D6052 OPEN
L6051 OPEN
C6053 OPEN
CH
BS_9V
BSD_5V
C6052 OPEN
BSCLK_0
BSHP_0
BSVP_0
R6064 OPEN
R6065 OPEN
R6066 OPEN
BSCLK
BSHP
BSVP
BSUV7
BSUV6
BSUV5
BSUV4
BSUV3
BSUV2
BSUV1
BSUV0
BSY7
BSY6
BSY5
BSY4
BSY3
BSY2
BSY1
BSY0
ATSC・BS-DTV CONNECT MODEL
BSV7
BSV6
BSV5
BSV4
BSV3
BSV2
BSV1
BSV0
16 15 14 13 12 11 10 9
1 2 3 4 5 6 7 8
R6068 OPEN
SHEET22
BS_BT30
BS_ODU
SHEET9,17,18,24
POW_GOOD
SHEET18
DBSPWOFF
SHEET23,24
BS_TXD
BS_RXD
SHEET18
VOUTENB
BS_POWEN
SHEET18,24
BS_RST
SHEET18
VMUTE
SHEET9
BS_IR
SHEET18
DSyncSW1
SHEET13
BS_LOUT
BS_ROUT
BS_YOUT
BS_COUT
ML
MR

NOTE.
*1:NQR0498-001X
*2:NQR0489-002X
*3:BAV99L-X
*4:MA111-X
*5:NQL0914M-4R7X
*6:NQL092K-4R7X
*7:2SK1228-X
*8:CHP302-1608T
*9:NAF0013-001X
*21:UN2113-X
*22:UN2213-X
L10:NQL79GM-100X
L22:NQL79GM-220X
RA0:NRZ0034-0R0W

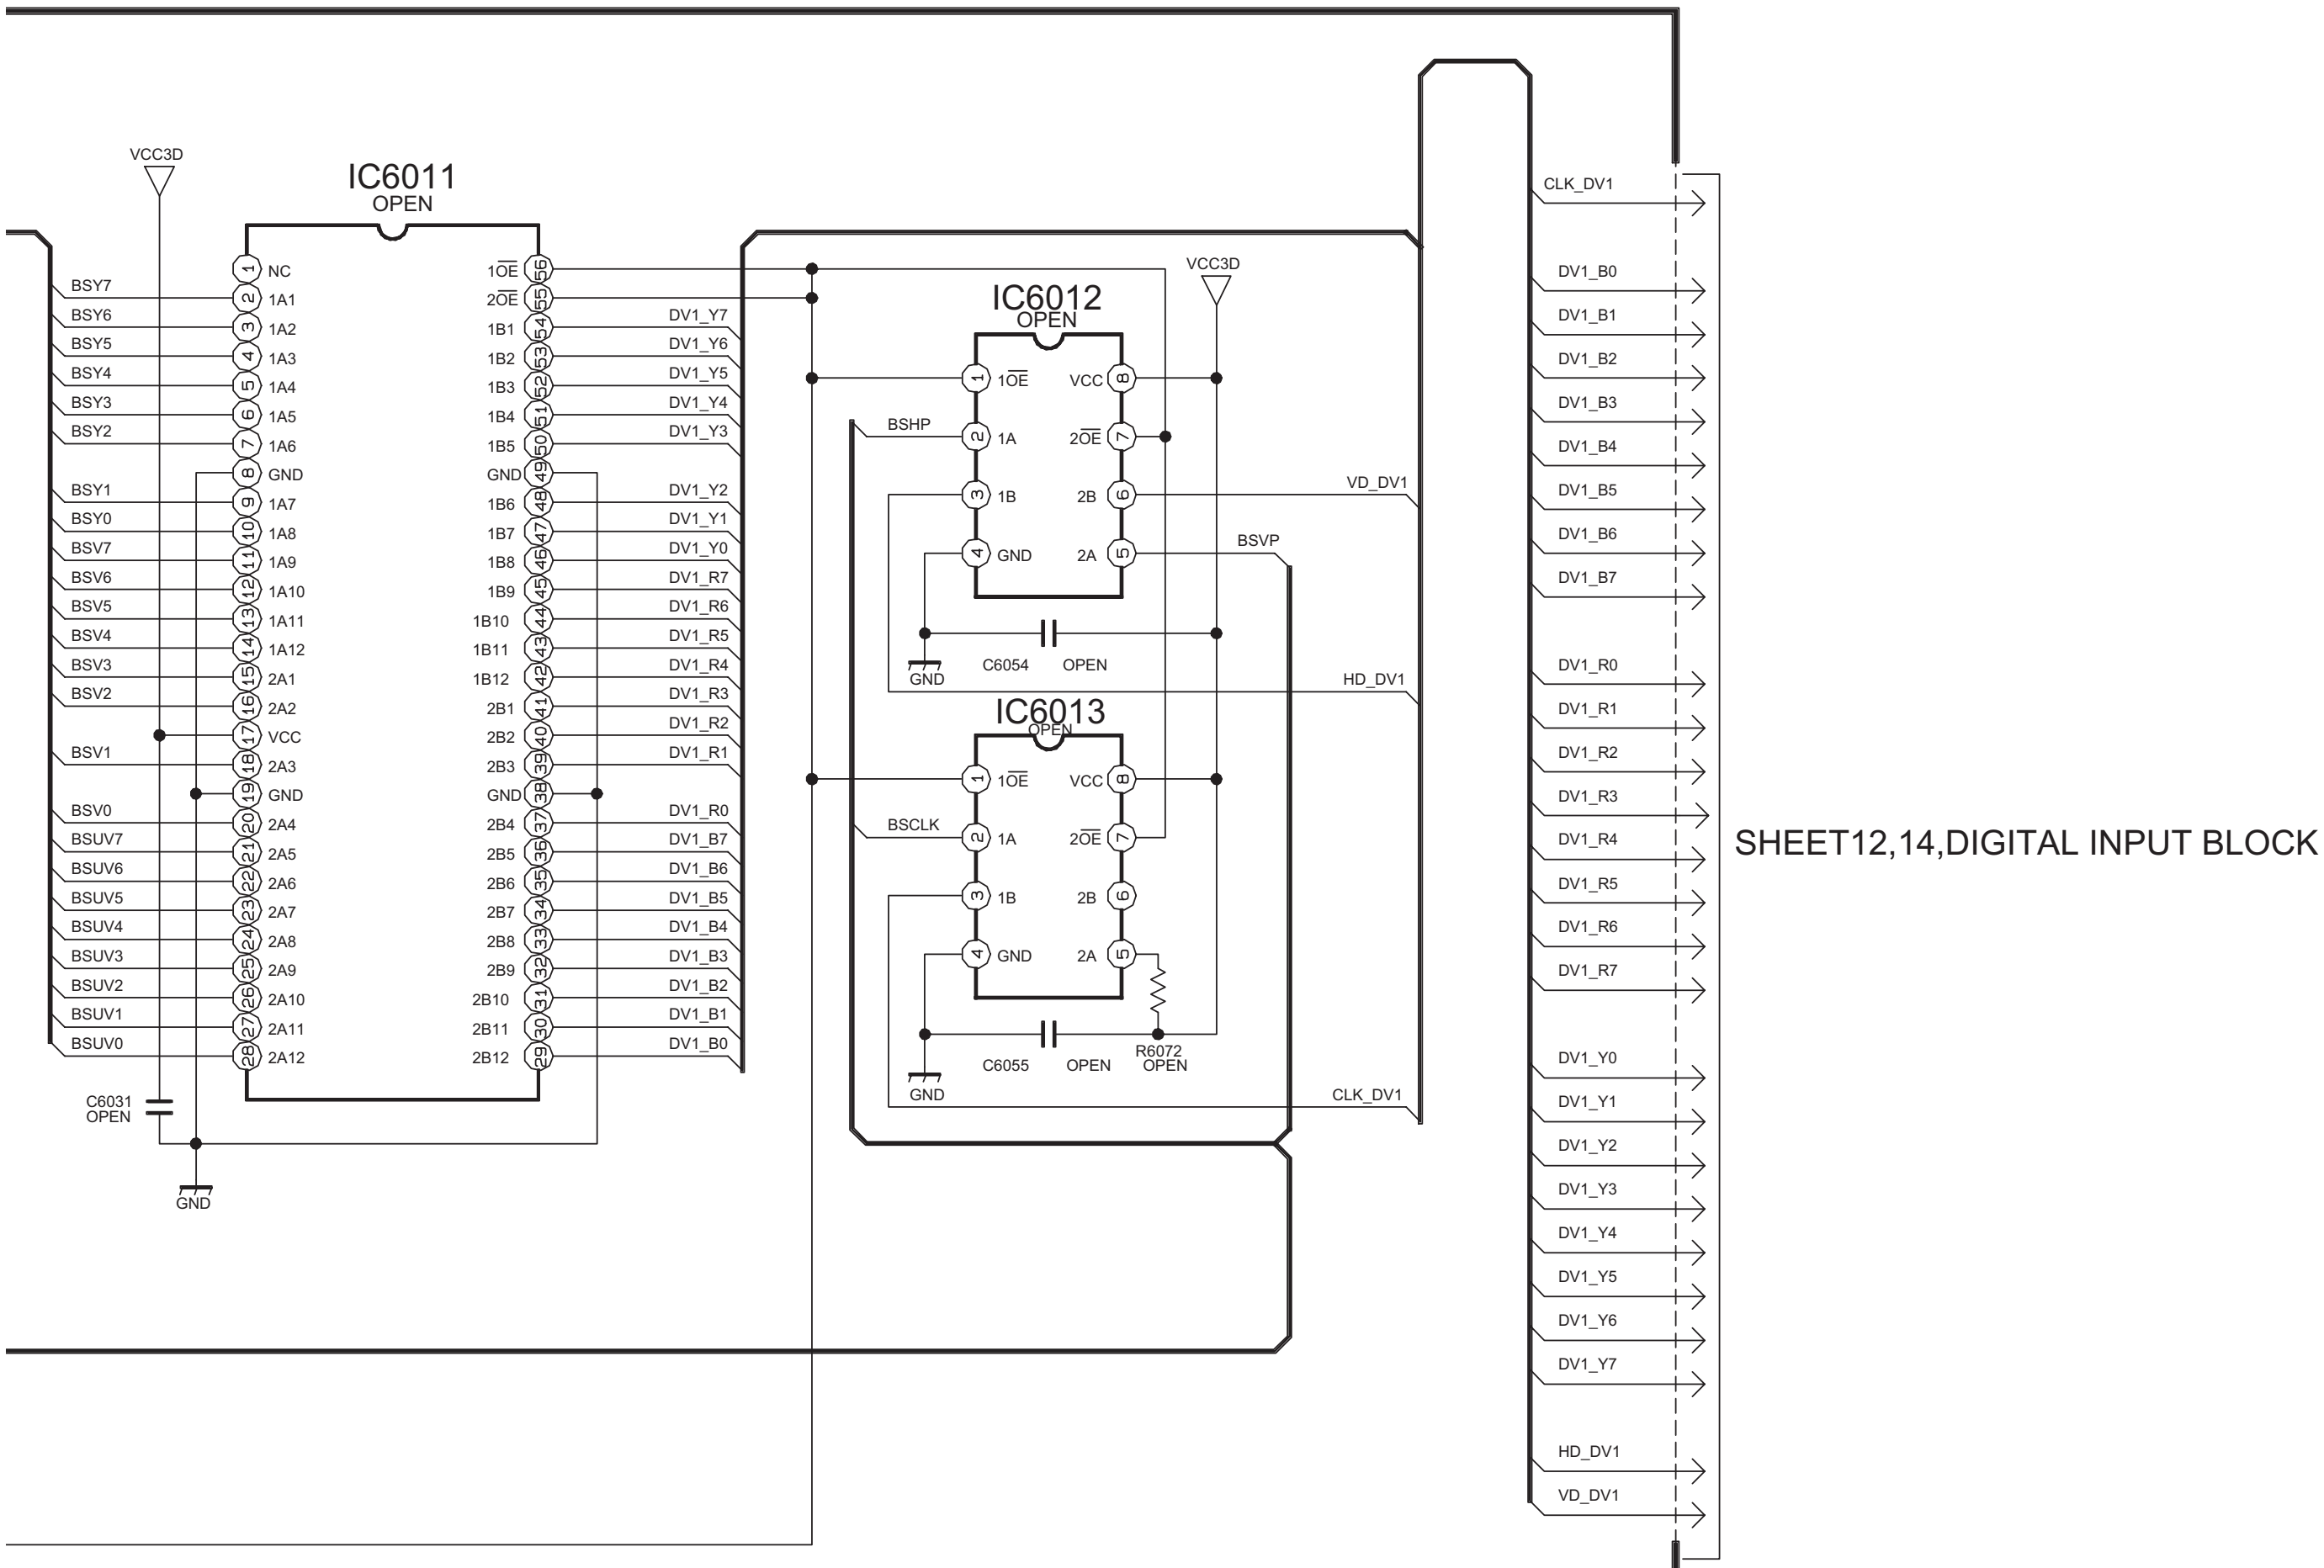
IC6011
OPEN
VCC3D
NC
1A1
1A2
1A3
1A4
1A5
1A6
GND
1A7
1A8
1A9
1A10
1A11
1A12
2A1
2A2
VCC
2A3
GND
2A4
2A5
2A6
2A7
2A8
2A9
2A10
2A11
2A12
1OE
2OE
1B1
1B2
1B3
1B4
1B5
GND
1B6
1B7
1B8
1B9
1B10
1B11
1B12
2B1
2B2
2B3
GND
2B4
2B5
2B6
2B7
2B8
2B9
2B10
2B11
2B12
BSY7
BSY6
BSY5
BSY4
BSY3
BSY2
BSY1
BSY0
BSV7
BSV6
BSV5
BSV4
BSV3
BSV2
BSV1
BSV0
BSUV7
BSUV6
BSUV5
BSUV4
BSUV3
BSUV2
BSUV1
BSUV0
C6031
OPEN
GND
DV1_Y7
DV1_Y6
DV1_Y5
DV1_Y4
DV1_Y3
DV1_Y2
DV1_Y1
DV1_Y0
DV1_R7
DV1_R6
DV1_R5
DV1_R4
DV1_R3
DV1_R2
DV1_R1
DV1_R0
DV1_B7
DV1_B6
DV1_B5
DV1_B4
DV1_B3
DV1_B2
DV1_B1
DV1_B0
IC6012
OPEN
1OE
1A
1B
GND
VCC
2OE
2B
2A
BSHP
BSVP
C6054
OPEN
VD_DV1
HD_DV1
IC6013
OPEN
BSCLK
C6055
OPEN
R6072
OPEN
CLK_DV1
SHEET12,14,DIGITAL INPUT BLOCK

X
X

7X
X

T
X

0X
0X
0W

DIGITAL PWB ASS'Y (12/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

DIGITAL PWB CIRCUIT DIAGRAM (13/16) [DVI OUT BLOCK] SHEET 21

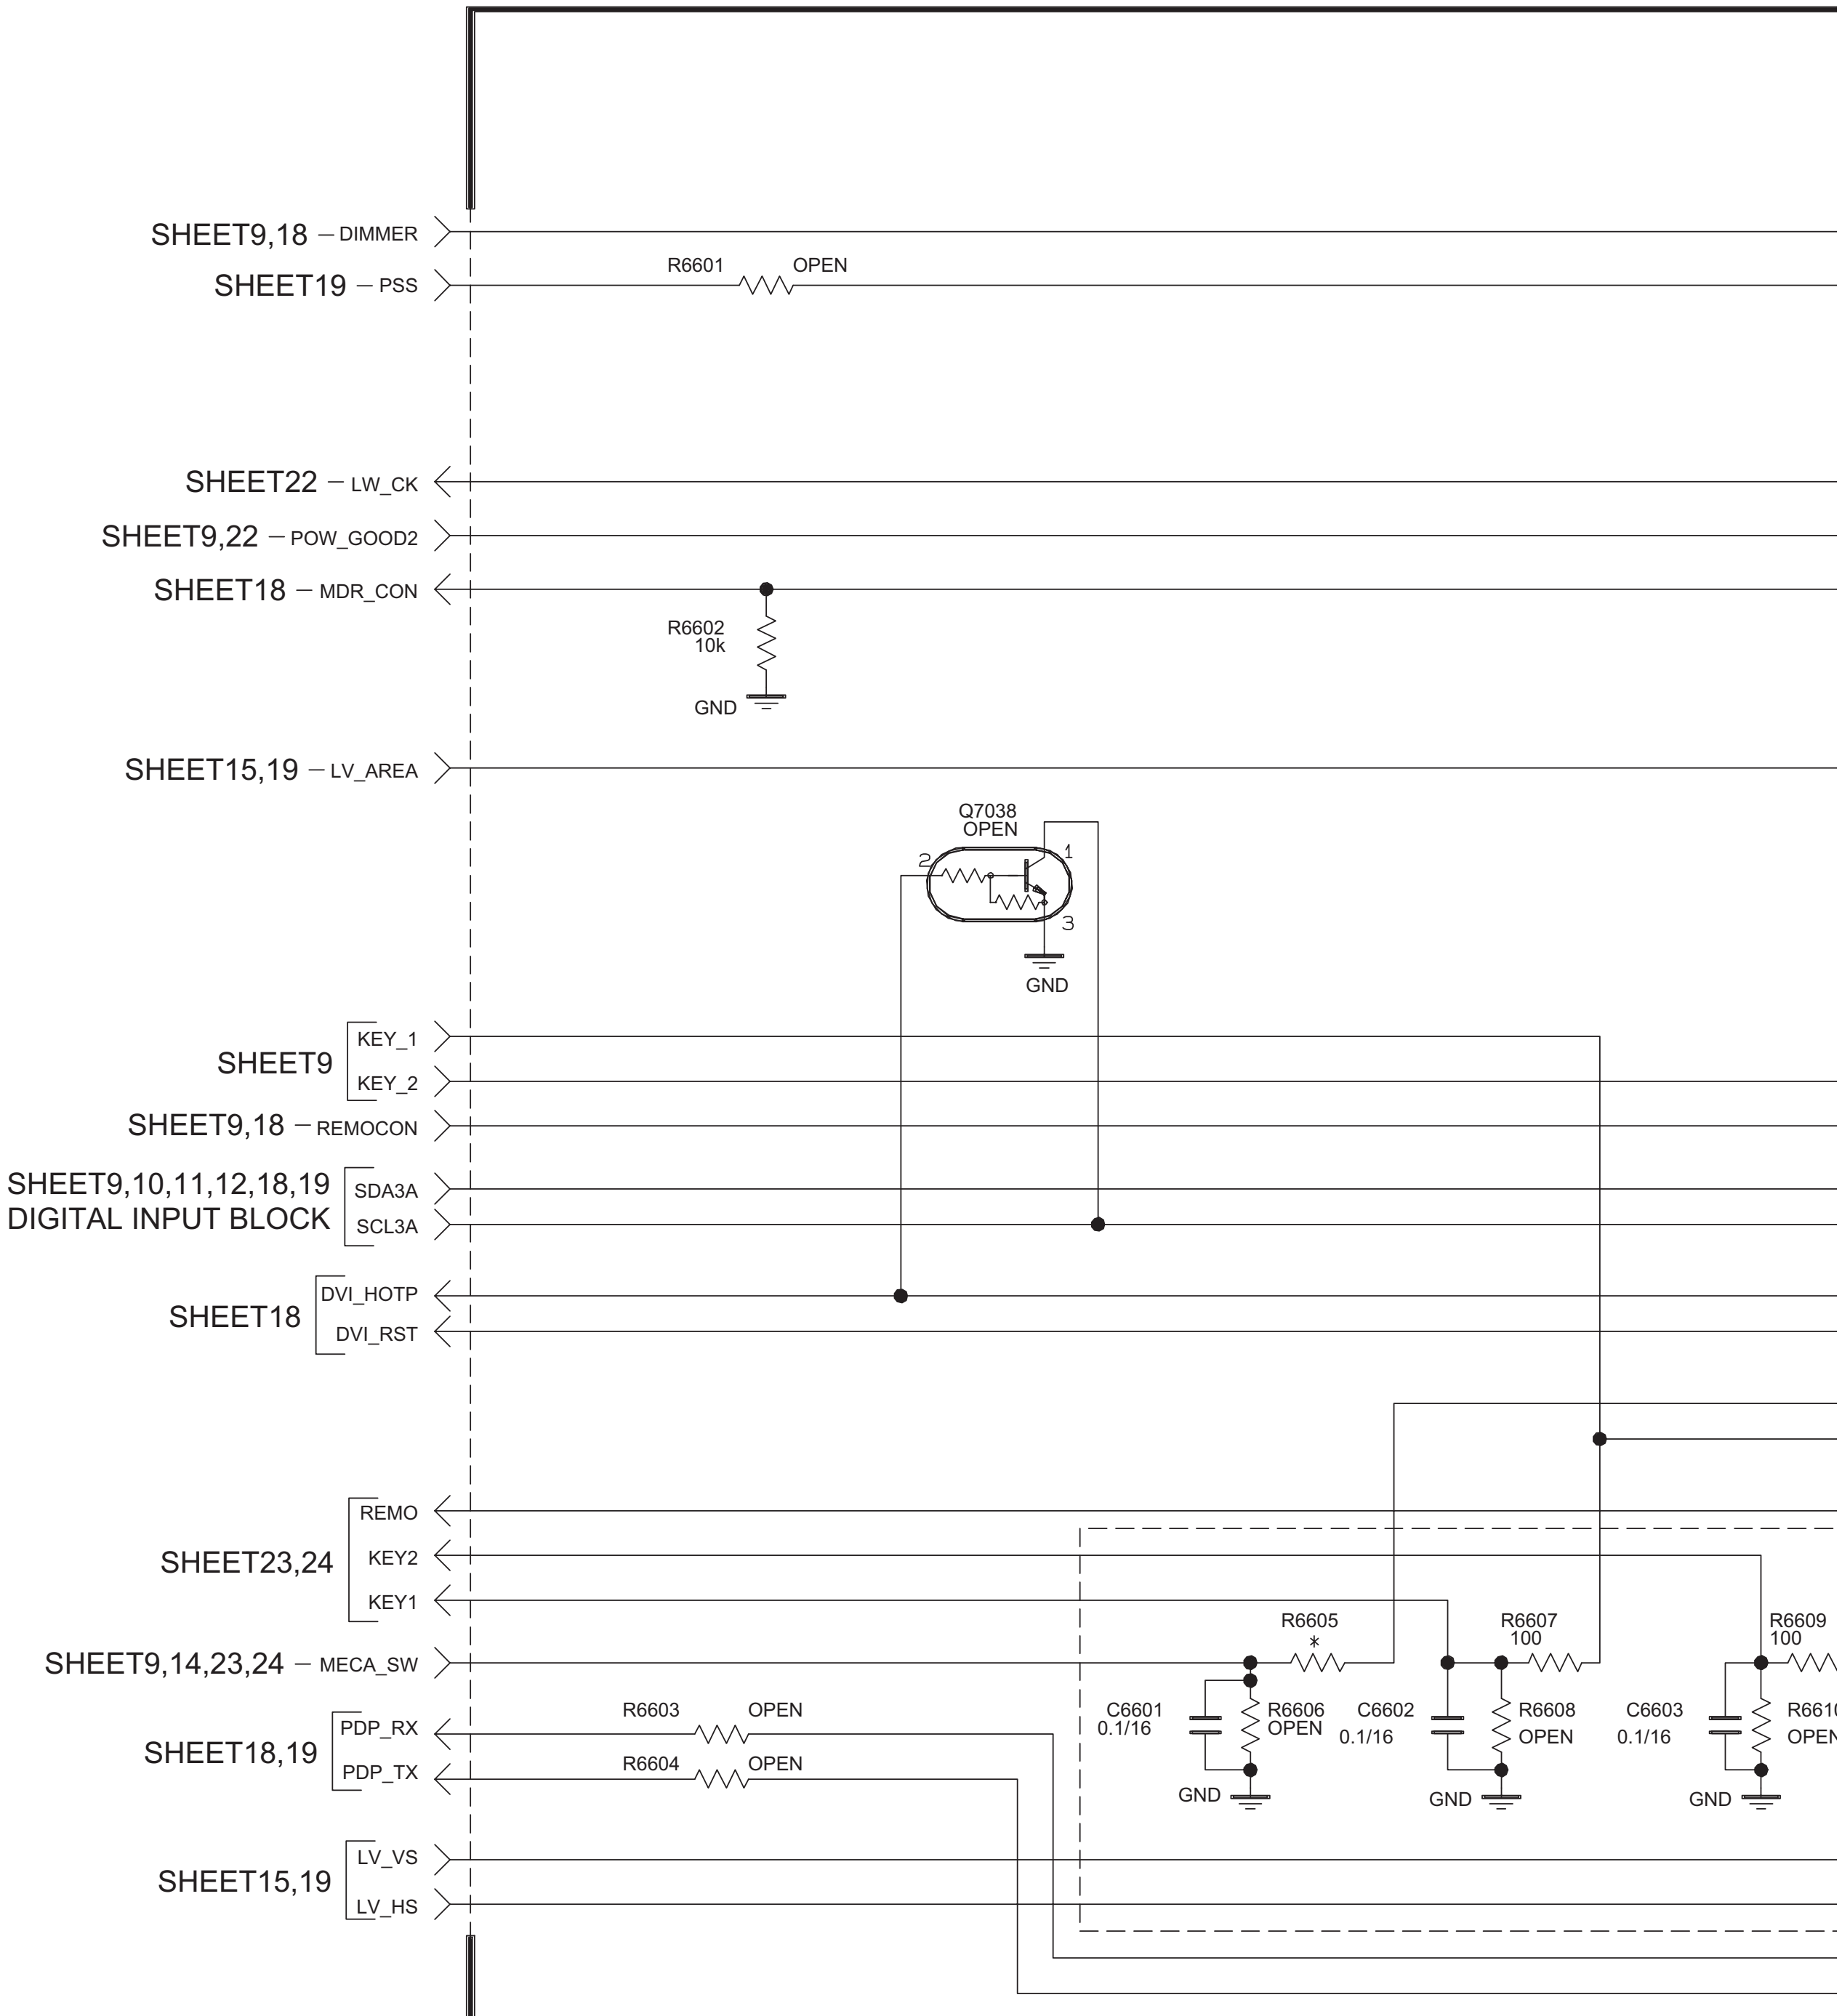
SHEET9,18 DIMMER
SHEET19 PSS
R6601 OPEN
SHEET22 LW_CK
SHEET9,22 POW_GOOD2
SHEET18 MDR_CON
R6602 10k
GND
SHEET15,19 LV_AREA
Q7038 OPEN
1
2
3
GND
SHEET9
KEY_1
KEY_2
SHEET9,18 REMOCON
SHEET9,10,11,12,18,19
DIGITAL INPUT BLOCK
SDA3A
SCL3A
SHEET18
DVI_HOTP
DVI_RST
SHEET23,24
REMO
KEY2
KEY1
SHEET9,14,23,24 MECA_SW
R6605 *
R6607 100
R6609 100
C6601 0.1/16
R6606 OPEN
C6602 0.1/16
R6608 OPEN
C6603 0.1/16
OPEN
GND
GND
GND
SHEET18,19
PDP_RX
PDP_TX
R6603 OPEN
R6604 OPEN
SHEET15,19
LV_VS
LV_HS

DIGITAL PWB ASS'Y (13/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
R6605	100	100	100	100	100	100	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN

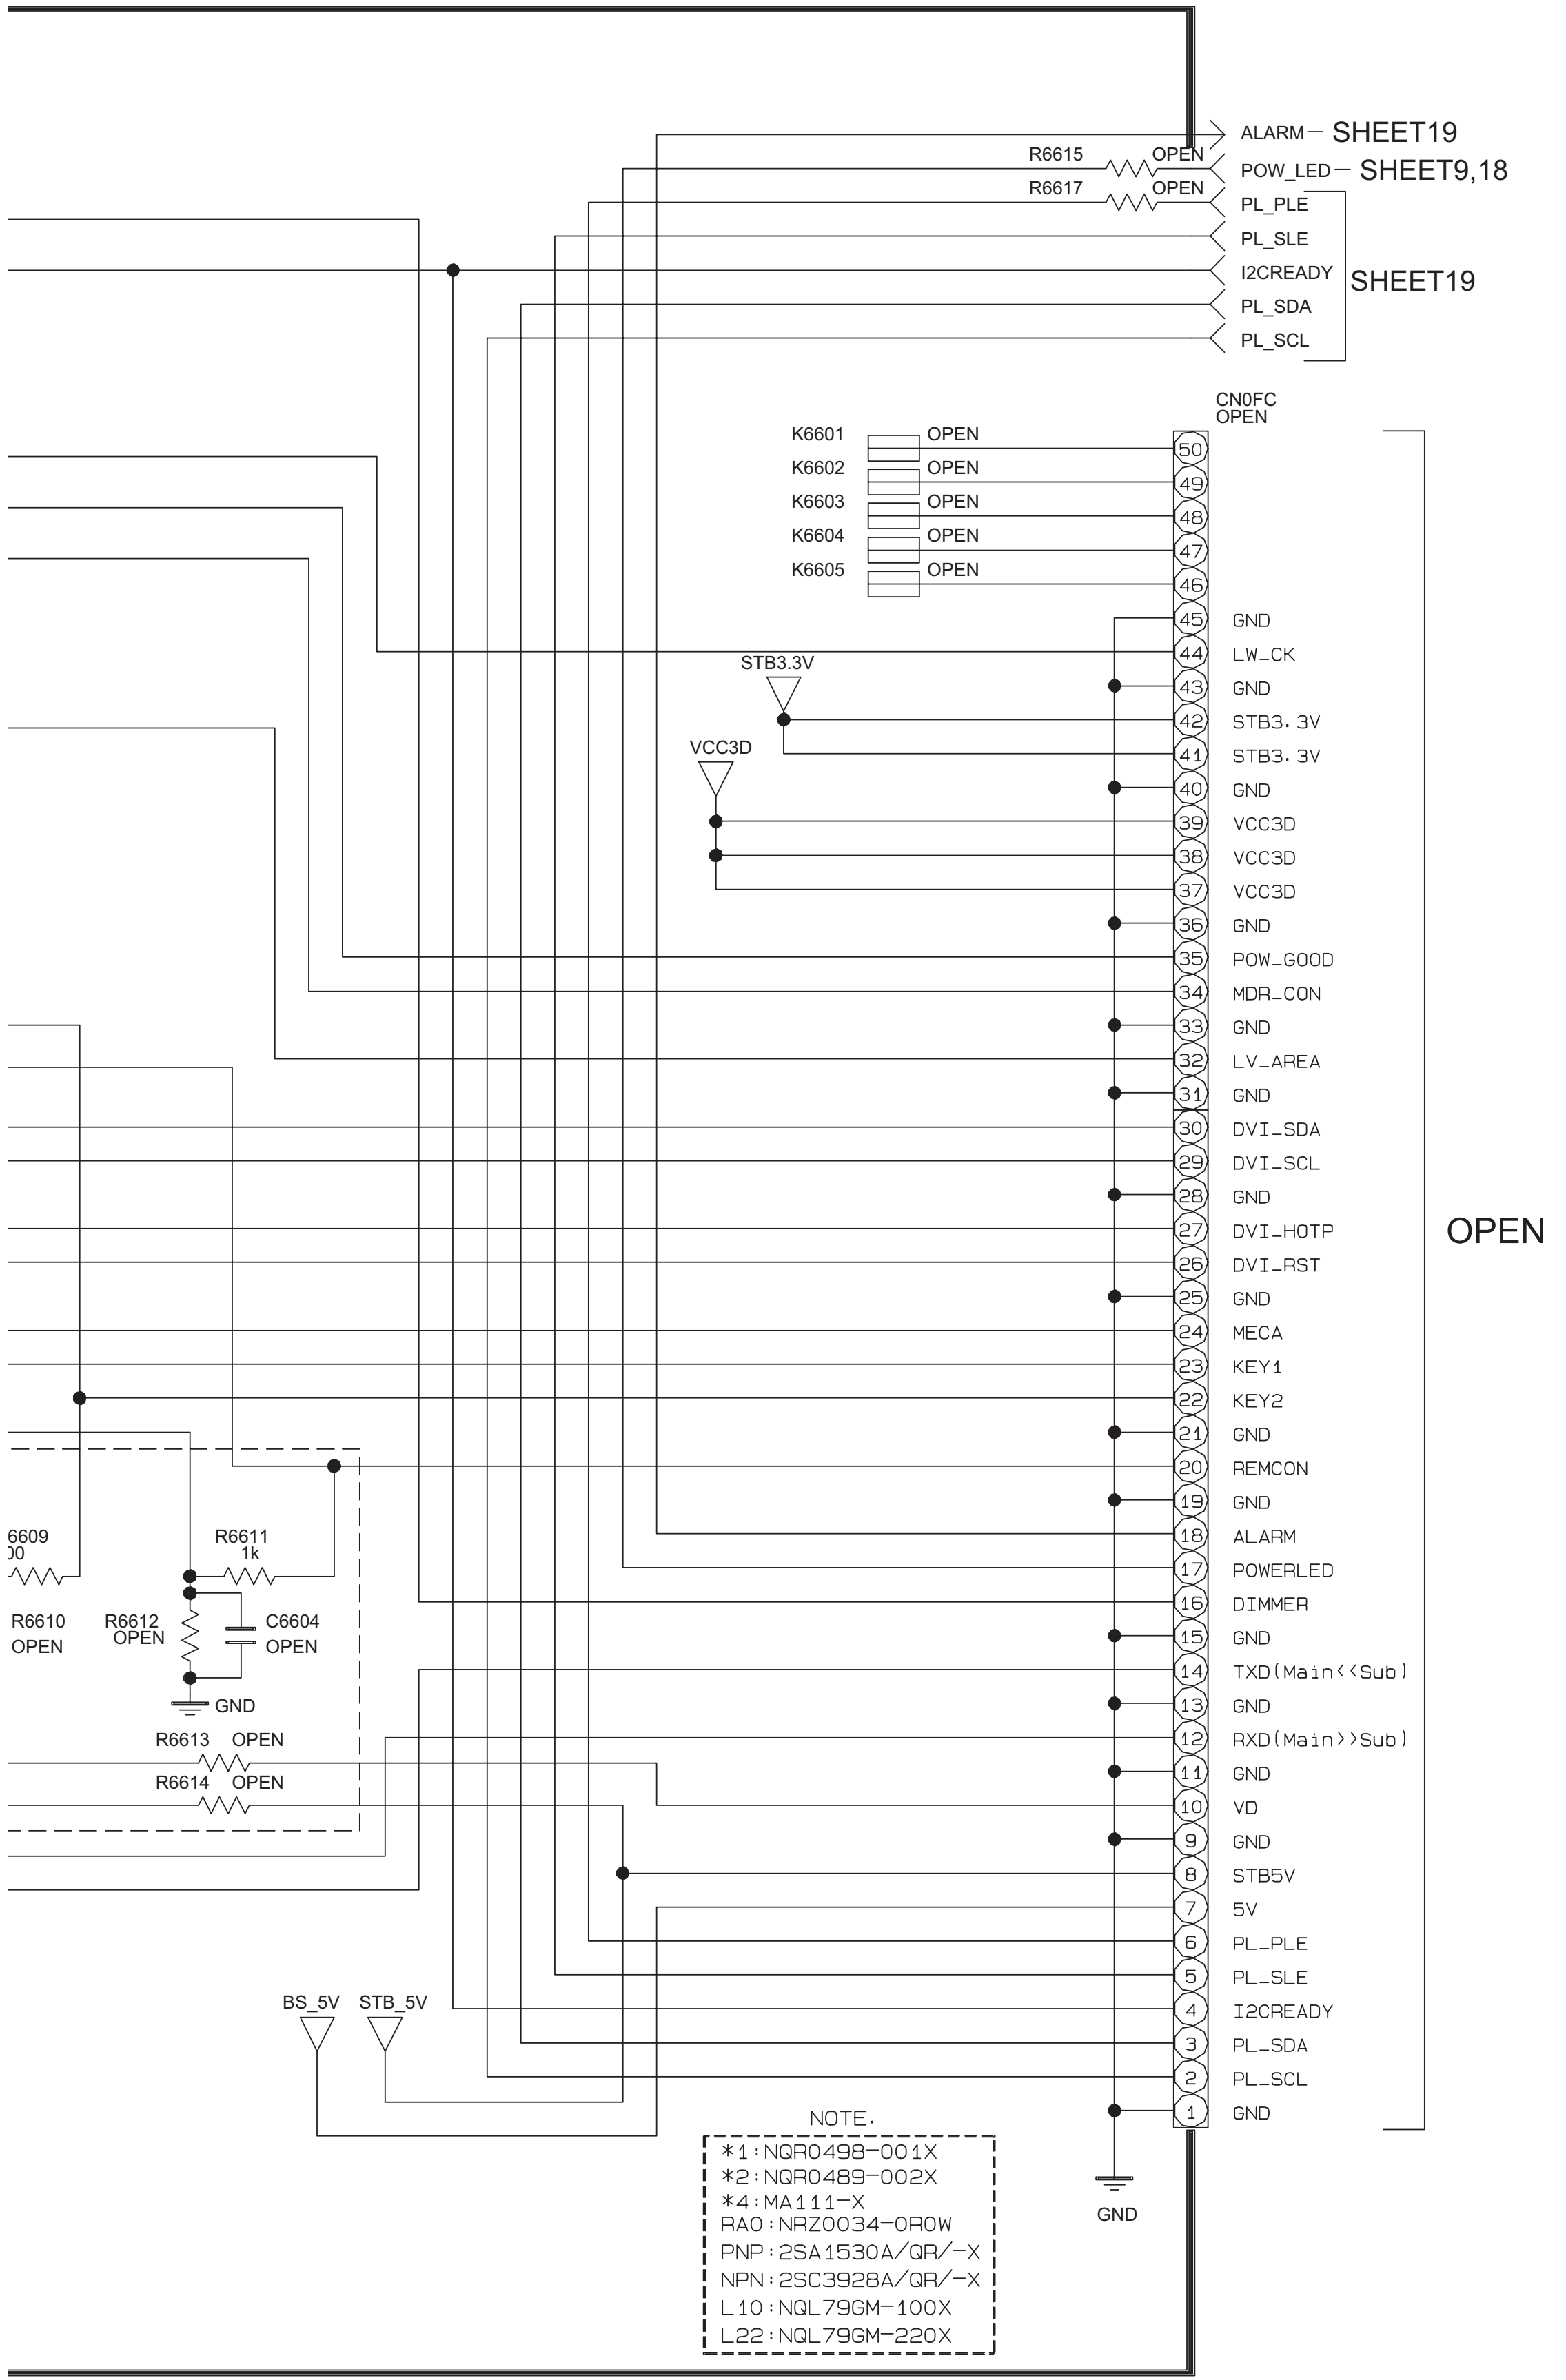
ALARM
SHEET19
R6615
OPEN
POW_LED
SHEET9,18
R6617
OPEN
PL_PLE
PL_SLE
I2CREADY
SHEET19
PL_SDA
PL_SCL
CN0FC
OPEN
K6601
OPEN
K6602
OPEN
K6603
OPEN
K6604
OPEN
K6605
OPEN
STB3.3V
VCC3D
50
49
48
47
46
45 GND
44 LW_CK
43 GND
42 STB3.3V
41 STB3.3V
40 GND
39 VCC3D
38 VCC3D
37 VCC3D
36 GND
35 POW_GOOD
34 MDR_CON
33 GND
32 LV_AREA
31 GND
30 DVI_SDA
29 DVI_SCL
28 GND
27 DVI_HOTP
26 DVI_RST
25 GND
24 MECA
23 KEY1
22 KEY2
21 GND
20 REMCON
19 GND
18 ALARM
17 POWERLED
16 DIMMER
15 GND
14 TXD(Main<<Sub)
13 GND
12 RXD(Main>>Sub)
11 GND
10 VD
9 GND
8 STB5V
7 5V
6 PL_PLE
5 PL_SLE
4 I2CREADY
3 PL_SDA
2 PL_SCL
1 GND
OPEN
6609
00
R6611
1k
R6610
OPEN
R6612
OPEN
C6604
OPEN
GND
R6613 OPEN
R6614 OPEN
BS_5V
STB_5V
GND

NOTE.
*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

c10446012_0214_12/17_0.0

DIGITAL PWB ASS'Y (14/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
C9306	0	0	0	0	0	0	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	0	0
R9302	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	NRSA02J -0R0X	NRSA02J -0R0X

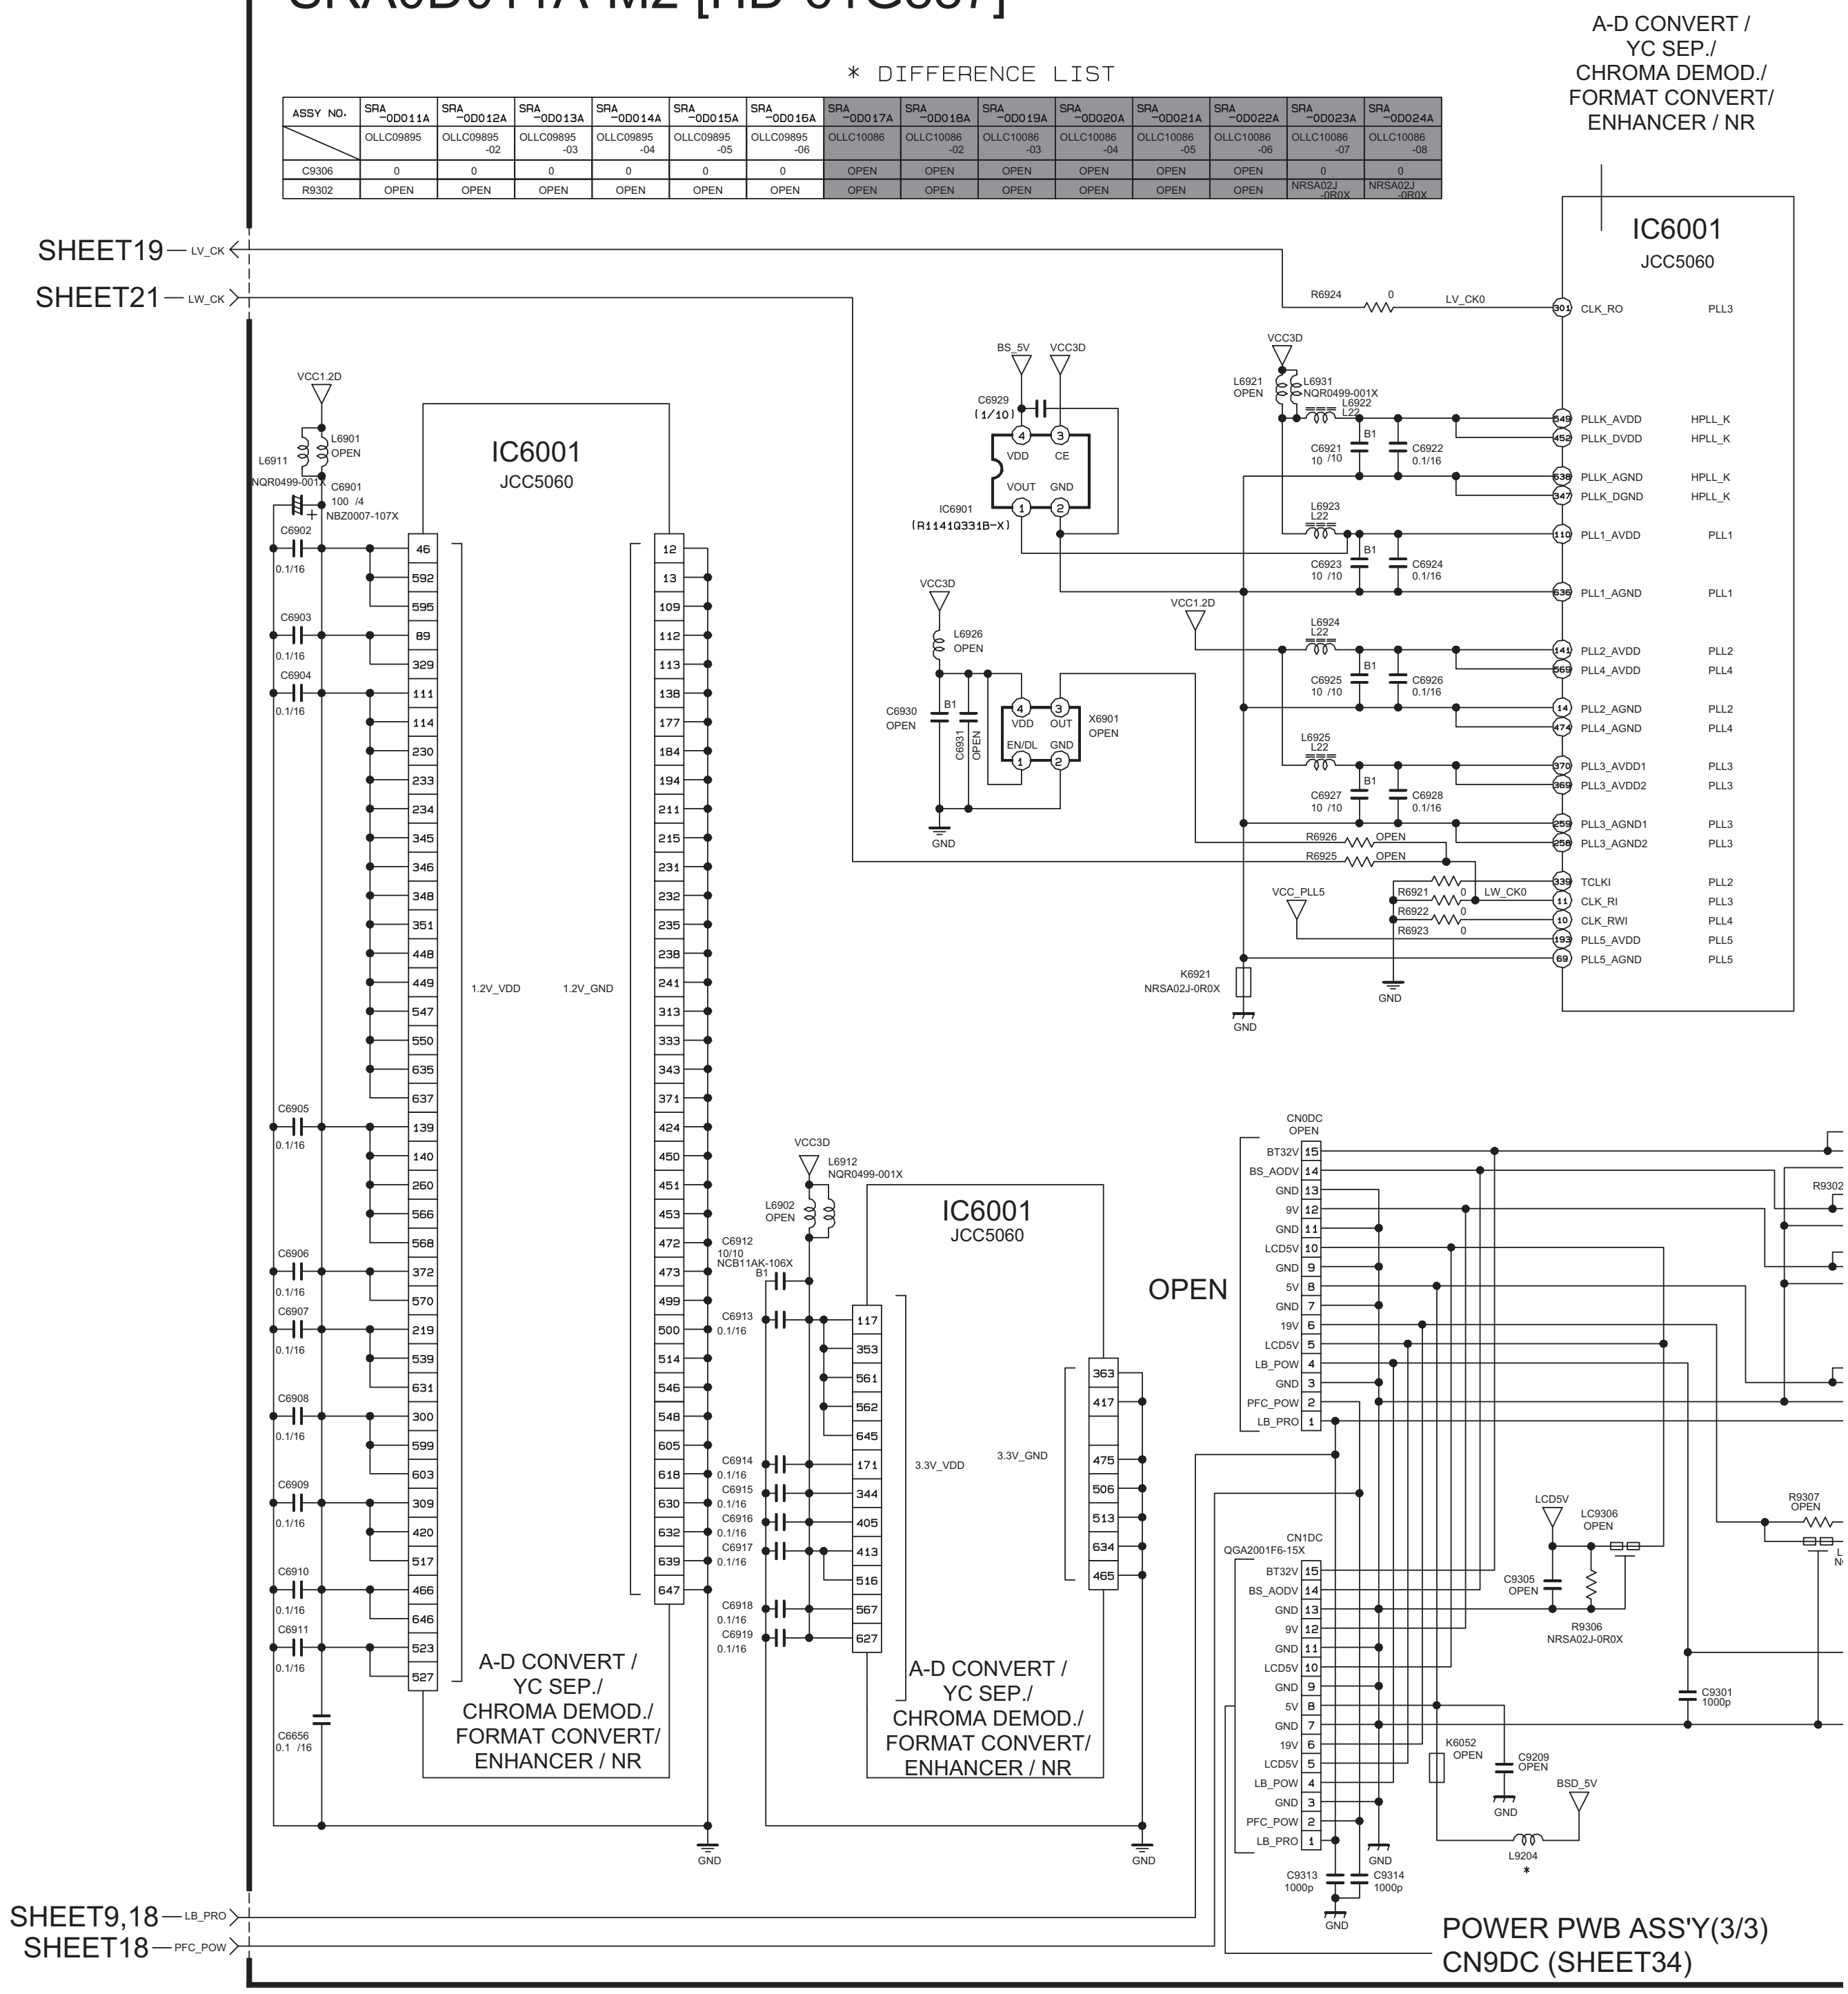
A-D CONVERT / YC SEP./ CHROMA DEMOD./ FORMAT CONVERT/ ENHANCER / NR
IC6001
JCC5060
SHEET19 — LV_CK
SHEET21 — LW_CK
R6924 0
LV_CK0
301 CLK_RO PLL3
VCC3D
L6921 OPEN
L6931 NQR0499-001X
L6922 L22
549 PLLK_AVDD HPLL_K
452 PLLK_DVDD HPLL_K
B1
C6921 10 /10
C6922 0.1/16
538 PLLK_AGND HPLL_K
347 PLLK_DGND HPLL_K
L6923 L22
110 PLL1_AVDD PLL1
C6923 10 /10
C6924 0.1/16
536 PLL1_AGND PLL1
VCC1.2D
L6924 L22
141 PLL2_AVDD PLL2
569 PLL4_AVDD PLL4
C6925 10 /10
C6926 0.1/16
14 PLL2_AGND PLL2
474 PLL4_AGND PLL4
L6925 L22
370 PLL3_AVDD1 PLL3
369 PLL3_AVDD2 PLL3
C6927 10 /10
C6928 0.1/16
259 PLL3_AGND1 PLL3
258 PLL3_AGND2 PLL3
R6926 OPEN
R6925 OPEN
339 TCLKI PLL2
R6921 0
LW_CK0
11 CLK_RI PLL3
R6922 0
10 CLK_RWI PLL4
R6923 0
VCC_PLL5
193 PLL5_AVDD PLL5
69 PLL5_AGND PLL5
K6921 NRSA02J-0R0X
GND
BS_5V
VCC3D
C6929 (1/10)
VDD CE VOUT GND
IC6901 (R1141Q331B-X)
L6926 OPEN
C6930 OPEN
C6931 OPEN
VDD OUT EN/DL GND
X6901 OPEN
VCC1.2D
L6901 OPEN
L6911 NQR0499-001X
C6901 100 /4 NBZ0007-107X
C6902 0.1/16
C6903 0.1/16
C6904 0.1/16
C6905 0.1/16
C6906 0.1/16
C6907 0.1/16
C6908 0.1/16
C6909 0.1/16
C6910 0.1/16
C6911 0.1/16
C6656 0.1 /16
46 592 595 89 329 111 114 230 233 234 345 346 348 351 448 449 547 550 635 637 139 140 260 566 568 372 570 219 539 631 300 599 603 309 420 517 466 646 523 527
1.2V_VDD
1.2V_GND
12 13 109 112 113 138 177 184 194 211 215 231 232 235 238 241 313 333 343 371 424 450 451 453 472 473 499 500 514 546 548 605 618 630 632 639 647
VCC3D
L6912 NQR0499-001X
L6902 OPEN
C6912 10/10 NCB11AK-106X B1
C6913 0.1/16
C6914 0.1/16
C6915 0.1/16
C6916 0.1/16
C6917 0.1/16
C6918 0.1/16
C6919 0.1/16
117 353 561 562 645 171 344 405 413 516 567 627
3.3V_VDD
3.3V_GND
363 417 475 506 513 634 465
OPEN
CN0DC OPEN
BT32V 15
BS_AODV 14
GND 13
9V 12
GND 11
LCD5V 10
GND 9
5V 8
GND 7
19V 6
LCD5V 5
LB_POW 4
GND 3
PFC_POW 2
LB_PRO 1
R9302
CN1DC QGA2001F6-15X
LCD5V
LC9306 OPEN
C9305 OPEN
R9306 NRSA02J-0R0X
R9307 OPEN
C9301 1000p
K6052 OPEN
C9209 OPEN
BSD_5V
L9204 *
C9313 1000p
C9314 1000p
POWER PWB ASS'Y(3/3) CN9DC (SHEET34)
SHEET9,18 — LB_PRO
SHEET18 — PFC_POW

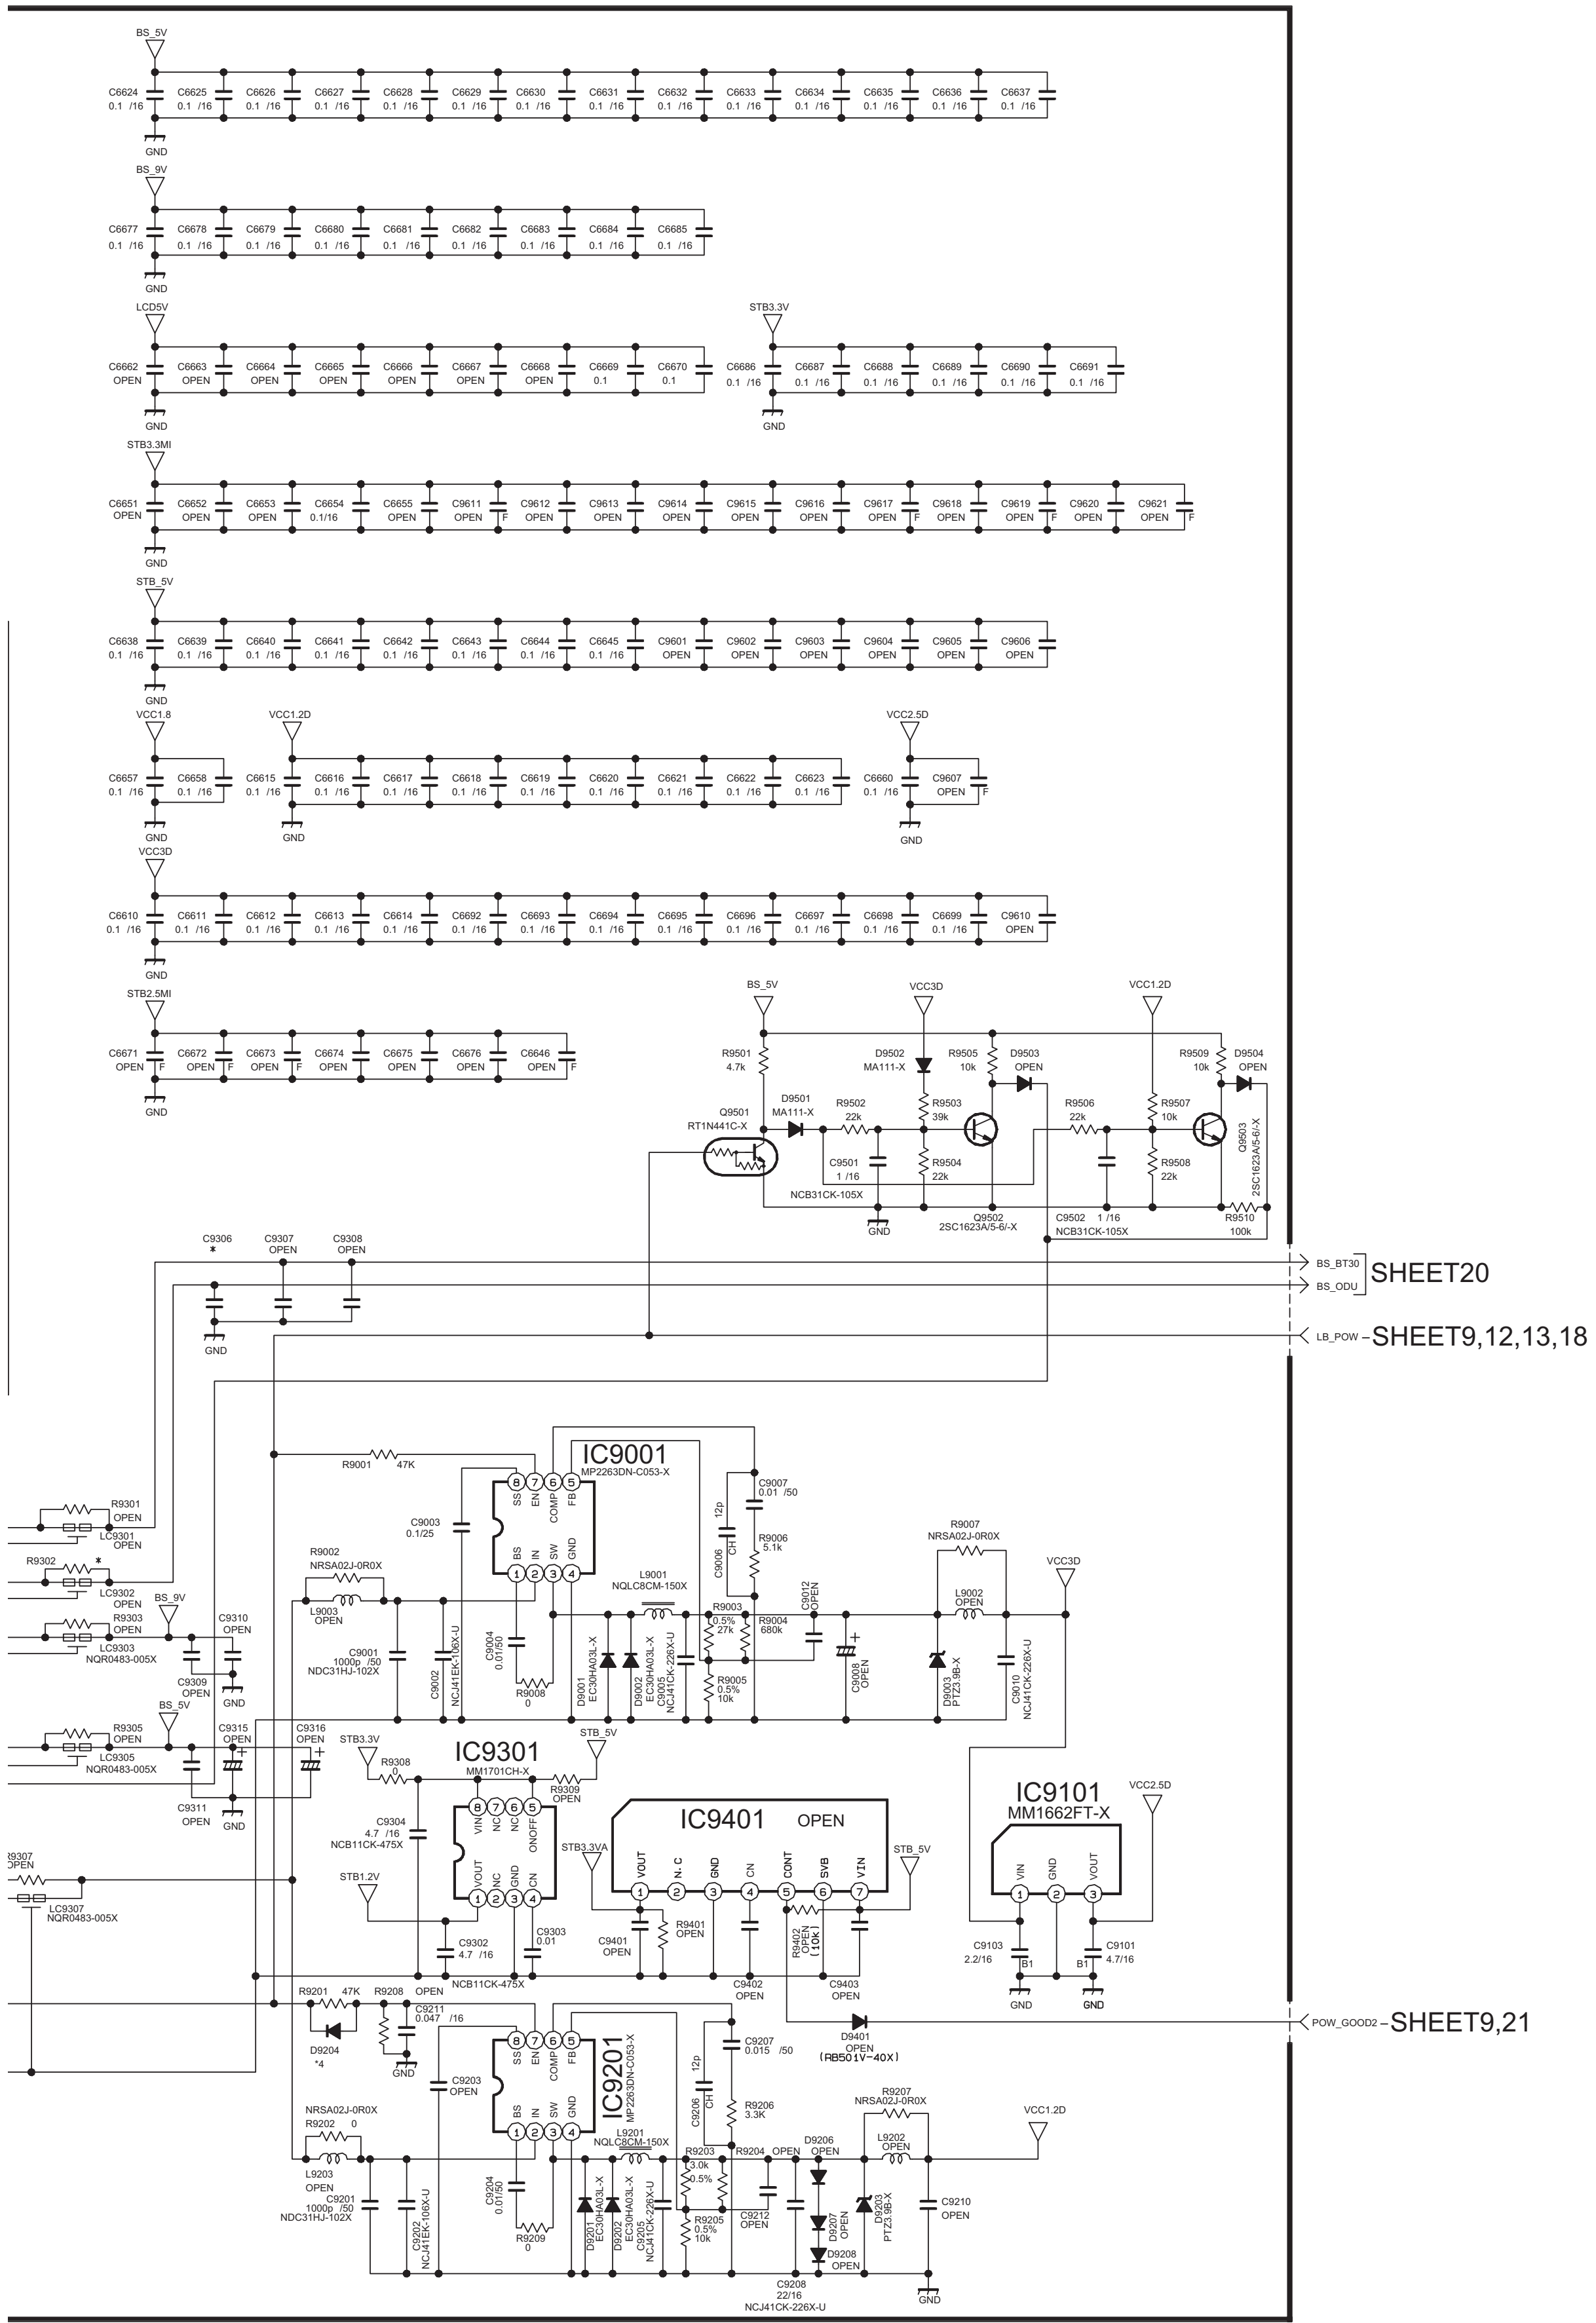
BS_5V
C6624 0.1 /16
C6625 0.1 /16
C6626 0.1 /16
C6627 0.1 /16
C6628 0.1 /16
C6629 0.1 /16
C6630 0.1 /16
C6631 0.1 /16
C6632 0.1 /16
C6633 0.1 /16
C6634 0.1 /16
C6635 0.1 /16
C6636 0.1 /16
C6637 0.1 /16
GND
BS_9V
C6677 0.1 /16
C6678 0.1 /16
C6679 0.1 /16
C6680 0.1 /16
C6681 0.1 /16
C6682 0.1 /16
C6683 0.1 /16
C6684 0.1 /16
C6685 0.1 /16
LCD5V
C6662 OPEN
C6663 OPEN
C6664 OPEN
C6665 OPEN
C6666 OPEN
C6667 OPEN
C6668 OPEN
C6669 0.1
C6670 0.1
STB3.3V
C6686 0.1 /16
C6687 0.1 /16
C6688 0.1 /16
C6689 0.1 /16
C6690 0.1 /16
C6691 0.1 /16
STB3.3MI
C6651 OPEN
C6652 OPEN
C6653 OPEN
C6654 0.1/16
C6655 OPEN
C9611 OPEN F
C9612 OPEN
C9613 OPEN
C9614 OPEN
C9615 OPEN
C9616 OPEN
C9617 OPEN F
C9618 OPEN
C9619 OPEN F
C9620 OPEN
C9621 OPEN F
STB_5V
C6638 0.1 /16
C6639 0.1 /16
C6640 0.1 /16
C6641 0.1 /16
C6642 0.1 /16
C6643 0.1 /16
C6644 0.1 /16
C6645 0.1 /16
C9601 OPEN
C9602 OPEN
C9603 OPEN
C9604 OPEN
C9605 OPEN
C9606 OPEN
VCC1.8
C6657 0.1 /16
C6658 0.1 /16
VCC1.2D
C6615 0.1 /16
C6616 0.1 /16
C6617 0.1 /16
C6618 0.1 /16
C6619 0.1 /16
C6620 0.1 /16
C6621 0.1 /16
C6622 0.1 /16
C6623 0.1 /16
VCC2.5D
C6660 0.1 /16
C9607 OPEN F
VCC3D
C6610 0.1 /16
C6611 0.1 /16
C6612 0.1 /16
C6613 0.1 /16
C6614 0.1 /16
C6692 0.1 /16
C6693 0.1 /16
C6694 0.1 /16
C6695 0.1 /16
C6696 0.1 /16
C6697 0.1 /16
C6698 0.1 /16
C6699 0.1 /16
C9610 OPEN
STB2.5MI
C6671 OPEN F
C6672 OPEN F
C6673 OPEN F
C6674 OPEN
C6675 OPEN
C6676 OPEN
C6646 OPEN F
R9501 4.7k
Q9501 RT1N441C-X
D9501 MA111-X
R9502 22k
C9501 1 /16
NCB31CK-105X
D9502 MA111-X
R9503 39k
R9504 22k
R9505 10k
D9503 OPEN
Q9502 2SC1623A/5-6/-X
R9506 22k
C9502 1 /16 NCB31CK-105X
VCC1.2D
R9507 10k
R9508 22k
R9509 10k
D9504 OPEN
Q9503 2SC1623A/5-6/-X
R9510 100k
C9306 *
C9307 OPEN
C9308 OPEN
BS_BT30
BS_ODU
SHEET20
LB_POW
SHEET9,12,13,18
IC9001
MP2263DN-C053-X
SS EN COMP FB
BS IN SW GND
R9001 47K
C9003 0.1/25
R9002 NRSA02J-0R0X
L9003 OPEN
C9001 1000p /50 NDC31HJ-102X
C9002 NCJ41EK-106X-U
C9004 0.01/50
R9008 0
D9001 EC30HA03L-X
D9002 EC30HA03L-X
C9005 NCJ41CK-226X-U
L9001 NQLC8CM-150X
12p
C9006 CH
C9007 0.01 /50
R9006 5.1k
R9003 0.5% 27k
R9004 680k
R9005 0.5% 10k
C9012 OPEN
C9008 OPEN
R9007 NRSA02J-0R0X
L9002 OPEN
D9003 PTZ3.9B-X
C9010 NCJ41CK-226X-U
VCC3D
R9301 OPEN
LC9301 OPEN
R9302 *
LC9302 OPEN
BS_9V
R9303 OPEN
LC9303 NQR0483-005X
C9310 OPEN
C9309 OPEN
BS_5V
R9305 OPEN
LC9305 NQR0483-005X
C9315 OPEN
C9316 OPEN
C9311 OPEN
STB3.3V
R9308 0
IC9301
MM1701CH-X
STB_5V
R9309 OPEN
VIN NC NC ON/OFF
VOUT NC GND CN
C9304 4.7 /16 NCB11CK-475X
STB1.2V
C9302 4.7 /16
NCB11CK-475X
C9303 0.01
R9307 OPEN
LC9307 NQR0483-005X
IC9401 OPEN
STB3.3VA
VOUT N.C GND CN CONT SVB VIN
STB_5V
C9401 OPEN
R9401 OPEN
C9402 OPEN
R9402 OPEN (10k)
C9403 OPEN
IC9101
MM1662FT-X
VIN GND VOUT
VCC2.5D
C9103 2.2/16
B1
C9101 4.7/16
POW_GOOD2
SHEET9,21
D9401 OPEN (RB501V-40X)
R9201 47K
R9208 OPEN
C9211 0.047 /16
D9204 *4
C9203 OPEN
IC9201
MP2263DN-C053-X
SS EN COMP FB
BS IN SW GND
NRSA02J-0R0X
R9202 0
L9203 OPEN
C9201 1000p /50 NDC31HJ-102X
C9202 NCJ41EK-106X-U
C9204 0.01/50
R9209 0
D9201 EC30HA03L-X
D9202 EC30HA03L-X
C9205 NCJ41CK-226X-U
L9201 NQLC8CM-150X
12p
C9206 CH
C9207 0.015 /50
R9206 3.3K
R9203 3.0k 0.5%
R9205 0.5% 10k
R9204 OPEN
C9212 OPEN
D9206 OPEN
D9207 OPEN
D9208 OPEN
C9208 22/16 NCJ41CK-226X-U
R9207 NRSA02J-0R0X
L9202 OPEN
D9203 PTZ3.9B-X
C9210 OPEN
VCC1.2D
GND

c10446010_0214_10/17_0.0

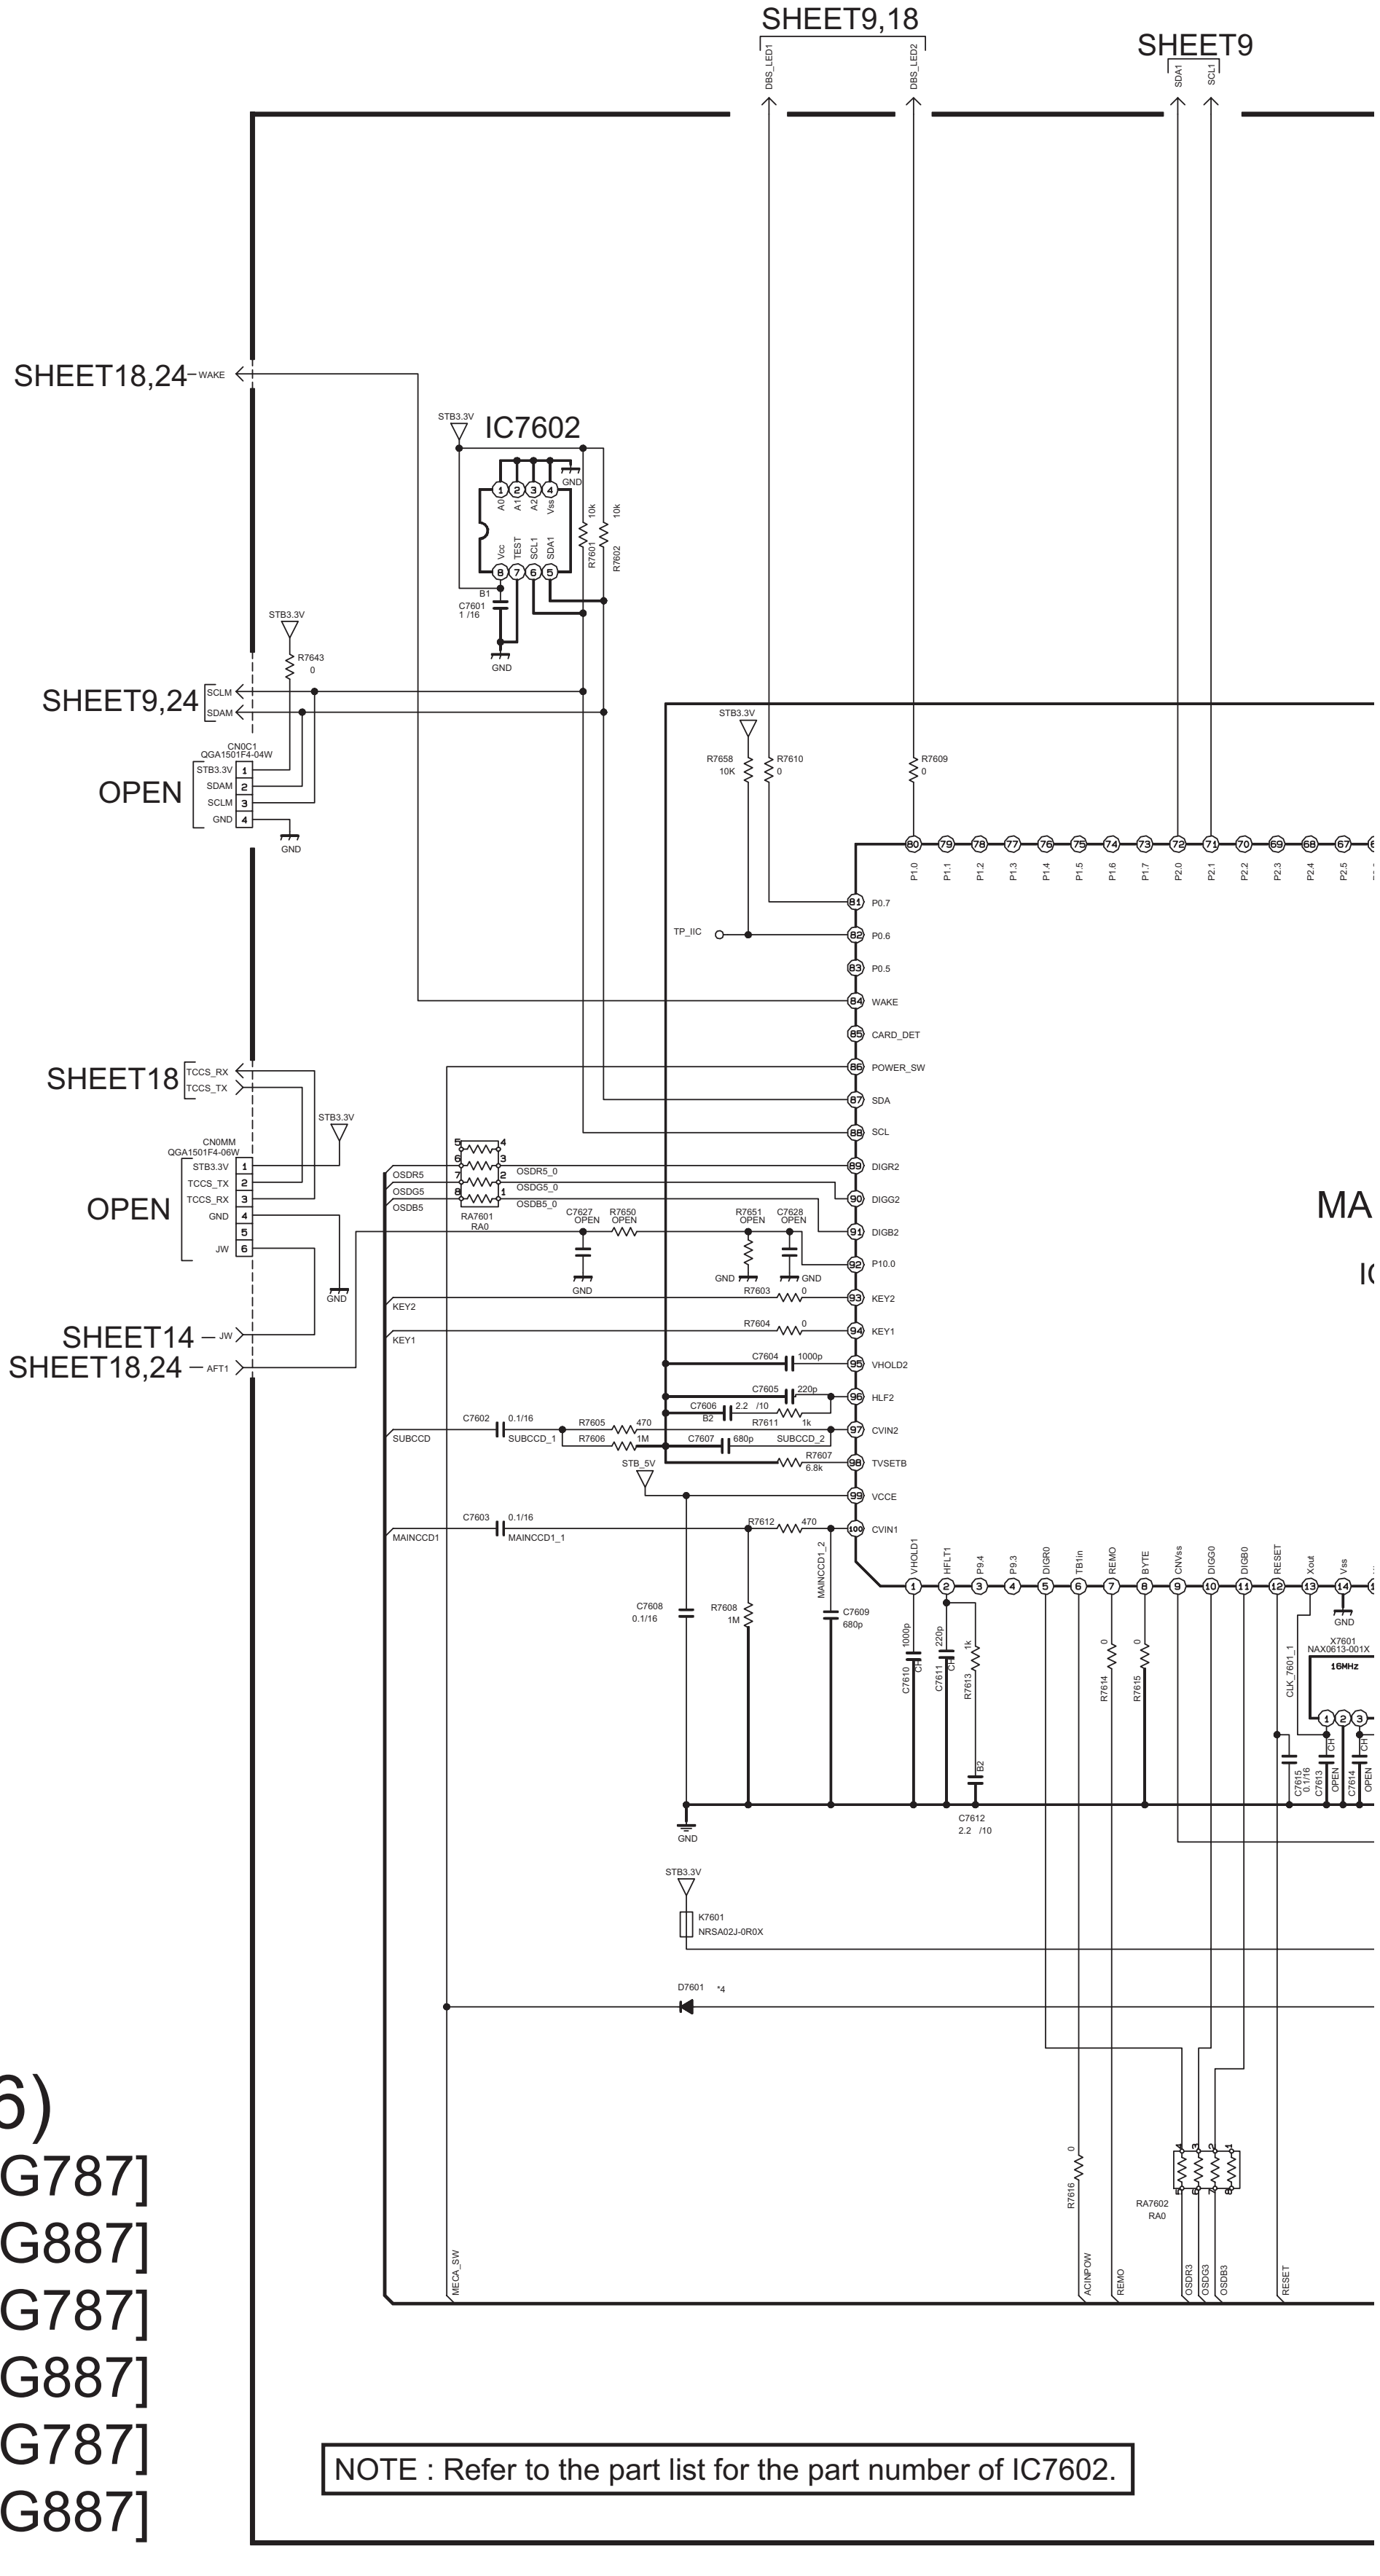
SHEET9,18
DBS_LED1
DBS_LED2
SHEET9
SDA1
SCL1
SHEET18,24
WAKE
STB3.3V
IC7602
A0
A1
A2
Vss
Vcc
TEST
SCL1
SDA1
GND
R7601
10k
R7602
10k
B1
C7601
1 /16
GND
R7643
0
SHEET9,24
SCLM
SDAM
CN0C1
QGA1501F4-04W
OPEN
STB3.3V
SDAM
SCLM
GND
R7658
10K
R7610
0
R7609
0
TP_IIC
P0.7
P0.6
P0.5
WAKE
CARD_DET
POWER_SW
SDA
SCL
DIGR2
DIGG2
DIGB2
P10.0
KEY2
KEY1
VHOLD2
HLF2
CVIN2
TVSETB
VCCE
CVIN1
P1.0
P1.1
P1.2
P1.3
P1.4
P1.5
P1.6
P1.7
P2.0
P2.1
P2.2
P2.3
P2.4
P2.5
SHEET18
TCCS_RX
TCCS_TX
CN0MM
QGA1501F4-06W
OPEN
STB3.3V
TCCS_TX
TCCS_RX
GND
JW
SHEET14
JW
SHEET18,24
AFT1
OSDR5
OSDG5
OSDB5
OSDR5_0
OSDG5_0
OSDB5_0
RA7601
RA0
C7627
OPEN
R7650
OPEN
R7651
OPEN
C7628
OPEN
R7603
0
R7604
0
C7604
1000p
C7605
220p
C7606
2.2 /10
B2
R7611
1k
C7602
0.1/16
SUBCCD
SUBCCD_1
R7605
470
R7606
1M
C7607
680p
SUBCCD_2
R7607
6.8k
STB_5V
C7603
0.1/16
MAINCCD1
MAINCCD1_1
R7612
470
MAINCCD1_2
C7608
0.1/16
R7608
1M
C7609
680p
VHOLD1
HFLT1
P9.4
P9.3
DIGR0
TB1in
REMO
BYTE
CNVss
DIGG0
DIGB0
RESET
Xout
Vss
GND
C7610
1000p
CH
C7611
220p
CH
R7613
1k
B2
C7612
2.2 /10
R7614
0
R7615
0
CLK_7601_1
X7601
NAX0613-001X
16MHz
C7615
0.1/16
C7613
OPEN
C7614
OPEN
CH
MA
IC
GND
STB3.3V
K7601
NRSA02J-0R0X
D7601
*4
R7616
0
RA7602
RA0
MECA_SW
ACINPOW
REMO
OSDR3
OSDG3
OSDB3
RESET

NOTE : Refer to the part list for the part number of IC7602.

DIGITAL
PWB ASS'Y (15/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

* DIFFERENCE LIST

ASSY NO.	SRA-0D011A	SRA-0D012A	SRA-0D013A	SRA-0D014A	SRA-0D015A	SRA-0D016A	SRA-0D017A	SRA-0D018A	SRA-0D019A	SRA-0D020A	SRA-0D021A	SRA-0D022A	SRA-0D023A	SRA-0D024A
	OLLC09895	OLLC09895-02	OLLC09895-03	OLLC09895-04	OLLC09895-05	OLLC09895-06	OLLC10086	OLLC10086-02	OLLC10086-03	OLLC10086-04	OLLC10086-05	OLLC10086-06	OLLC10086-07	OLLC10086-08
IC7601	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-152FP	M306V7FG-153FP	M306V7FG-153FP
IC7603	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	SN74AHCT1G08V-X	OPEN	OPEN
C7617	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	NCB31CK-104X	OPEN	OPEN
R7621	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	10k	10k

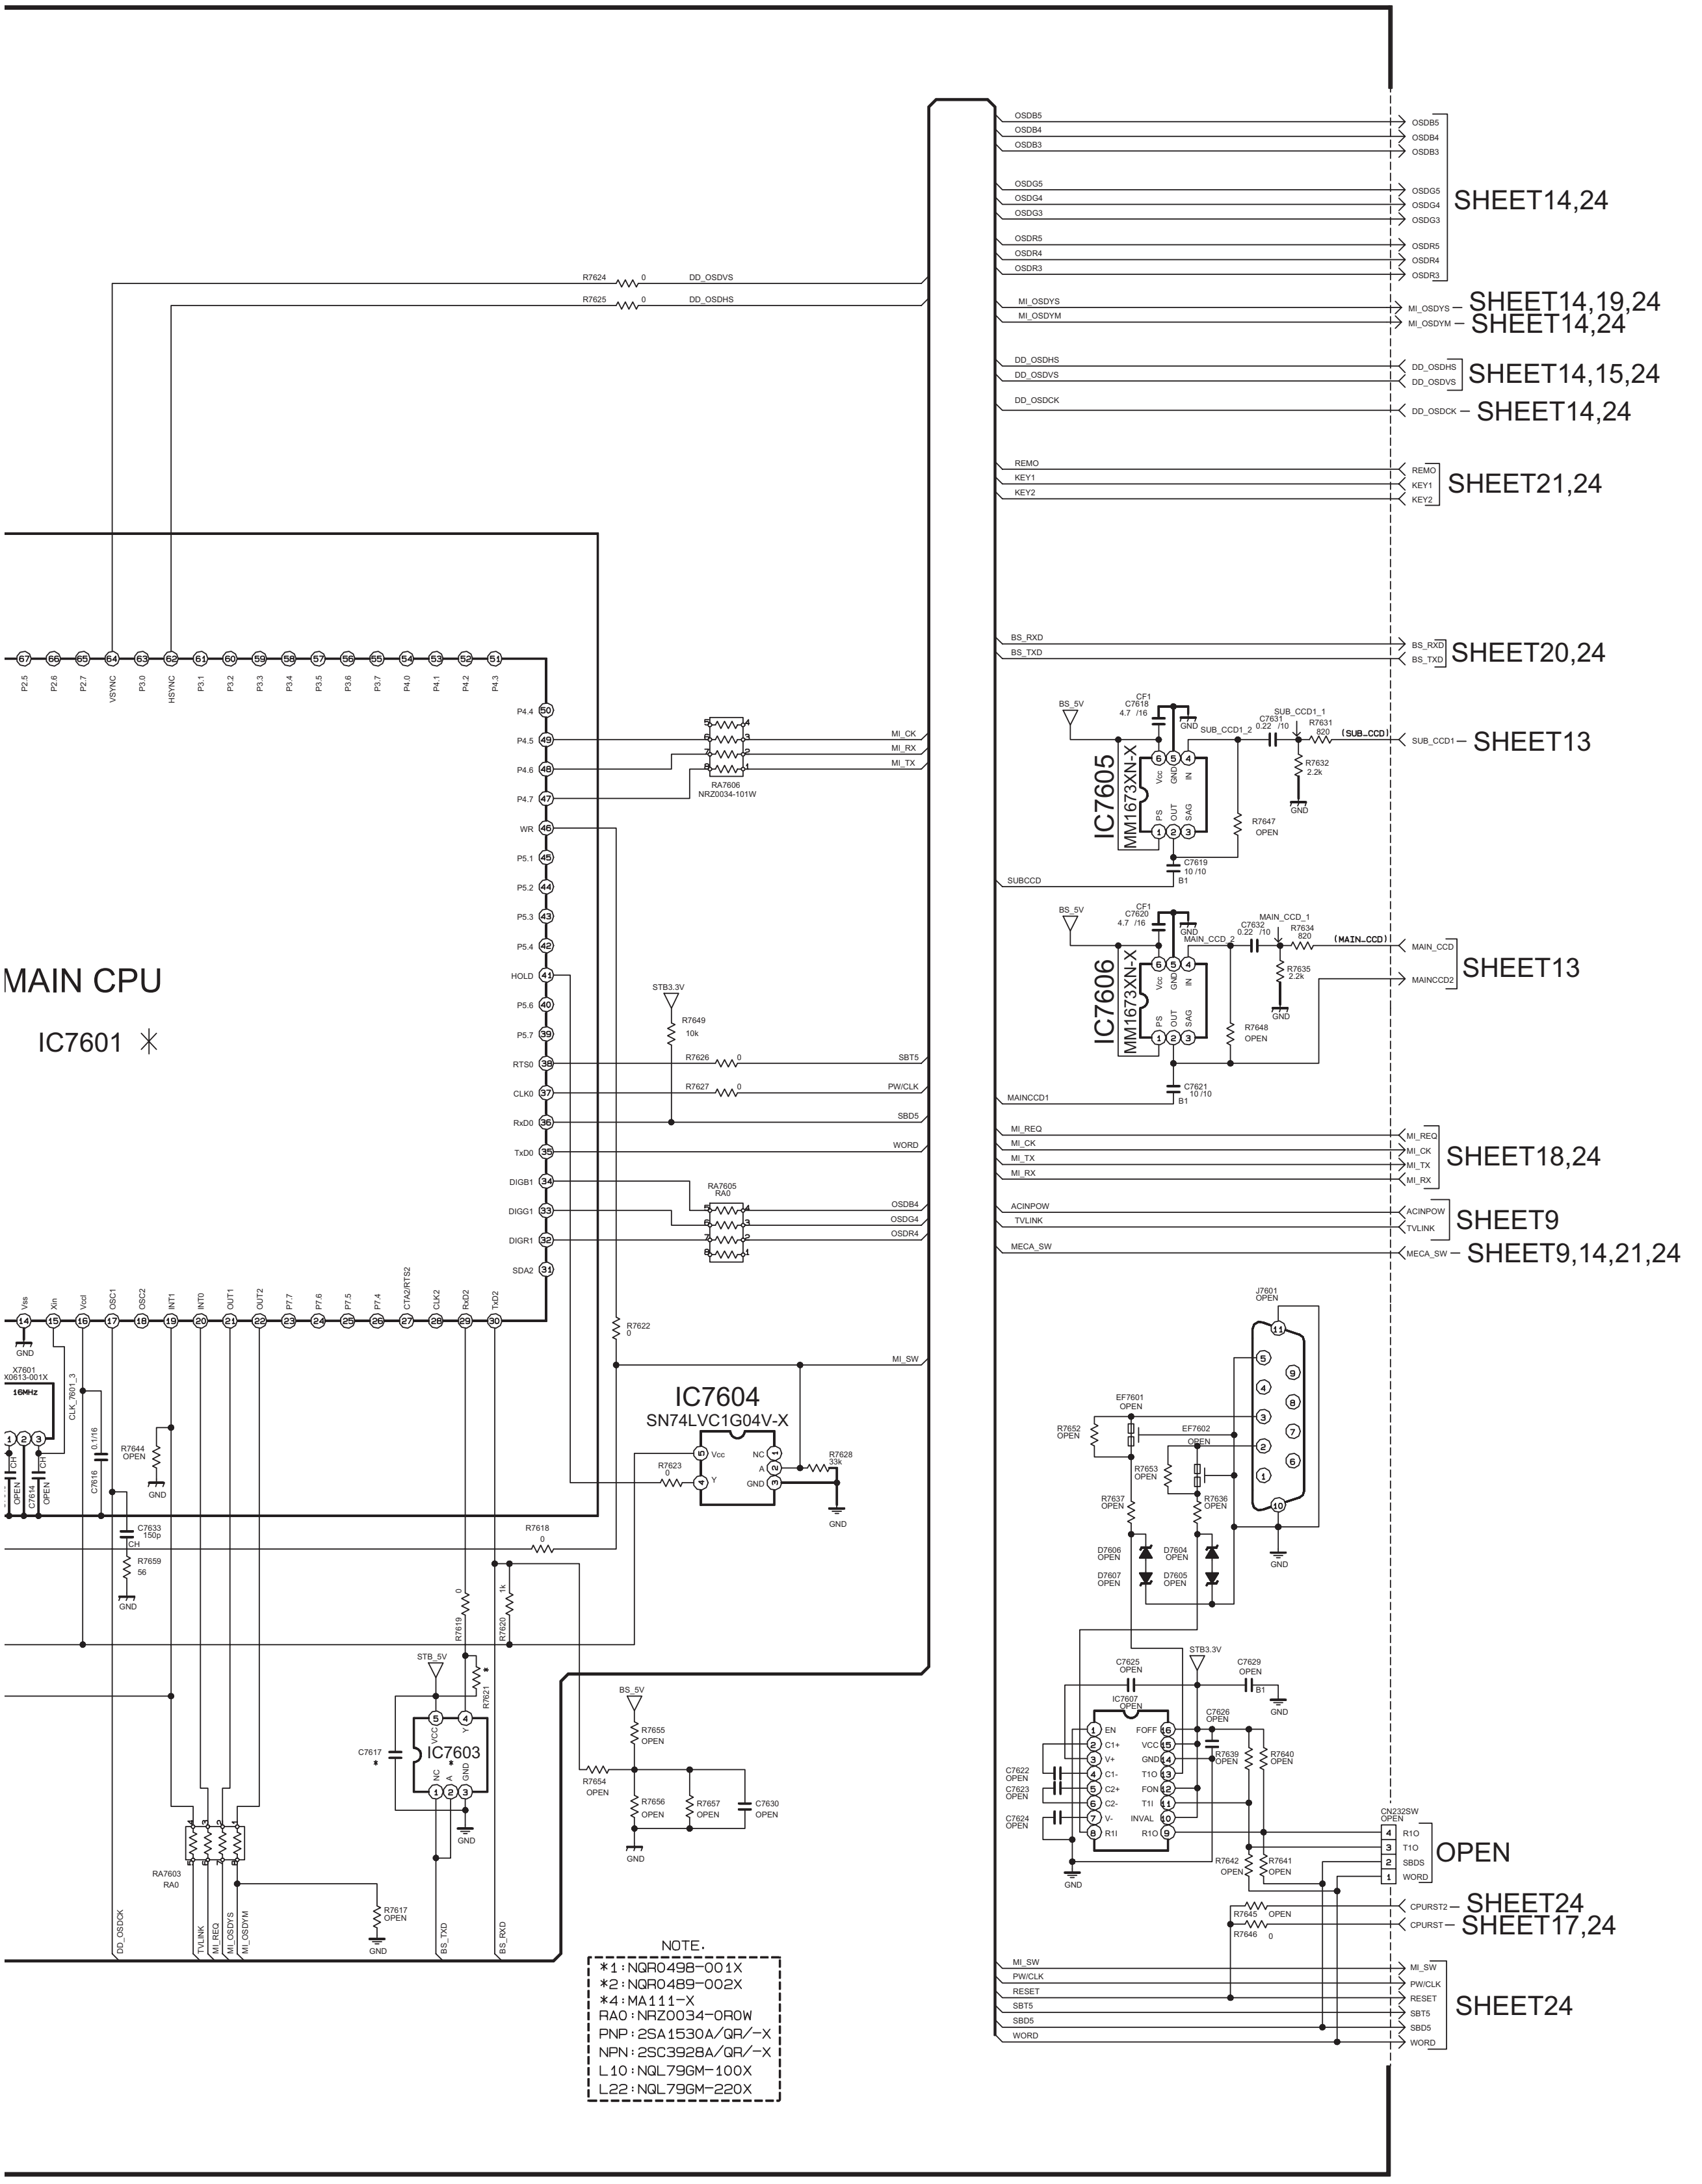
MAIN CPU
IC7601 *
SHEET14,24
SHEET14,19,24
SHEET14,24
SHEET14,15,24
SHEET14,24
SHEET21,24
SHEET20,24
SHEET13
SHEET13
SHEET18,24
SHEET9
SHEET9,14,21,24
OPEN
SHEET24
SHEET17,24
SHEET24
OSDB5
OSDB4
OSDB3
OSDG5
OSDG4
OSDG3
OSDR5
OSDR4
OSDR3
MI_OSDYS
MI_OSDYM
DD_OSDHS
DD_OSDVS
DD_OSDCK
REMO
KEY1
KEY2
BS_RXD
BS_TXD
SUB_CCD1
MAIN_CCD
MAINCCD2
MI_REQ
MI_CK
MI_TX
MI_RX
ACINPOW
TVLINK
MECA_SW
CPURST2
CPURST
MI_SW
PW/CLK
RESET
SBT5
SBD5
WORD
R7624 0
R7625 0
IC7605
MM1673XN-X
IC7606
MM1673XN-X
IC7604
SN74LVC1G04V-X
IC7603
IC7607 OPEN
RA7606 NRZ0034-101W
RA7605 RA0
RA7603 RA0
J7601 OPEN
CN232SW OPEN
X7601 X0613-001X
16MHz
STB3.3V
STB_5V
BS_5V
GND

NOTE.
*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

c10446006_0214_6/17_0.0

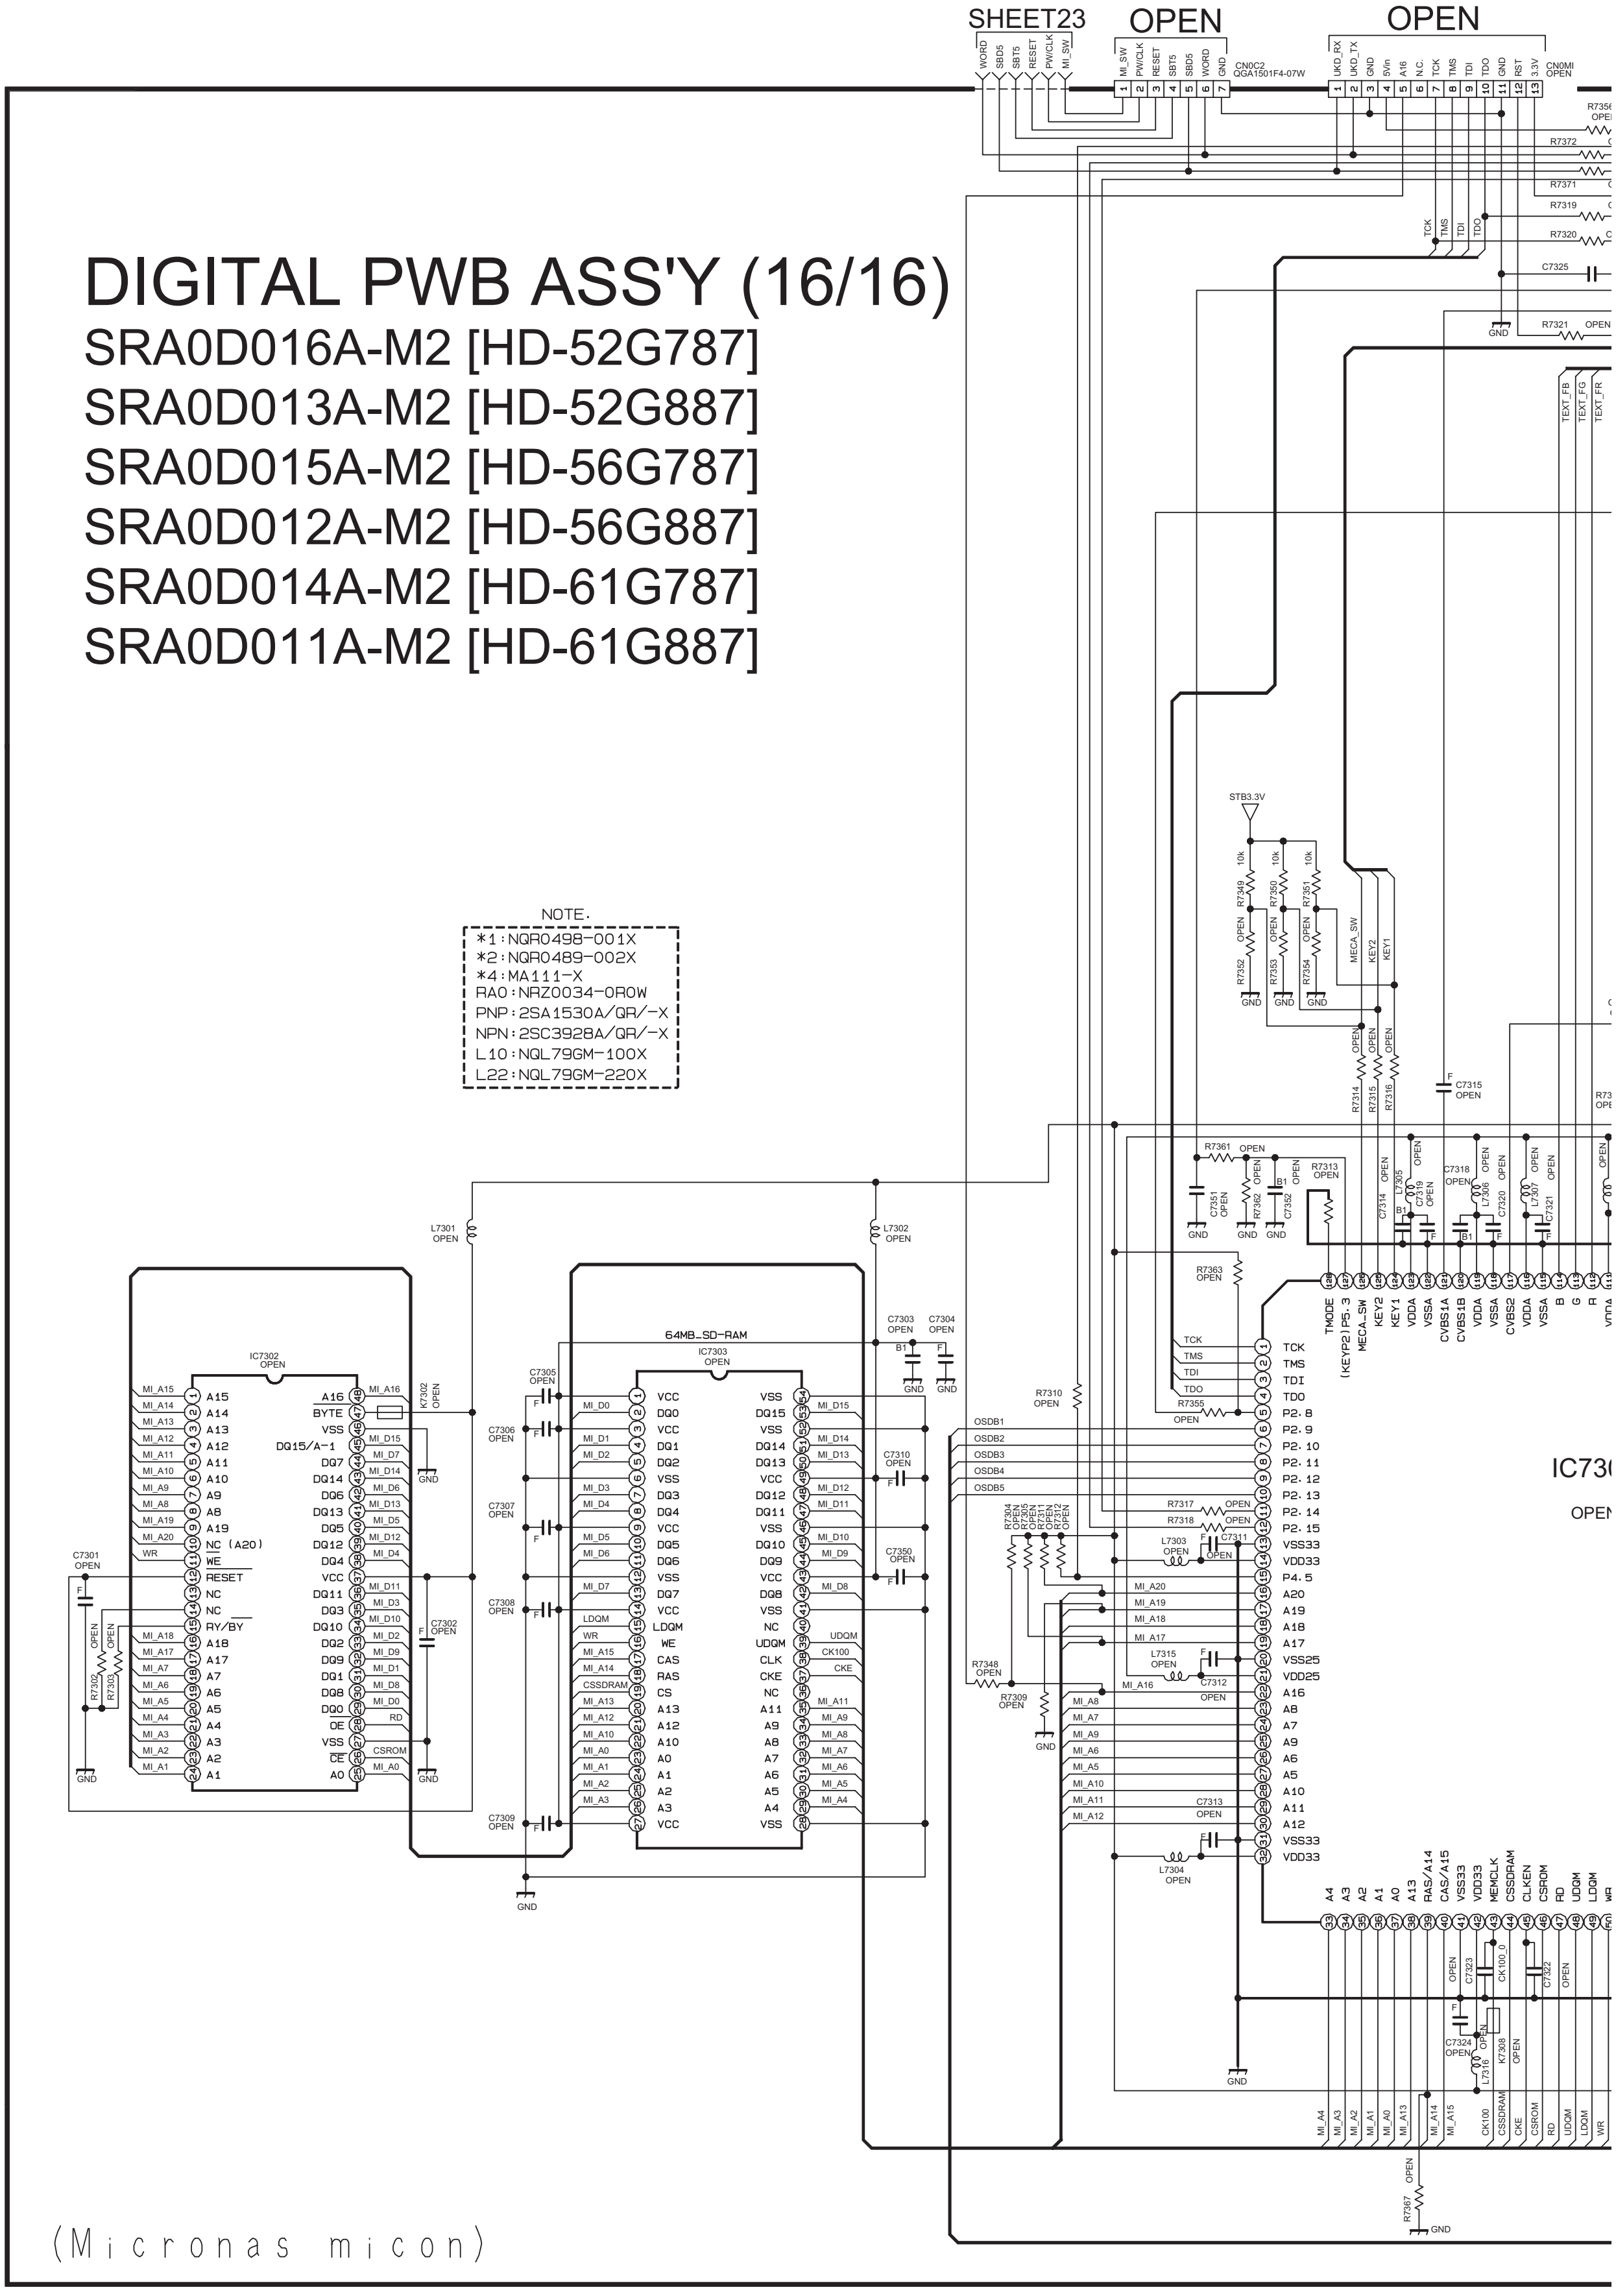

DIGITAL PWB ASS'Y (16/16)

SRA0D016A-M2 [HD-52G787]
SRA0D013A-M2 [HD-52G887]
SRA0D015A-M2 [HD-56G787]
SRA0D012A-M2 [HD-56G887]
SRA0D014A-M2 [HD-61G787]
SRA0D011A-M2 [HD-61G887]

NOTE.

*1:NQR0498-001X
*2:NQR0489-002X
*4:MA111-X
RA0:NRZ0034-0R0W
PNP:2SA1530A/QR/-X
NPN:2SC3928A/QR/-X
L10:NQL79GM-100X
L22:NQL79GM-220X

(Micronas micon)

SHEET23
OPEN
OPEN
WORD
SBD5
SBT5
RESET
PW/CLK
MI_SW
CN0C2
QGA1501F4-07W
CN0MI
OPEN
UKD_RX
UKD_TX
GND
5Vin
A16
N.C.
TCK
TMS
TDI
TDO
RST
3.3V
R7372
R7371
R7319
R7320
C7325
R7321
TEXT_FB
TEXT_FG
TEXT_FR
STB3.3V
R7349
R7350
R7351
10k
R7352
R7353
R7354
MECA_SW
KEY2
KEY1
R7314
R7315
R7316
C7315
R7361
R7362
R7313
C7351
C7352
R7363
L7301
L7302
IC7302
64MB_SD-RAM
IC7303
C7301
C7302
C7303
C7304
C7305
C7306
C7307
C7308
C7309
C7310
C7350
K7302
R7302
R7303
R7310
R7355
R7317
R7318
L7303
C7311
L7315
C7312
R7348
R7309
C7313
L7304
C7323
C7324
C7322
L7316
K7308
CK100_0
R7367
OSDB1
OSDB2
OSDB3
OSDB4
OSDB5
IC730
TMODE
(KEYP2)P5.3
MECA_SW
KEY2
KEY1
VDDA
VSSA
CVBS1A
CVBS1B
CVBS2
TCK
TMS
TDI
TDO
P2.8
P2.9
P2.10
P2.11
P2.12
P2.13
P2.14
P2.15
VSS33
VDD33
P4.5
A20
A19
A18
A17
VSS25
VDD25
A16
A8
A7
A9
A6
A5
A10
A11
A12
RAS/A14
CAS/A15
MEMCLK
CSSDRAM
CLKEN
CSROM
RD
UDQM
LDQM
WR
BYTE
DQ15/A-1
RY/BY
NC (A20)
GND

ATSC TUNER
MODULE PWB

EU, ASIA MODEL : MOUNT
etc : NO MOUNT

* DIFFERENCE LIST

ASSY NO.	SRA -0D011A	SRA -0D012A	SRA -0D013A	SRA -0D014A	SRA -0D015A	SRA -0D016A	SRA -0D017A	SRA -0D018A	SRA -0D019A	SRA -0D020A	SRA -0D021A	SRA -0D022A	SRA -0D023A	SRA -0D024A
	OLLC09895	OLLC09895 -02	OLLC09895 -03	OLLC09895 -04	OLLC09895 -05	OLLC09895 -06	OLLC10086	OLLC10086 -02	OLLC10086 -03	OLLC10086 -04	OLLC10086 -05	OLLC10086 -06	OLLC10086 -07	OLLC10086 -08
R7370	0	0	0	0	0	0	0	0	0	0	0	0	OPEN	OPEN
CN0ID	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	QGA1217F1 -05X	OPEN	OPEN

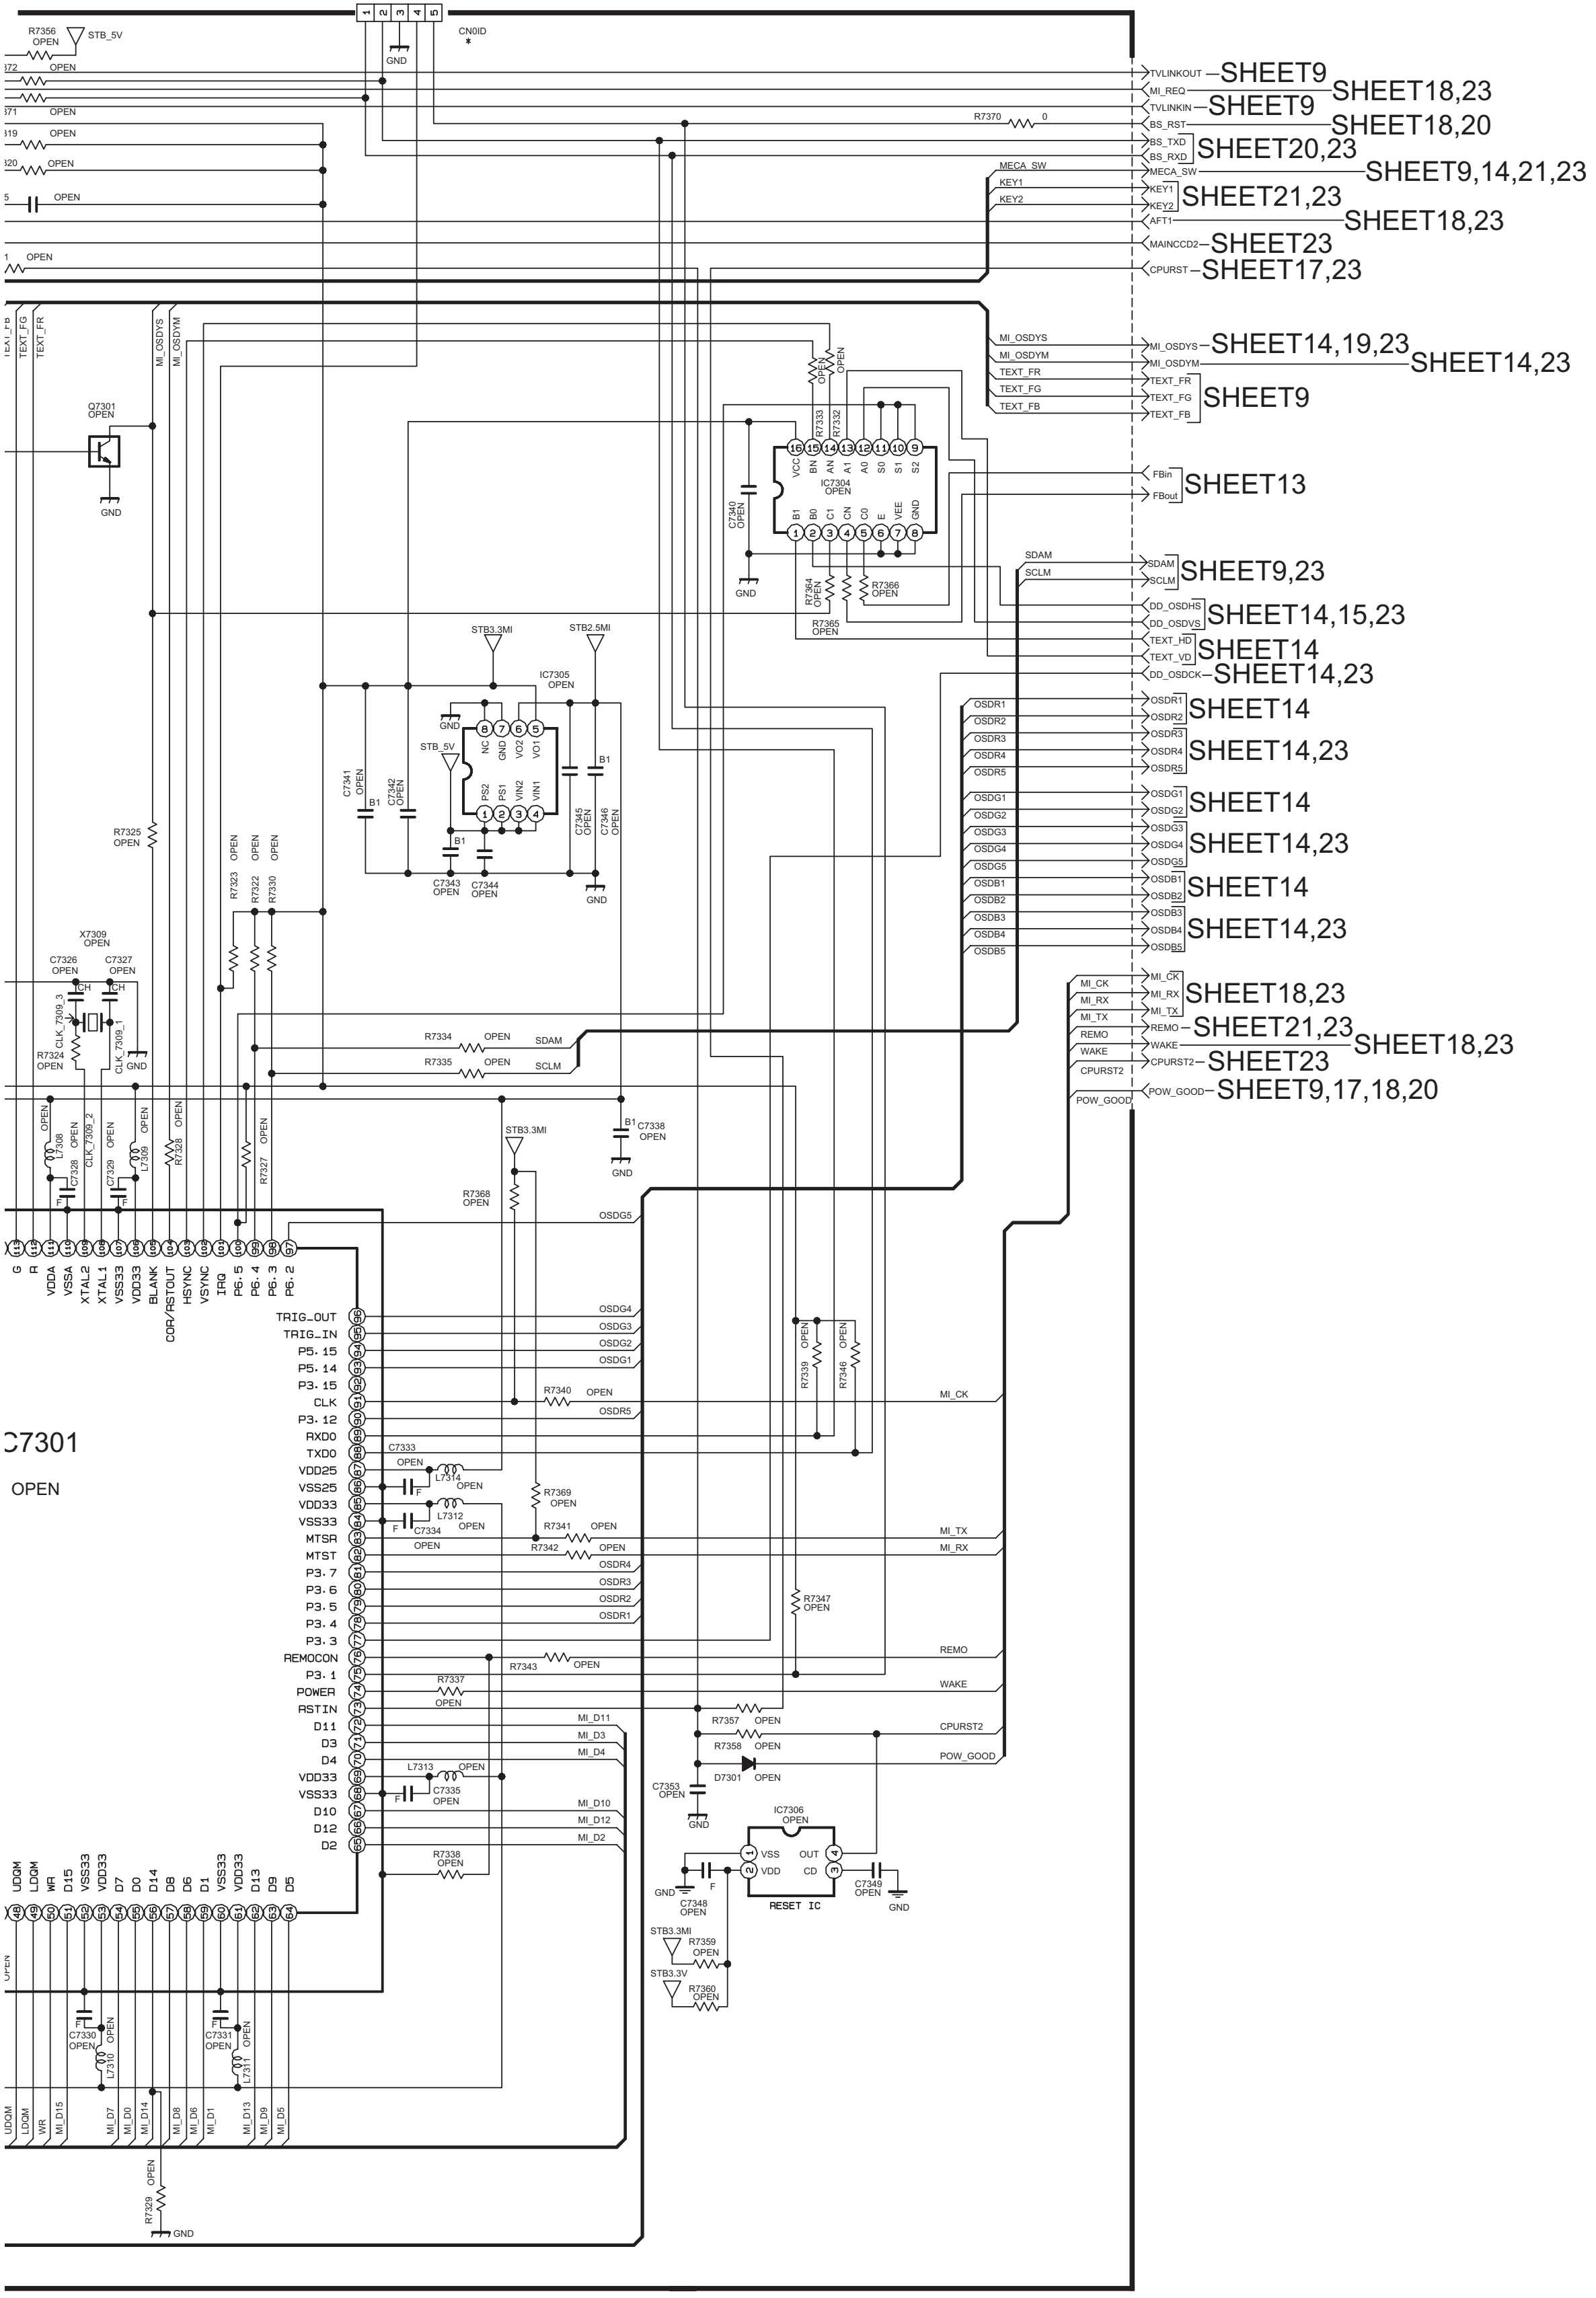
UKD_RX
UKD_TX
GND
IRQ
DM_RESET
CN0ID
R7356 OPEN
STB_5V
R7370 0
MECA_SW
KEY1
KEY2
TVLINKOUT SHEET9
MI_REQ SHEET18,23
TVLINKIN SHEET9
BS_RST SHEET18,20
BS_TXD
BS_RXD SHEET20,23
MECA_SW SHEET9,14,21,23
KEY1
KEY2 SHEET21,23
AFT1 SHEET18,23
MAINCCD2 SHEET23
CPURST SHEET17,23
MI_OSDYS SHEET14,19,23
MI_OSDYM SHEET14,23
TEXT_FR
TEXT_FG
TEXT_FB SHEET9
FBin
FBout SHEET13
SDAM
SCLM SHEET9,23
DD_OSDHS
DD_OSDVS SHEET14,15,23
TEXT_HD
TEXT_VD SHEET14
DD_OSDCK SHEET14,23
OSDR1
OSDR2 SHEET14
OSDR3
OSDR4
OSDR5 SHEET14,23
OSDG1
OSDG2 SHEET14
OSDG3
OSDG4
OSDG5 SHEET14,23
OSDB1
OSDB2 SHEET14
OSDB3
OSDB4
OSDB5 SHEET14,23
MI_CK
MI_RX
MI_TX SHEET18,23
REMO SHEET21,23
WAKE SHEET18,23
CPURST2 SHEET23
POW_GOOD SHEET9,17,18,20
Q7301 OPEN
IC7304 OPEN
VCC BN AN A1 A0 S0 S1 S2
B1 B0 C1 CN C0 E VEE GND
C7340 OPEN
R7333
R7332
R7364 OPEN
R7366 OPEN
R7365 OPEN
STB3.3MI
STB2.5MI
IC7305 OPEN
NC GND VO2 VO1
PS2 PS1 VIN2 VIN1
C7341 OPEN
C7342 OPEN
C7343 OPEN
C7344 OPEN
C7345 OPEN
C7346 OPEN
R7325 OPEN
R7323 R7322 R7330 OPEN
X7309 OPEN
C7326 OPEN
C7327 OPEN
CLK_7309_3
CLK_7309_1
R7324 OPEN
R7334 OPEN SDAM
R7335 OPEN SCLM
C7338 OPEN
L7308 C7328 CLK_7309_2 C7329 L7309 R7328 R7327
R7368 OPEN
G R VDDA VSSA XTAL2 XTAL1 VSS33 VDD33 BLANK COR/RSTOUT HSYNC VSYNC IRQ P6.5 P6.4 P6.3 P6.2
TRIG_OUT
TRIG_IN
P5.15
P5.14
P3.15
CLK
P3.12
RXD0
TXD0
VDD25
VSS25
VDD33
VSS33
MTSR
MTST
P3.7
P3.6
P3.5
P3.4
P3.3
REMOCON
P3.1
POWER
RSTIN
D11
D3
D4
VDD33
VSS33
D10
D12
D2
IC7301
OPEN
R7340 OPEN
C7333 OPEN
L7314 OPEN
L7312 OPEN
C7334 OPEN
R7369 OPEN
R7341 OPEN
R7342 OPEN
R7343 OPEN
R7337 OPEN
R7339 OPEN
R7348 OPEN
R7347 OPEN
L7313 OPEN
C7335 OPEN
R7338 OPEN
R7357 OPEN
R7358 OPEN
D7301 OPEN
C7353 OPEN
IC7306 OPEN
VSS VDD OUT CD
RESET IC
C7348 OPEN
C7349 OPEN
STB3.3MI R7359 OPEN
STB3.3V R7360 OPEN
MI_D11 MI_D3 MI_D4 MI_D10 MI_D12 MI_D2
UDQM LDQM WR D15 VSS33 VDD33 D7 D0 D14 D8 D6 D1 VSS33 VDD33 D13 D9 D5
C7330 OPEN L7310 OPEN
C7331 OPEN L7311 OPEN
MI_D15 MI_D7 MI_D0 MI_D14 MI_D8 MI_D6 MI_D1 MI_D13 MI_D9 MI_D5
R7329 OPEN
GND

c10446007_0214_7/17_0.0

DRIVE PWB CIRCUIT DIAGRAM (1/7) [LVDS_INPUT] SHEET 25

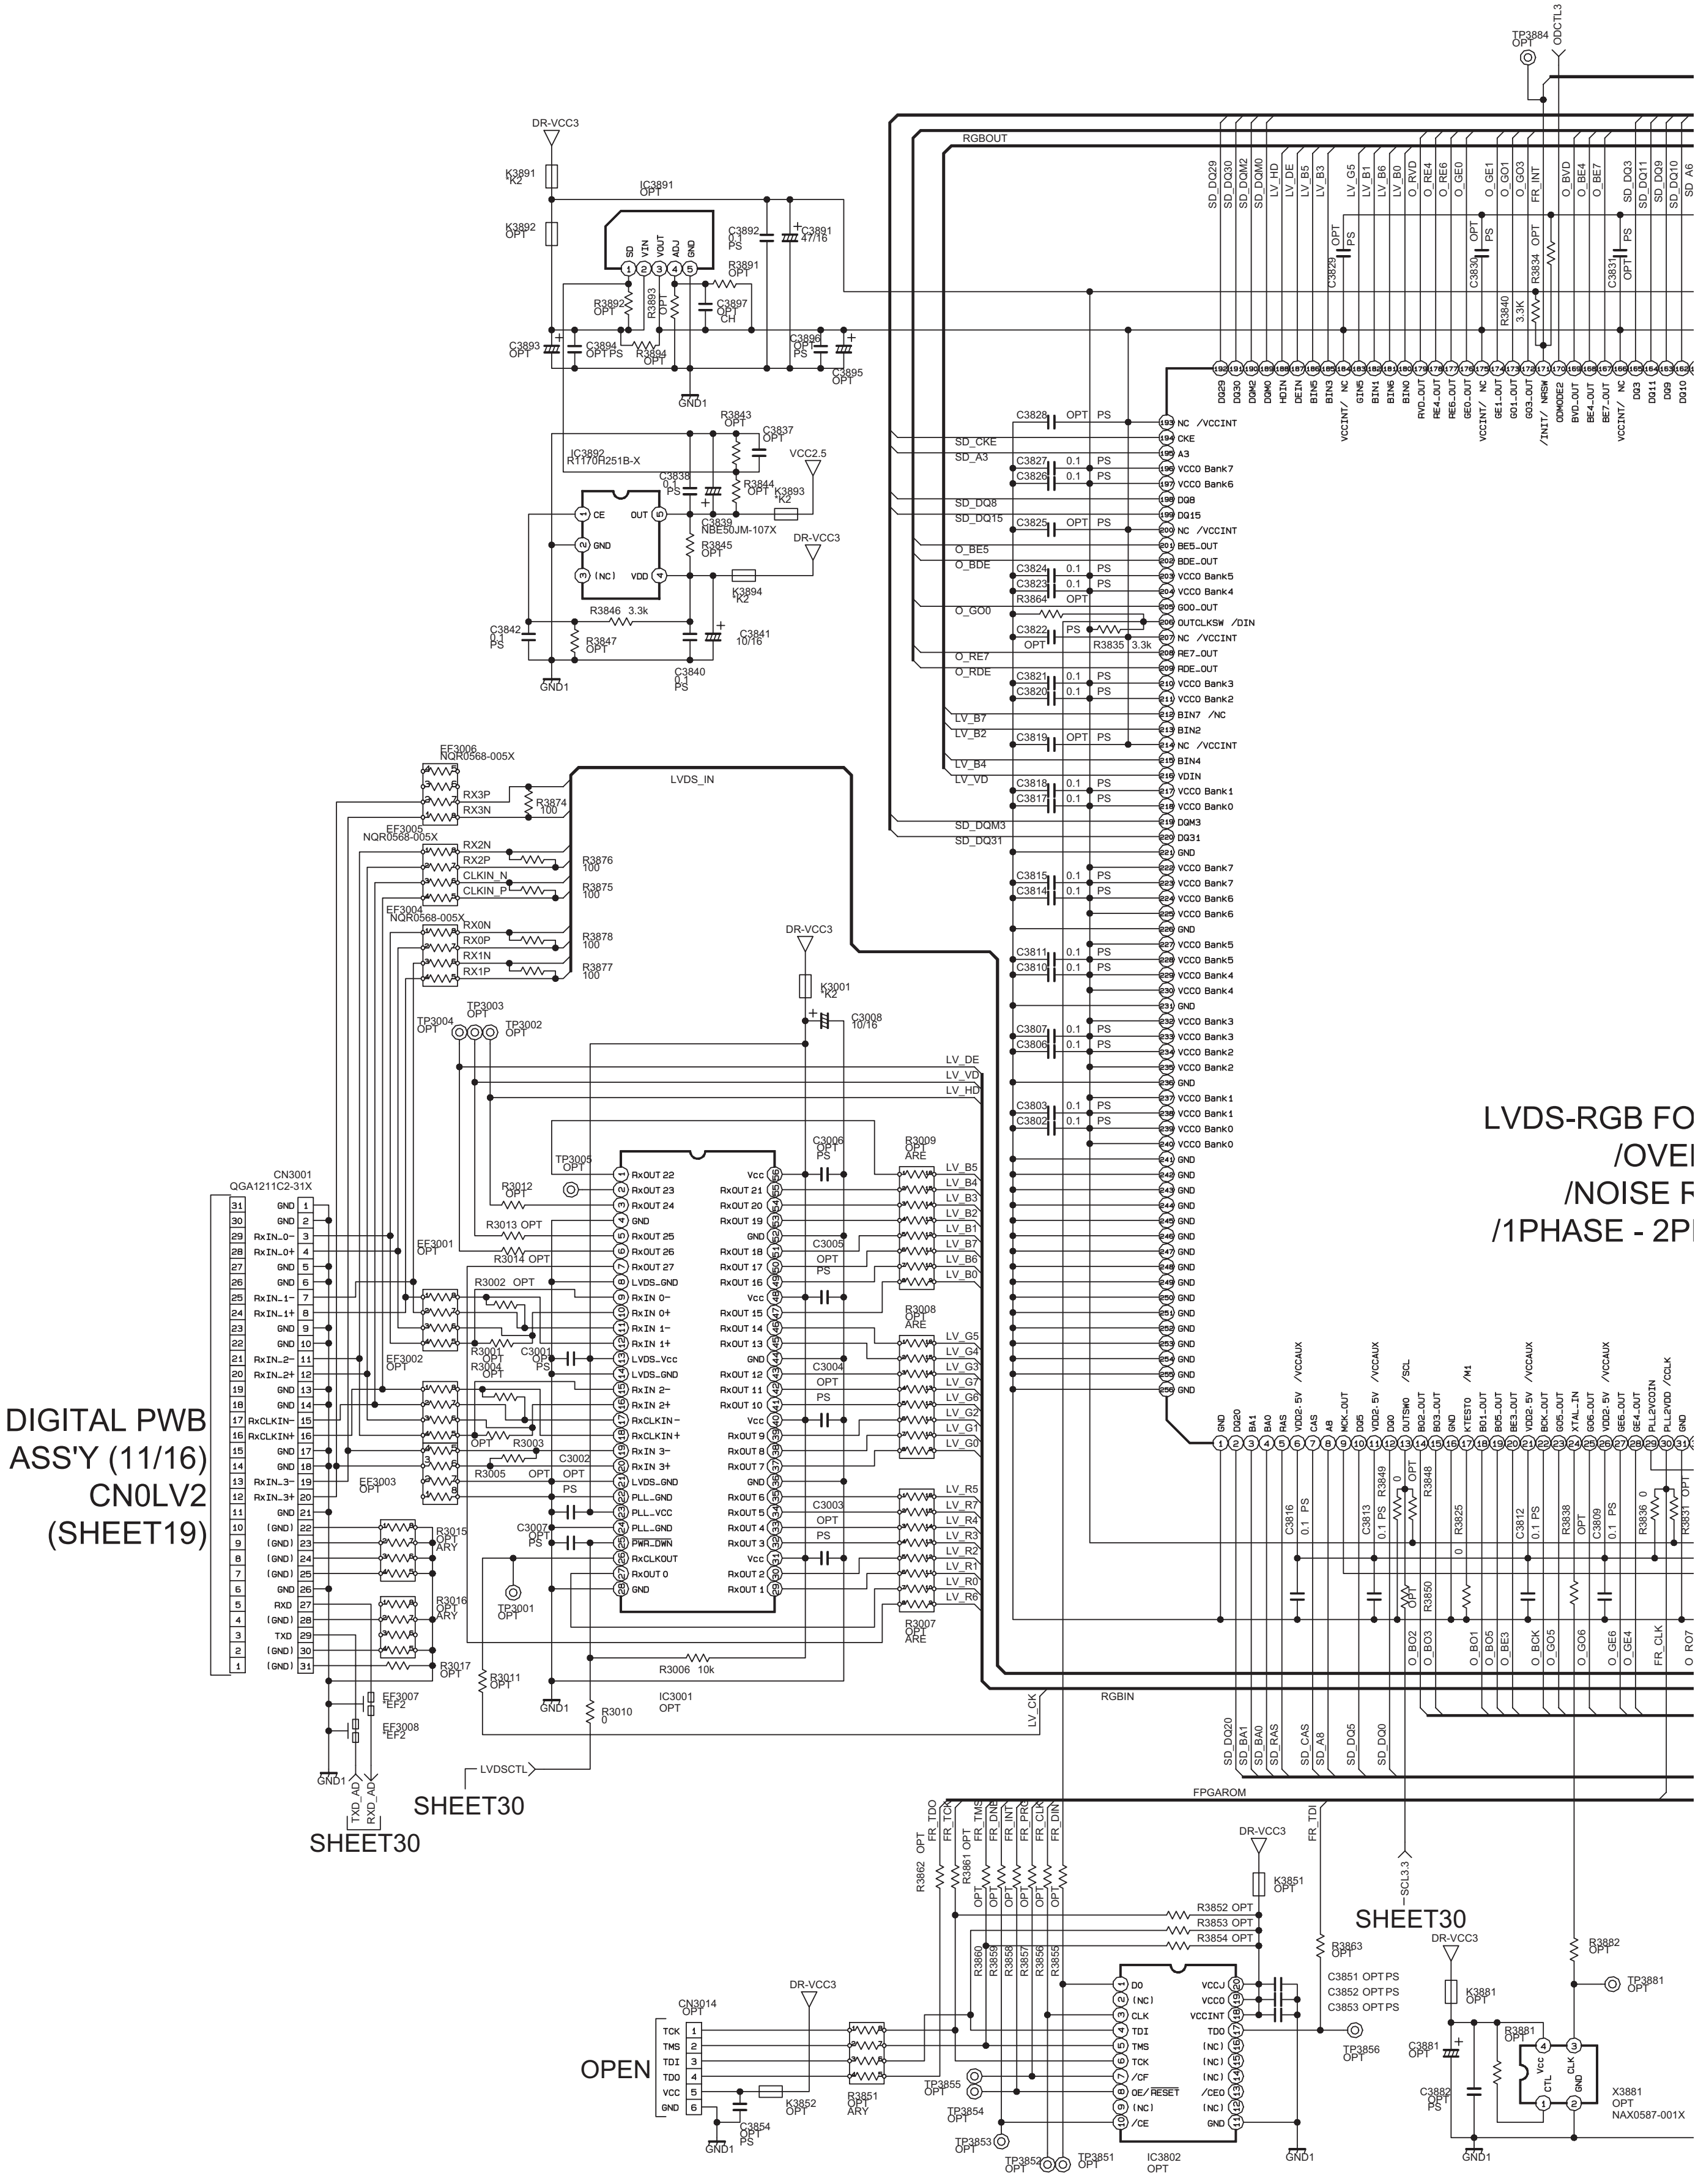
SHEET30
ODCTL3
TP3884 OPT
RGBOUT
DR-VCC3
K3891 K2
K3892 OPT
IC3891 OPT
C3892 0.1 PS
C3891 47/16
R3891 OPT
R3892 OPT
R3893 OPT
C3897 OPT CH
C3893 OPT
C3894 OPT PS
R3894 OPT
C3896 OPT PS
C3895 OPT
GND1
R3843 OPT
C3837 OPT
IC3892 RT170R251B-X
C3838 0.1 PS
R3844 OPT
K3893 K2
VCC2.5
C3839 NBE50JM-107X
R3845 OPT
DR-VCC3
K3894 K2
R3846 3.3k
C3842 0.1 PS
R3847 OPT
C3841 10/16
C3840 0.1 PS
GND1
EF3006 NQR0568-005X
RX3P
RX3N
R3874 100
LVDS_IN
EF3005 NQR0568-005X
RX2N
RX2P
CLKIN_N
CLKIN_P
R3876 100
R3875 100
EF3004 NQR0568-005X
RX0N
RX0P
RX1N
RX1P
R3878 100
R3877 100
DR-VCC3
K3001 K2
C3008 10/16
TP3004 OPT
TP3003 OPT
TP3002 OPT
LV_DE
LV_VD
LV_HD
CN3001 QGA1211C2-31X
TP3005 OPT
R3012 OPT
R3013 OPT
R3014 OPT
EF3001 OPT
R3002 OPT
R3001 OPT
C3001 OPT PS
R3004 OPT
EF3002 OPT
R3003
R3005 OPT
C3002 OPT PS
EF3003 OPT
C3007 OPT PS
R3015 OPT ARY
R3016 OPT ARY
TP3001 OPT
R3017 OPT
R3011 OPT
R3006 10k
IC3001 OPT
R3010 0
EF3007 EF2
EF3008 EF2
GND1
C3006 OPT PS
C3005 OPT PS
C3004 OPT PS
C3003 OPT PS
R3009 OPT ARE
R3008 OPT ARE
R3007 OPT ARE
LV_B5 LV_B4 LV_B3 LV_B2 LV_B1 LV_B7 LV_B6 LV_B0
LV_G5 LV_G4 LV_G3 LV_G7 LV_G6 LV_G2 LV_G1 LV_G0
LV_R5 LV_R7 LV_R4 LV_R3 LV_R2 LV_R1 LV_R0 LV_R6
RxOUT 22 RxOUT 23 RxOUT 24 GND RxOUT 25 RxOUT 26 RxOUT 27 LVDS_GND RxIN 0- RxIN 0+ RxIN 1- RxIN 1+ LVDS_Vcc LVDS_GND RxIN 2- RxIN 2+ RxCLKIN- RxCLKIN+ RxIN 3- RxIN 3+ LVDS_GND PLL_GND PLL_VCC PLL_GND PWR_DWN RxCLKOUT RxOUT 0 GND
Vcc RxOUT 21 RxOUT 20 RxOUT 19 GND RxOUT 18 RxOUT 17 RxOUT 16 Vcc RxOUT 15 RxOUT 14 RxOUT 13 GND RxOUT 12 RxOUT 11 RxOUT 10 Vcc RxOUT 9 RxOUT 8 RxOUT 7 GND RxOUT 6 RxOUT 5 RxOUT 4 GND RxOUT 3 Vcc RxOUT 2 RxOUT 1
GND GND RxIN_0- RxIN_0+ GND GND RxIN_1- RxIN_1+ GND GND RxIN_2- RxIN_2+ GND GND RxCLKIN- RxCLKIN+ GND GND RxIN_3- RxIN_3+ GND (GND) (GND) (GND) (GND) GND RXD (GND) TXD (GND) (GND)
DIGITAL PWB ASS'Y (11/16) CN0LV2 (SHEET19)
TXD_AD
RXD_AD
SHEET30
LVDSCTL
SHEET30
LV_CK
RGBIN
SD_DQ29 SD_DQ30 SD_DQM2 SD_DQM0 LV_HD LV_DE LV_B5 LV_B3 LV_G5 LV_B1 LV_B6 LV_B0 O_RVD O_RE4 O_RE6 O_GE0 O_GE1 O_GO1 O_GO3 FR_INT O_BVD O_BE4 O_BE7 SD_DQ3 SD_DQ11 SD_DQ10 SD_A6
C3829 OPT PS
C3830 OPT PS
R3834 OPT
R3840 3.3K
C3831 OPT PS
SD_CKE SD_A3 SD_DQ8 SD_DQ15 O_BE5 O_BDE O_GO0 O_RE7 O_RDE LV_B7 LV_B2 LV_B4 LV_VD SD_DQM3 SD_DQ31
C3828 OPT PS
C3827 0.1 PS
C3826 0.1 PS
C3825 OPT PS
C3824 0.1 PS
C3823 0.1 PS
R3864 OPT
C3822 PS OPT
R3835 3.3k
C3821 0.1 PS
C3820 0.1 PS
C3819 OPT PS
C3818 0.1 PS
C3817 0.1 PS
C3815 0.1 PS
C3814 0.1 PS
C3811 0.1 PS
C3810 0.1 PS
C3807 0.1 PS
C3806 0.1 PS
C3803 0.1 PS
C3802 0.1 PS
NC /VCCINT CKE A3 VCCO Bank7 VCCO Bank6 DQ8 DQ15 NC /VCCINT BE5_OUT BDE_OUT VCCO Bank5 VCCO Bank4 GO0_OUT OUTCLKSW /DIN NC /VCCINT RE7_OUT RDE_OUT VCCO Bank3 VCCO Bank2 BIN7 /NC BIN2 NC /VCCINT BIN4 VDIN VCCO Bank1 VCCO Bank0 DQM3 DQ31 GND VCCO Bank7 VCCO Bank7 VCCO Bank6 VCCO Bank6 GND VCCO Bank5 VCCO Bank5 VCCO Bank4 VCCO Bank4 GND VCCO Bank3 VCCO Bank3 VCCO Bank2 VCCO Bank2 GND VCCO Bank1 VCCO Bank1 VCCO Bank0 VCCO Bank0 GND
LVDS-RGB FO
/OVE
/NOISE R
/1PHASE - 2P
C3816 0.1 PS
C3813 0.1 PS
R3849 0
R3848 OPT
R3850 OPT
R3825 0
C3812 0.1 PS
R3838 OPT
C3809 0.1 PS
R3836 0
R3837 OPT
O_BO2 O_BO3 O_BO1 O_BO5 O_BE3 O_BCK O_GO5 O_GO6 O_GE6 O_GE4 FR_CLK O_RO7
SD_DQ20 SD_BA1 SD_BA0 SD_RAS SD_CAS SD_A8 SD_DQ5 SD_DQ0
FPGAROM
FR_TDO FR_TCK FR_TMS FR_DIN FR_INT FR_PRG FR_CLK FR_DIN FR_TDI
R3862 OPT
R3861 OPT
DR-VCC3
K3851 OPT
R3852 OPT
R3853 OPT
R3854 OPT
R3860 R3859 R3858 R3857 R3856 R3855
R3863 OPT
C3851 OPT PS
C3852 OPT PS
C3853 OPT PS
D0 (NC) CLK TDI TMS TCK /CF OE/RESET (NC) /CE
VCCJ VCCO VCCINT TDO (NC) (NC) (NC) /CEO (NC) GND
IC3802 OPT
TP3856 OPT
TP3855 OPT
TP3854 OPT
TP3853 OPT
TP3852 OPT
TP3851 OPT
GND1
SCL3.3
SHEET30
DR-VCC3
K3881 OPT
R3881 OPT
C3881 OPT
C3882 OPT PS
R3882 OPT
TP3881 OPT
X3881 OPT NAX0587-001X
GND1
CN3014 OPT
TCK TMS TDI TDO VCC GND
OPEN
DR-VCC3
R3851 OPT ARY
K3852 OPT
C3854 OPT PS
GND1

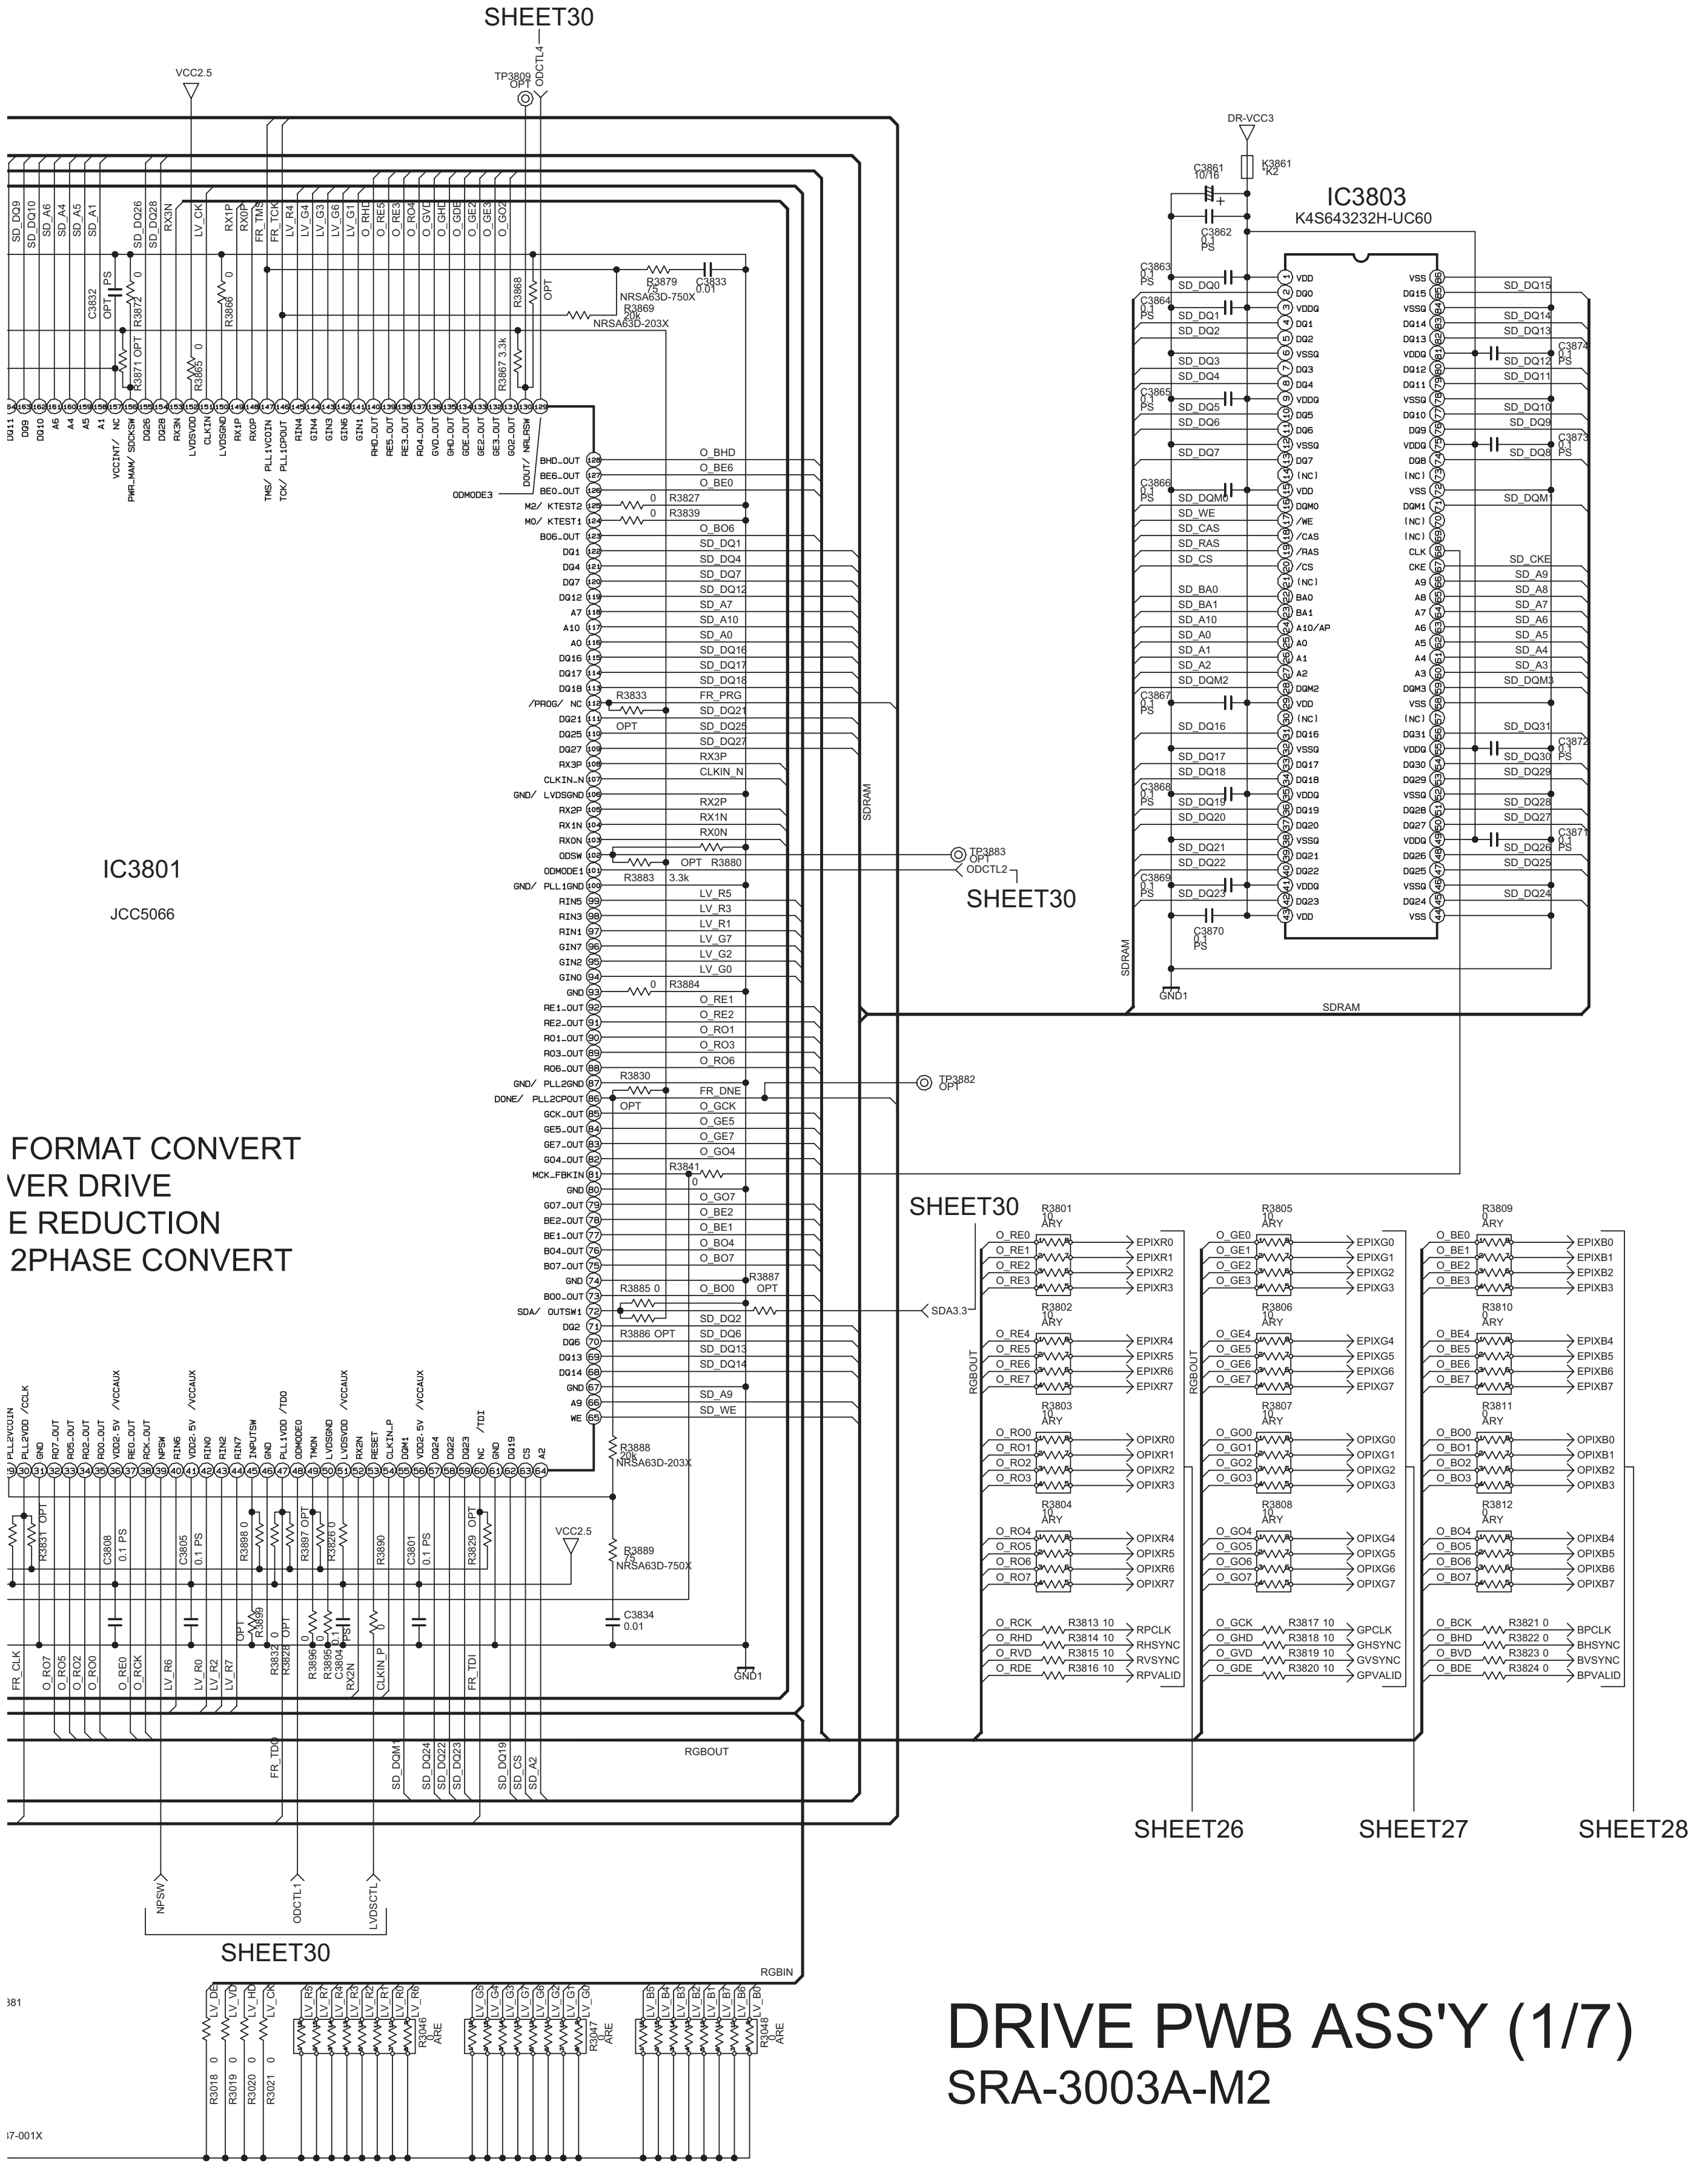
SHEET30
VCC2.5
TP3809 OPT
ODCTL4
IC3801
JCC5066
FORMAT CONVERT
VER DRIVE
E REDUCTION
2PHASE CONVERT
DR-VCC3
C3861 10/16
K3861 K2
IC3803
K4S643232H-UC60
SDRAM
TP3883 OPT
ODCTL2
SHEET30
TP3882 OPT
SHEET30
SDA3.3
RGBOUT
SHEET26
SHEET27
SHEET28
NPSW
ODCTL1
LVDSCTL
SHEET30
RGBIN
GND1

DRIVE PWB ASS'Y (1/7)

SRA-3003A-M2

DRIVE PWB CIRCUIT DIAGRAM (2/7) [R_DRIVER] SHEET 26

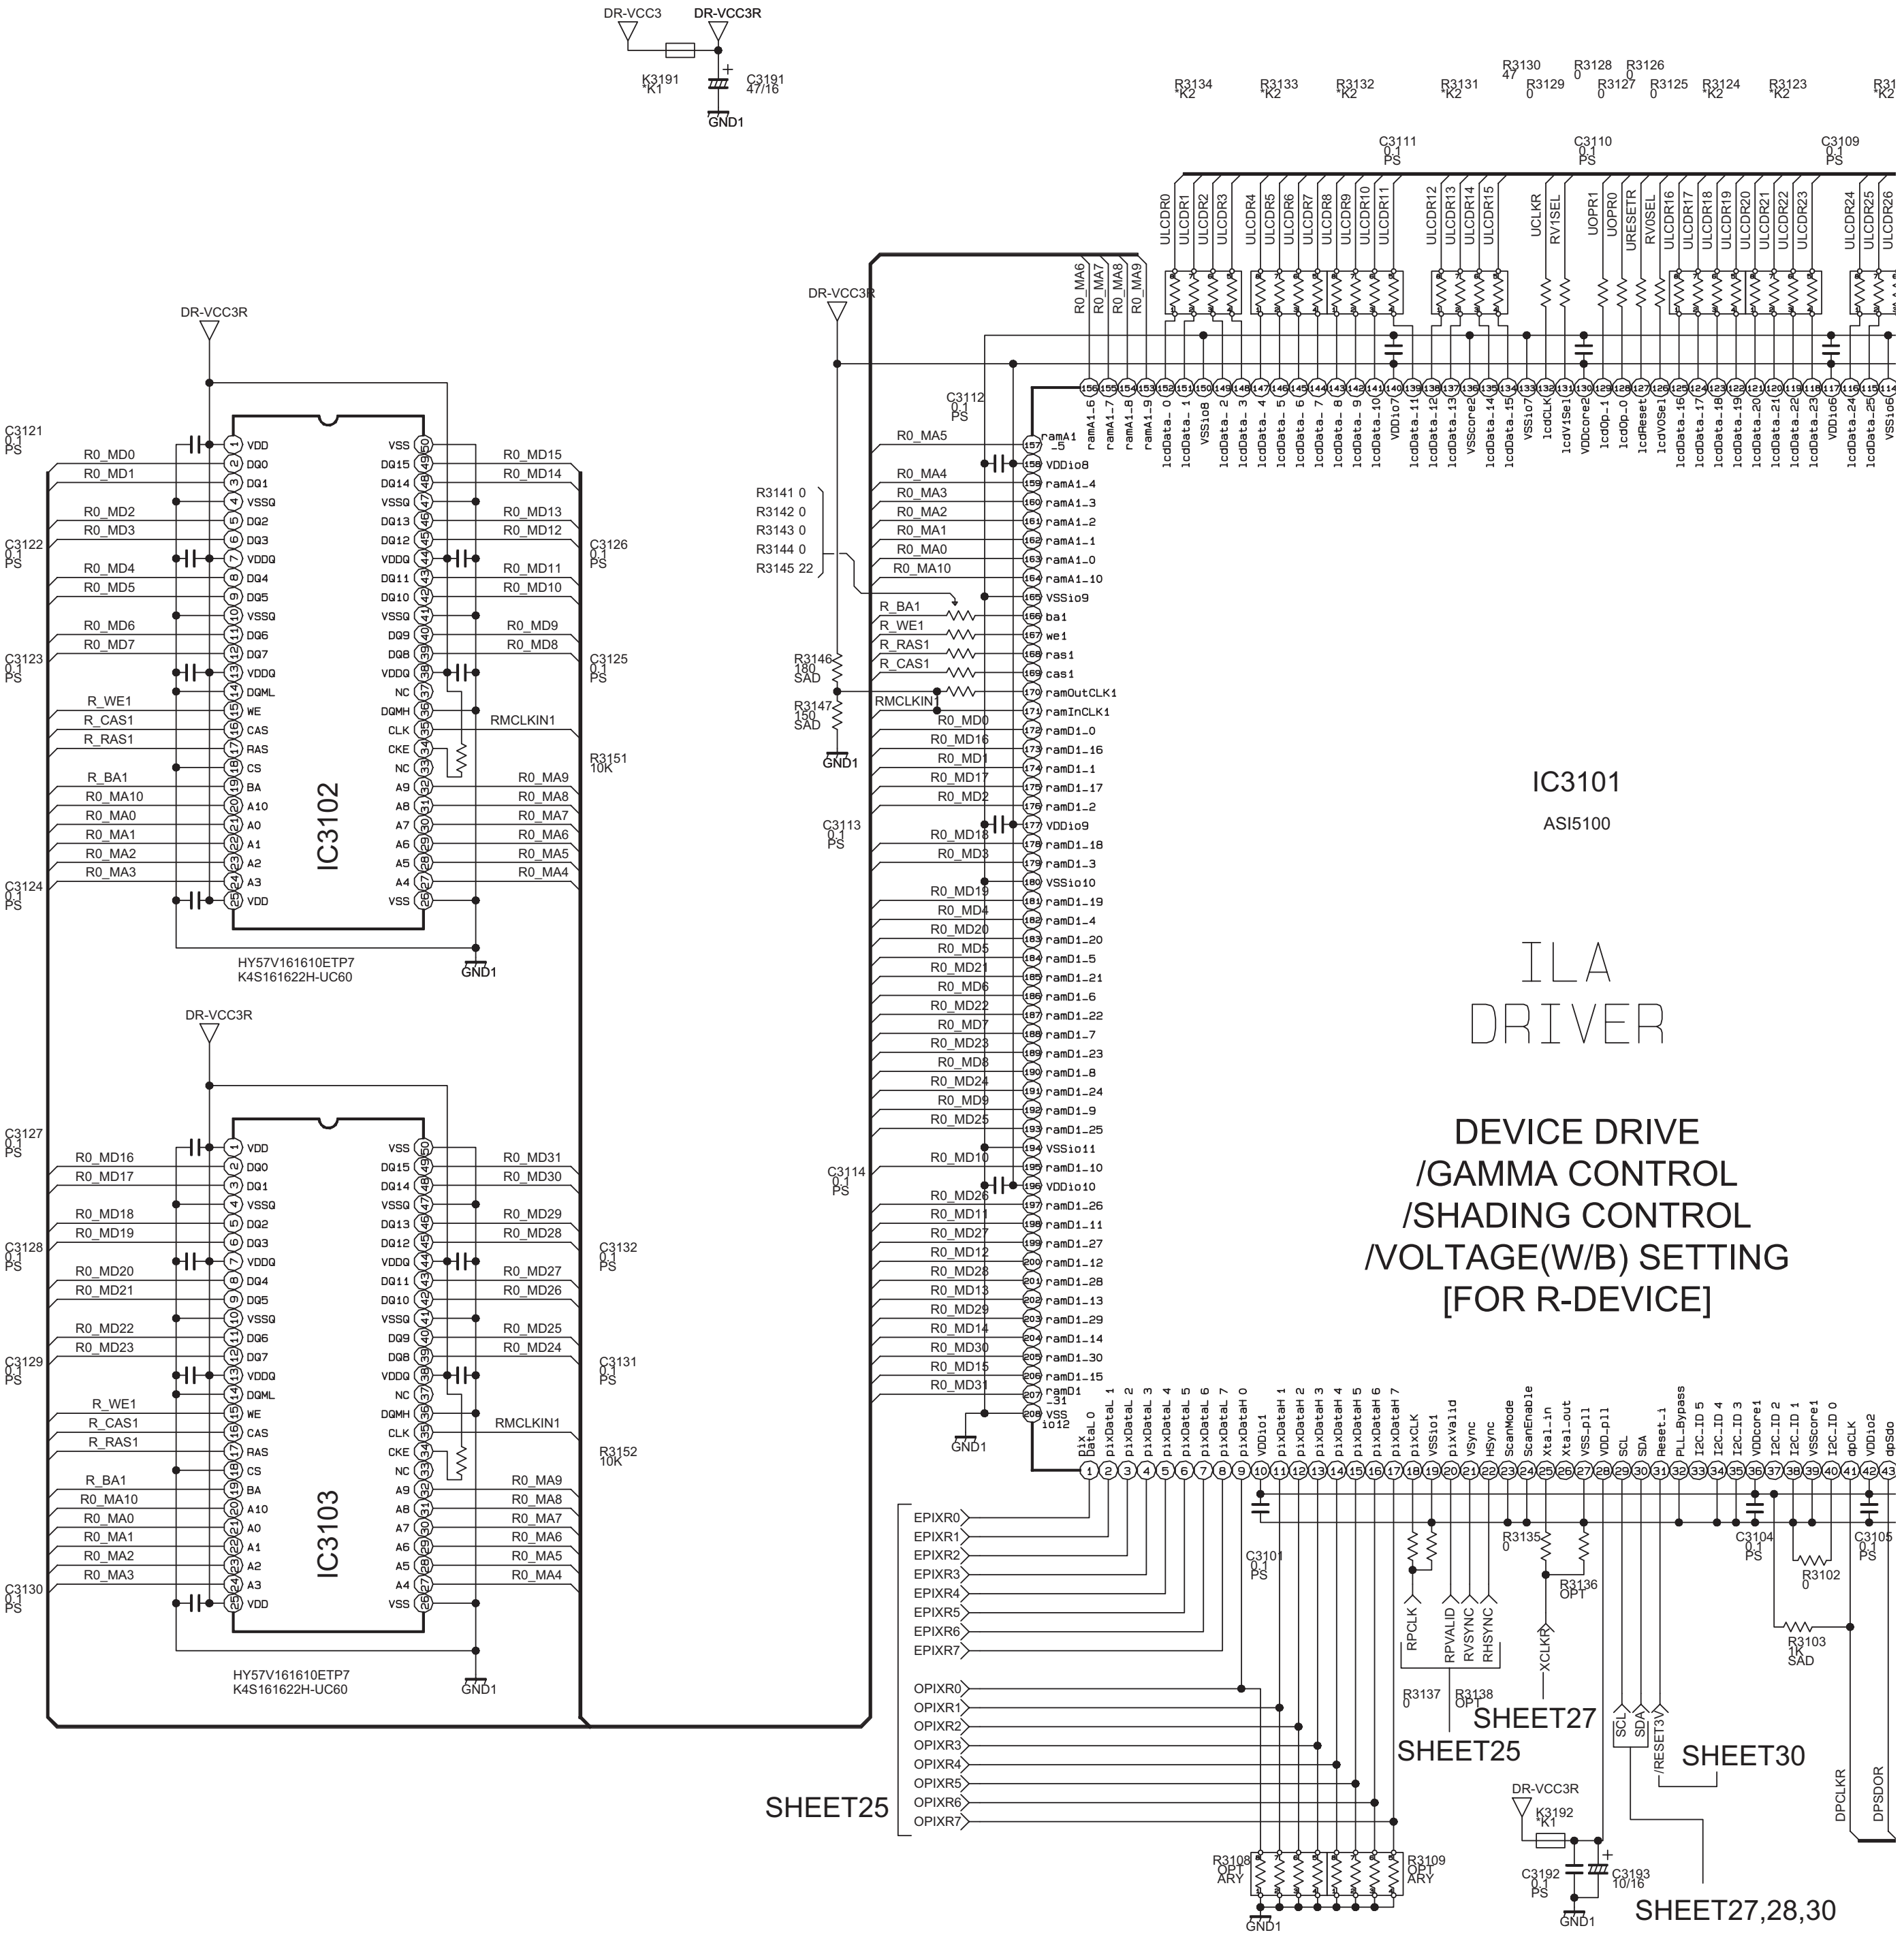

DR-VCC3
DR-VCC3R
K3191
K1
C3191
47/16
GND1
IC3102
HY57V161610ETP7
K4S161622H-UC60
IC3103
HY57V161610ETP7
K4S161622H-UC60
C3121
C3122
C3123
C3124
C3125
C3126
C3127
C3128
C3129
C3130
C3131
C3132
0.1
PS
R0_MD0
R0_MD1
R0_MD2
R0_MD3
R0_MD4
R0_MD5
R0_MD6
R0_MD7
R0_MD8
R0_MD9
R0_MD10
R0_MD11
R0_MD12
R0_MD13
R0_MD14
R0_MD15
R0_MD16
R0_MD17
R0_MD18
R0_MD19
R0_MD20
R0_MD21
R0_MD22
R0_MD23
R0_MD24
R0_MD25
R0_MD26
R0_MD27
R0_MD28
R0_MD29
R0_MD30
R0_MD31
R_WE1
R_CAS1
R_RAS1
R_BA1
R0_MA0
R0_MA1
R0_MA2
R0_MA3
R0_MA4
R0_MA5
R0_MA6
R0_MA7
R0_MA8
R0_MA9
R0_MA10
RMCLKIN1
R3151
10K
R3152
10K
VDD
DQ0
DQ1
VSSQ
DQ2
DQ3
VDDQ
DQ4
DQ5
DQ6
DQ7
DQML
WE
CAS
RAS
CS
BA
A10
A0
A1
A2
A3
VSS
DQ15
DQ14
DQ13
DQ12
DQ11
DQ10
DQ9
DQ8
NC
DQMH
CLK
CKE
A9
A8
A7
A6
A5
A4
C3112
C3113
C3114
R3141 0
R3142 0
R3143 0
R3144 0
R3145 22
R3146
180
SAD
R3147
150
SAD
IC3101
ASI5100
ILA
DRIVER
DEVICE DRIVE
/GAMMA CONTROL
/SHADING CONTROL
/VOLTAGE(W/B) SETTING
[FOR R-DEVICE]
R3134
R3133
R3132
R3131
R3130
R3129
R3128
R3127
R3126
R3125
R3124
R3123
K2
47
C3111
C3110
C3109
ULCDR0
ULCDR1
ULCDR2
ULCDR3
ULCDR4
ULCDR5
ULCDR6
ULCDR7
ULCDR8
ULCDR9
ULCDR10
ULCDR11
ULCDR12
ULCDR13
ULCDR14
ULCDR15
UCLKR
RV1SEL
UOPR1
UOPR0
URESETR
RV0SEL
ULCDR16
ULCDR17
ULCDR18
ULCDR19
ULCDR20
ULCDR21
ULCDR22
ULCDR23
ULCDR24
ULCDR25
ULCDR26
EPIXR0
EPIXR1
EPIXR2
EPIXR3
EPIXR4
EPIXR5
EPIXR6
EPIXR7
OPIXR0
OPIXR1
OPIXR2
OPIXR3
OPIXR4
OPIXR5
OPIXR6
OPIXR7
SHEET25
RPCLK
RPVALID
RVSYNC
RHSYNC
XCLKR
SHEET27
SHEET25
SCL
SDA
/RESET3V
SHEET30
DPCLKR
DPSDOR
C3101
C3104
C3105
R3135
R3136
OPT
R3137
R3138
R3102
R3103
1K
SAD
R3108
R3109
OPT
ARY
K3192
C3192
C3193
10/16
SHEET27,28,30

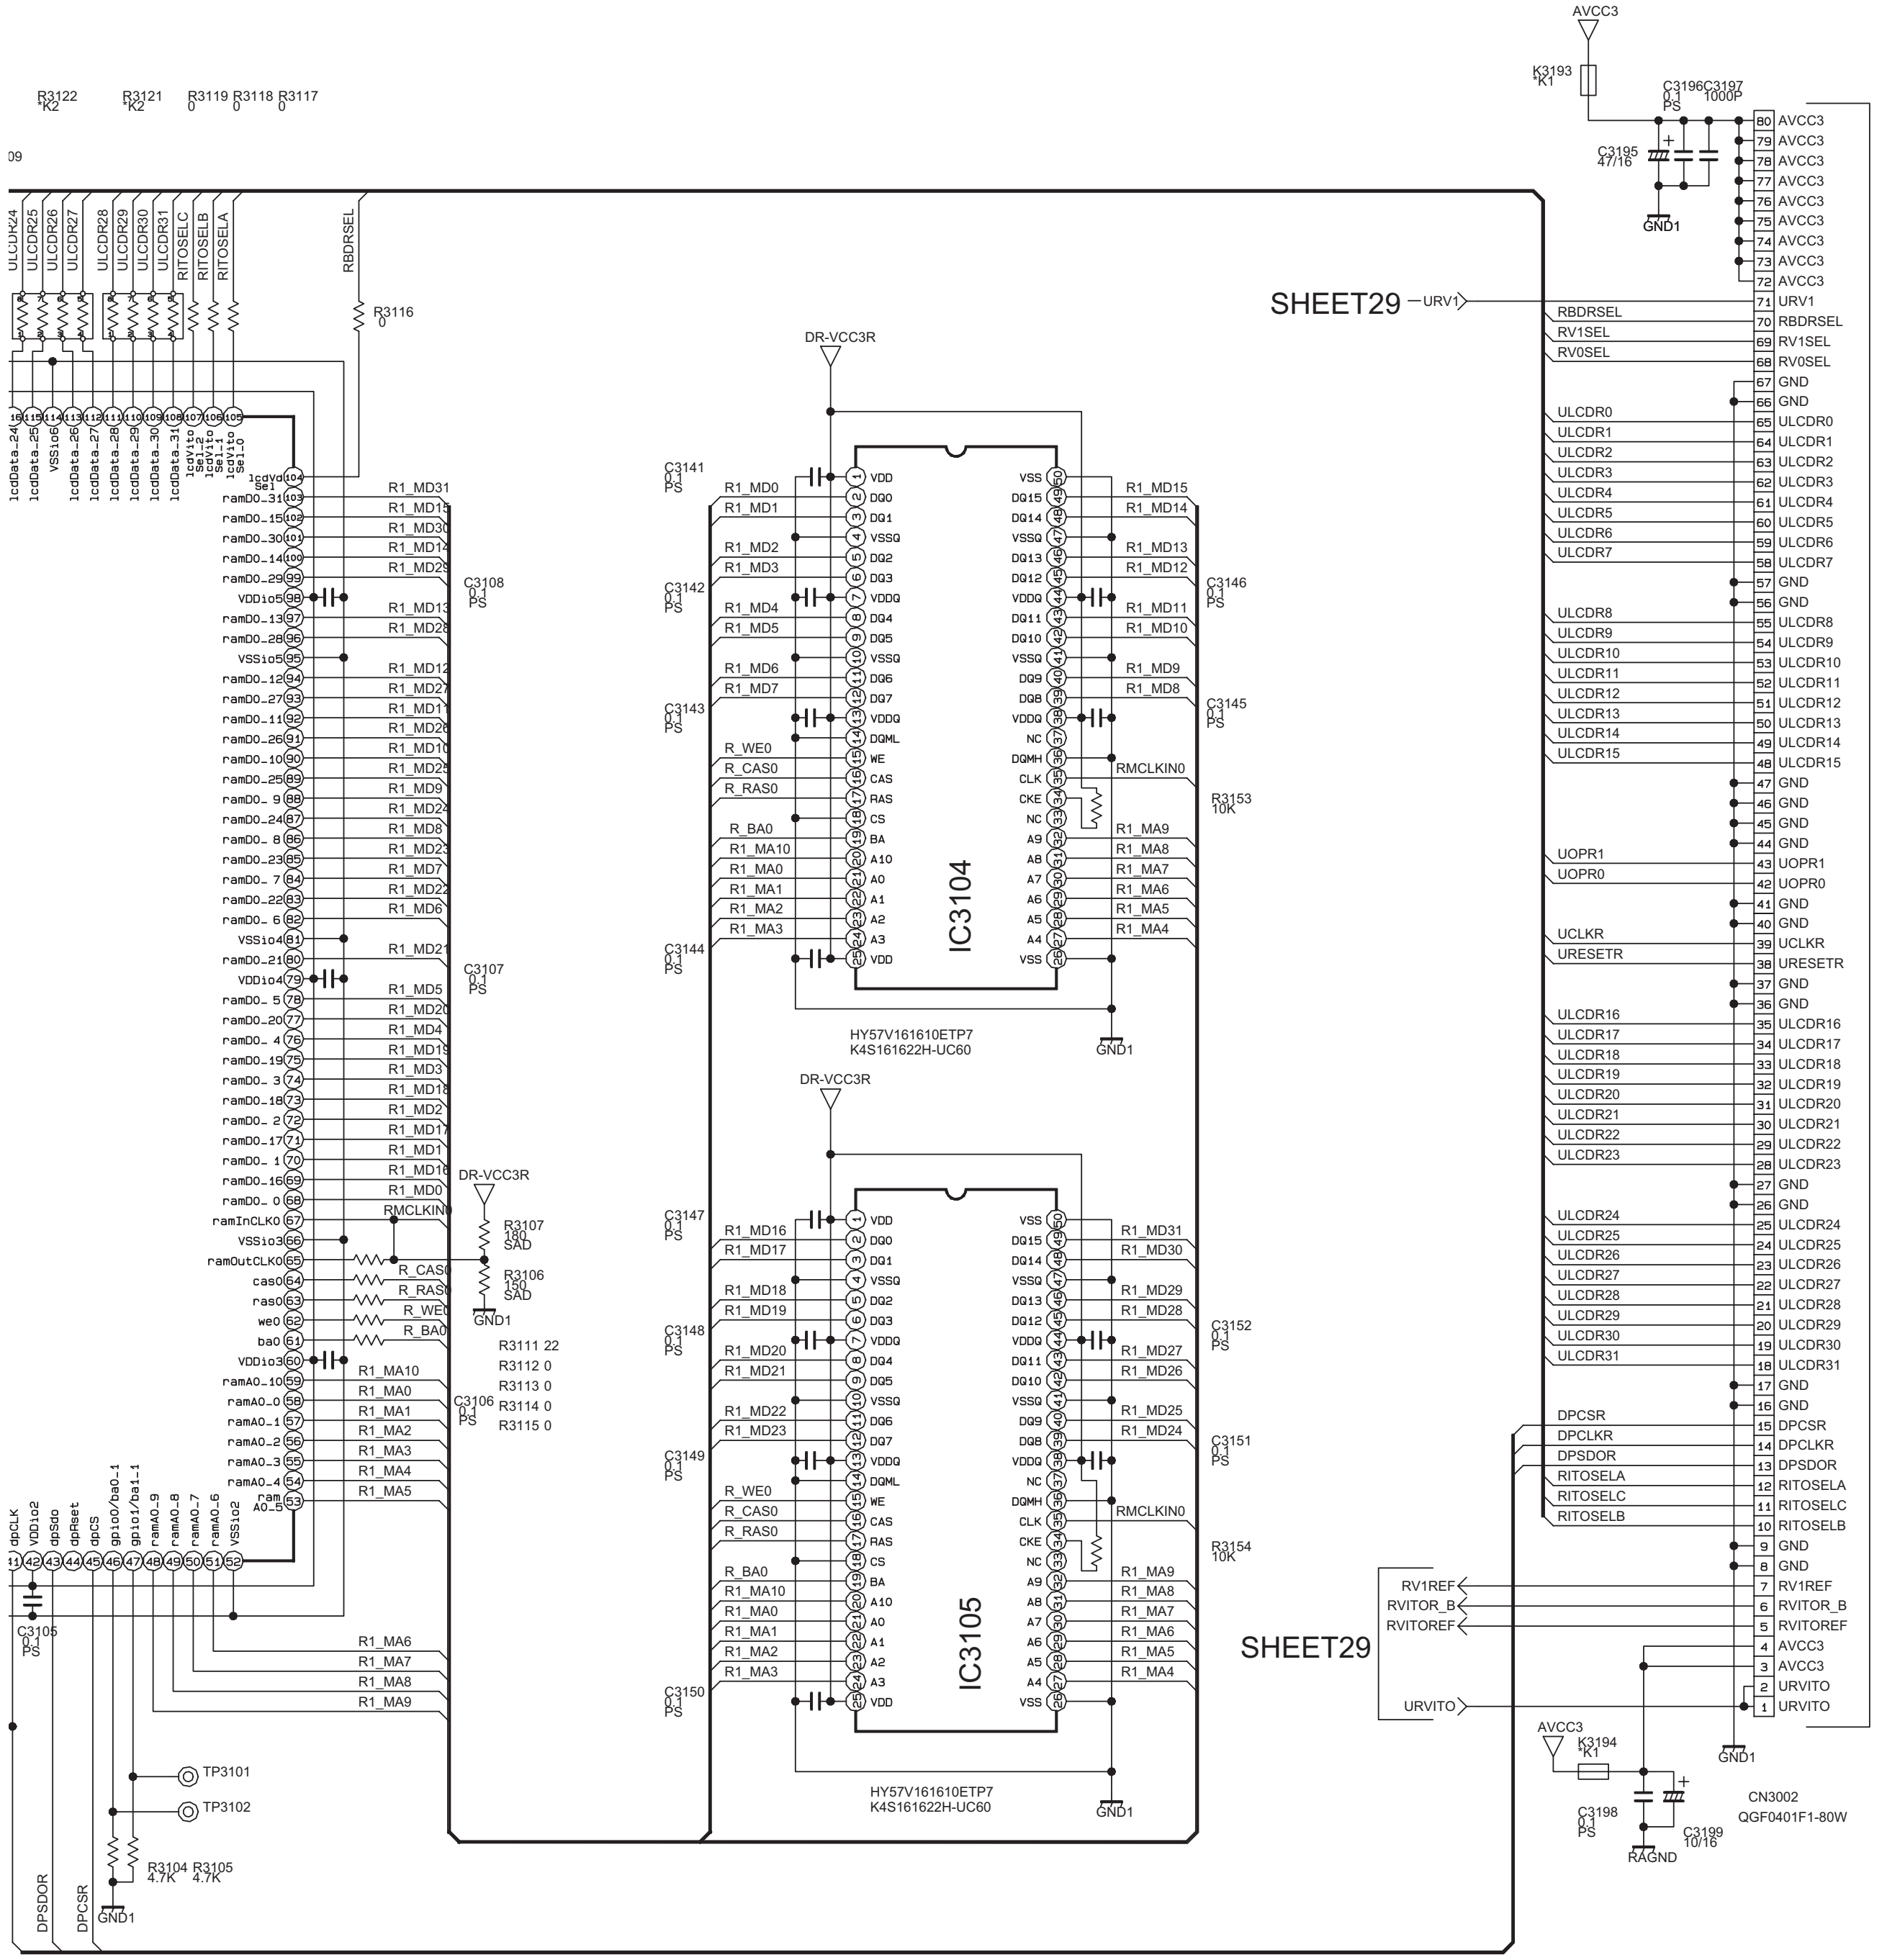
R D-ILA DEVICE
SHEET29
URV1
URVITO
RV1REF
RVITOR_B
RVITOREF
IC3104
IC3105
HY57V161610ETP7
K4S161622H-UC60
DR-VCC3R
AVCC3
GND1
RAGND
CN3002
QGF0401F1-80W
K3193
K1
K3194
K1
C3195
47/16
C3196
0.1
PS
C3197
1000P
C3198
0.1
PS
C3199
10/16
R3116
0
R3122
K2
R3121
K2
R3119
0
R3118
0
R3117
0
R3107
180
SAD
R3106
150
SAD
R3111 22
R3112 0
R3113 0
R3114 0
R3115 0
R3153
10K
R3154
10K
R3104
4.7K
R3105
4.7K
TP3101
TP3102
C3105
C3106
C3107
C3108
C3141
C3142
C3143
C3144
C3145
C3146
C3147
C3148
C3149
C3150
C3151
C3152
RMCLKIN0
RBDRSEL
RV1SEL
RV0SEL
DPCSR
DPCLKR
DPSDOR
RITOSELA
RITOSELC
RITOSELB
UOPR1
UOPR0
UCLKR
URESETR

DRIVE PWB ASS'Y (2/7)

SRA-3003A-M2

c10437002_0208_2/7_0.0

DRIVE PWB CIRCUIT DIAGRAM (3/7) [G_DRIVER] SHEET 27

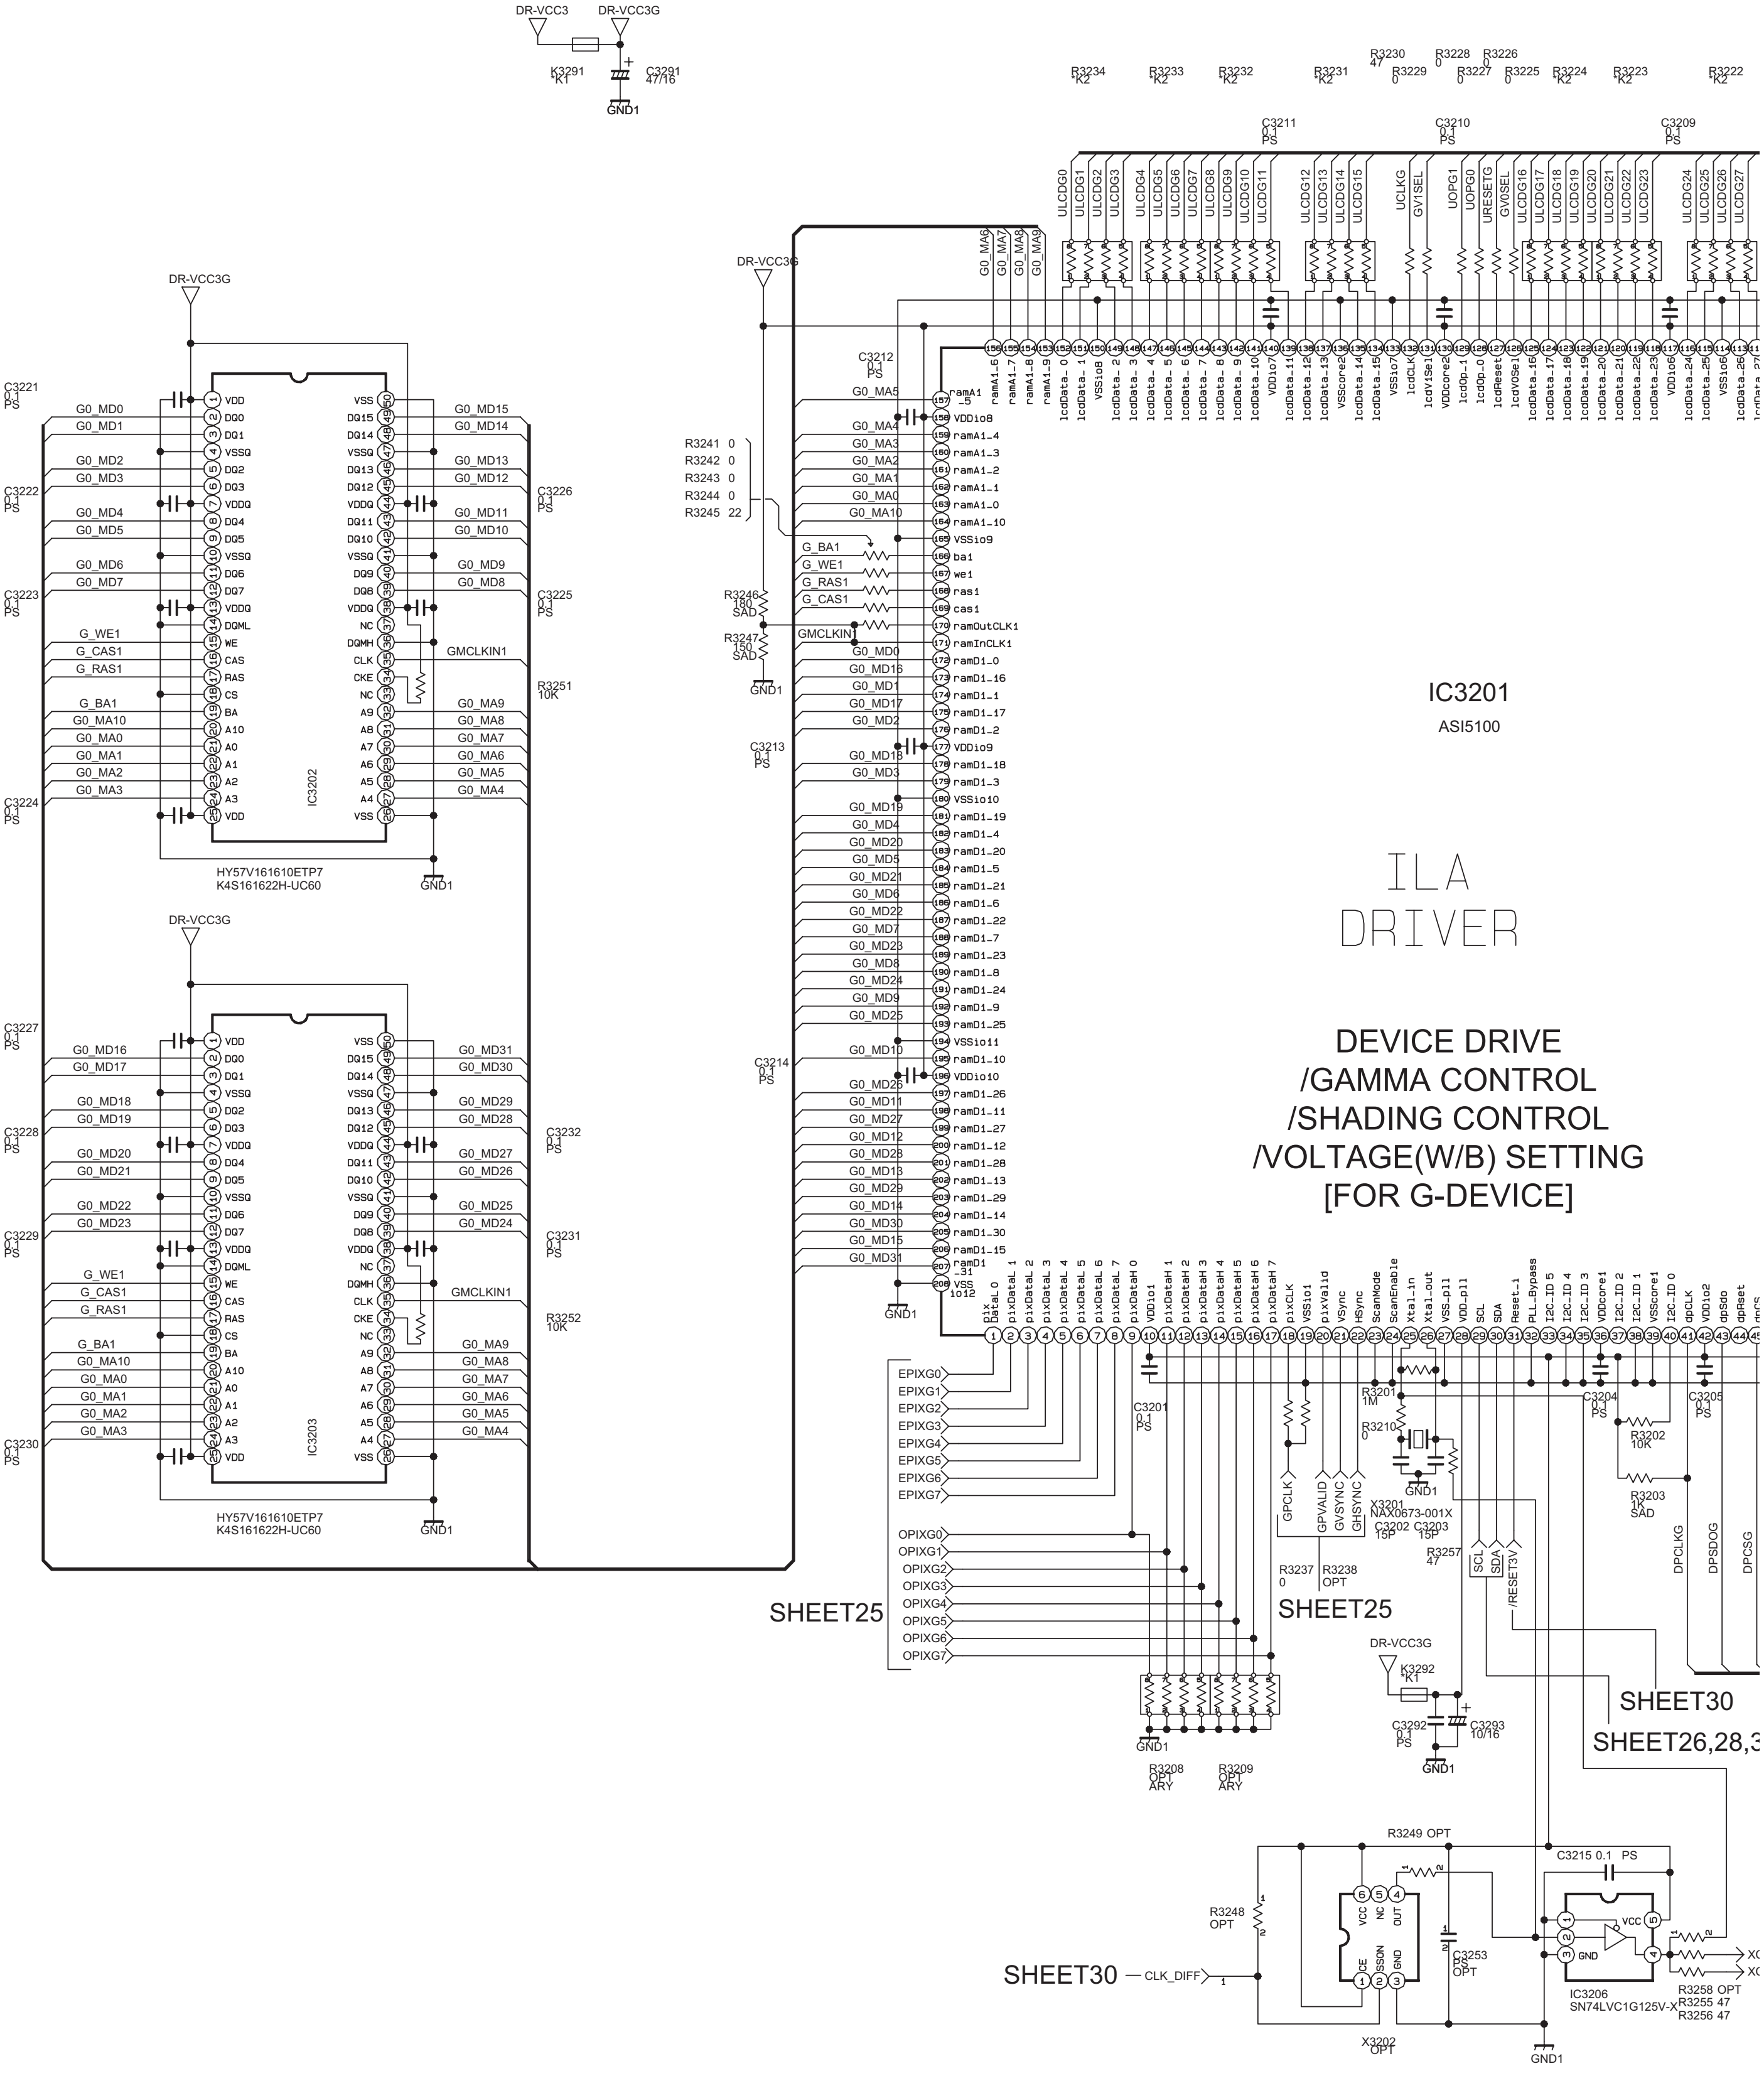
DR-VCC3
DR-VCC3G
K3291 K1
C3291 47/16
GND1
IC3201
ASI5100
ILA DRIVER
DEVICE DRIVE
/GAMMA CONTROL
/SHADING CONTROL
/VOLTAGE(W/B) SETTING
[FOR G-DEVICE]
IC3202
HY57V161610ETP7
K4S161622H-UC60
IC3203
HY57V161610ETP7
K4S161622H-UC60
C3221 0.1 PS
C3222 0.1 PS
C3223 0.1 PS
C3224 0.1 PS
C3225 0.1 PS
C3226 0.1 PS
C3227 0.1 PS
C3228 0.1 PS
C3229 0.1 PS
C3230 0.1 PS
C3231 0.1 PS
C3232 0.1 PS
R3251 10K
R3252 10K
GMCLKIN1
G_WE1
G_CAS1
G_RAS1
G_BA1
G0_MA0
G0_MA1
G0_MA2
G0_MA3
G0_MA4
G0_MA5
G0_MA6
G0_MA7
G0_MA8
G0_MA9
G0_MA10
C3212 0.1 PS
C3213 0.1 PS
C3214 0.1 PS
R3241 0
R3242 0
R3243 0
R3244 0
R3245 22
R3246 180 SAD
R3247 150 SAD
R3234 K2
R3233 K2
R3232 K2
R3231 K2
R3230 47
R3229 0
R3228 0
R3227 0
R3226 0
R3225 0
R3224 K2
R3223 K2
R3222 K2
C3211 0.1 PS
C3210 0.1 PS
C3209 0.1 PS
EPIXG0
EPIXG1
EPIXG2
EPIXG3
EPIXG4
EPIXG5
EPIXG6
EPIXG7
OPIXG0
OPIXG1
OPIXG2
OPIXG3
OPIXG4
OPIXG5
OPIXG6
OPIXG7
SHEET25
C3201 0.1 PS
R3201 1M
R3210 0
X3201 NAX0673-001X
C3202 15P
C3203 15P
R3257 47
R3237 0
R3238 OPT
GPCLK
GPVALID
GVSYNC
GHSYNC
SCL
SDA
/RESET3V
C3204 0.1 PS
C3205 0.1 PS
R3202 10K
R3203 1K SAD
DPCLKG
DPSDOG
DPCSG
SHEET30
SHEET26,28,3
K3292 K1
C3292 0.1 PS
C3293 10/16
R3208 OPT ARY
R3209 OPT ARY
R3249 OPT
R3248 OPT
C3215 0.1 PS
C3253 OPT
X3202 OPT
IC3206
SN74LVC1G125V-X
R3258 OPT
R3255 47
R3256 47
CLK_DIFF
SHEET30

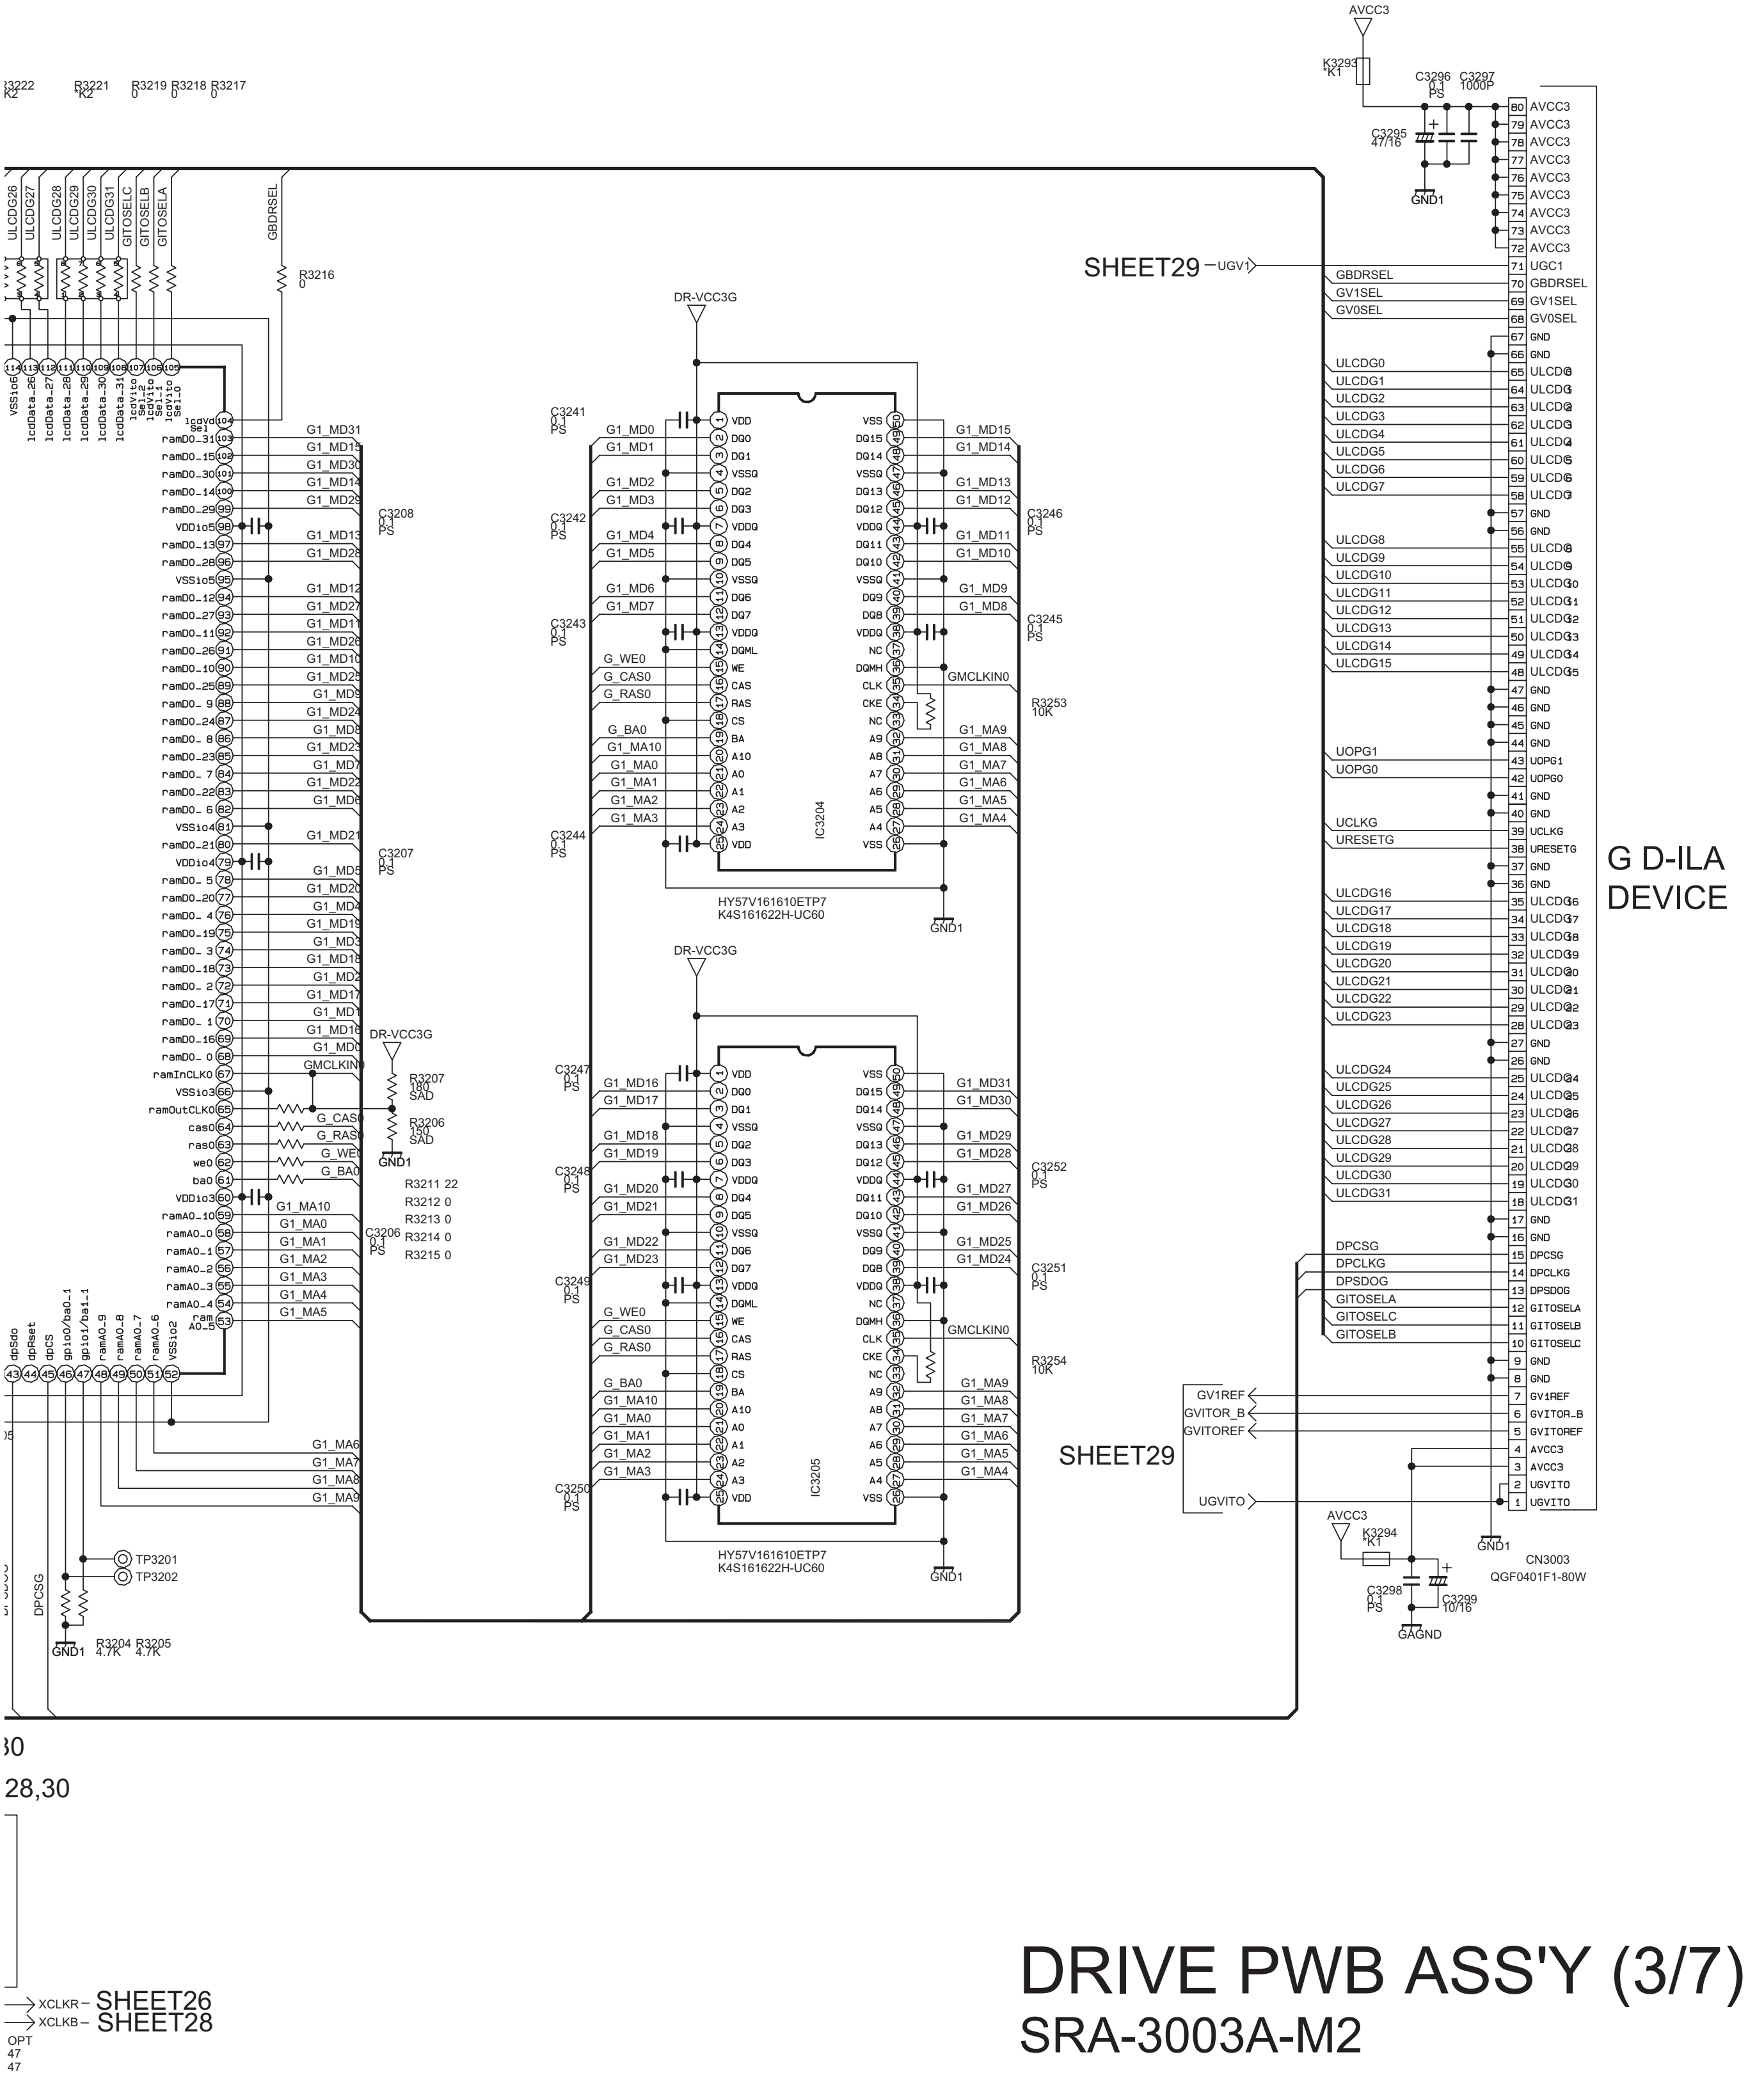
AVCC3
K3293 K1
C3296 0.1 PS
C3297 1000P
C3295 47/16
GND1
SHEET29
UGV1
GBDRSEL
GV1SEL
GV0SEL
DR-VCC3G
IC3204
HY57V161610ETP7
K4S161622H-UC60
IC3205
HY57V161610ETP7
K4S161622H-UC60
GMCLKIN0
R3253 10K
R3254 10K
C3208 0.1 PS
C3207 0.1 PS
C3206 0.1 PS
R3207 180 SAD
R3206 150 SAD
R3211 22
R3212 0
R3213 0
R3214 0
R3215 0
R3216 0
R3204 4.7K
R3205 4.7K
TP3201
TP3202
G D-ILA DEVICE
CN3003
QGF0401F1-80W
GV1REF
GVITOR_B
GVITOREF
UGVITO
K3294 K1
C3298 0.1 PS
C3299 10/16
GAGND
SHEET26
SHEET28
XCLKR
XCLKB
OPT

DRIVE PWB ASS'Y (3/7)

SRA-3003A-M2

c10437003_0208_3/7_0.0

DRIVE PWB CIRCUIT DIAGRAM (4/7) [B_DRIVER] SHEET 28

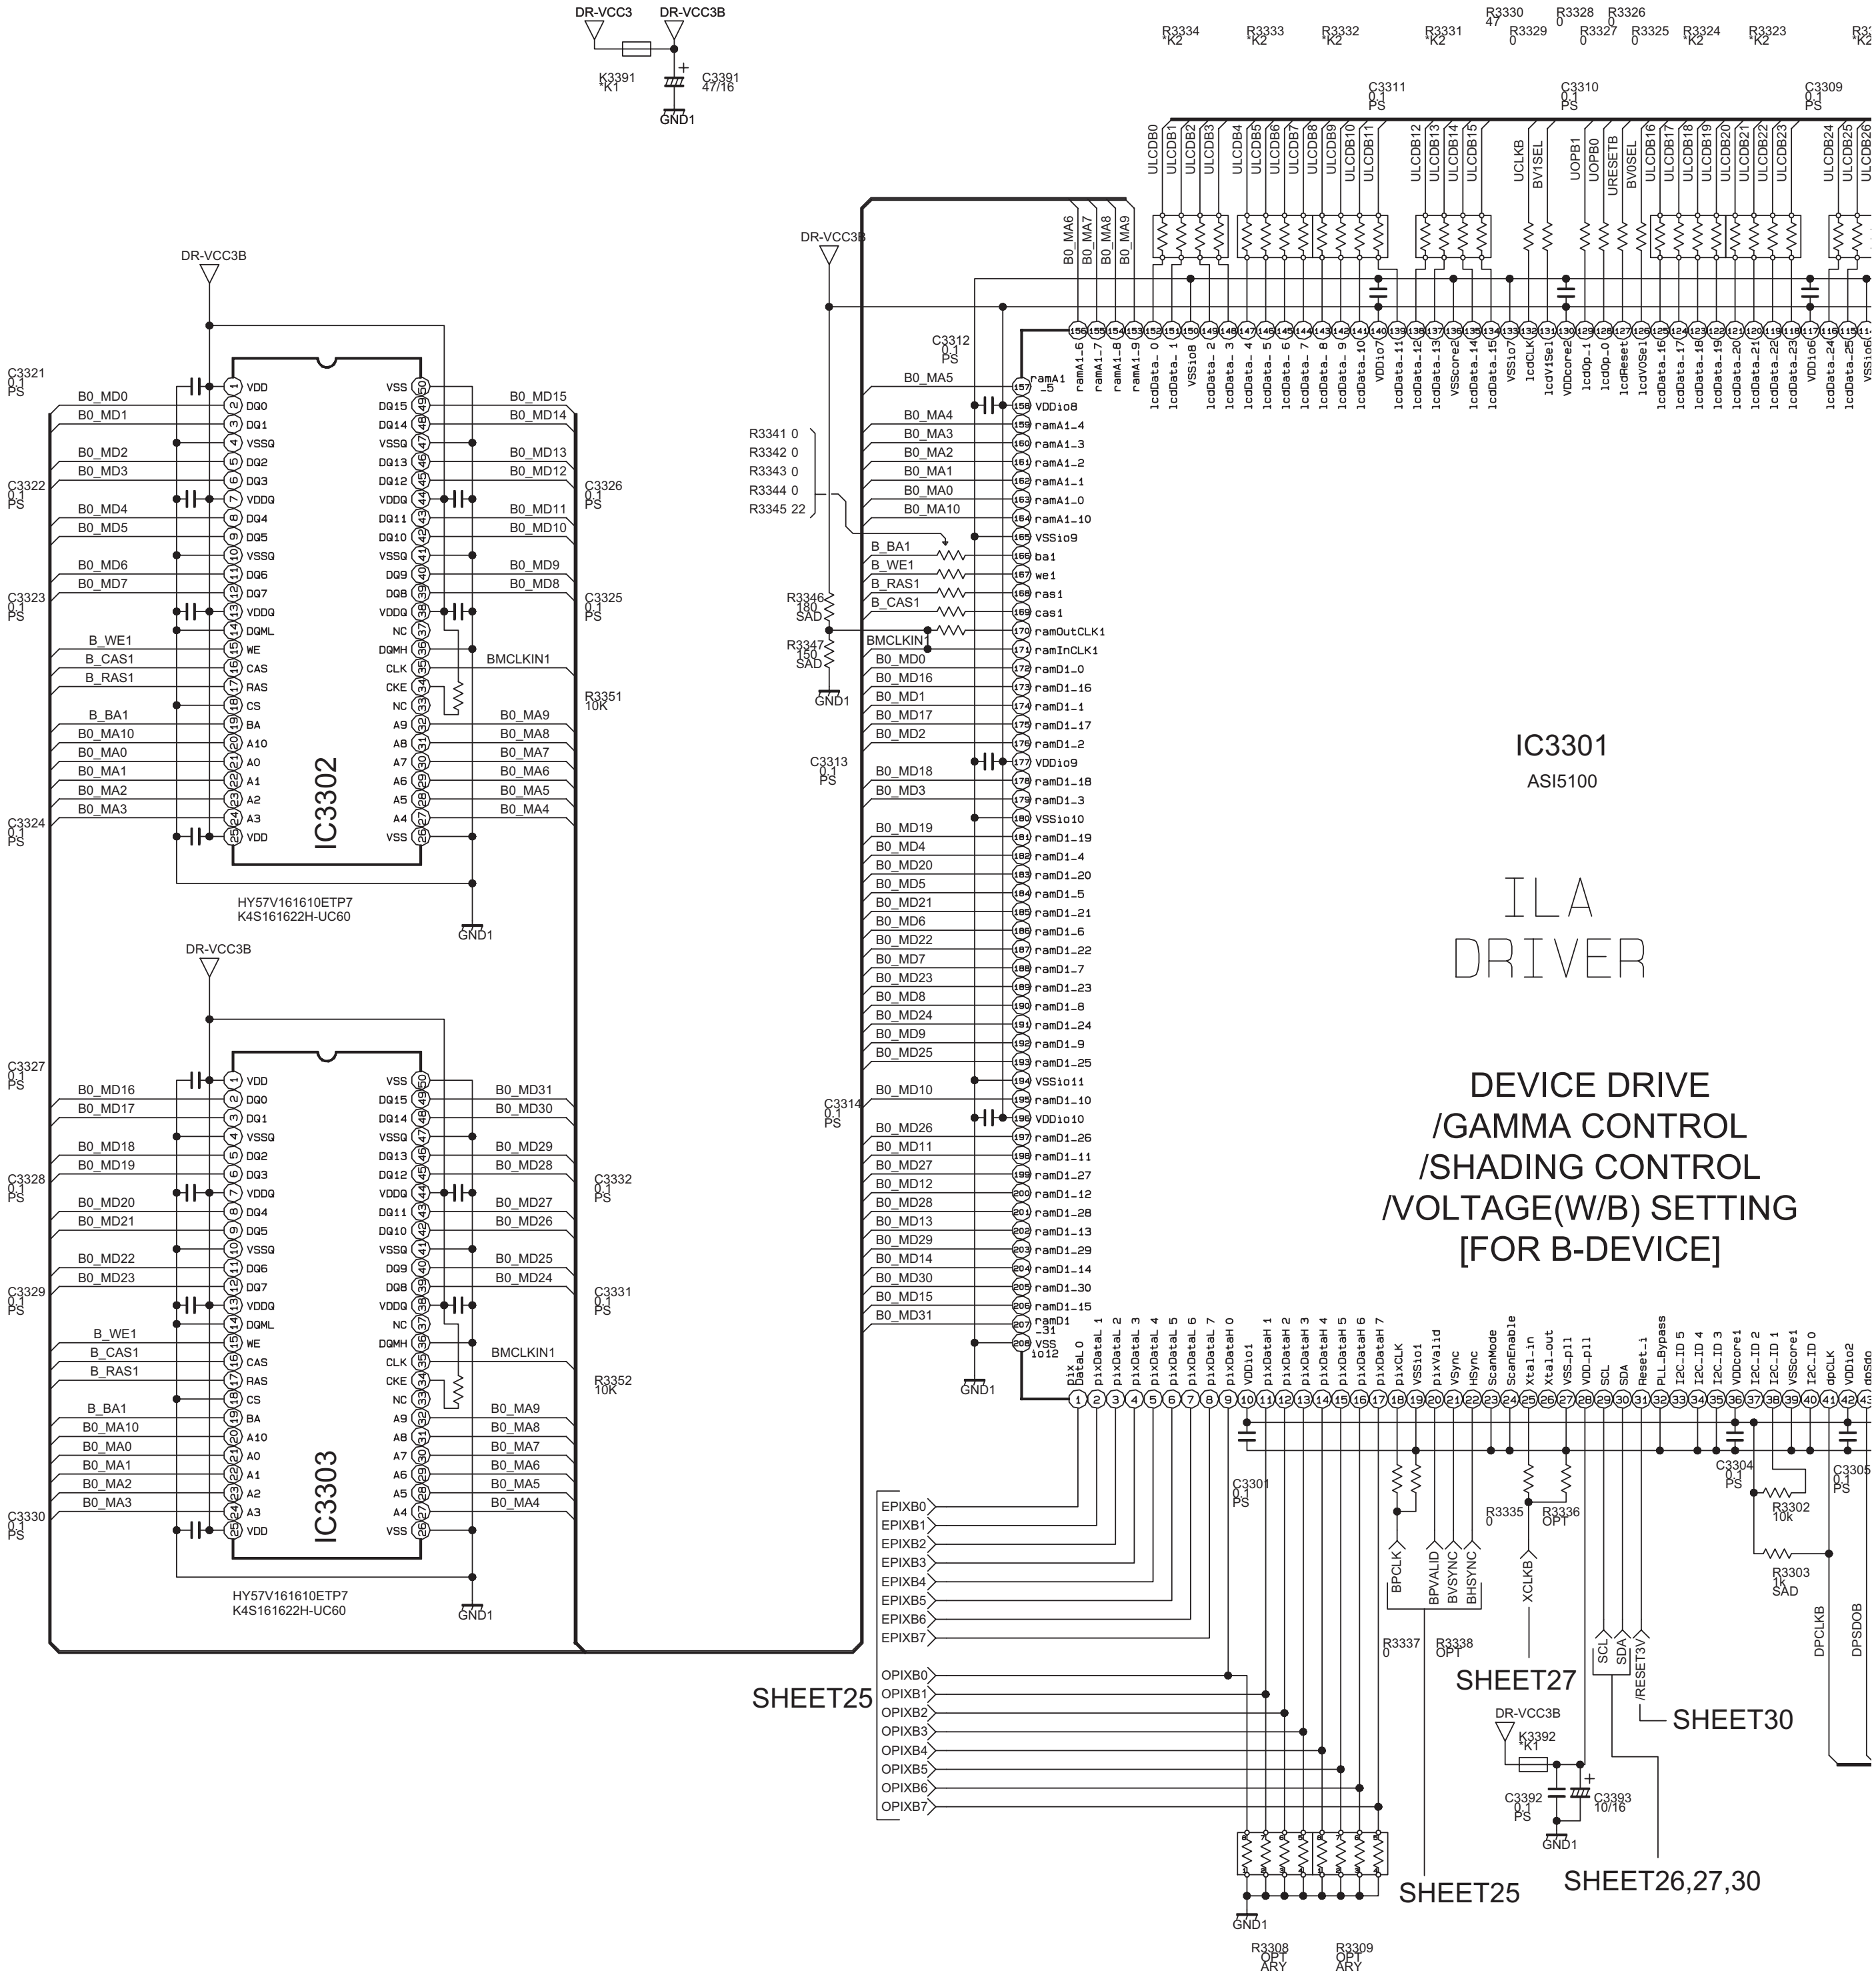
DR-VCC3
DR-VCC3B
K3391
K1
C3391
47/16
GND1
IC3301
ASI5100
ILA
DRIVER
DEVICE DRIVE
/GAMMA CONTROL
/SHADING CONTROL
/VOLTAGE(W/B) SETTING
[FOR B-DEVICE]
IC3302
HY57V161610ETP7
K4S161622H-UC60
IC3303
HY57V161610ETP7
K4S161622H-UC60
C3321 0.1 PS
C3322 0.1 PS
C3323 0.1 PS
C3324 0.1 PS
C3325 0.1 PS
C3326 0.1 PS
C3327 0.1 PS
C3328 0.1 PS
C3329 0.1 PS
C3330 0.1 PS
C3331 0.1 PS
C3332 0.1 PS
R3351 10K
R3352 10K
BMCLKIN1
C3312 0.1 PS
C3313 0.1 PS
C3314 0.1 PS
R3341 0
R3342 0
R3343 0
R3344 0
R3345 22
R3346 180 SAD
R3347 150 SAD
R3334 K2
R3333 K2
R3332 K2
R3331 K2
R3330 47
R3329 0
R3328 0
R3327 0
R3326 0
R3325 0
R3324 K2
R3323 K2
C3311 0.1 PS
C3310 0.1 PS
C3309 0.1 PS
C3301 0.1 PS
C3304 0.1 PS
C3305 0.1 PS
R3335 0
R3336 OPT
R3337 0
R3338 OPT
R3302 10k
R3303 1k SAD
K3392 K1
C3392 0.1 PS
C3393 10/16
R3308 OPT ARY
R3309 OPT ARY
EPIXB0
EPIXB1
EPIXB2
EPIXB3
EPIXB4
EPIXB5
EPIXB6
EPIXB7
OPIXB0
OPIXB1
OPIXB2
OPIXB3
OPIXB4
OPIXB5
OPIXB6
OPIXB7
BPCLK
BPVALID
BVSYNC
BHSYNC
XCLKB
SCL
SDA
/RESET3V
DPCLKB
DPSDOB
SHEET25
SHEET27
SHEET30
SHEET26,27,30
B_WE1
B_CAS1
B_RAS1
B_BA1
B0_MA0
B0_MA1
B0_MA2
B0_MA3
B0_MA4
B0_MA5
B0_MA6
B0_MA7
B0_MA8
B0_MA9
B0_MA10
B0_MD0
B0_MD31
ULCDB0
ULCDB26
UCLKB
BV1SEL
UOPB1
UOPB0
URESETB
BV0SEL

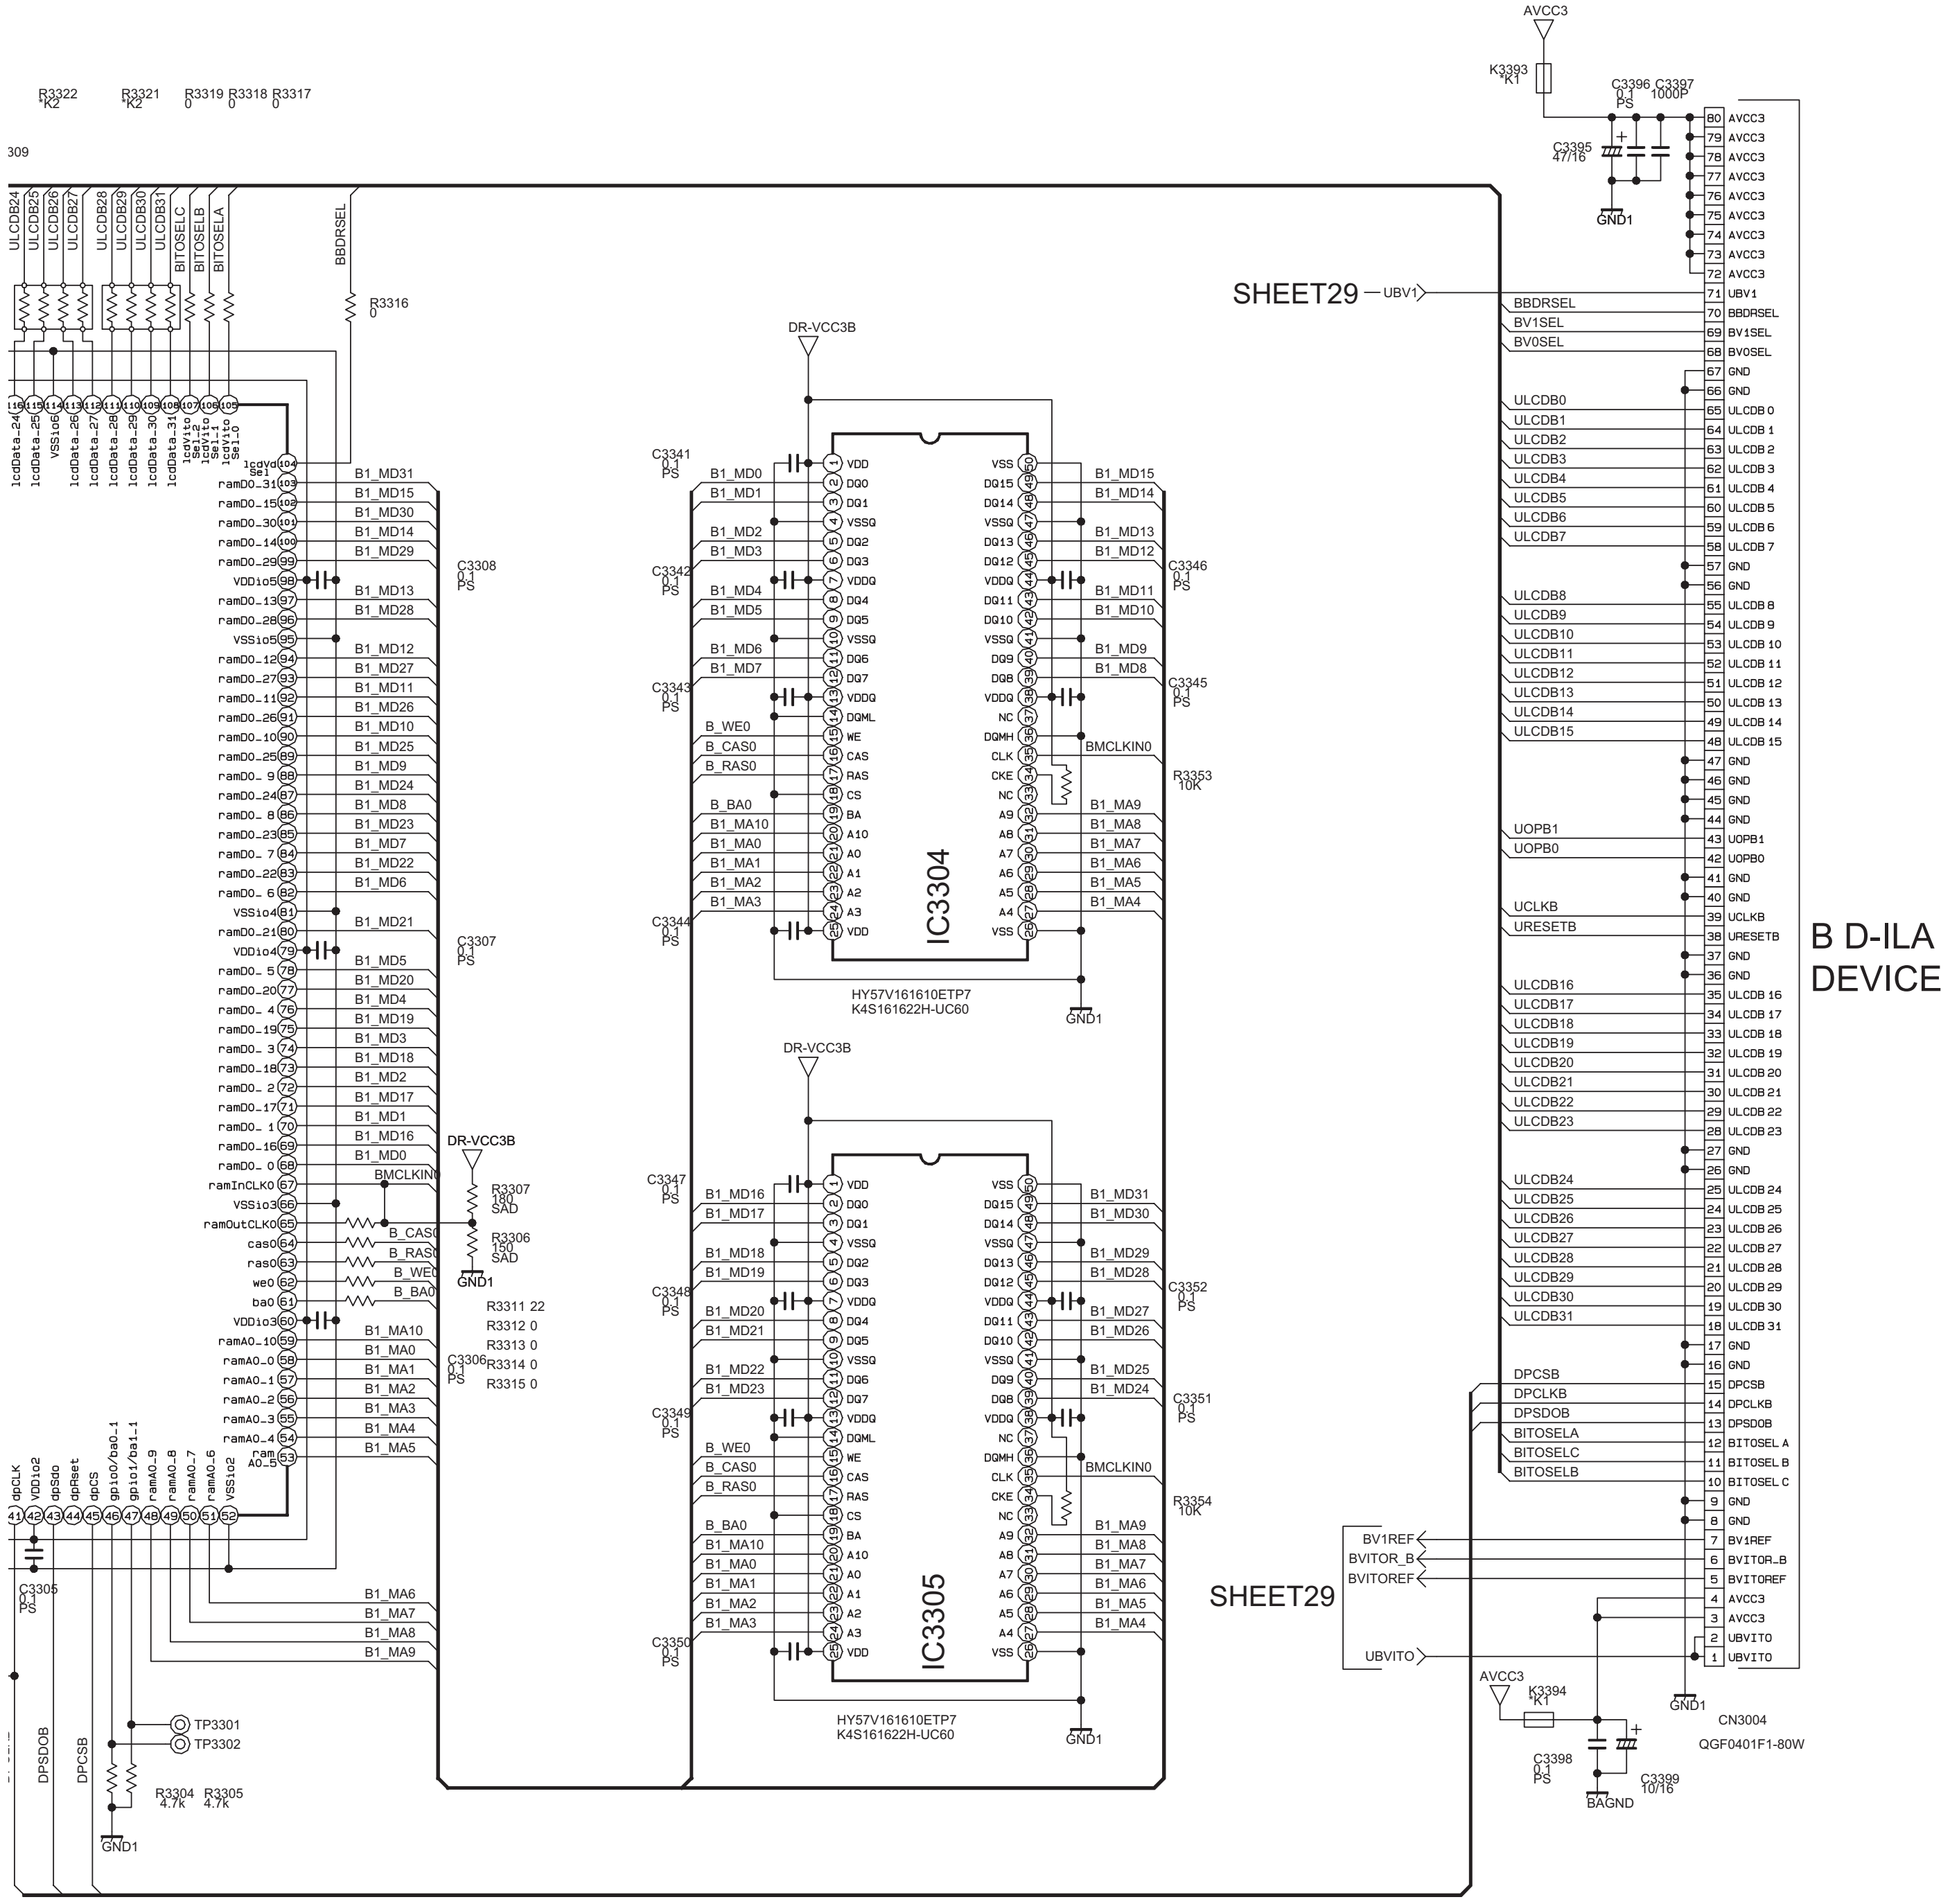
AVCC3
K3393
K1
C3396 0.1 PS
C3397 1000P
C3395 47/16
GND1
R3322 K2
R3321 K2
R3319 0
R3318 0
R3317 0
309
ULCDB24
ULCDB25
ULCDB26
ULCDB27
ULCDB28
ULCDB29
ULCDB30
ULCDB31
BITOSELC
BITOSELB
BITOSELA
BBDRSEL
R3316 0
SHEET29
UBV1
DR-VCC3B
C3341 0.1 PS
C3342 0.1 PS
C3343 0.1 PS
C3344 0.1 PS
C3345 0.1 PS
C3346 0.1 PS
C3308 0.1 PS
C3307 0.1 PS
C3306 0.1 PS
C3305 0.1 PS
IC3304
HY57V161610ETP7
K4S161622H-UC60
BMCLKIN0
R3353 10K
IC3305
C3347 0.1 PS
C3348 0.1 PS
C3349 0.1 PS
C3350 0.1 PS
C3351 0.1 PS
C3352 0.1 PS
R3354 10K
R3307 180 SAD
R3306 150 SAD
R3311 22
R3312 0
R3313 0
R3314 0
R3315 0
B_CAS0
B_RAS0
B_WE0
B_BA0
B1_MD0
B1_MD31
B1_MA0
B1_MA10
TP3301
TP3302
R3304 4.7k
R3305 4.7k
DPSDOB
DPCSB
B D-ILA DEVICE
BV1REF
BVITOR_B
BVITOREF
UBVITO
K3394 K1
C3398 0.1 PS
C3399 10/16
BAGND
CN3004
QGF0401F1-80W

DRIVE PWB ASS'Y (4/7)

SRA-3003A-M2

c10437004_0208_4/7_0.0

DRIVE PWB CIRCUIT DIAGRAM (5/7) [ANALOG_DRIVER] SHEET 29

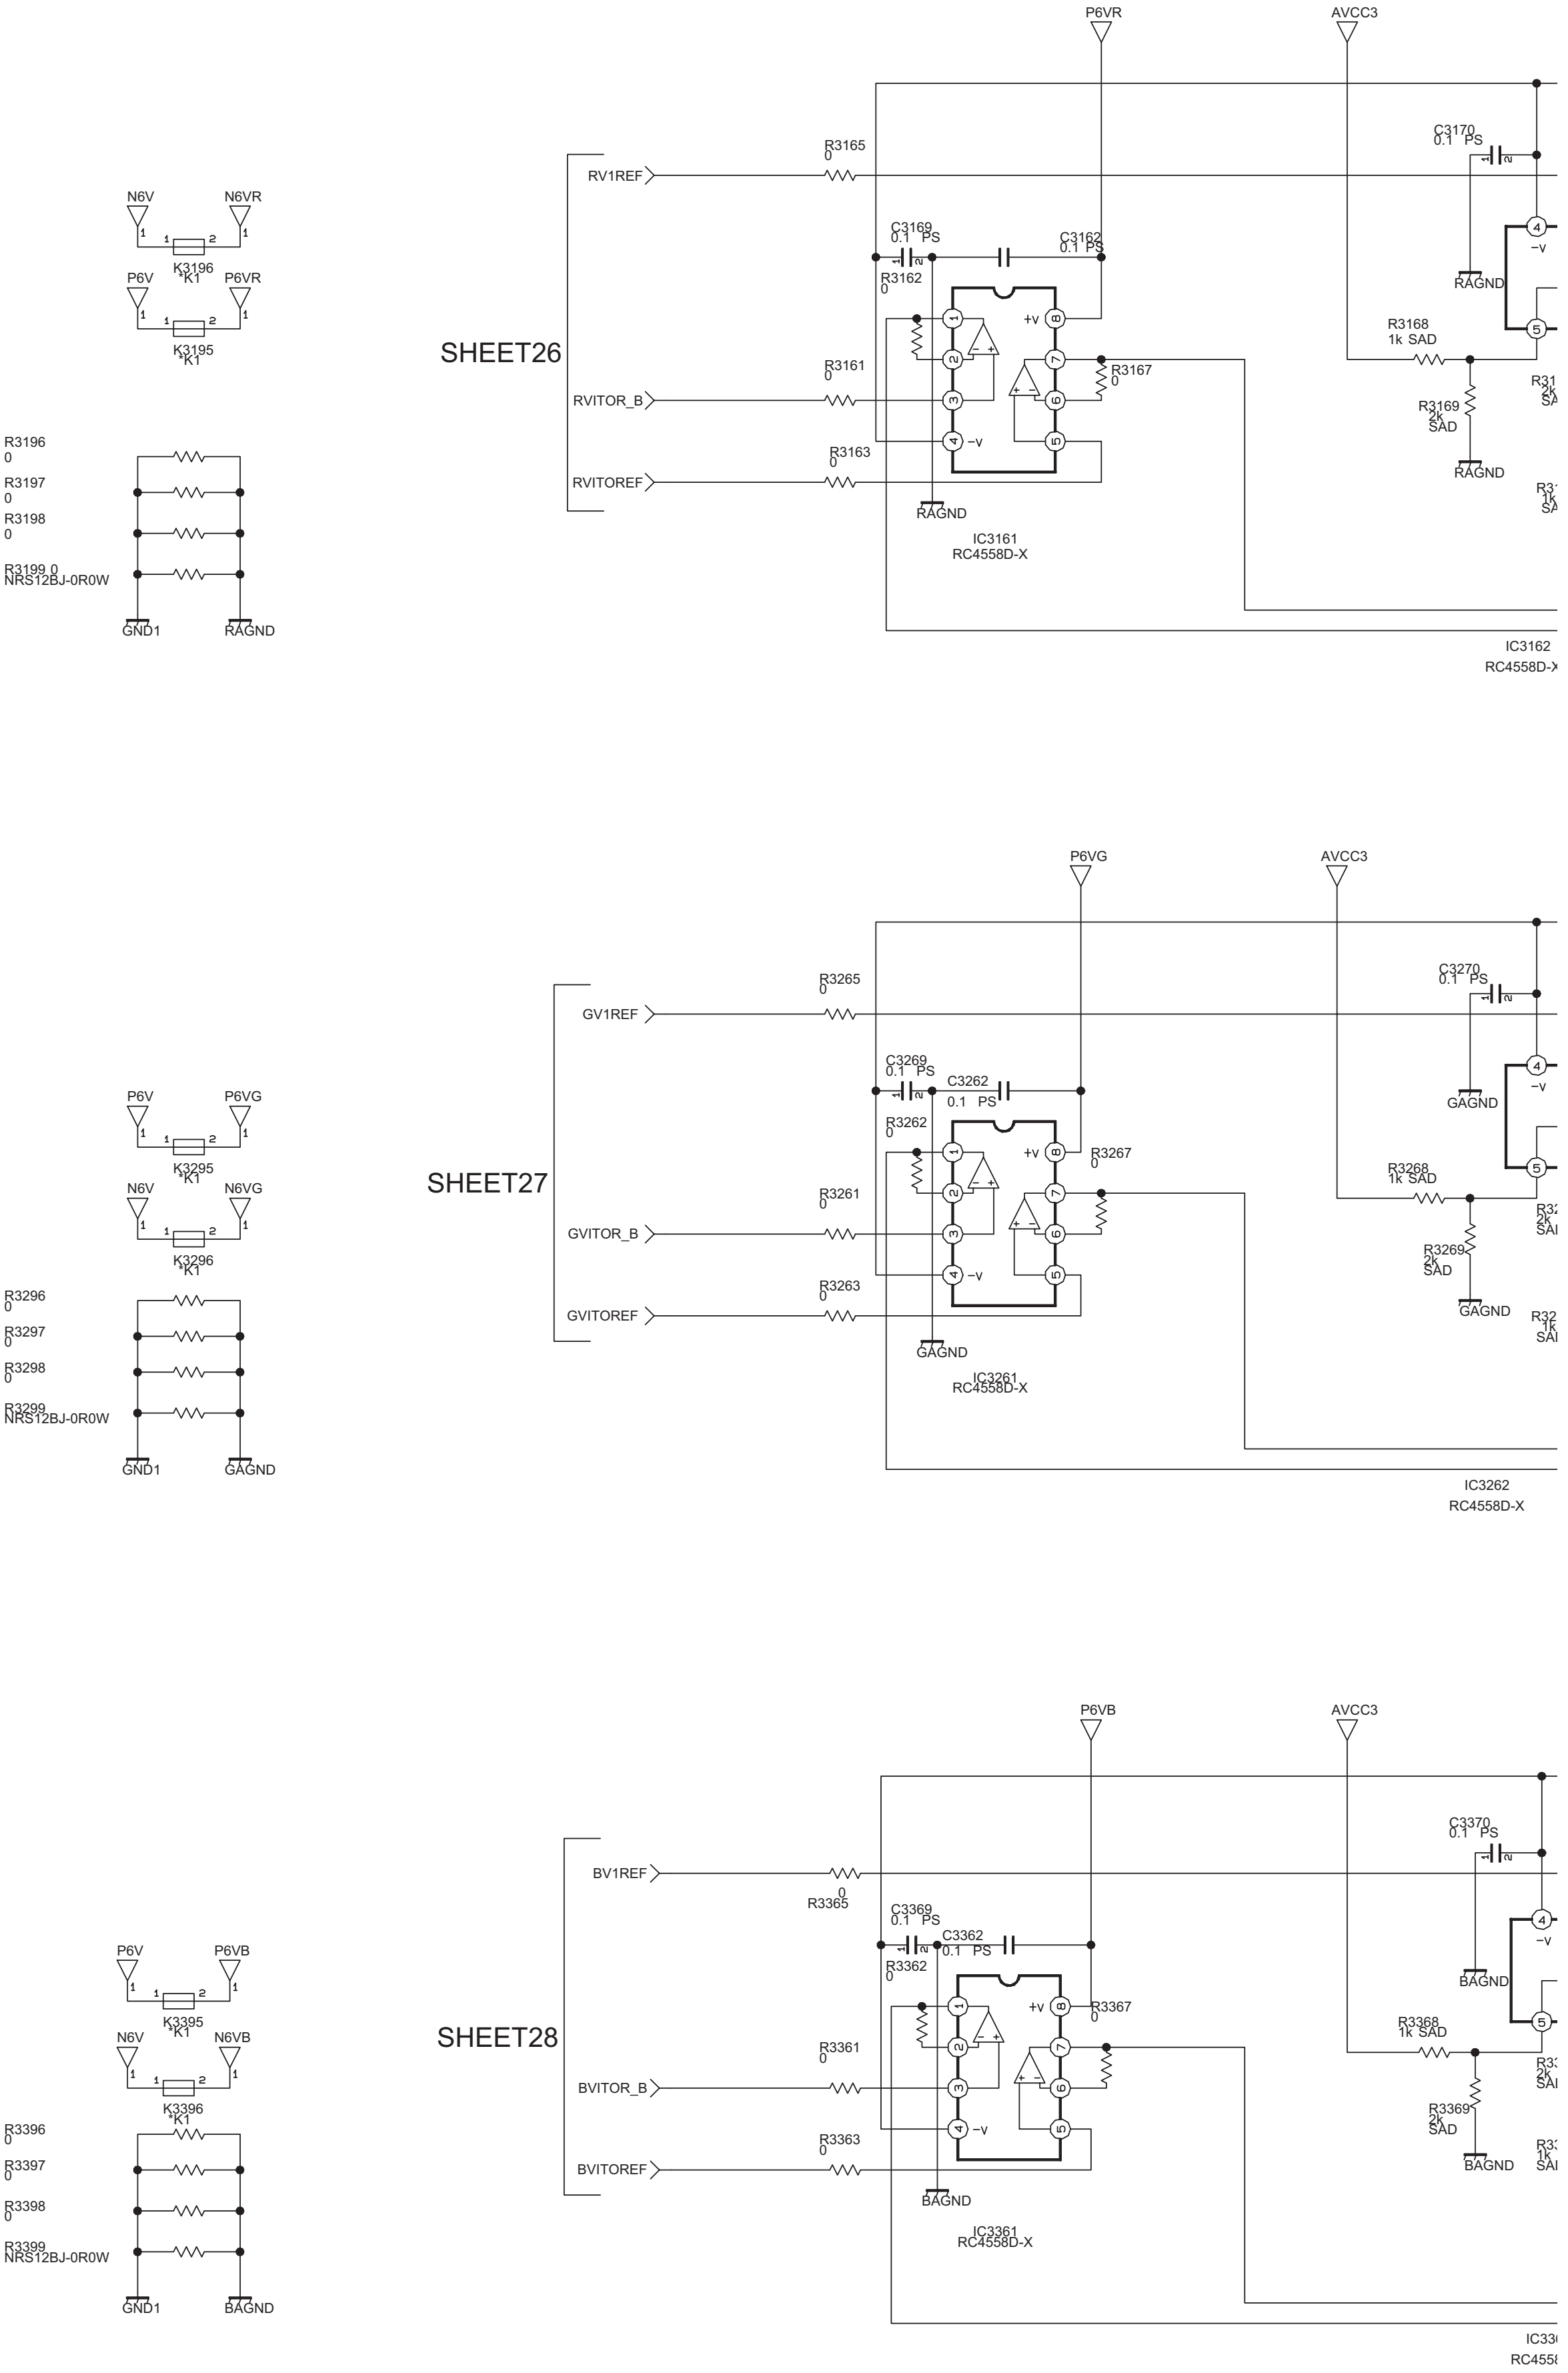

P6VR
AVCC3
RV1REF
R3165
0
C3170
0.1 PS
N6V
N6VR
K3196
K1
P6V
P6VR
K3195
K1
C3169
0.1 PS
C3162
0.1 PS
R3162
0
R3161
0
R3167
0
R3163
0
R3168
1k SAD
R3169
2k
SAD
SHEET26
RVITOR_B
RVITOREF
RAGND
IC3161
RC4558D-X
IC3162
RC4558D-X
R3196
0
R3197
0
R3198
0
R3199 0
NRS12BJ-0R0W
GND1
RAGND
P6VG
AVCC3
GV1REF
R3265
0
C3270
0.1 PS
C3269
0.1 PS
C3262
0.1 PS
R3262
0
R3267
0
GAGND
P6V
P6VG
K3295
K1
N6V
N6VG
K3296
K1
SHEET27
R3261
0
GVITOR_B
R3263
0
GVITOREF
R3268
1k SAD
R3269
2k
SAD
IC3261
RC4558D-X
IC3262
RC4558D-X
R3296
0
R3297
0
R3298
0
R3299
NRS12BJ-0R0W
GND1
GAGND
P6VB
AVCC3
BV1REF
R3365
0
C3370
0.1 PS
C3369
0.1 PS
C3362
0.1 PS
R3362
0
R3367
0
BAGND
P6V
P6VB
K3395
K1
N6V
N6VB
K3396
K1
SHEET28
R3361
0
BVITOR_B
R3363
0
BVITOREF
R3368
1k SAD
R3369
2k
SAD
IC3361
RC4558D-X
R3396
0
R3397
0
R3398
0
R3399
NRS12BJ-0R0W
GND1
BAGND
+v
−v

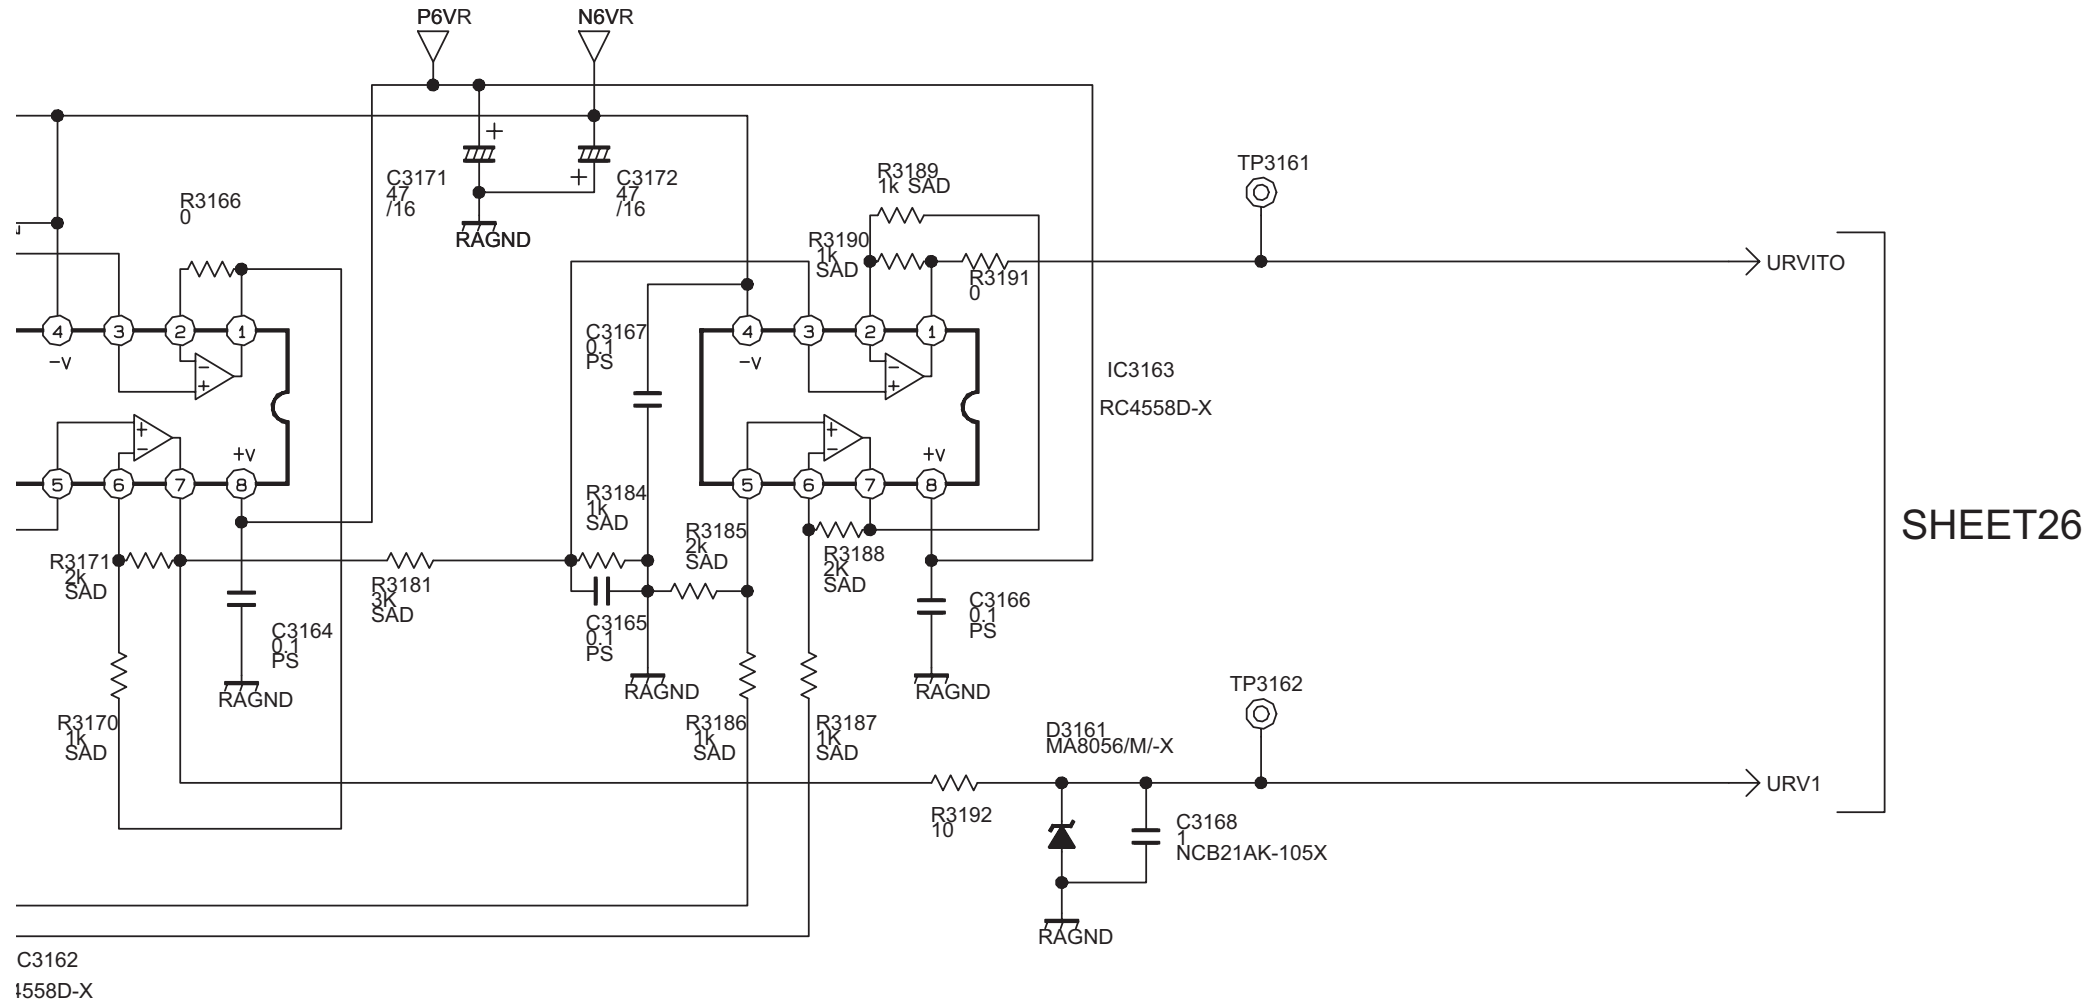
P6VR
N6VR
C3171
47
/16
C3172
47
/16
RAGND
R3166
0
R3189
1k SAD
R3190
1k
SAD
R3191
0
TP3161
URVITO
C3167
0.1
PS
IC3163
RC4558D-X
−v
+v
R3184
1k
SAD
R3185
2K
SAD
R3188
2K
SAD
R3171
2K
SAD
R3181
3K
SAD
C3164
0.1
PS
C3165
0.1
PS
C3166
0.1
PS
SHEET26
R3170
1K
SAD
R3186
1K
SAD
R3187
1K
SAD
TP3162
D3161
MA8056/M/-X
URV1
R3192
10
C3168
1
NCB21AK-105X
C3162
4558D-X

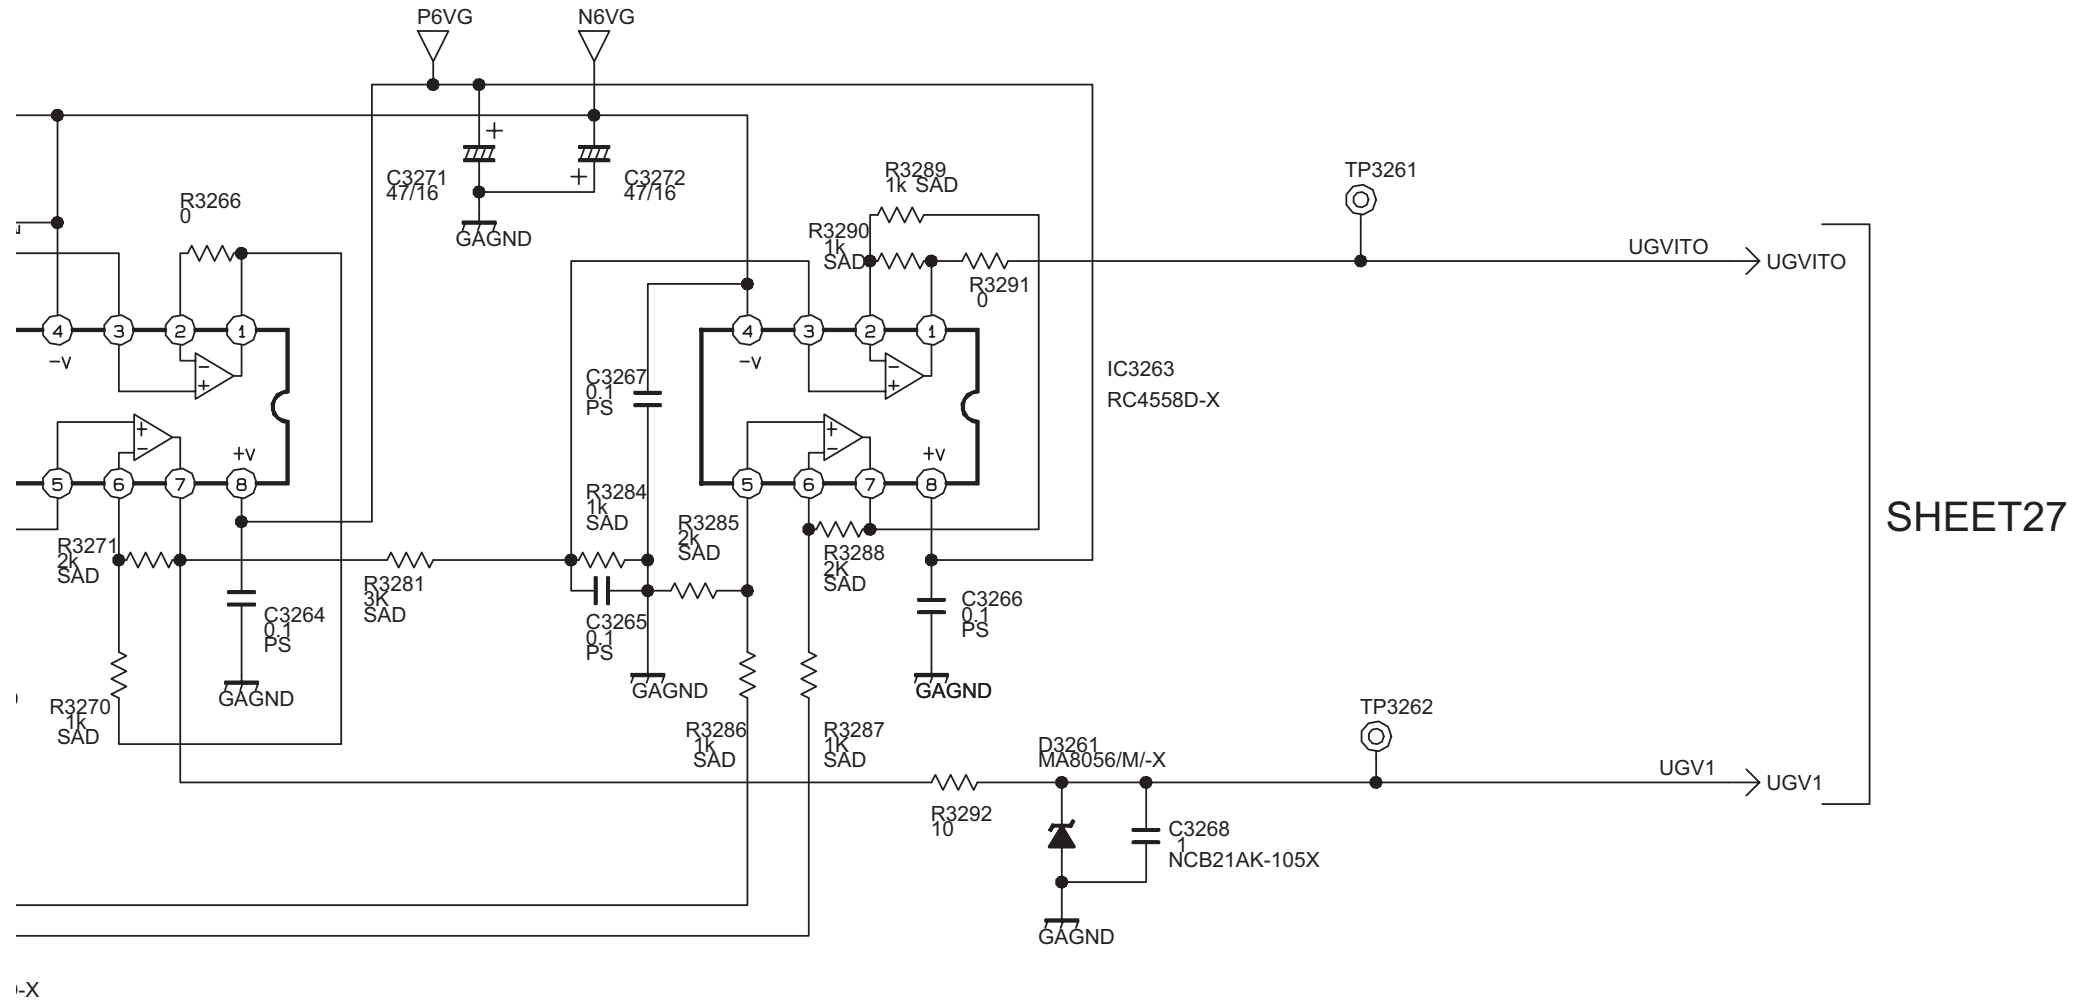
P6VG
N6VG
C3271
47/16
C3272
47/16
GAGND
R3266
0
R3289
1k SAD
R3290
1k
SAD
R3291
0
TP3261
UGVITO
UGVITO
C3267
0.1
PS
IC3263
RC4558D-X
−v
+v
R3284
1k
SAD
R3285
2K
SAD
R3288
2K
SAD
R3271
2K
SAD
R3281
3K
SAD
C3264
0.1
PS
C3265
0.1
PS
C3266
0.1
PS
SHEET27
R3270
1K
SAD
R3286
1K
SAD
R3287
1K
SAD
TP3262
D3261
MA8056/M/-X
UGV1
UGV1
R3292
10
C3268
1
NCB21AK-105X
-X

DRIVE PWB ASS'Y (5/7)

SRA-3003A-M2

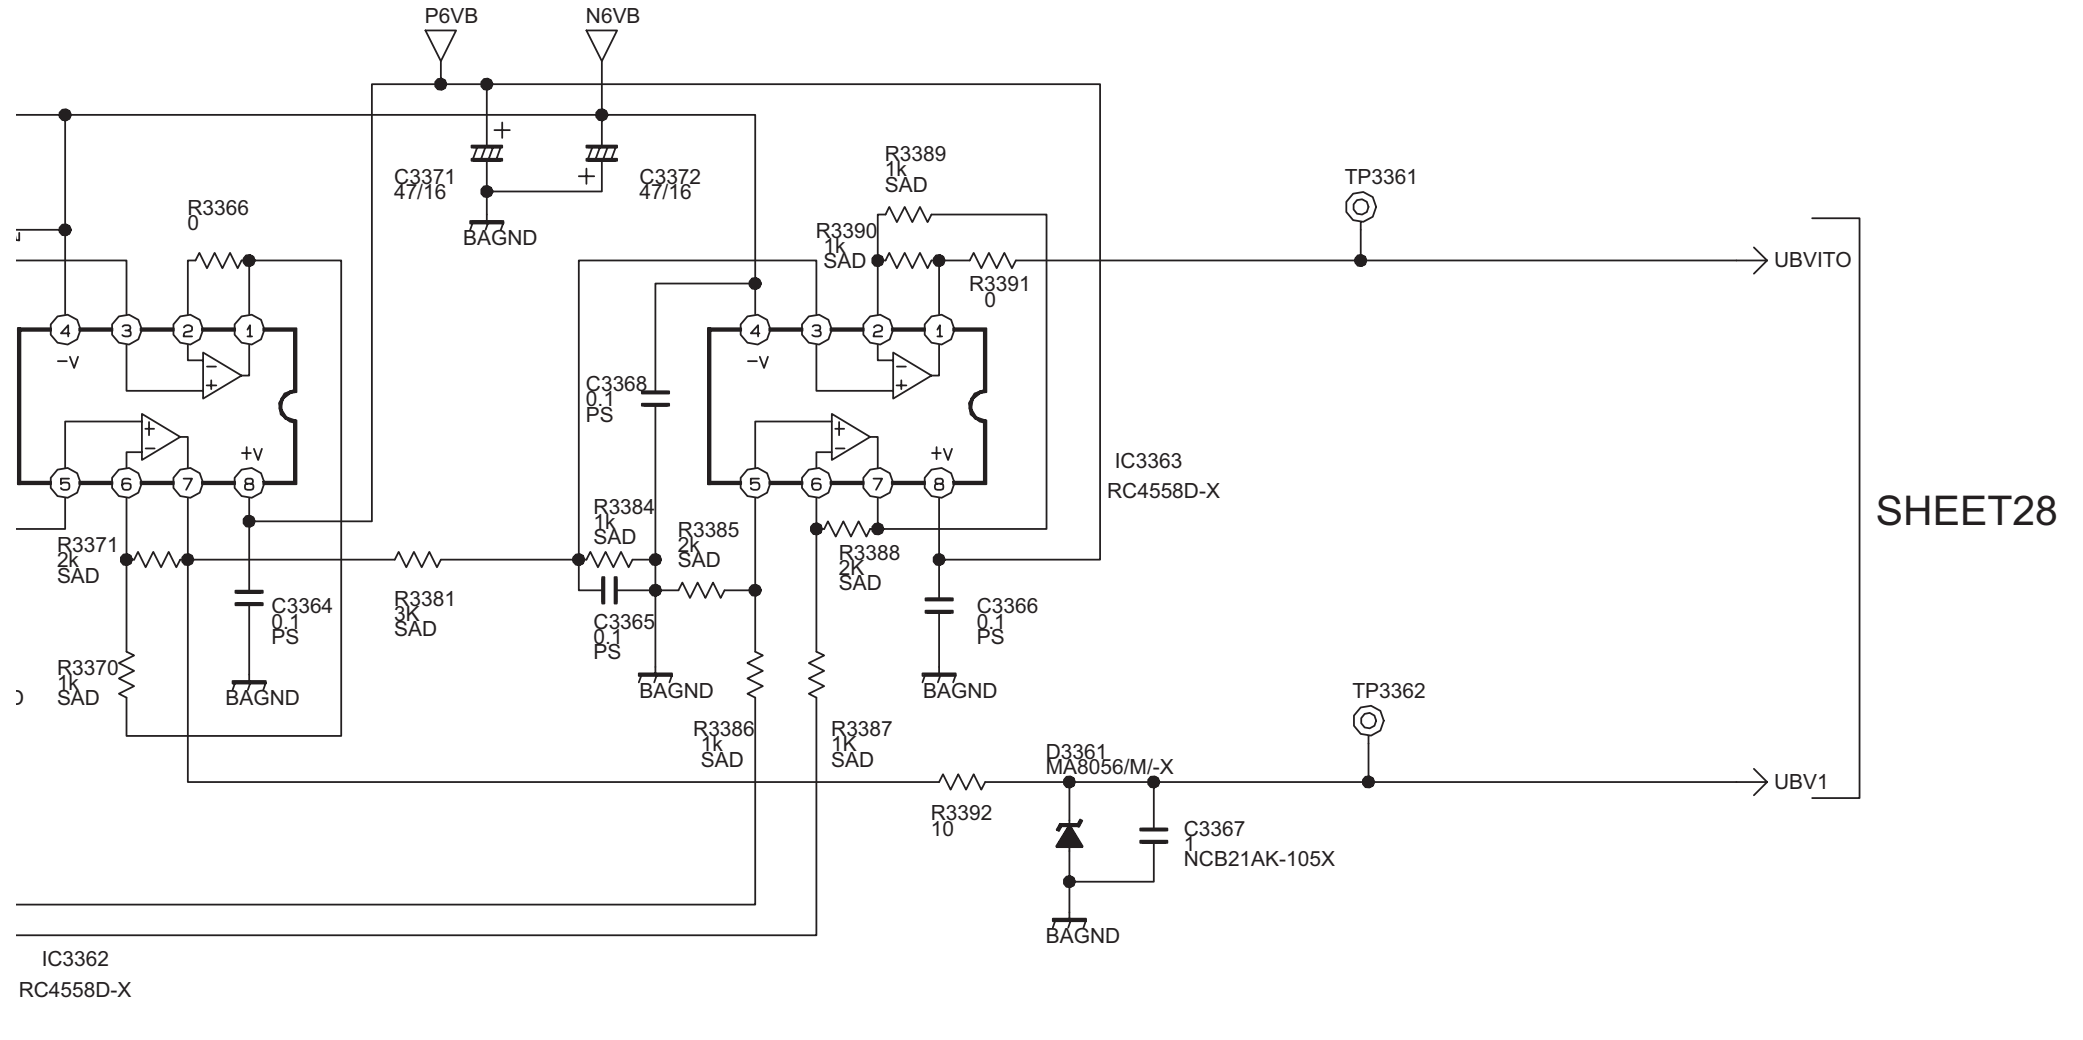
P6VB
N6VB
C3371
47/16
C3372
47/16
BAGND
R3366
0
R3389
1k
SAD
R3390
1k
SAD
R3391
0
TP3361
UBVITO
C3368
0.1
PS
IC3363
RC4558D-X
−v
+v
R3384
1k
SAD
R3385
2K
SAD
R3388
2K
SAD
R3371
2K
SAD
R3381
3K
SAD
C3364
0.1
PS
C3365
0.1
PS
C3366
0.1
PS
SHEET28
R3370
1K
SAD
R3386
1K
SAD
R3387
1K
SAD
TP3362
D3361
MA8056/M/-X
UBV1
R3392
10
C3367
1
NCB21AK-105X
IC3362
RC4558D-X

DRIVE PWB CIRCUIT DIAGRAM (6/7) [CONTROLLER] SHEET 30

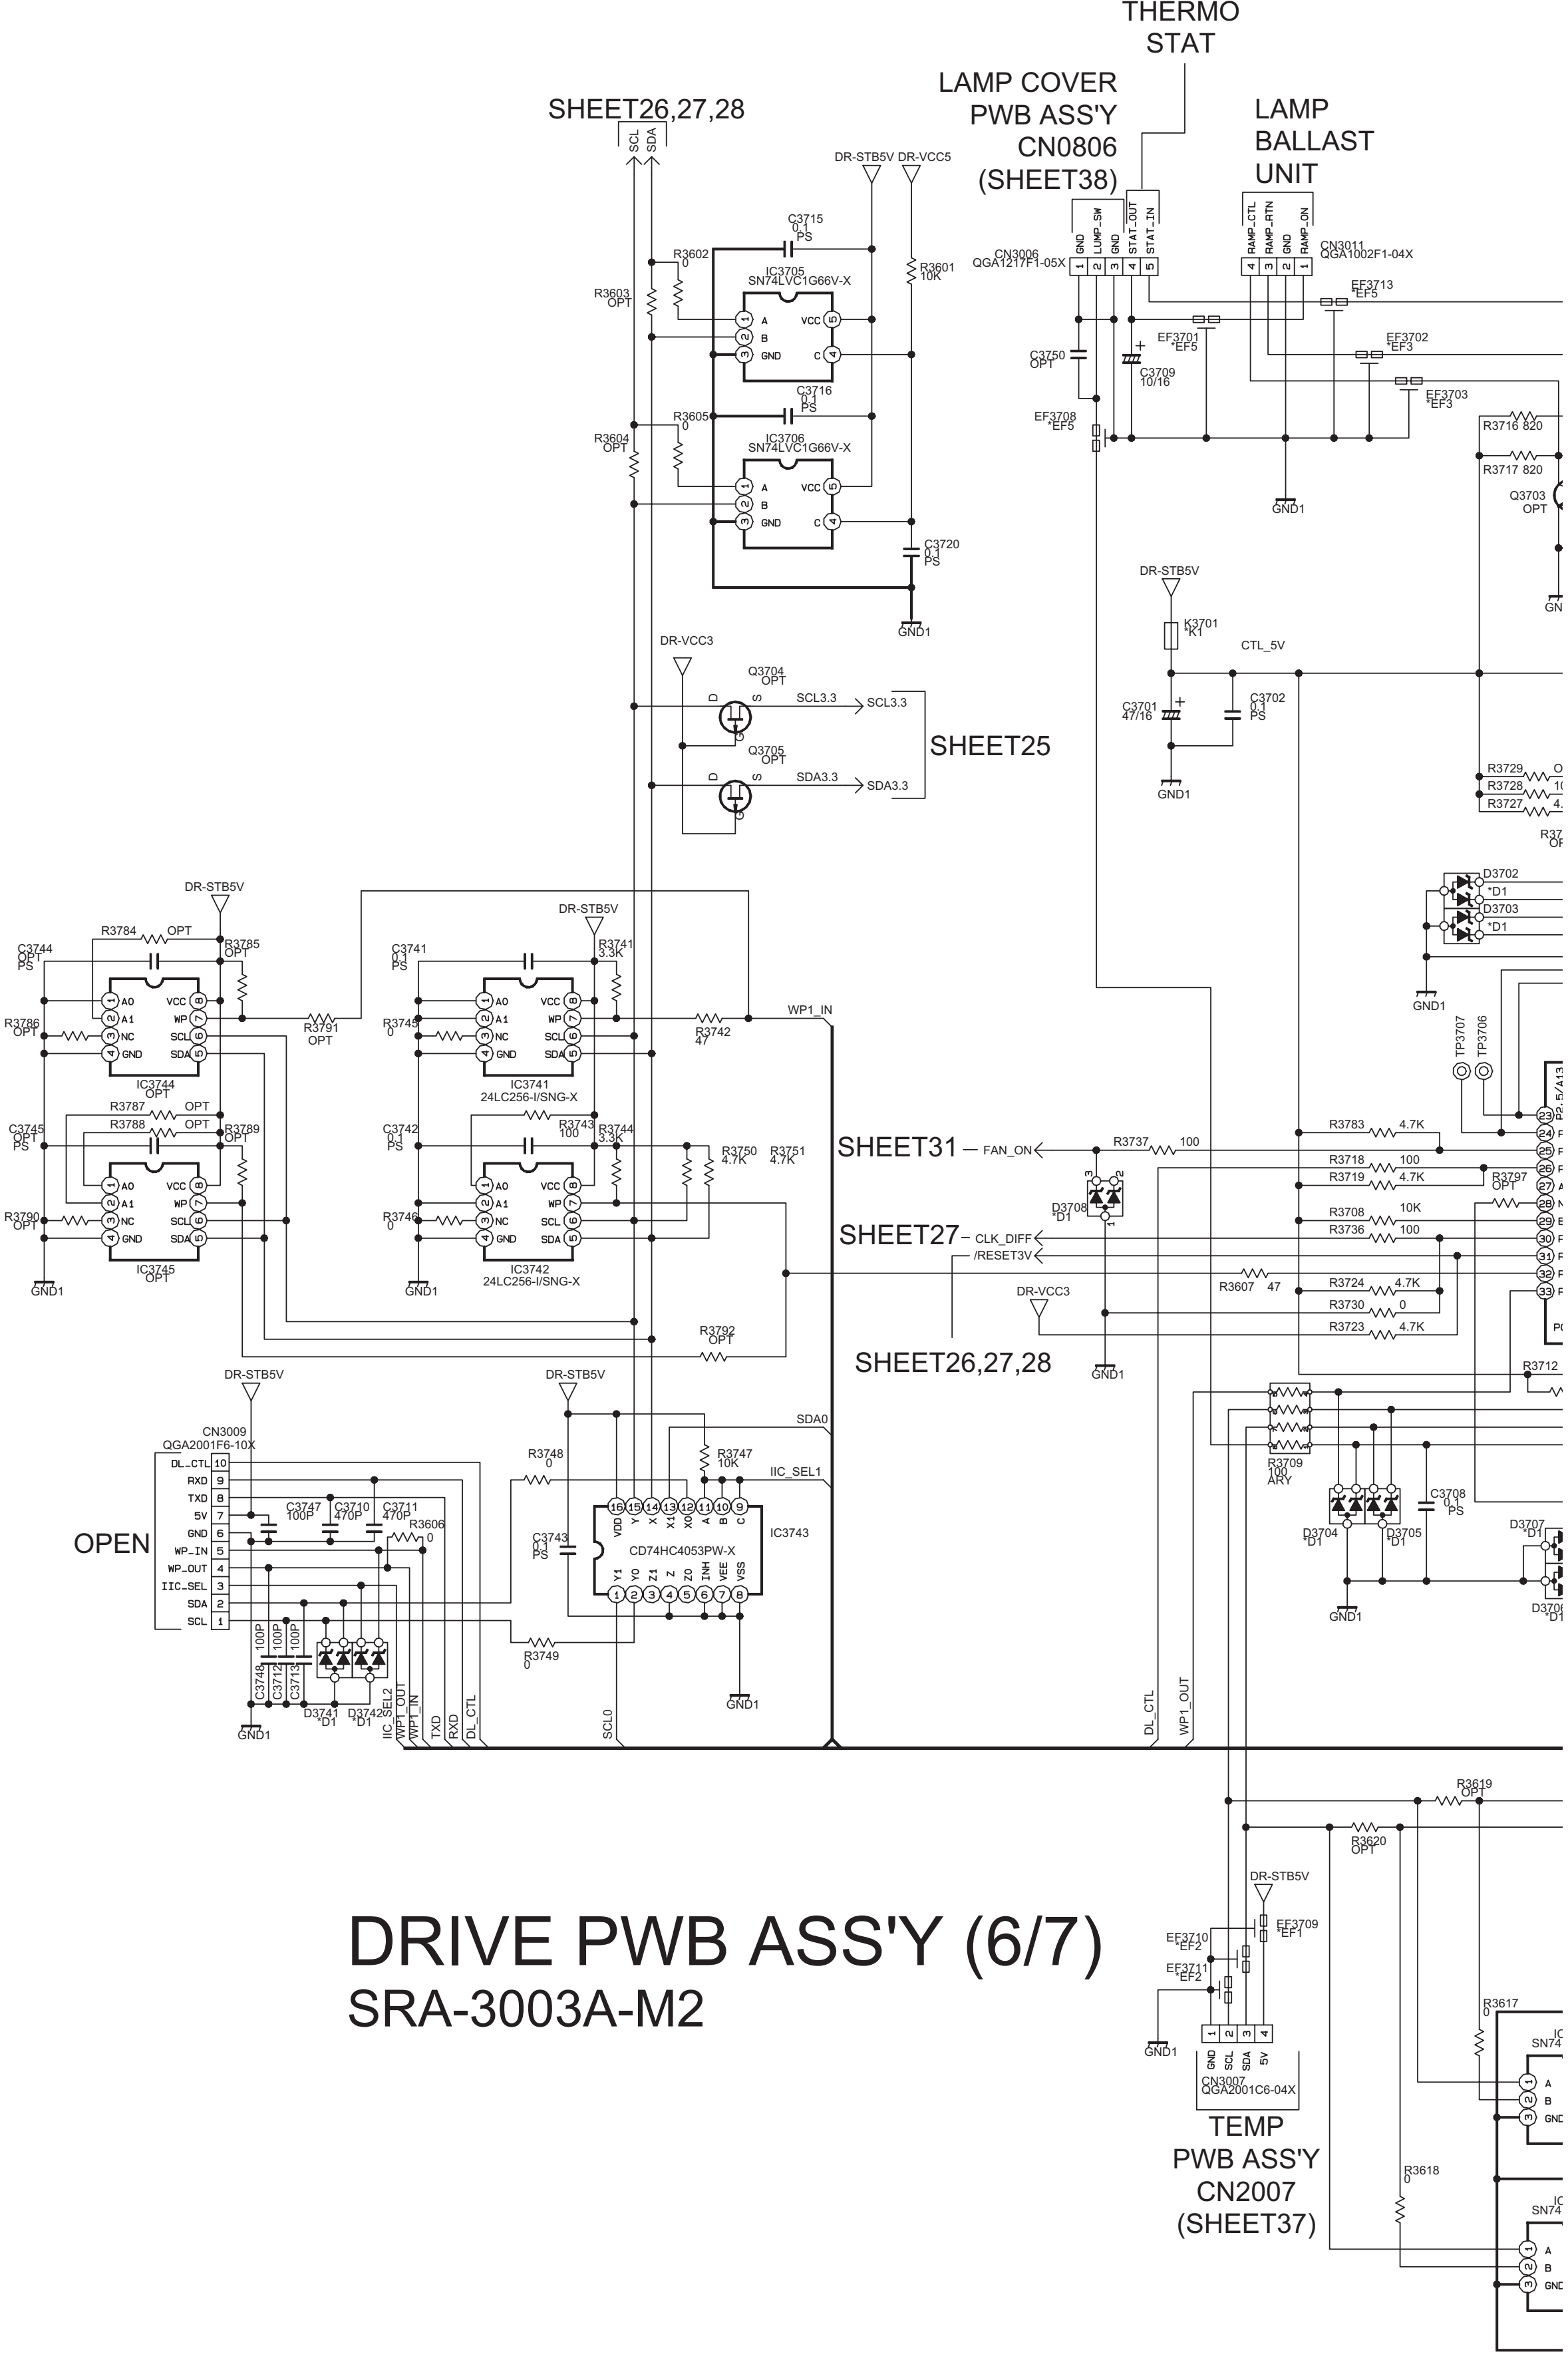
THERMO STAT
LAMP COVER PWB ASS'Y CN0806 (SHEET38)
LAMP BALLAST UNIT
SHEET26,27,28
SCL
SDA
DR-STB5V
DR-VCC5
C3715 0.1 PS
R3602 0
R3601 10K
R3603 OPT
IC3705 SN74LVC1G66V-X
C3716 0.1 PS
R3605 0
R3604 OPT
IC3706 SN74LVC1G66V-X
C3720 0.1 PS
GND1
CN3006 QGA1217F1-05X
GND
LUMP_SW
GND
STAT_OUT
STAT_IN
CN3011 QGA1002F1-04X
RAMP_CTL
RAMP_RTN
GND
RAMP_ON
EF3713 *EF5
EF3701 *EF5
EF3702 *EF3
EF3703 *EF3
C3750 OPT
C3709 10/16
EF3708 *EF5
R3716 820
R3717 820
Q3703 OPT
DR-VCC3
Q3704 OPT
SCL3.3
Q3705 OPT
SDA3.3
SHEET25
DR-STB5V
K3701 *K1
CTL_5V
C3701 47/16
C3702 0.1 PS
R3729
R3728
R3727
D3702 *D1
D3703 *D1
C3744 OPT PS
R3784 OPT
R3785 OPT
R3786 OPT
IC3744 OPT
R3791 OPT
C3741 0.1 PS
R3741 3.3K
R3745 0
IC3741 24LC256-I/SNG-X
R3742 47
WP1_IN
TP3707
TP3706
C3745 OPT PS
R3787 OPT
R3788 OPT
R3789 OPT
R3790 OPT
IC3745 OPT
C3742 0.1 PS
R3743 100
R3744 3.3K
R3746 0
IC3742 24LC256-I/SNG-X
R3750 4.7K
R3751 4.7K
SHEET31
FAN_ON
R3737 100
D3708 *D1
SHEET27
CLK_DIFF
/RESET3V
R3607 47
DR-VCC3
R3783 4.7K
R3718 100
R3719 4.7K
R3797 OPT
R3708 10K
R3736 100
R3724 4.7K
R3730 0
R3723 4.7K
R3792 OPT
SHEET26,27,28
R3712
CN3009 QGA2001F6-10X
DL_CTL
RXD
TXD
5V
GND
WP_IN
WP_OUT
IIC_SEL
SDA
SCL
OPEN
C3747 100P
C3710 470P
C3711 470P
R3606 0
C3748 100P
C3712 100P
C3713 100P
D3741 *D1
D3742 *D1
IIC_SEL2
WP1_OUT
WP1_IN
TXD
RXD
DL_CTL
SDA0
R3748 0
R3747 10K
IIC_SEL1
C3743 0.1 PS
IC3743
CD74HC4053PW-X
R3749 0
SCL0
DL_CTL
WP1_OUT
R3709 100 ARY
C3708 0.1 PS
D3704 *D1
D3705 *D1
D3707 *D1
R3619 OPT
R3620 OPT
DR-STB5V
EF3709 *EF1
EF3710 *EF2
EF3711 *EF2
R3617 0
CN3007 QGA2001C6-04X
GND
SCL
SDA
5V
TEMP PWB ASS'Y CN2007 (SHEET37)
R3618 0
DRIVE PWB ASS'Y (6/7)
SRA-3003A-M2

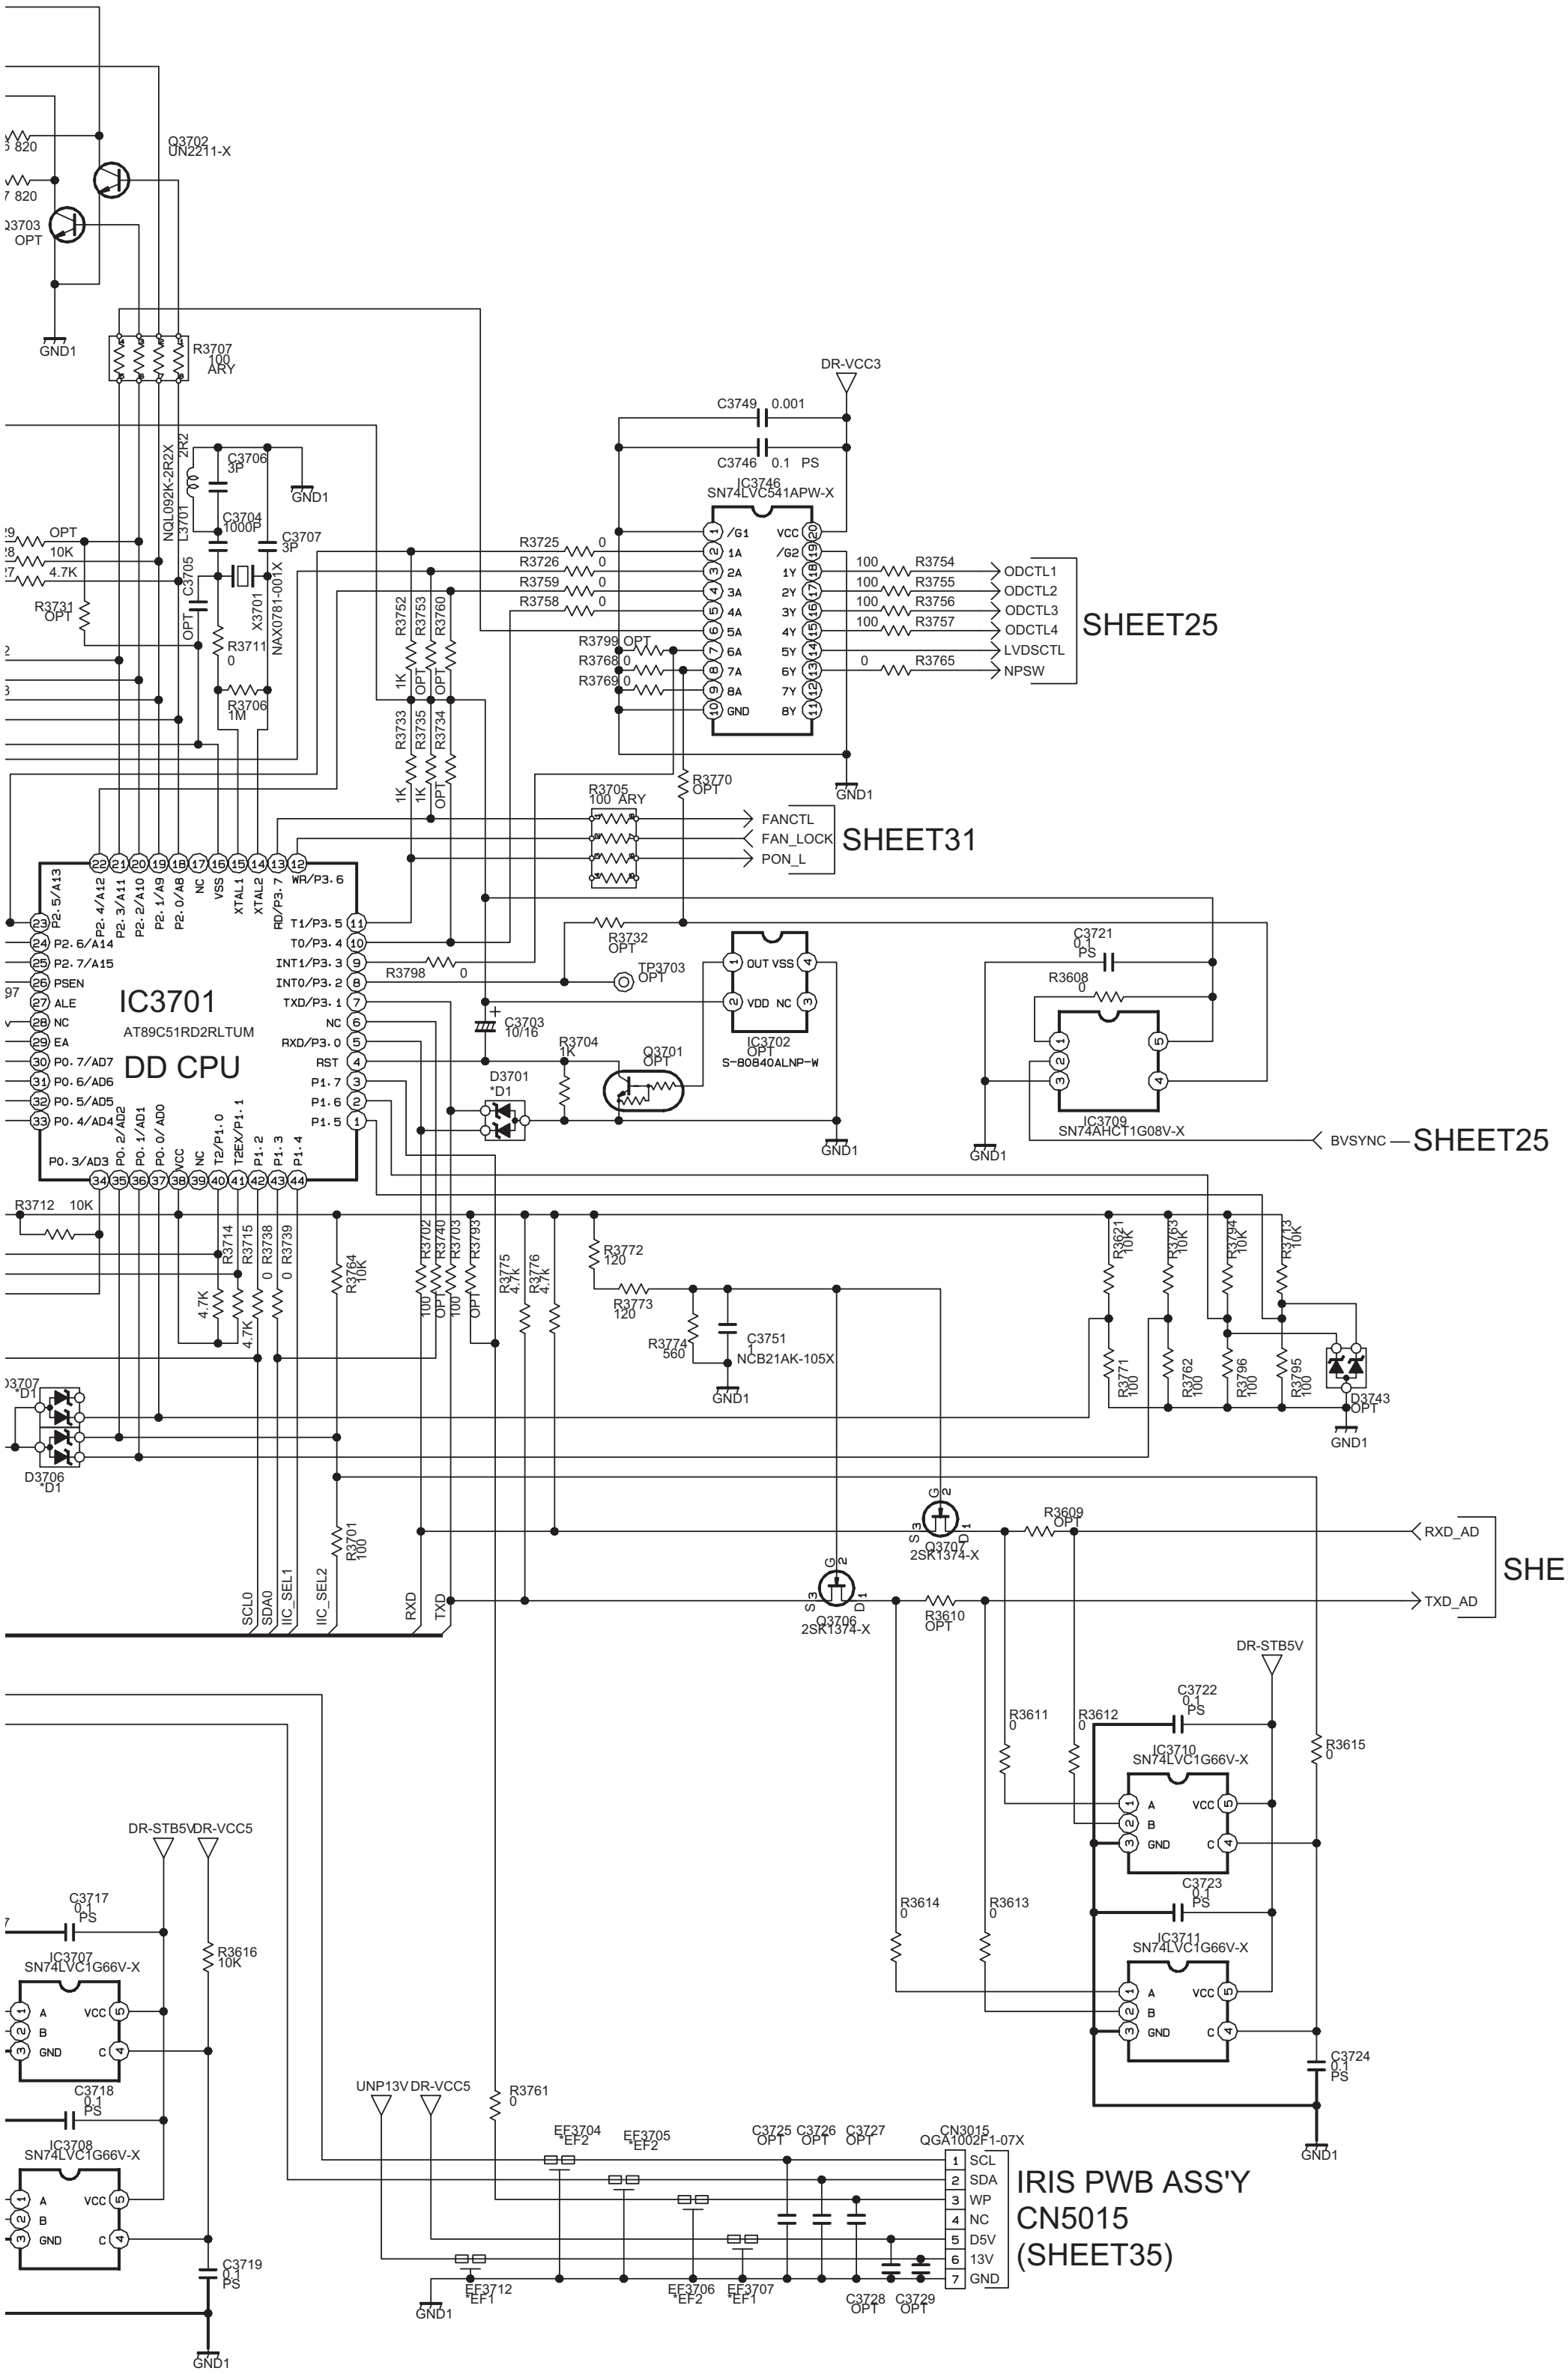
Q3702
UN2211-X
Q3703
OPT
820
GND1
R3707
100
ARY
L3701
NQL092K-2R2X
2R2
C3706
3P
C3704
1000P
C3707
3P
C3705
OPT
X3701
NAX0781-001X
R3711
0
R3706
1M
R3731
OPT
OPT
10K
4.7K
DR-VCC3
C3749 0.001
C3746 0.1 PS
IC3746
SN74LVC541APW-X
/G1
1A
2A
3A
4A
5A
6A
7A
8A
GND
VCC
/G2
1Y
2Y
3Y
4Y
5Y
6Y
7Y
8Y
R3725 0
R3726 0
R3759 0
R3758 0
R3799 OPT
R3768 0
R3769 0
R3754 100
R3755 100
R3756 100
R3757 100
R3765 0
ODCTL1
ODCTL2
ODCTL3
ODCTL4
LVDSCTL
NPSW
SHEET25
R3752 1K
R3753 OPT
R3760 OPT
R3733 1K
R3735 1K
R3734 OPT
R3770 OPT
R3705 100 ARY
FANCTL
FAN_LOCK
PON_L
SHEET31
IC3701
AT89C51RD2RLTUM
DD CPU
P2.5/A13
P2.4/A12
P2.3/A11
P2.2/A10
P2.1/A9
P2.0/A8
NC
VSS
XTAL1
XTAL2
RD/P3.7
WR/P3.6
T1/P3.5
T0/P3.4
INT1/P3.3
INT0/P3.2
TXD/P3.1
NC
RXD/P3.0
RST
P1.7
P1.6
P1.5
P2.6/A14
P2.7/A15
PSEN
ALE
NC
EA
P0.7/AD7
P0.6/AD6
P0.5/AD5
P0.4/AD4
P0.3/AD3
P0.2/AD2
P0.1/AD1
P0.0/AD0
VCC
NC
T2/P1.0
T2EX/P1.1
P1.2
P1.3
P1.4
R3732 OPT
R3798 0
TP3703 OPT
C3703 10/16
R3704 1K
Q3701 OPT
IC3702 OPT S-80840ALNP-W
OUT VSS
VDD NC
D3701 *D1
GND1
C3721 0.1 PS
R3608 0
IC3709
SN74AHCT1G08V-X
BVSYNC
SHEET25
R3712 10K
R3714 4.7K
R3715 4.7K
R3738 0
R3739 0
R3784 10K
R3702 100
R3740 OPT
R3703 100
R3793 OPT
R3775 4.7K
R3776 4.7K
R3772 120
R3773 120
R3774 560
C3751 1 NCB21AK-105X
GND1
R3621 10K
R3763 10K
R3794 10K
R3793 10K
R3771 100
R3762 100
R3796 100
R3795 100
D3743 OPT
GND1
D3707 *D1
D3706 *D1
R3701 100
SCL0
SDA0
IIC_SEL1
IIC_SEL2
RXD
TXD
Q3707 2SK1374-X
Q3706 2SK1374-X
G2
S3
D1
R3609 OPT
R3610 OPT
RXD_AD
TXD_AD
SHEET25
DR-STB5V
C3722 0.1 PS
R3611 0
R3612 0
R3615 0
IC3710
SN74LVC1G66V-X
A
B
GND
VCC
C
R3614
R3613 0
C3723 0.1 PS
IC3711
SN74LVC1G66V-X
C3724 0.1 PS
GND1
DR-STB5V
DR-VCC5
C3717 0.1 PS
R3616 10K
IC3707
SN74LVC1G66V-X
C3718 0.1 PS
IC3708
SN74LVC1G66V-X
C3719 0.1 PS
GND1
UNP13V
DR-VCC5
R3761 0
EF3704 EF2
EF3705 EF2
C3725 OPT
C3726 OPT
C3727 OPT
CN3015
QGA1002F1-07X
1 SCL
2 SDA
3 WP
4 NC
5 D5V
6 13V
7 GND
EF3712 EF1
EF3706 EF2
EF3707 EF1
C3728 OPT
C3729 OPT
GND1
IRIS PWB ASS'Y
CN5015
(SHEET35)

c10437006_0208_6/7_0.0

DRIVE PWB CIRCUIT DIAGRAM (7/7) [POWER_REGULATOR] SHEET 31

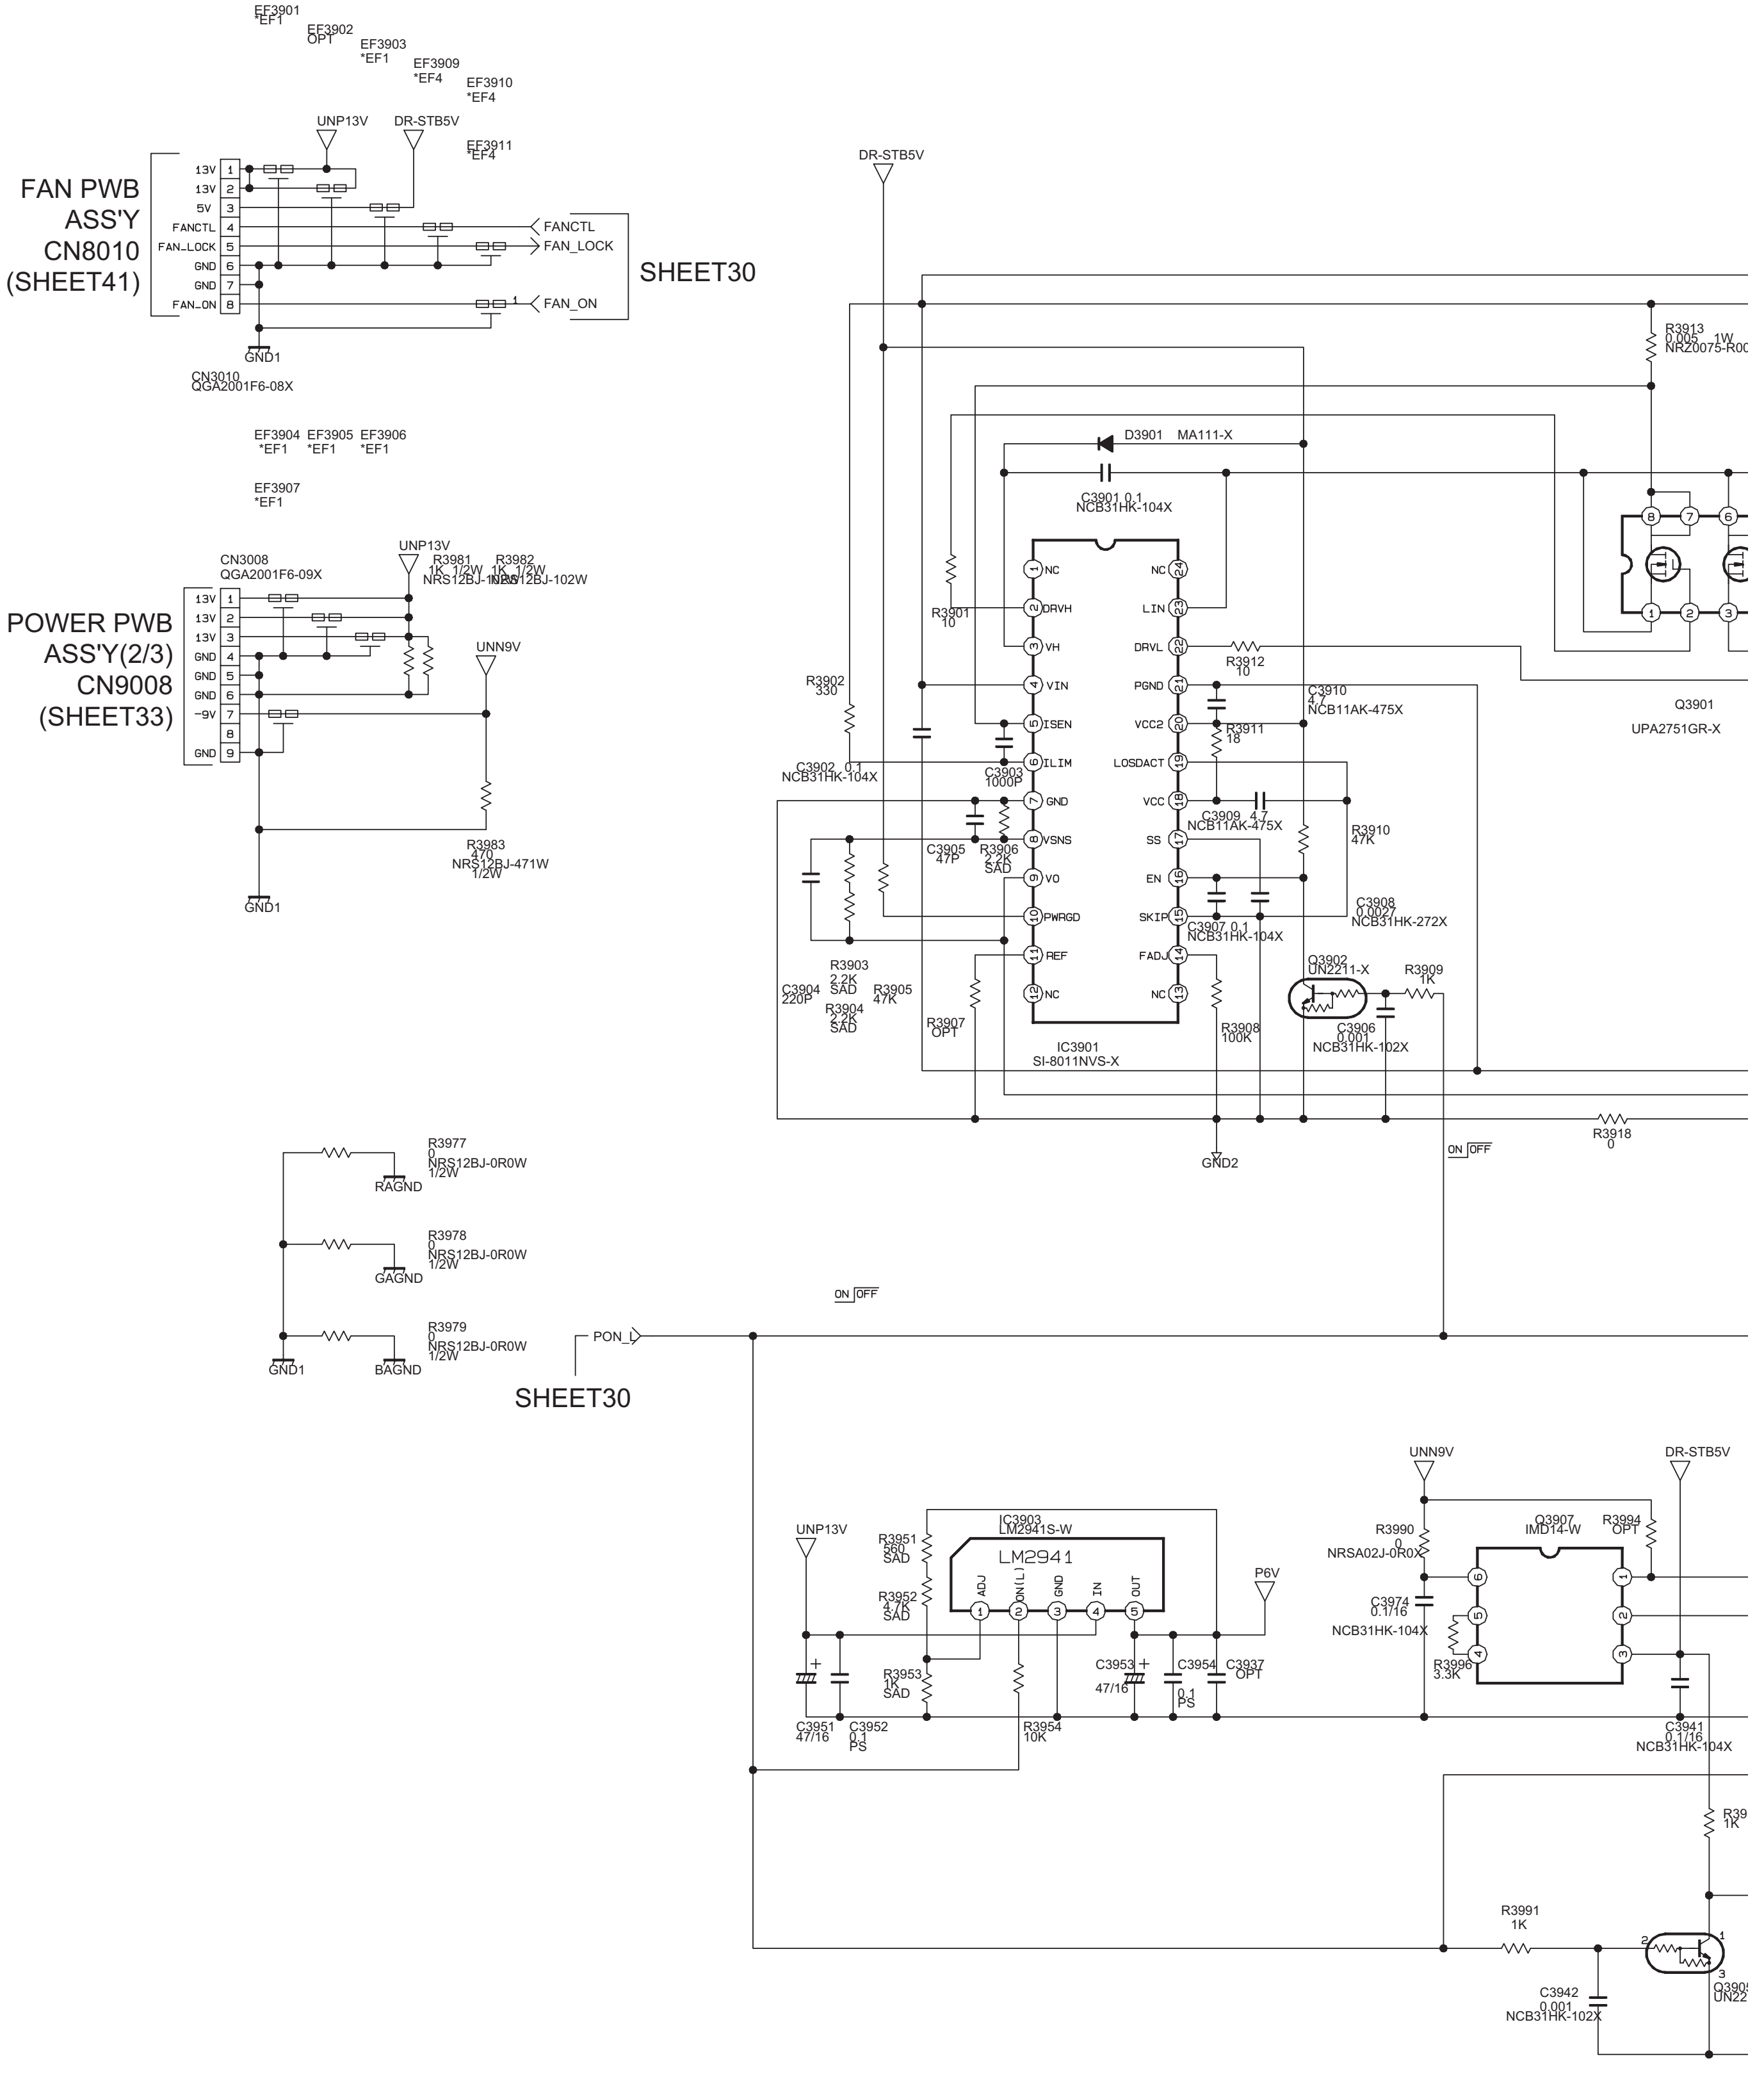

EF3901 *EF1
EF3902 OPT
EF3903 *EF1
EF3909 *EF4
EF3910 *EF4
EF3911 *EF4
UNP13V
DR-STB5V
FAN PWB ASS'Y CN8010 (SHEET41)
13V 1
13V 2
5V 3
FANCTL 4
FAN_LOCK 5
GND 6
GND 7
FAN_ON 8
FANCTL
FAN_LOCK
FAN_ON
SHEET30
GND1
CN3010 QGA2001F6-08X
EF3904 *EF1
EF3905 *EF1
EF3906 *EF1
EF3907 *EF1
CN3008 QGA2001F6-09X
UNP13V
R3981 1K 1/2W NRS12BJ-102W
R3982 1K 1/2W NRS12BJ-102W
POWER PWB ASS'Y(2/3) CN9008 (SHEET33)
13V 1
13V 2
13V 3
GND 4
GND 5
GND 6
-9V 7
8
GND 9
UNN9V
R3983 470 NRS12BJ-471W 1/2W
GND1
R3977 0 NRS12BJ-0R0W 1/2W
RAGND
R3978 0 NRS12BJ-0R0W 1/2W
GAGND
R3979 0 NRS12BJ-0R0W 1/2W
GND1
BAGND
PON_L
SHEET30
DR-STB5V
R3913 0.005 1W NRZ0075-R00
D3901 MA111-X
C3901 0.1 NCB31HK-104X
R3901 10
R3902 330
C3902 0.1 NCB31HK-104X
C3903 1000P
C3905 47P
R3906 2.2K SAD
R3903 2.2K SAD
C3904 220P
R3905 47K
R3904 2.2K SAD
R3907 OPT
1 NC
2 DRVH
3 VH
4 VIN
5 ISEN
6 ILIM
7 GND
8 VSNS
9 VO
10 PWRGD
11 REF
12 NC
24 NC
23 LIN
22 DRVL
21 PGND
20 VCC2
19 LOSDACT
18 VCC
17 SS
16 EN
15 SKIP
14 FADJ
13 NC
IC3901 SI-8011NVS-X
R3912 10
C3910 4.7 NCB11AK-475X
R3911 18
C3909 4.7 NCB11AK-475X
R3910 47K
C3907 0.1 NCB31HK-104X
C3908 0.0027 NCB31HK-272X
R3908 100K
Q3902 UN2211-X
R3909 1K
C3906 0.001 NCB31HK-102X
Q3901 UPA2751GR-X
8 7 6
1 2 3
R3918 0
ON OFF
GND2
ON OFF
UNP13V
IC3903 LM2941S-W
LM2941
ADJ 1
ON(L) 2
GND 3
IN 4
OUT 5
R3951 560 SAD
R3952 4.7K SAD
R3953 1K SAD
R3954 10K
C3951 47/16
C3952 0.1 PS
C3953 47/16
C3954 0.1 PS
C3937 OPT
P6V
UNN9V
DR-STB5V
R3990 0 NRSA02J-0R0X
Q3907 IMD14-W
R3994 OPT
C3974 0.1/16 NCB31HK-104X
R3996 3.3K
C3941 0.1/16 NCB31HK-104X
R39 1K
R3991 1K
C3942 0.001 NCB31HK-102X
Q390 UN22

DRIVE PWB ASS'Y (7/7)

SRA-3003A-M2

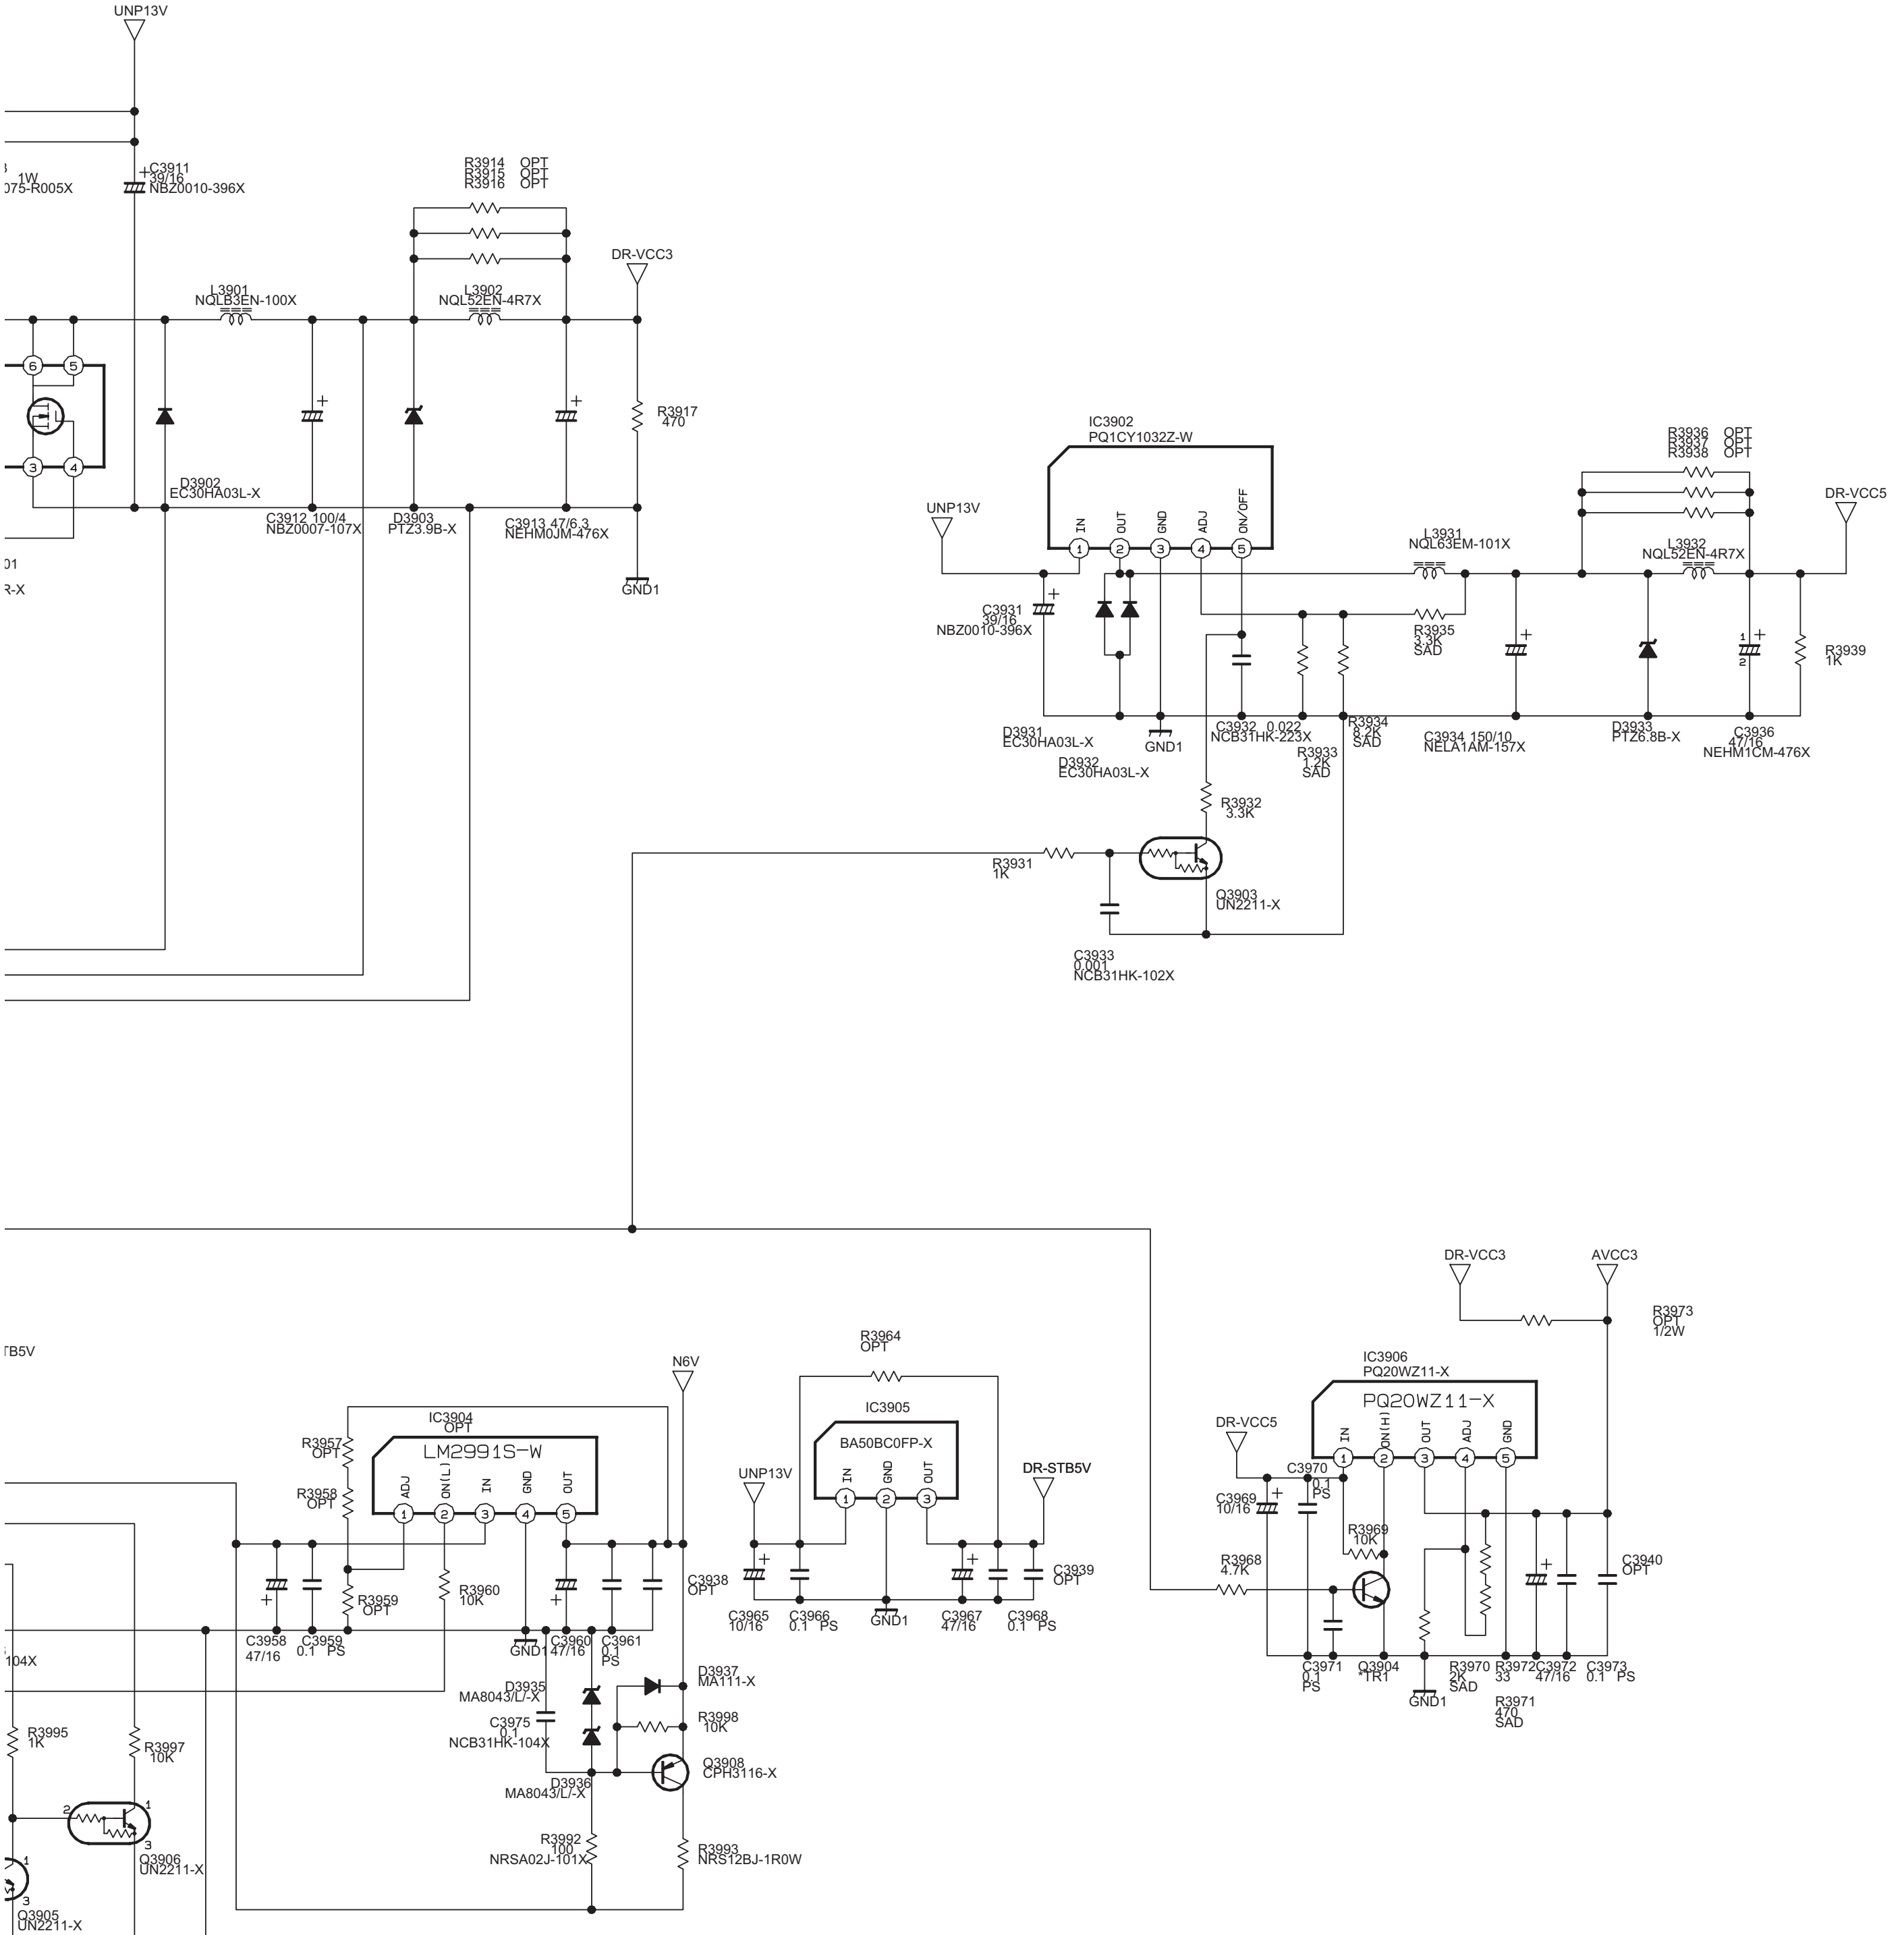

UNP13V
C3911
39/16
NBZ0010-396X
1W
075-R005X
R3914 OPT
R3915 OPT
R3916 OPT
DR-VCC3
L3901
NQLB3EN-100X
L3902
NQL52EN-4R7X
R3917
470
D3902
EC30HA03L-X
C3912 100/4
NBZ0007-107X
D3903
PTZ3.9B-X
C3913 47/6.3
NEHM0JM-476X
GND1
01
R-X
IC3902
PQ1CY1032Z-W
IN
OUT
GND
ADJ
ON/OFF
UNP13V
C3931
39/16
NBZ0010-396X
D3931
EC30HA03L-X
D3932
EC30HA03L-X
GND1
C3932 0.022
NCB31HK-223X
R3933
1.2K
SAD
R3934
8.2K
SAD
L3931
NQL63EM-101X
R3935
3.3K
SAD
C3934 150/10
NELA1AM-157X
R3936 OPT
R3937 OPT
R3938 OPT
L3932
NQL52EN-4R7X
D3933
PTZ6.8B-X
C3936
47/16
NEHM1CM-476X
R3939
1K
DR-VCC5
R3932
3.3K
R3931
1K
Q3903
UN2211-X
C3933
0.001
NCB31HK-102X
TB5V
N6V
IC3904
OPT
LM2991S-W
ADJ
ON(L)
IN
GND
OUT
R3957
OPT
R3958
OPT
R3959
OPT
R3960
10K
C3958
47/16
C3959
0.1 PS
GND1
C3960
47/16
C3961
0.1
PS
C3938
OPT
104X
D3935
MA8043/L/-X
C3975
0.1
NCB31HK-104X
D3936
MA8043/L/-X
D3937
MA111-X
R3998
10K
Q3908
CPH3116-X
R3992
100
NRSA02J-101X
R3993
NRS12BJ-1R0W
R3995
1K
R3997
10K
Q3906
UN2211-X
Q3905
UN2211-X
R3964
OPT
IC3905
BA50BC0FP-X
IN
GND
OUT
UNP13V
DR-STB5V
C3965
10/16
C3966
0.1 PS
GND1
C3967
47/16
C3968
0.1 PS
C3939
OPT
DR-VCC3
AVCC3
R3973
OPT
1/2W
IC3906
PQ20WZ11-X
PQ20WZ11-X
IN
ON(H)
OUT
ADJ
GND
DR-VCC5
C3970
0.1
PS
C3969
10/16
R3969
10K
R3968
4.7K
C3940
OPT
C3971
0.1
PS
Q3904
*TR1
GND1
R3970
2K
SAD
R3972
33
C3972
47/16
C3973
0.1 PS
R3971
470
SAD

c10437007_0208_7/7_0.0

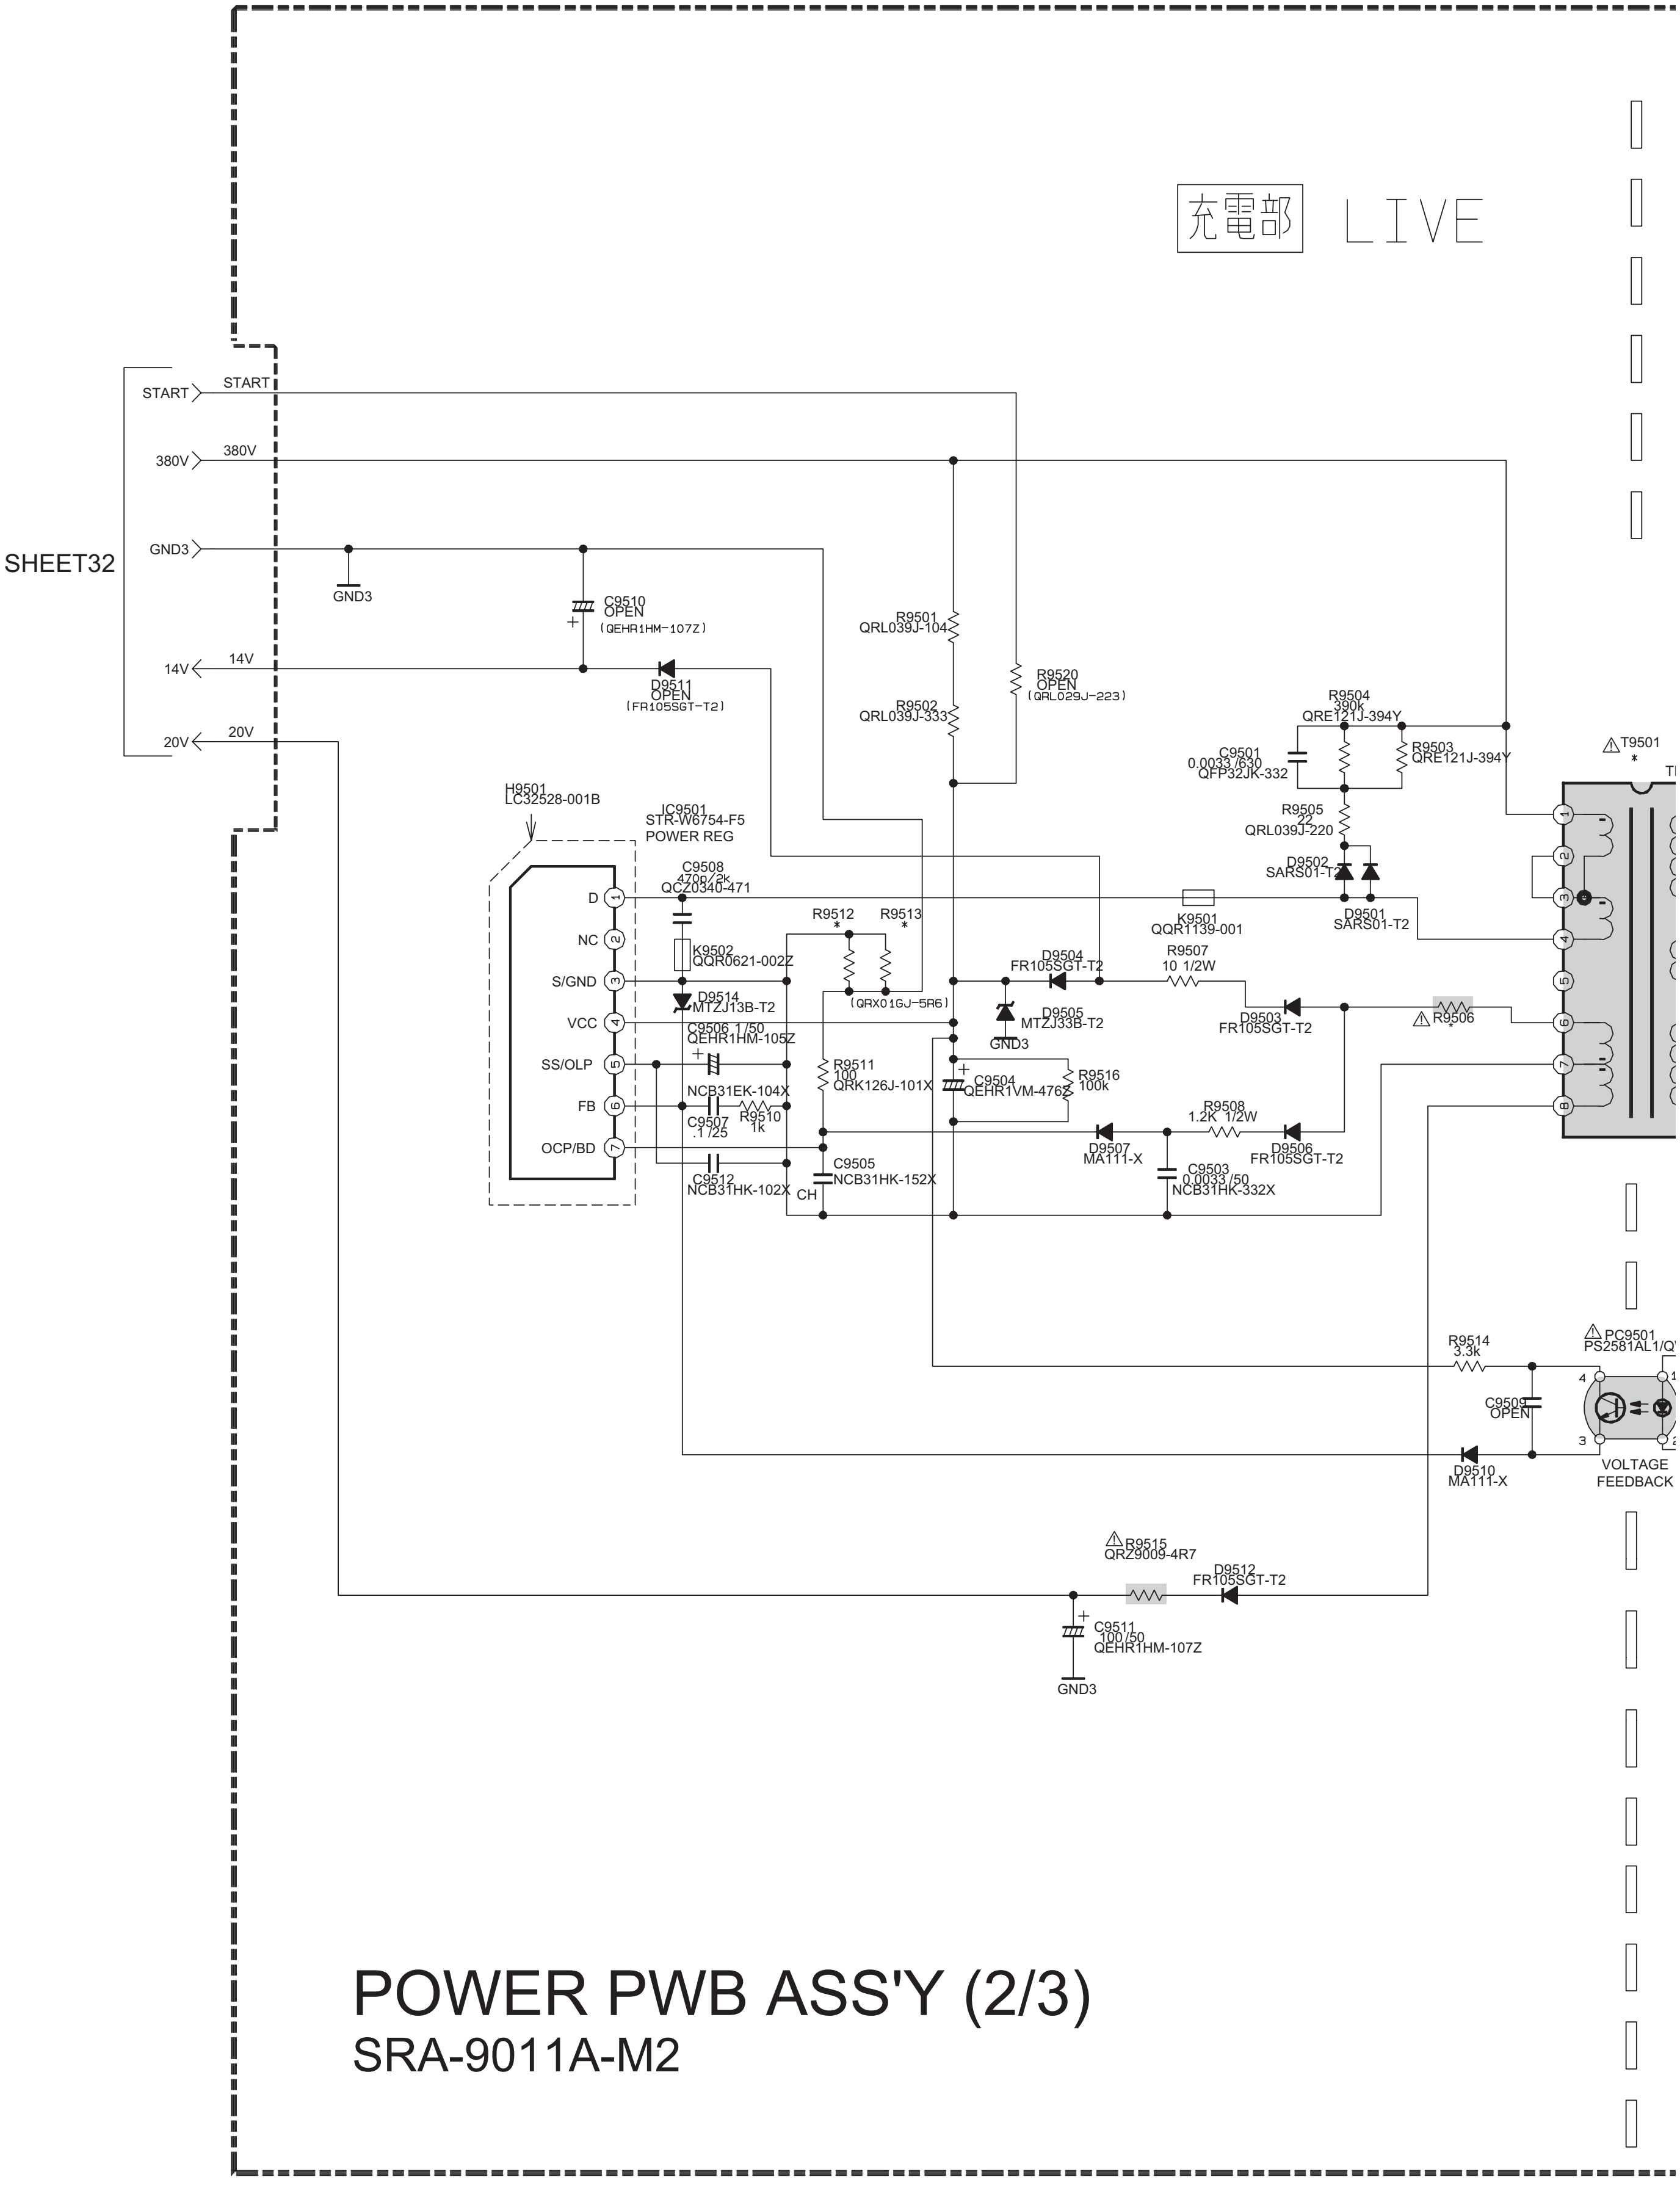
充電部 LIVE
SHEET32
START
380V
GND3
14V
20V
GND3
C9510
OPEN
(QEHR1HM-107Z)
D9511
OPEN
(FR105SGT-T2)
R9501
QRL039J-104
R9502
QRL039J-333
R9520
OPEN
(QRL029J-223)
R9504
390k
QRE121J-394Y
C9501
0.0033 /630
QFP32JK-332
R9503
QRE121J-394Y
R9505
22
QRL039J-220
D9502
SARS01-T2
D9501
SARS01-T2
T9501
*
H9501
LC32528-001B
IC9501
STR-W6754-F5
POWER REG
C9508
470p/2k
QCZ0340-471
D
NC
S/GND
VCC
SS/OLP
FB
OCP/BD
1
2
3
4
5
6
7
K9502
QQR0621-002Z
D9514
MTZJ13B-T2
C9506 1/50
QEHR1HM-105Z
NCB31EK-104X
C9507
.1 /25
R9510
1k
C9512
NCB31HK-102X
CH
R9512
*
R9513
*
(QRX01GJ-5R6)
R9511
100
QRK126J-101X
C9505
NCB31HK-152X
K9501
QQR1139-001
D9504
FR105SGT-T2
D9505
MTZJ33B-T2
GND3
C9504
QEHR1VM-476Z
R9516
100k
R9507
10 1/2W
D9503
FR105SGT-T2
R9506
R9508
1.2K 1/2W
D9507
MA111-X
C9503
0.0033 /50
NCB31HK-332X
D9506
FR105SGT-T2
1
2
3
4
5
6
7
8
R9514
3.3k
PC9501
PS2581AL1/Q
C9509
OPEN
4
3
D9510
MA111-X
VOLTAGE
FEEDBACK
R9515
QRZ9009-4R7
D9512
FR105SGT-T2
C9511
100/50
QEHR1HM-107Z
GND3

POWER PWB ASS'Y (2/3)

SRA-9011A-M2

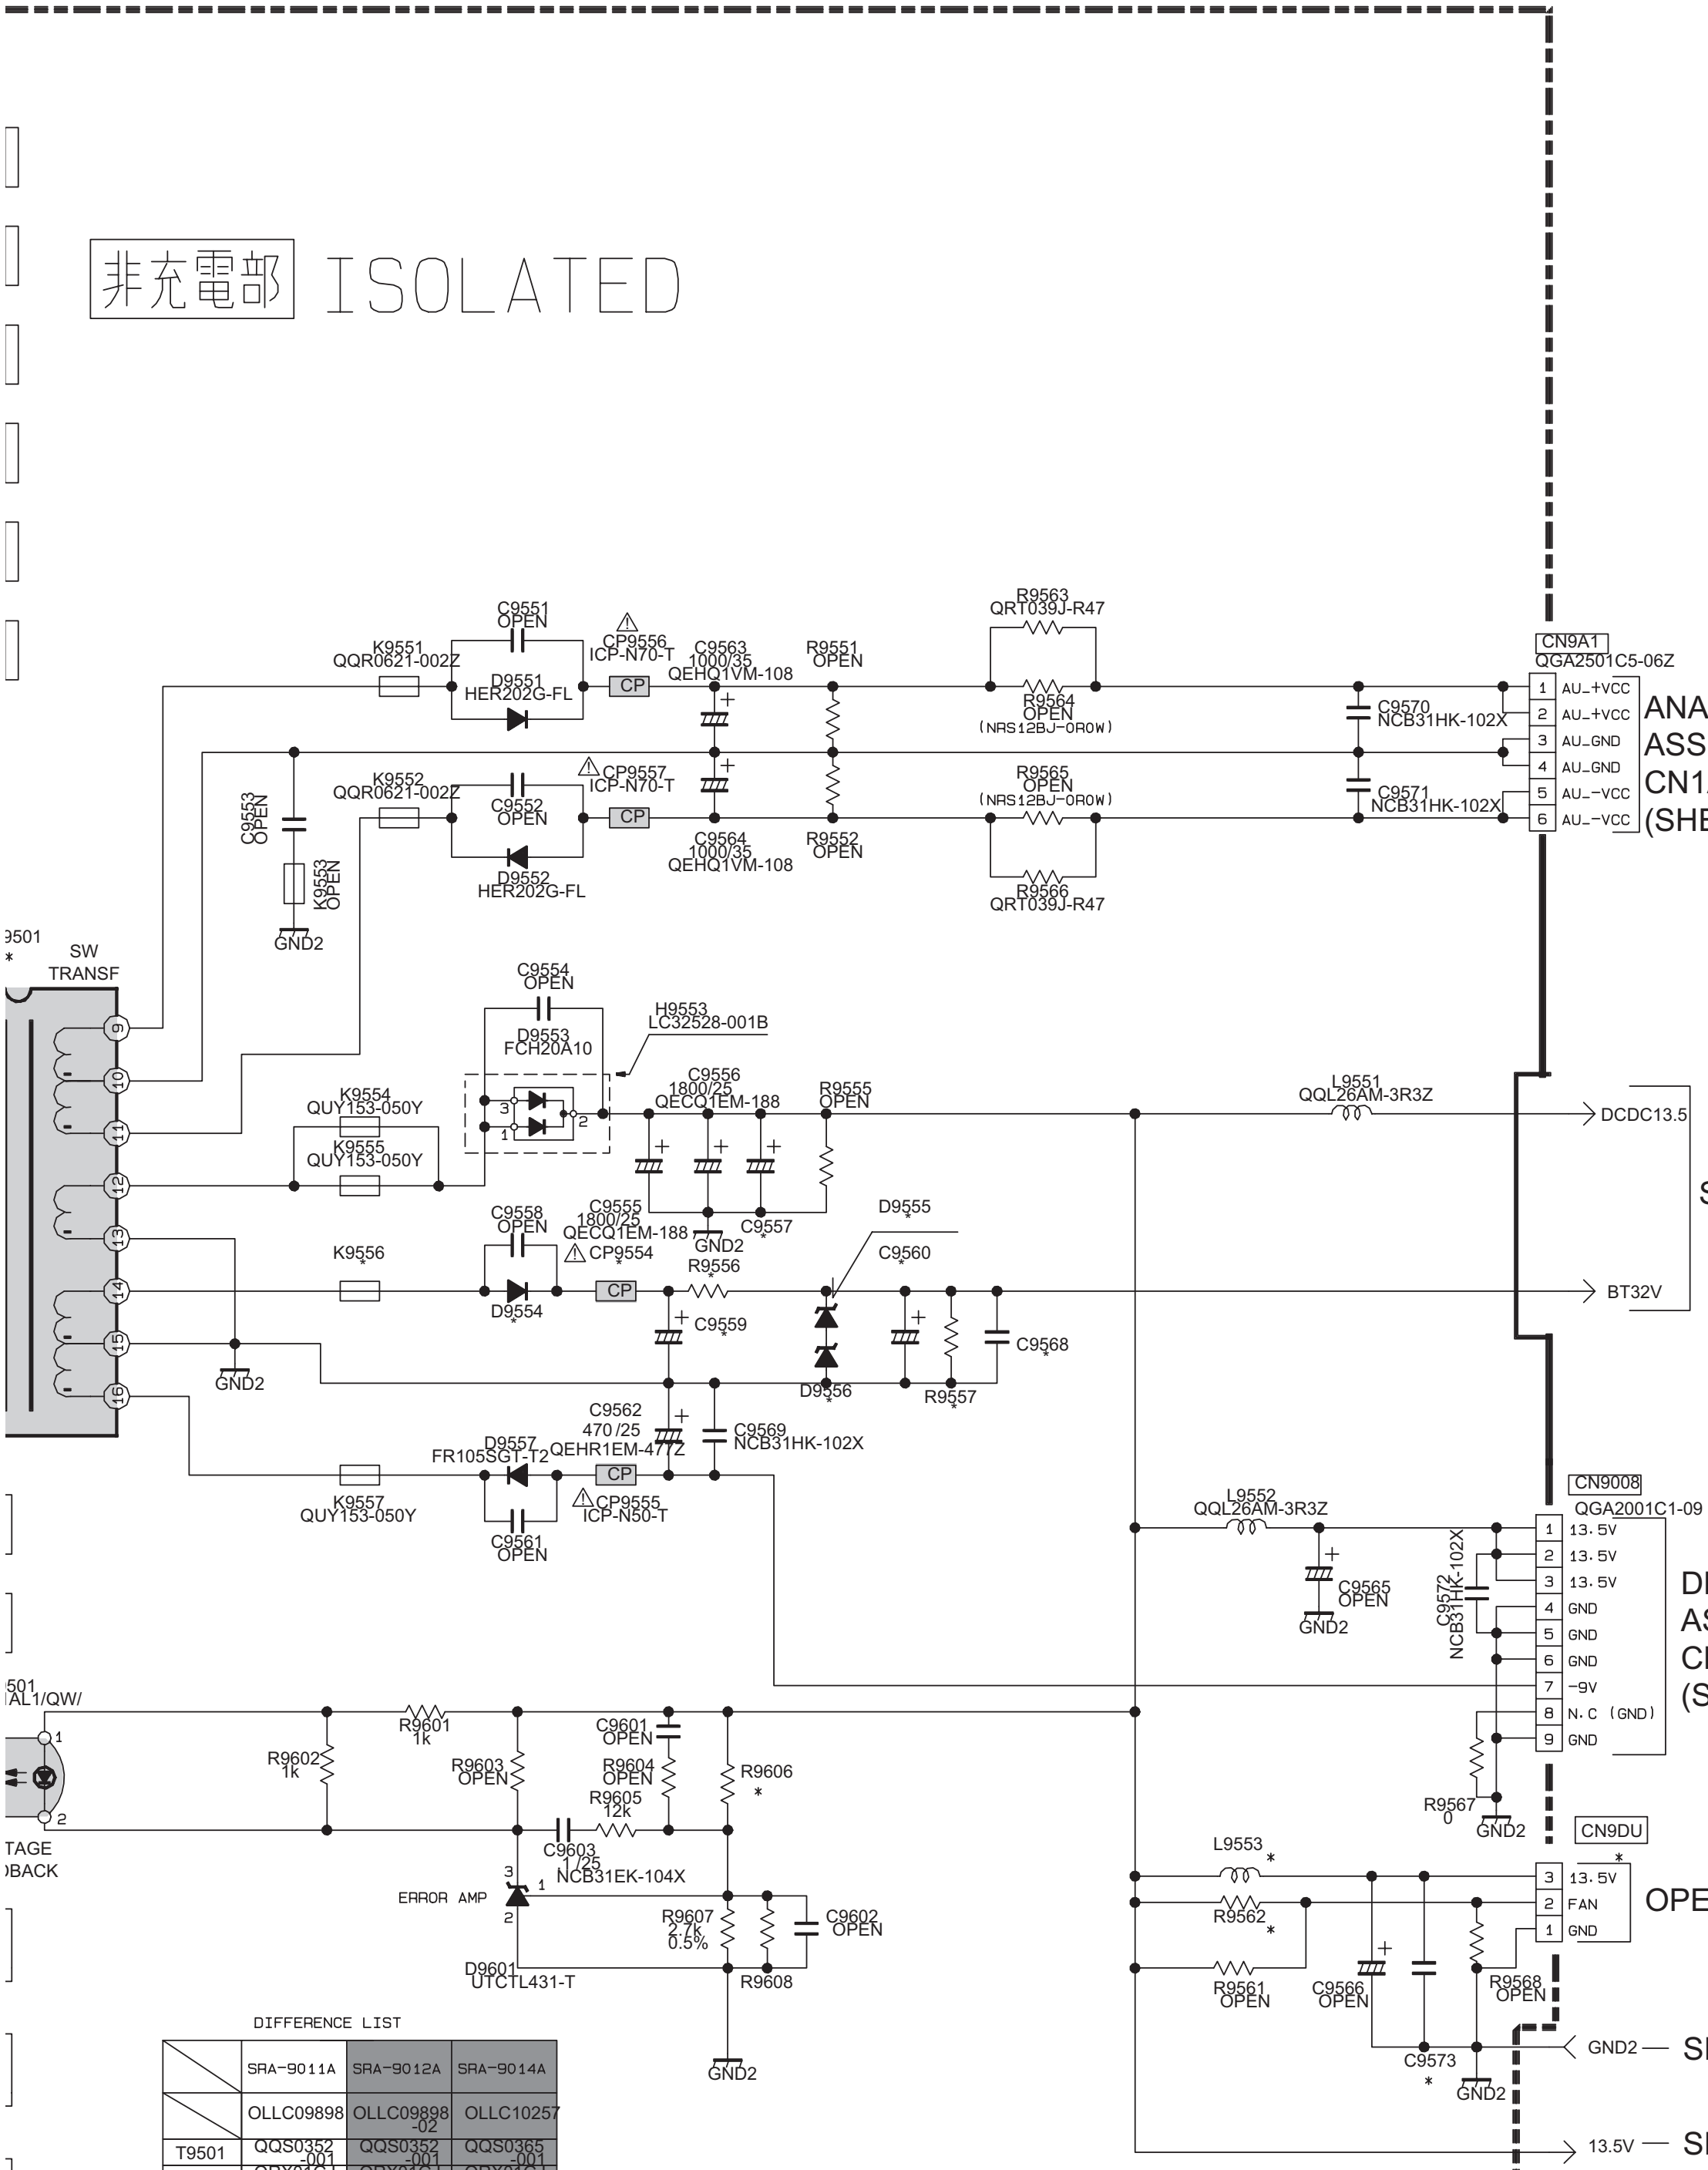

非充電部 ISOLATED
C9551 OPEN
K9551 QQR0621-002Z
D9551 HER202G-FL
CP9556 ICP-N70-T
CP
C9563 1000/35 QEHQ1VM-108
R9551 OPEN
R9563 QRT039J-R47
R9564 OPEN (NRS12BJ-0R0W)
C9570 NCB31HK-102X
CN9A1 QGA2501C5-06Z
1 AU_+VCC
2 AU_+VCC
3 AU_GND
4 AU_GND
5 AU_-VCC
6 AU_-VCC
ANALOG PWB ASS'Y(5/6) CN1A1 (SHEET7)
C9553 OPEN
K9553 OPEN
GND2
K9552 QQR0621-002Z
C9552 OPEN
CP9557 ICP-N70-T
D9552 HER202G-FL
C9564 1000/35 QEHQ1VM-108
R9552 OPEN
R9565 OPEN (NRS12BJ-0R0W)
C9571 NCB31HK-102X
R9566 QRT039J-R47
9501 *
SW TRANSF
9 10 11 12 13 14 15 16
C9554 OPEN
H9553 LC32528-001B
D9553 FCH20A10
K9554 QUY153-050Y
K9555 QUY153-050Y
C9556 1800/25 QECQ1EM-188
R9555 OPEN
L9551 QQL26AM-3R3Z
DCDC13.5
SHEET34
C9558 OPEN
C9555 1800/25 QECQ1EM-188
C9557
GND2
D9555
K9556
CP9554
R9556
C9560
BT32V
D9554
C9559
D9556
R9557
C9568
GND2
C9562 470/25 QEHR1EM-477Z
C9569 NCB31HK-102X
D9557 FR105SGT-T2
CP
K9557 QUY153-050Y
CP9555 ICP-N50-T
C9561 OPEN
CN9008 QGA2001C1-09
L9552 QQL26AM-3R3Z
C9565 OPEN
C9572 NCB31HK-102X
1 13.5V
2 13.5V
3 13.5V
4 GND
5 GND
6 GND
7 -9V
8 N.C (GND)
9 GND
DRIVE PWB ASS'Y(7/7) CN3008 (SHEET31)
R9567 0
GND2
501 AL1/QW/
TAGE BACK
R9601 1k
R9602 1k
R9603 OPEN
C9601 OPEN
R9604 OPEN
R9605 12k
R9606 *
C9603 1/25 NCB31EK-104X
ERROR AMP
D9601 UTCTL431-T
R9607 2.7k 0.5%
C9602 OPEN
R9608
GND2
CN9DU *
L9553 *
R9562 *
3 13.5V
2 FAN
1 GND
OPEN
R9561 OPEN
C9566 OPEN
R9568 OPEN
C9573 *
GND2
GND2 — SHEET34
13.5V — SHEET32

DIFFERENCE LIST

	SRA-9011A	SRA-9012A	SRA-9014A
	OLLC09898	OLLC09898-02	OLLC10257
T9501	QQS0352-001	QQS0352-001	QQS0365-001
R9512	QRX01GJ-R39	QRX01GJ-R39	QRX01GJ-R33
R9513	QRX01GJ-5R6	OPEN	QRX01GJ-5R6
R9606	12k 0.5%	12k 0.5%	10k 0.5%
R9608	OPEN	OPEN	18k 0.5%
R9562	OPEN	OPEN	QRL029J-220
C9557	OPEN	OPEN	QECQ1EM-188
C9573	OPEN	OPEN	NCB31HK-102X
L9553	OPEN	OPEN	QQL26AM-3R3Z
CNDU	OPEN	OPEN	QGA2001C1-03
R9506	QRZ9017-470	QRZ9017-120	QRZ9017-470
C9559	QEHR2AM-106Z	OPEN	QEHR2AM-106Z
C9560	QEHR1HM-105Z	OPEN	QEHR1HM-105Z
C9568	NCB31HK-102X	OPEN	NCB31HK-102X
D9554	FR105SGT-T2	OPEN	FR105SGT-T2
D9555	MTZJ15B-T2	OPEN	MTZJ15B-T2
D9556	MTZJ16C-T2	OPEN	MTZJ16C-T2
K9556	QUY153-050Y	OPEN	QUY153-050Y
R9556	QRG01GJ-152	OPEN	QRG01GJ-152
R9557	330k	OPEN	330k
CP9554	ICP-N50-T	OPEN	ICP-N50-T

c20179001_0214_2/3_0.0

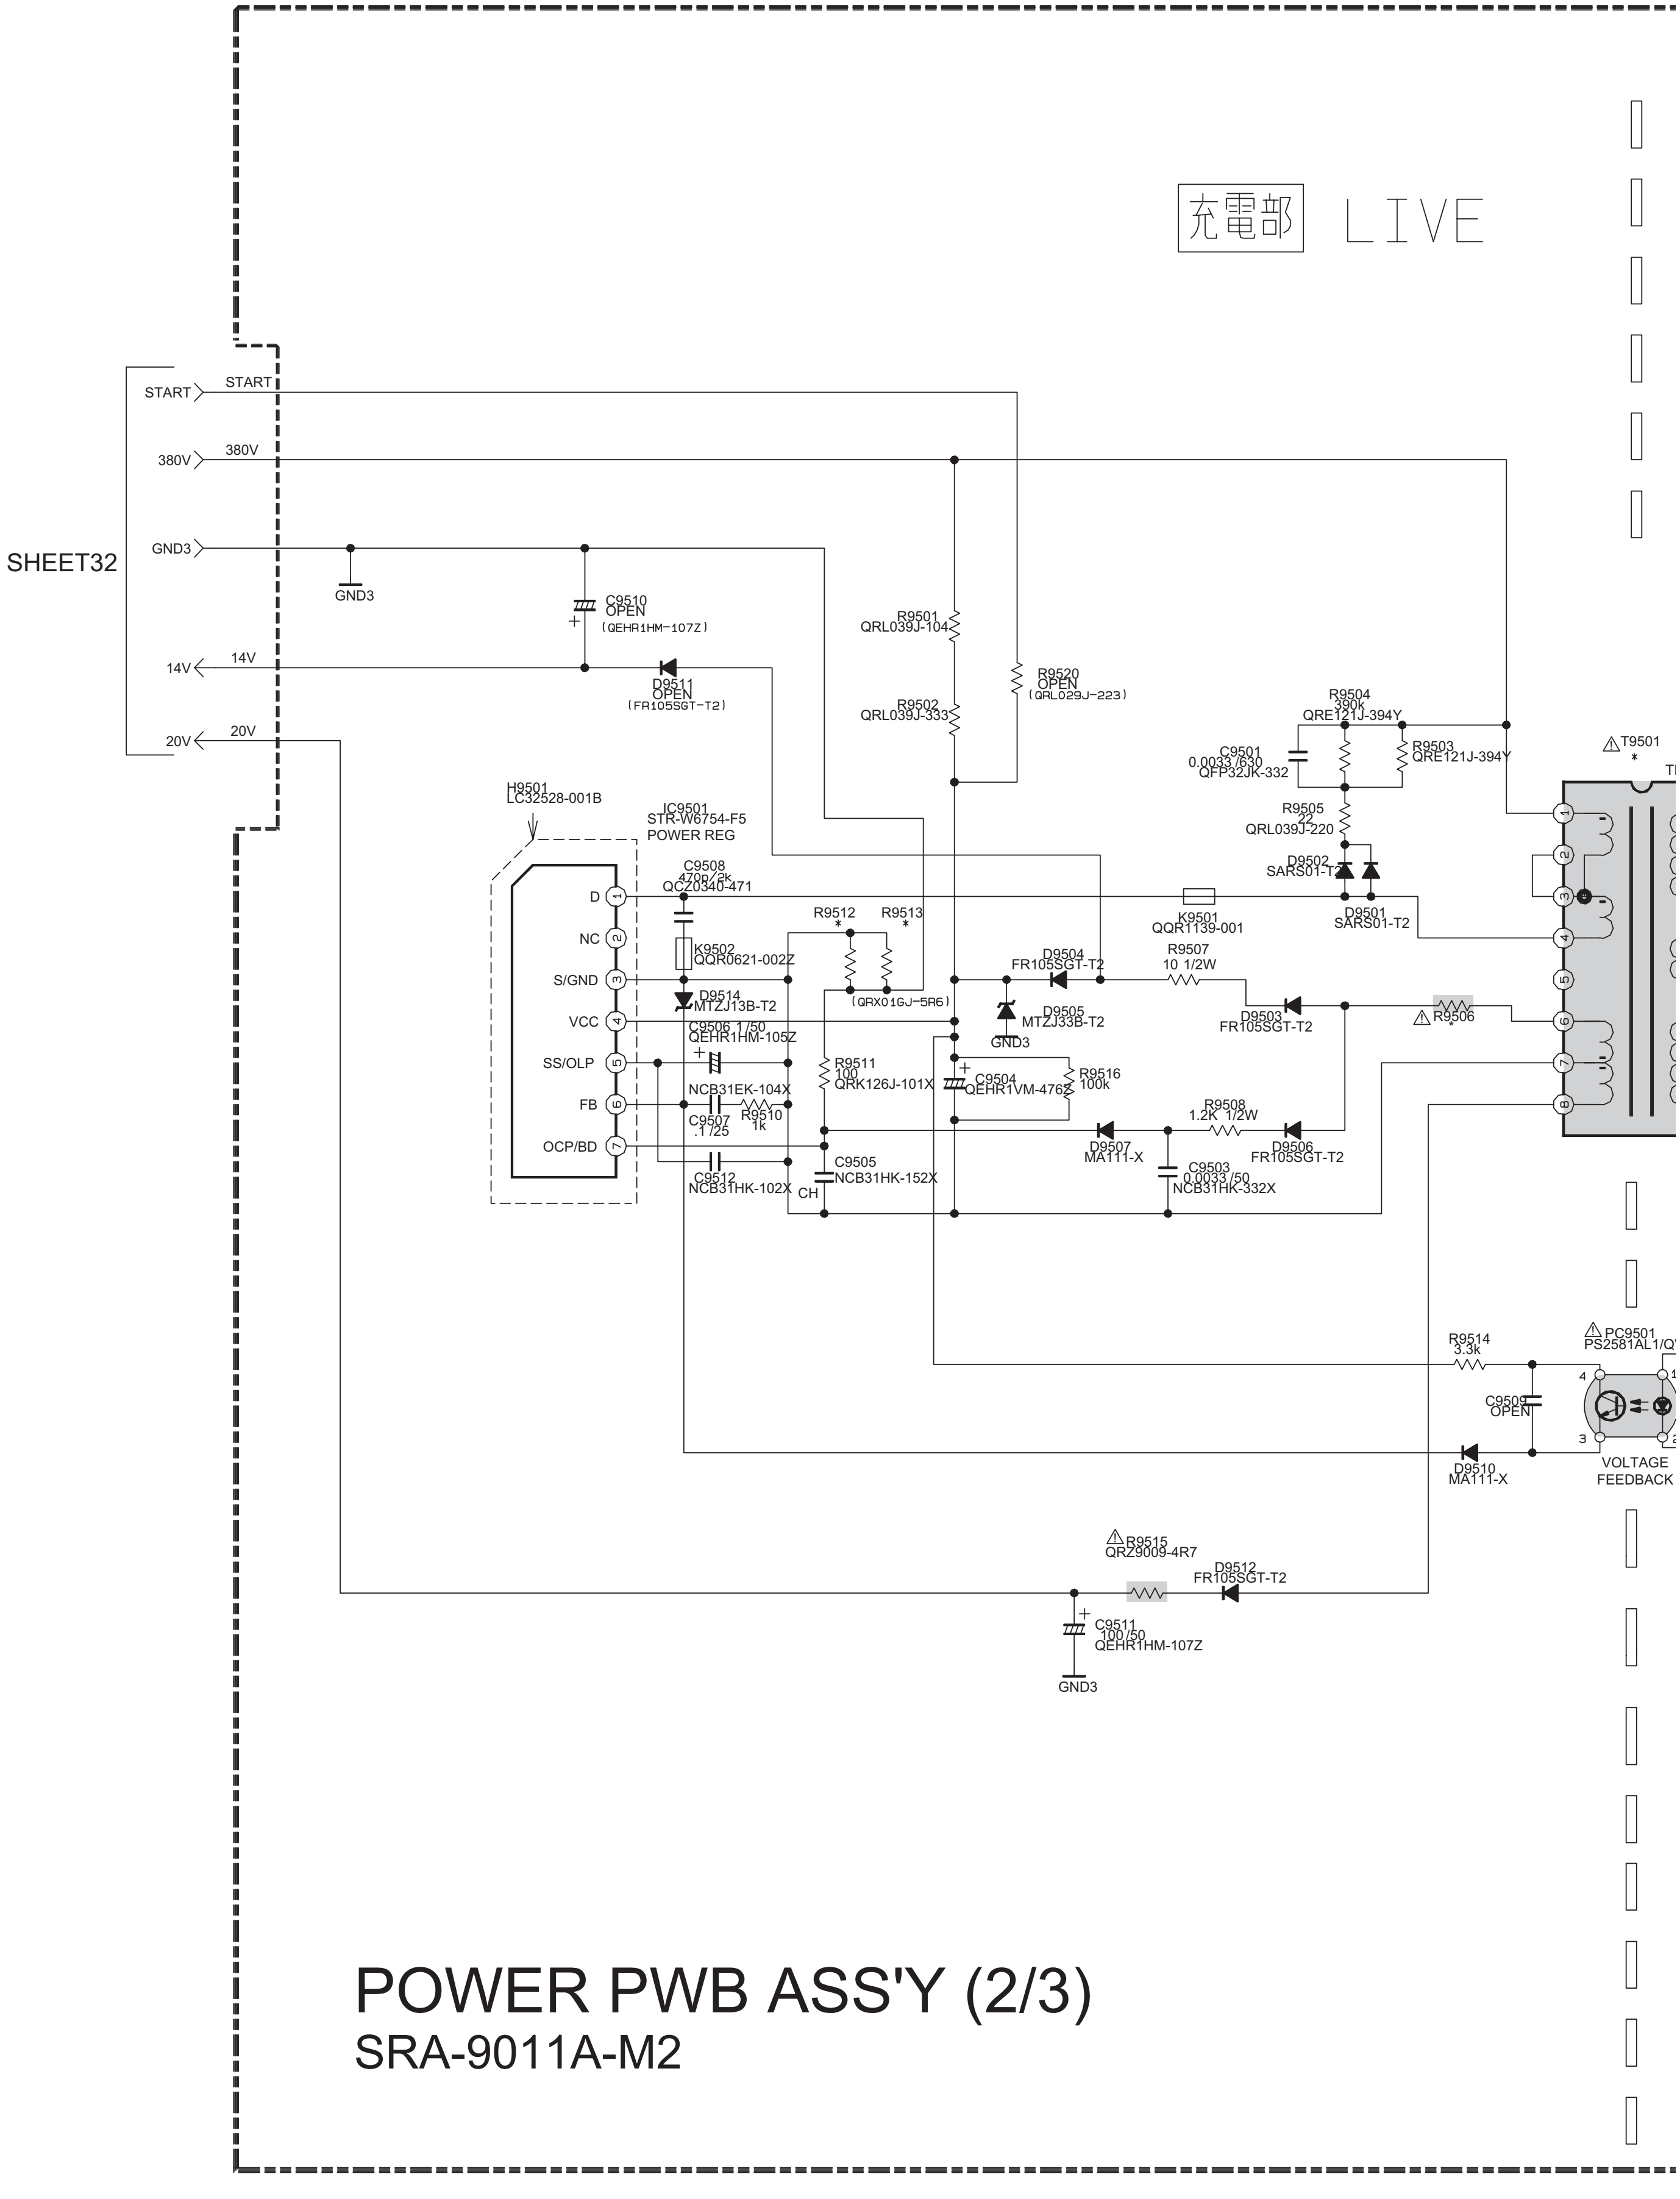
充電部 LIVE
SHEET32
START
380V
GND3
14V
20V
GND3
C9510
OPEN
(QEHR1HM-107Z)
D9511
OPEN
(FR105SGT-T2)
R9501
QRL039J-104
R9502
QRL039J-333
R9520
OPEN
(QRL029J-223)
R9504
390k
QRE121J-394Y
C9501
0.0033 /630
QFP32JK-332
R9503
QRE121J-394Y
R9505
22
QRL039J-220
D9502
SARS01-T2
D9501
SARS01-T2
T9501
*
H9501
LC32528-001B
IC9501
STR-W6754-F5
POWER REG
D
NC
S/GND
VCC
SS/OLP
FB
OCP/BD
C9508
470p/2k
QCZ0340-471
K9502
QQR0621-002Z
D9514
MTZJ13B-T2
C9506 1/50
QEHR1HM-105Z
NCB31EK-104X
C9507
.1 /25
R9510
1k
C9512
NCB31HK-102X
CH
C9505
NCB31HK-152X
R9512
*
R9513
*
(QRX01GJ-5R6)
R9511
100
QRK126J-101X
C9504
QEHR1VM-476Z
R9516
100k
K9501
QQR1139-001
D9504
FR105SGT-T2
D9505
MTZJ33B-T2
GND3
R9507
10 1/2W
D9503
FR105SGT-T2
R9506
R9508
1.2K 1/2W
D9507
MA111-X
C9503
0.0033 /50
NCB31HK-332X
D9506
FR105SGT-T2
R9514
3.3k
PC9501
PS2581AL1/Q
C9509
OPEN
D9510
MA111-X
VOLTAGE
FEEDBACK
R9515
QRZ9009-4R7
D9512
FR105SGT-T2
C9511
100 /50
QEHR1HM-107Z
GND3

POWER PWB ASS'Y (2/3)

SRA-9011A-M2

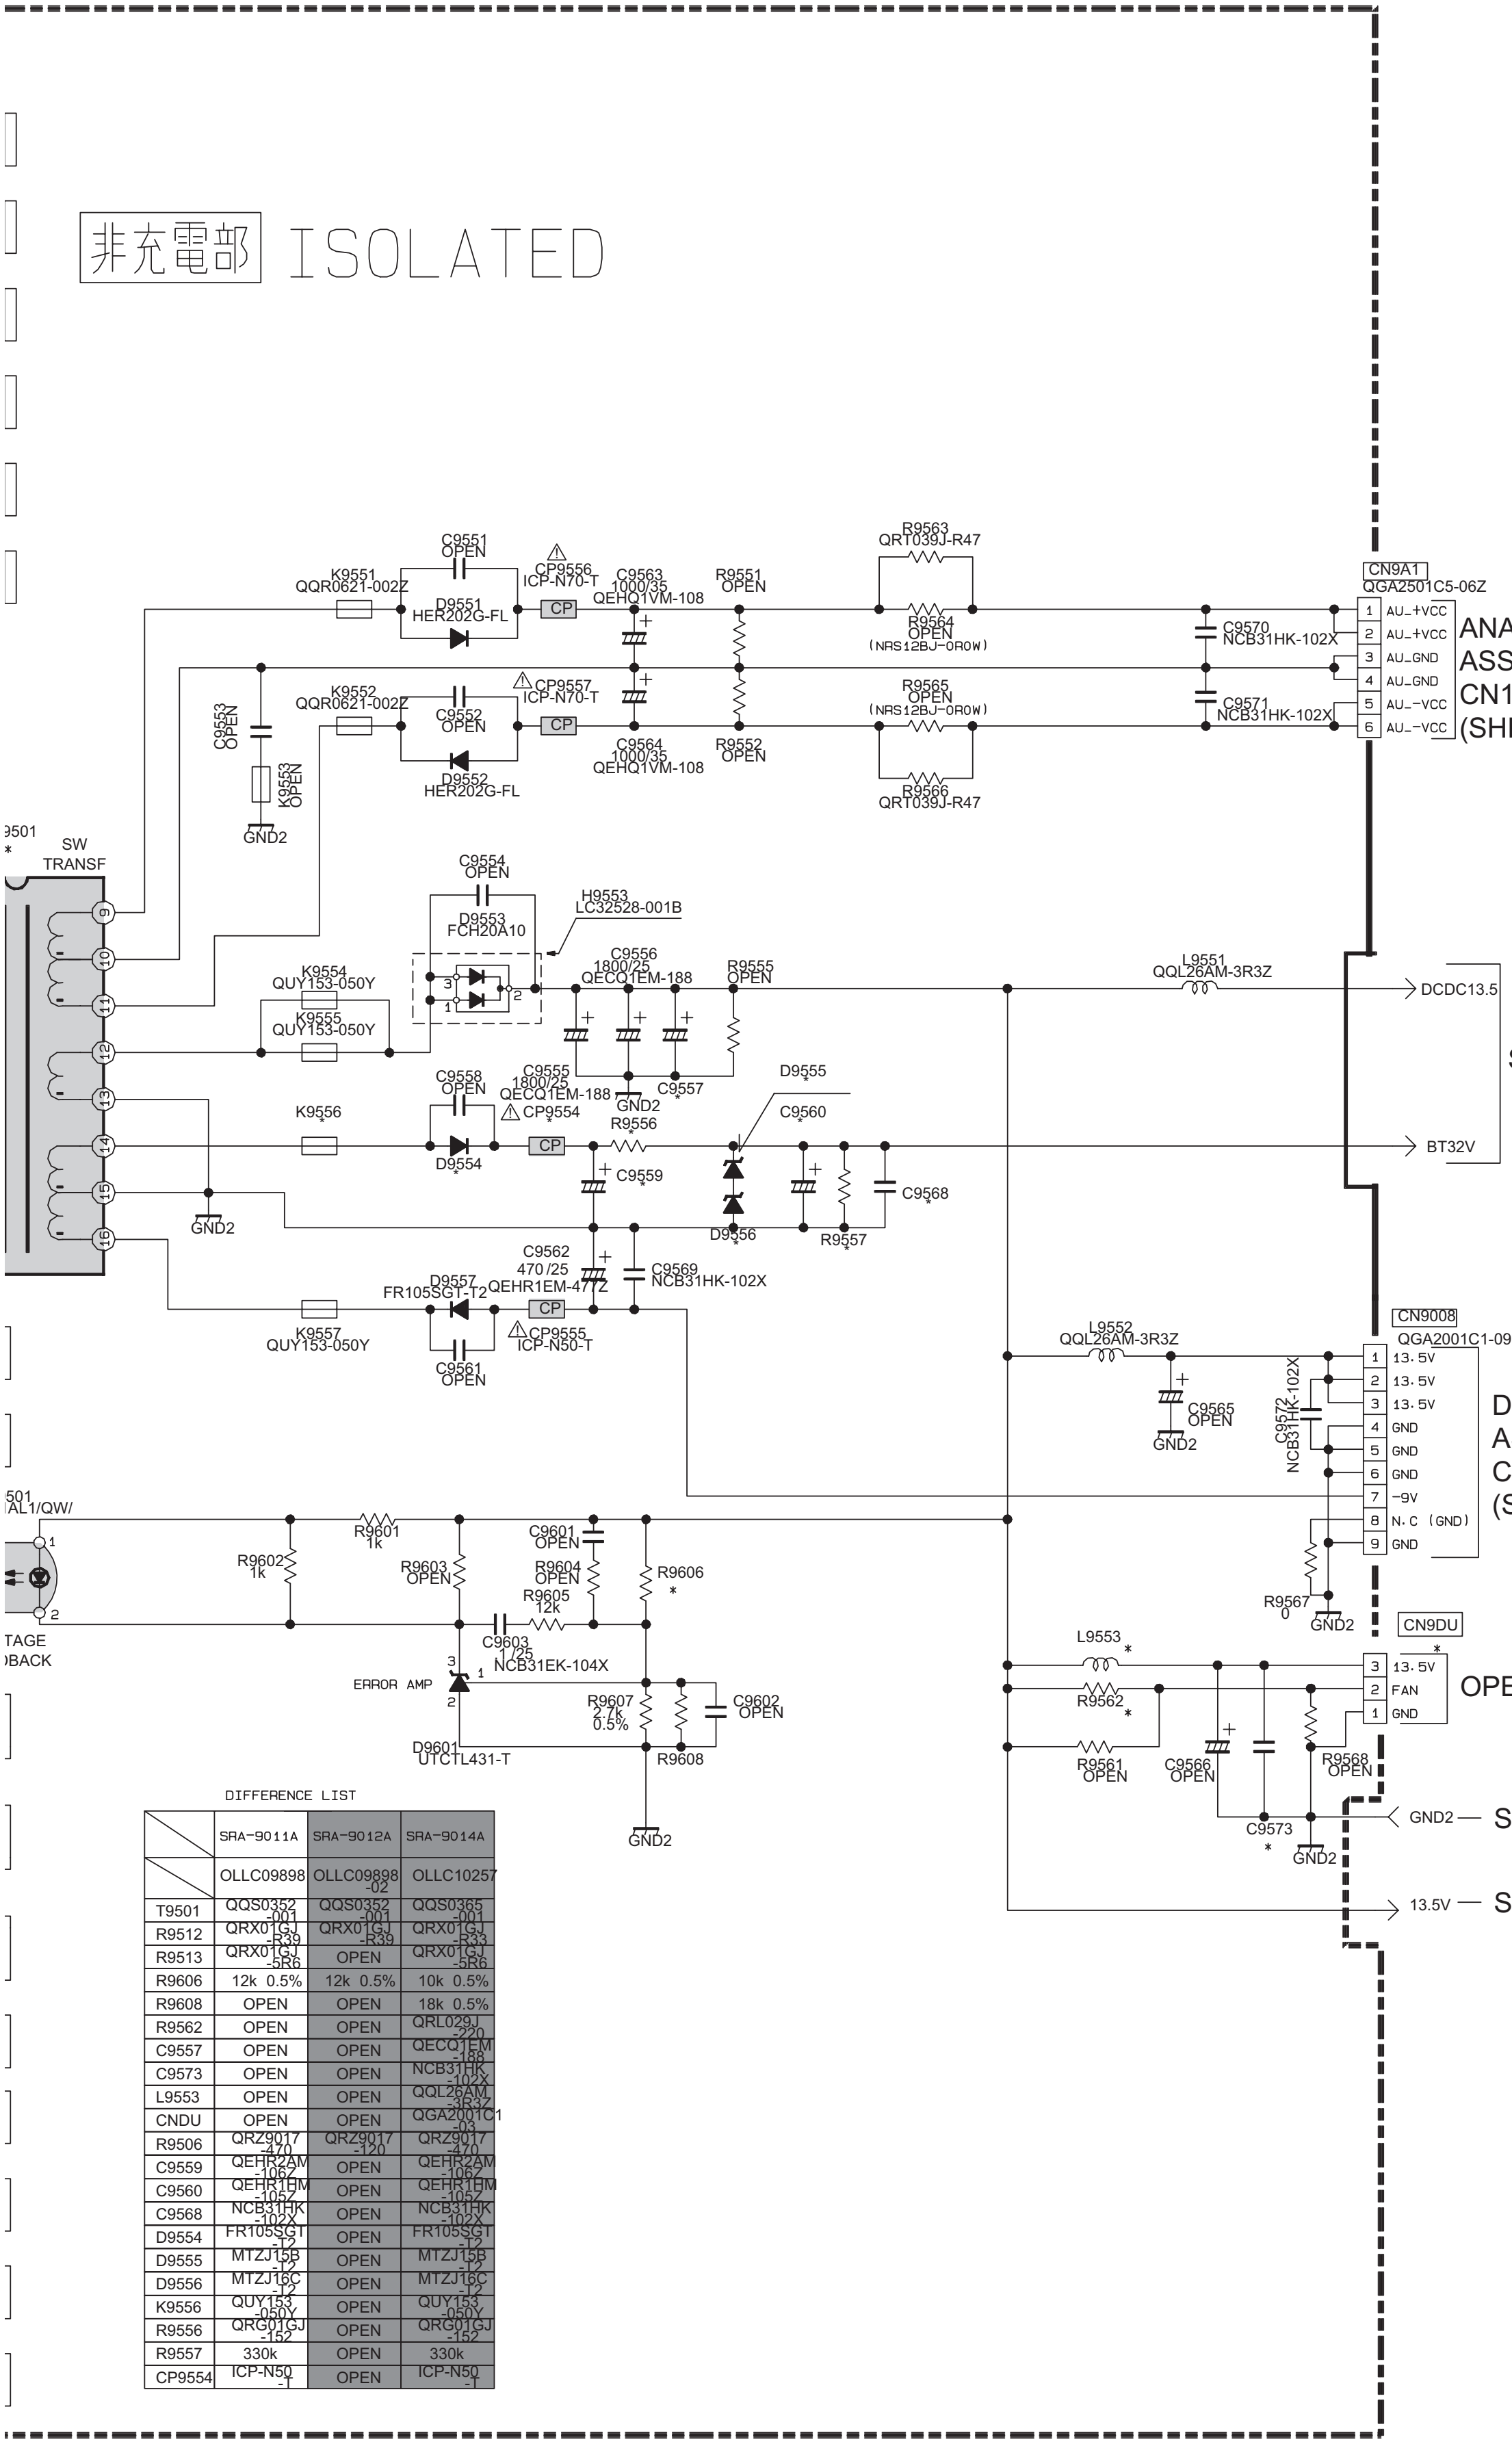
非充電部 ISOLATED
C9551 OPEN
K9551 QQR0621-002Z
D9551 HER202G-FL
CP9556 ICP-N70-T
CP
C9563 1000/35 QEHQ1VM-108
R9551 OPEN
R9563 QRT039J-R47
R9564 OPEN (NRS12BJ-0R0W)
CN9A1 QGA2501C5-06Z
C9570 NCB31HK-102X
C9571 NCB31HK-102X
1 AU_+VCC
2 AU_+VCC
3 AU_GND
4 AU_GND
5 AU_-VCC
6 AU_-VCC
ANALOG PWB ASS'Y(5/6) CN1A1 (SHEET7)
C9553 OPEN
K9553 OPEN
K9552 QQR0621-002Z
C9552 OPEN
D9552 HER202G-FL
CP9557 ICP-N70-T
C9564 1000/35 QEHQ1VM-108
R9552 OPEN
R9565 OPEN (NRS12BJ-0R0W)
R9566 QRT039J-R47
GND2
9501 *
SW TRANSF
C9554 OPEN
H9553 LC32528-001B
D9553 FCH20A10
K9554 QUY153-050Y
K9555 QUY153-050Y
C9556 1800/25 QECQ1EM-188
R9555 OPEN
L9551 QQL26AM-3R3Z
DCDC13.5
SHEET34
C9555 1800/25 QECQ1EM-188
C9557
C9558 OPEN
K9556
CP9554
D9554
R9556
C9559
D9555
C9560
D9556
R9557
C9568
BT32V
C9562 470/25 QEHR1EM-477Z
C9569 NCB31HK-102X
D9557 FR105SGT-T2
K9557 QUY153-050Y
C9561 OPEN
CP9555 ICP-N50-T
L9552 QQL26AM-3R3Z
CN9008 QGA2001C1-09
C9565 OPEN
C9572 NCB31HK-102X
1 13.5V
2 13.5V
3 13.5V
4 GND
5 GND
6 GND
7 -9V
8 N.C (GND)
9 GND
DRIVE PWB ASS'Y(7/7) CN3008 (SHEET31)
R9567 0
501 AL1/QW/
TAGE DBACK
R9601 1k
R9602 1k
R9603 OPEN
C9601 OPEN
R9604 OPEN
R9605 12k
R9606 *
C9603 1/25 NCB31EK-104X
ERROR AMP
R9607 2.7k 0.5%
C9602 OPEN
R9608
D9601 UTCTL431-T
L9553 *
CN9DU *
3 13.5V
2 FAN
1 GND
OPEN
R9562 *
R9561 OPEN
C9566 OPEN
C9573 *
R9568 OPEN
GND2 — SHEET34
13.5V — SHEET32

DIFFERENCE LIST

	SRA-9011A	SRA-9012A	SRA-9014A
	OLLC09898	OLLC09898 -02	OLLC10257
T9501	QQS0352 -001	QQS0352 -001	QQS0365 -001
R9512	QRX01GJ -R39	QRX01GJ -R39	QRX01GJ -R33
R9513	QRX01GJ -5R6	OPEN	QRX01GJ -5R6
R9606	12k 0.5%	12k 0.5%	10k 0.5%
R9608	OPEN	OPEN	18k 0.5%
R9562	OPEN	OPEN	QRL029J -220
C9557	OPEN	OPEN	QECQ1EM -188
C9573	OPEN	OPEN	NCB31HK -102X
L9553	OPEN	OPEN	QQL26AM -3R3Z
CNDU	OPEN	OPEN	QGA2001C1 -03
R9506	QRZ9017 -470	QRZ9017 -120	QRZ9017 -470
C9559	QEHR2AM -106Z	OPEN	QEHR2AM -106Z
C9560	QEHR1HM -105Z	OPEN	QEHR1HM -105Z
C9568	NCB31HK -102X	OPEN	NCB31HK -102X
D9554	FR105SGT -T2	OPEN	FR105SGT -T2
D9555	MTZJ15B -T2	OPEN	MTZJ15B -T2
D9556	MTZJ16C -T2	OPEN	MTZJ16C -T2
K9556	QUY153 -050Y	OPEN	QUY153 -050Y
R9556	QRG01GJ -152	OPEN	QRG01GJ -152
R9557	330k	OPEN	330k
CP9554	ICP-N50 -T	OPEN	ICP-N50 -T

c20179001_0214_2/3_0.0

POWER PWB CIRCUIT DIAGRAM (3/3) SHEET 34

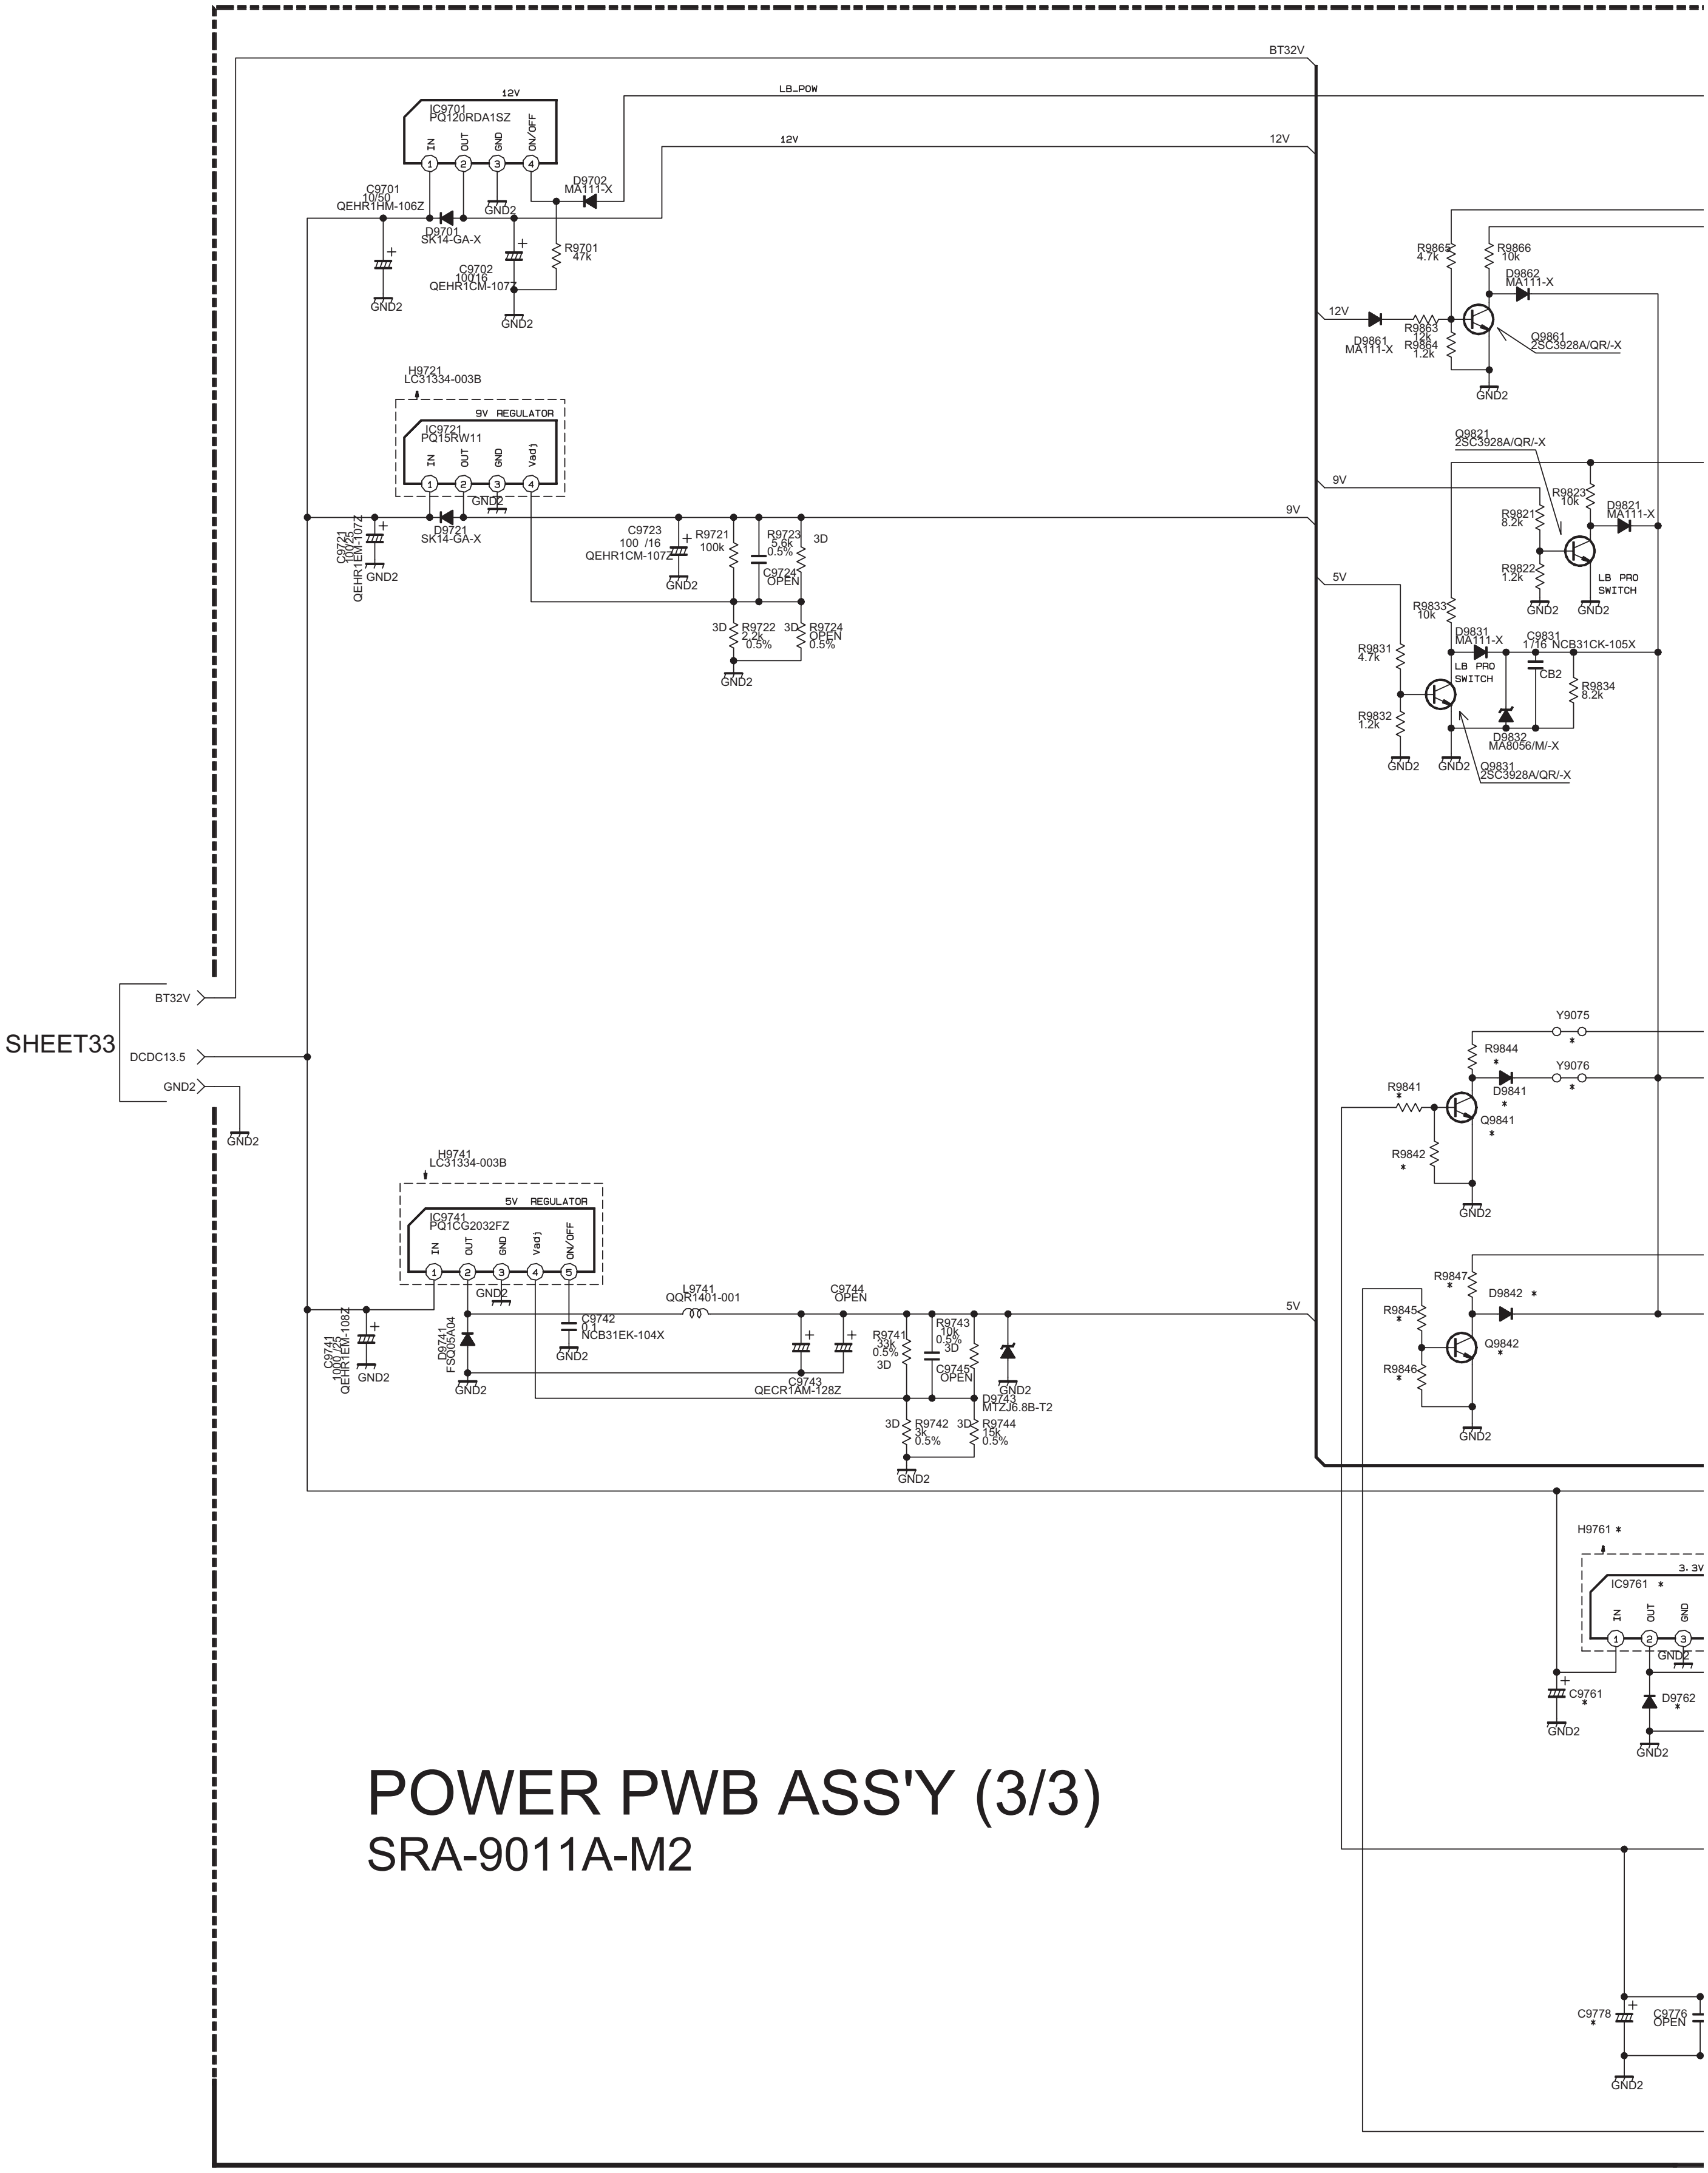
POWER PWB ASS'Y (3/3)
SRA-9011A-M2
SHEET33
BT32V
DCDC13.5
GND2
BT32V
LB_POW
12V
IC9701
PQ120RDA1SZ
IN
OUT
GND
ON/OFF
C9701
10/50
QEHR1HM-106Z
D9701
SK14-GA-X
D9702
MA111-X
C9702
100/16
QEHR1CM-107Z
R9701
47k
H9721
LC31334-003B
9V REGULATOR
IC9721
PQ15RW11
Vadj
C9721
QEHR1EM-107Z
D9721
SK14-GA-X
C9723
100 /16
QEHR1CM-107Z
R9721
100k
R9723
5.6k
0.5%
C9724
OPEN
3D
R9722
2.2k
0.5%
R9724
OPEN
0.5%
9V
5V
H9741
LC31334-003B
5V REGULATOR
IC9741
PQ1CG2032FZ
C9741
QEHR1EM-108Z
D9741
FSQ05A04
C9742
0.1
NCB31EK-104X
L9741
QQR1401-001
C9744
OPEN
C9743
QECR1AM-128Z
R9741
39k
0.5%
R9743
10k
0.5%
C9745
OPEN
D9743
MTZJ6.8B-T2
R9742
3k
0.5%
R9744
15k
0.5%
R9865
4.7k
R9866
10k
D9862
MA111-X
D9861
MA111-X
R9863
12k
R9864
1.2k
Q9861
2SC3928A/QR/-X
Q9821
2SC3928A/QR/-X
R9823
10k
D9821
MA111-X
R9821
8.2k
R9822
1.2k
LB PRO
SWITCH
R9833
10k
D9831
MA111-X
C9831
1/16 NCB31CK-105X
CB2
R9831
4.7k
R9834
8.2k
R9832
1.2k
D9832
MA8056/M/-X
Q9831
2SC3928A/QR/-X
Y9075
Y9076
R9844
D9841
R9841
Q9841
R9842
R9847
D9842
R9845
Q9842
R9846
H9761
3.3V
IC9761
C9761
D9762
C9778
C9776
OPEN
*

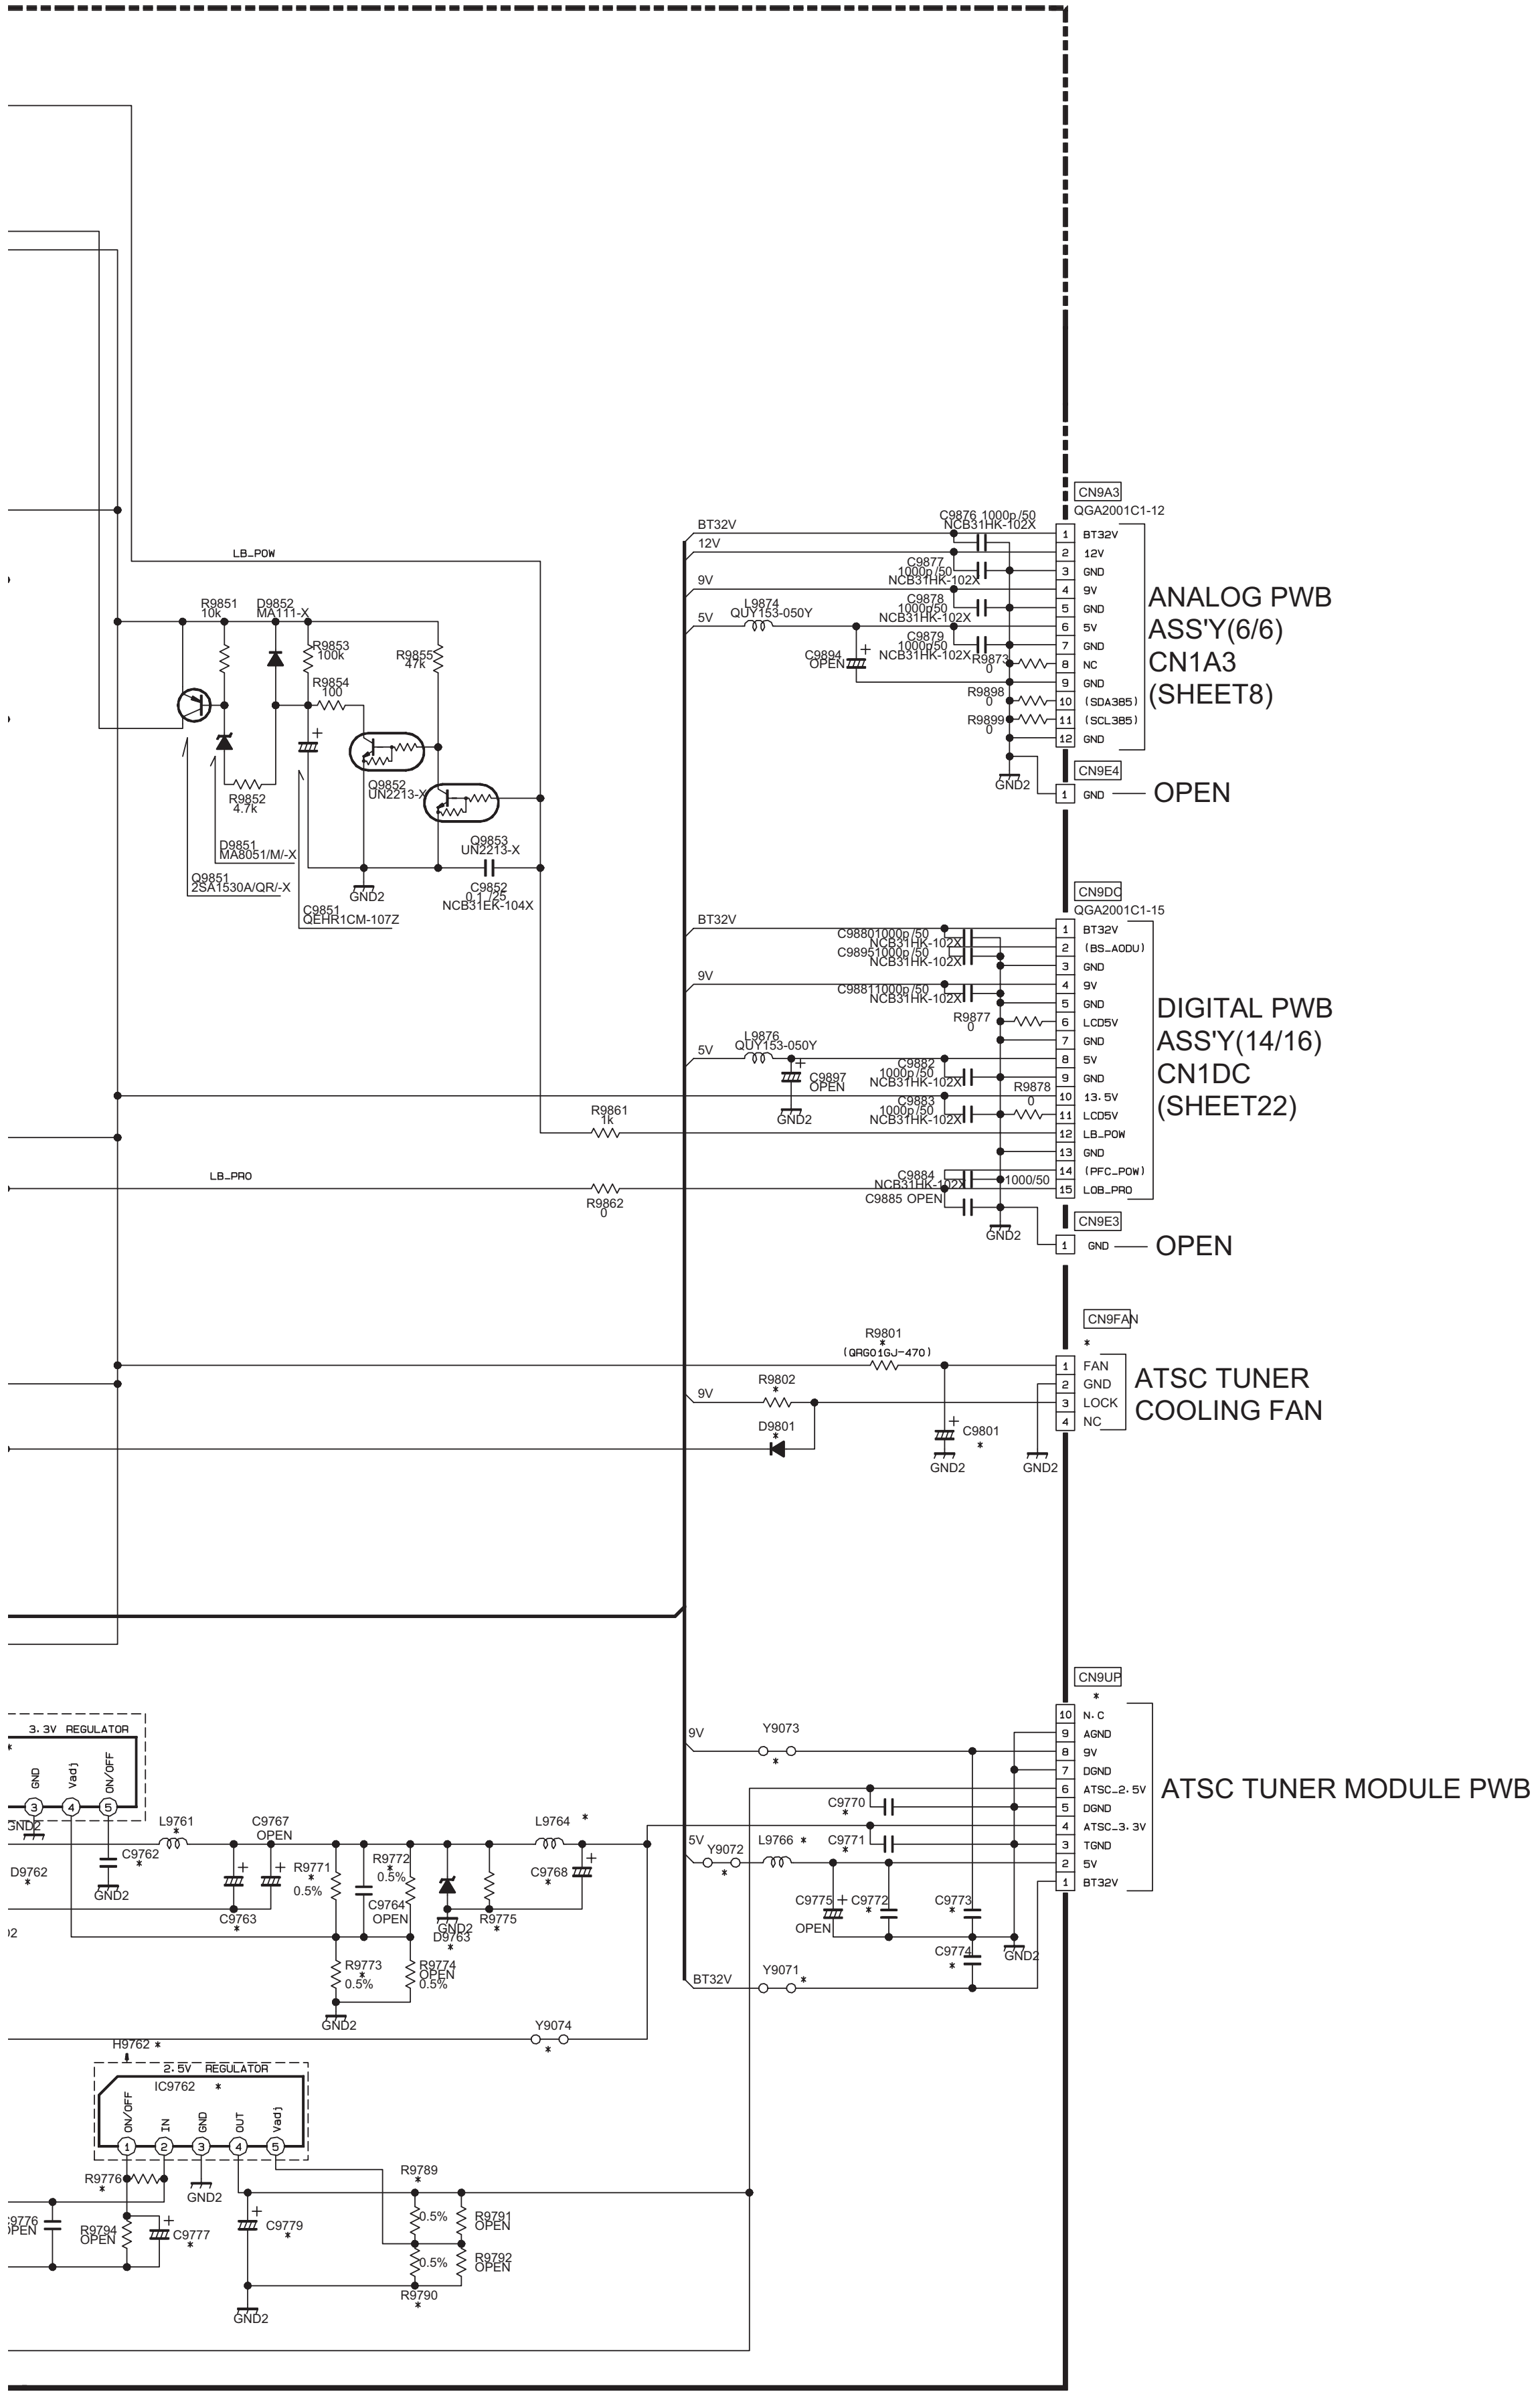
CN9A3
QGA2001C1-12
BT32V
12V
9V
5V
L9874
QUY153-050Y
LB_POW
C9876 1000p/50
NCB31HK-102X
C9877 1000p/50
NCB31HK-102X
C9878 1000p/50
NCB31HK-102X
C9879 1000p/50
NCB31HK-102X
C9894 OPEN
R9873 0
R9898 0
R9899 0
BT32V
12V
GND
9V
GND
5V
GND
NC
GND
(SDA3B5)
(SCL3B5)
GND
ANALOG PWB
ASS'Y(6/6)
CN1A3
(SHEET8)
CN9E4
GND2
GND
OPEN
R9851 10k
D9852 MA111-X
R9853 100k
R9854 100
R9855 47k
R9852 4.7k
Q9852 UN2213-X
Q9853 UN2213-X
D9851 MA8051/M/-X
Q9851 2SA1530A/QR/-X
C9851 QEHR1CM-107Z
C9852 0.1/25
NCB31ER-104X
GND2
CN9DC
QGA2001C1-15
BT32V
9V
5V
C9880 1000p/50
NCB31HK-102X
C9895 1000p/50
NCB31HK-102X
C9881 1000p/50
NCB31HK-102X
R9877 0
L9876
QUY153-050Y
C9897 OPEN
C9882 1000p/50
NCB31HK-102X
C9883 1000p/50
NCB31HK-102X
R9878 0
R9861 1k
LB_PRO
R9862 0
C9884
NCB31HK-102X
1000/50
C9885 OPEN
GND2
BT32V
(BS_AODU)
GND
9V
GND
LCD5V
GND
5V
GND
13.5V
LCD5V
LB_POW
GND
(PFC_POW)
LOB_PRO
DIGITAL PWB
ASS'Y(14/16)
CN1DC
(SHEET22)
CN9E3
GND
OPEN
CN9FAN
R9801
(QRG01GJ-470)
R9802
9V
D9801
C9801
GND2
FAN
GND
LOCK
NC
ATSC TUNER
COOLING FAN
CN9UP
3.3V REGULATOR
GND
Vadj
ON/OFF
L9761
C9762
C9767 OPEN
D9762
R9771 0.5%
R9772 0.5%
C9763
C9764 OPEN
D9763
R9775
L9764
C9768
R9773 0.5%
R9774 OPEN 0.5%
GND2
Y9074
9V
Y9073
5V
Y9072
L9766
C9770
C9771
C9775 OPEN
C9772
C9773
C9774
BT32V
Y9071
N.C
AGND
9V
DGND
ATSC_2.5V
DGND
ATSC_3.3V
TGND
5V
BT32V
ATSC TUNER MODULE PWB
H9762
2.5V REGULATOR
IC9762
ON/OFF
IN
GND
OUT
Vadj
R9776
C9776 OPEN
R9794 OPEN
C9777
C9779
R9789
R9791 OPEN
R9792 OPEN
R9790
0.5%

DIFFERENCE LIST

	SRA-9011A	SRA-9012A	SRA-9014A
	OLLC09898	ollc09898-02	OLLC10257
CNFAN	QGA2001C1-04	OPEN	OPEN
CN2UP	QGA2001C1-10	OPEN	OPEN
IC9761	PQ1CG2032FZ	OPEN	OPEN
IC9762	SI-3011ZF-F3	OPEN	OPEN
H9761	LC31334-003B	OPEN	OPEN
H9762	LC31334-003B	OPEN	OPEN
C9761	QEHR1EM-108Z	OPEN	OPEN
C9762	NCB31EK-104X	OPEN	OPEN
C9763	QECR1AM-128Z	OPEN	OPEN
C9768	QEHR1CM-107Z	OPEN	OPEN
C9770	NCB31HK-102X	OPEN	OPEN
C9771	NCB31HK-102X	OPEN	OPEN
C9772	NCB31HK-102X	OPEN	OPEN
C9773	NCB31HK-102X	OPEN	OPEN
C9774	NCB31HK-102X	OPEN	OPEN
C9777	QEHR1HM-105Z	OPEN	OPEN
C9778	QEHR1CM-107Z	OPEN	OPEN
C9779	QEHR1CM-107Z	OPEN	OPEN
C9801	QEHR1HM-106Z	OPEN	OPEN
D9762	FSQ05A04	OPEN	OPEN
D9763	MTZJ3.9B-T2	OPEN	OPEN
D9801	MA111-X	OPEN	OPEN
D9841	MA111-X	OPEN	OPEN
D9842	MA111-X	OPEN	OPEN
L9761	QQR1401-001	OPEN	OPEN
L9764	QUY153-050Y	OPEN	OPEN
L9766	QUY153-050Y	OPEN	OPEN
Q9841	2SC3928A/QR/-X	OPEN	OPEN
Q9842	2SC3928A/QR/-X	OPEN	OPEN
R9771	5.6k	OPEN	OPEN
R9772	6.8k	OPEN	OPEN
R9773	1.8k	OPEN	OPEN
R9775	NRS12BJ-331W	OPEN	OPEN
R9776	4.7k	OPEN	OPEN
R9789	15k	OPEN	OPEN
R9790	11k	OPEN	OPEN
R9801	QRG01GJ-470	OPEN	OPEN
R9802	4.7k	OPEN	OPEN
R9841	2.7k	OPEN	OPEN
R9842	1.2k	OPEN	OPEN
R9844	10k	OPEN	OPEN
R9845	1.8k	OPEN	OPEN
R9846	1.2k	OPEN	OPEN
R9847	10k	OPEN	OPEN
Y9071	QUY160-100Y	OPEN	OPEN
Y9072	QUY160-100Y	OPEN	OPEN
Y9073	QUY160-100Y	OPEN	OPEN
Y9074	QUY160-100Y	OPEN	OPEN
Y9075	QUY160-100Y	OPEN	OPEN
Y9076	QUY160-100Y	OPEN	OPEN

c20179001_0214_3/3_0.0

IRIS PWB CIRCUIT DIAGRAM SHEET 35

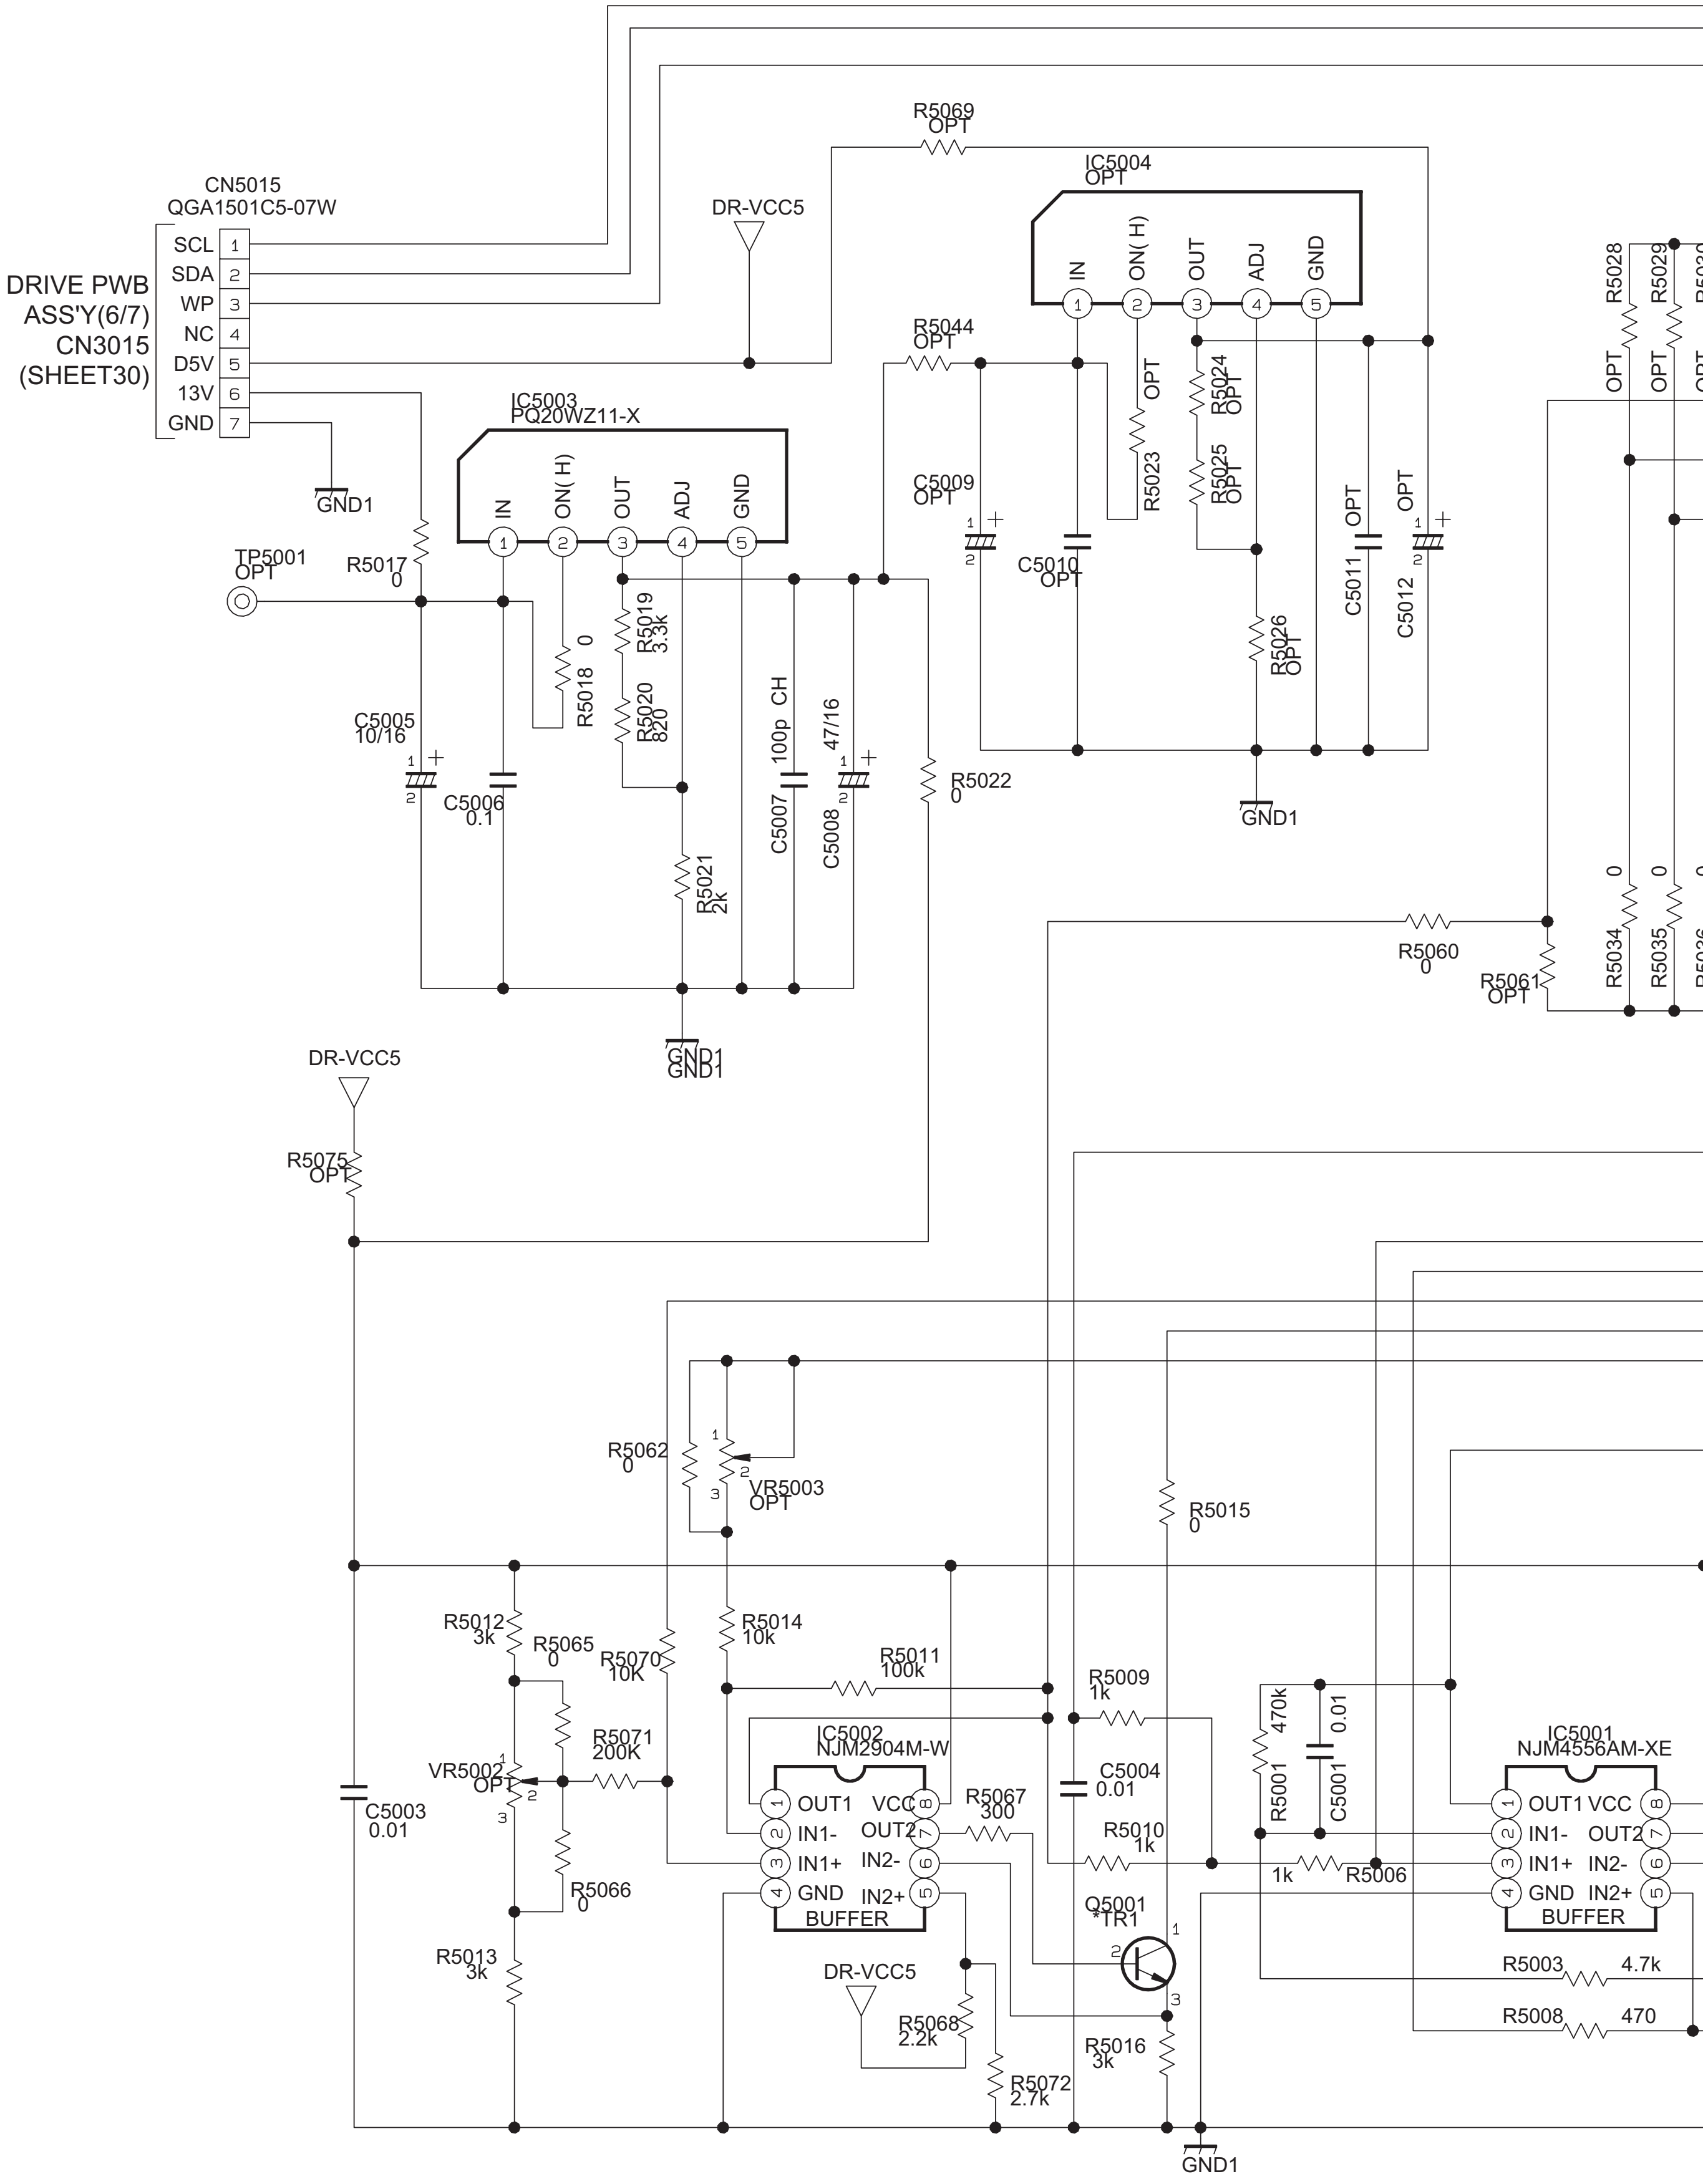
DRIVE PWB
ASS'Y(6/7)
CN3015
(SHEET30)
CN5015
QGA1501C5-07W
SCL 1
SDA 2
WP 3
NC 4
D5V 5
13V 6
GND 7
GND1
DR-VCC5
R5069 OPT
IC5004 OPT
IN ON(H) OUT ADJ GND
R5044 OPT
R5023
R5024 OPT
R5025 OPT
C5009 OPT
C5010 OPT
C5011 OPT
C5012 OPT
R5026 OPT
IC5003 PQ20WZ11-X
TP5001 OPT
R5017 0
R5018 0
R5019 3.3k
R5020 820
C5005 10/16
C5006 0.1
C5007 100p CH
C5008 47/16
R5021 2k
R5022 0
R5028 OPT
R5029 OPT
R5034 0
R5035 0
R5060 0
R5061 OPT
R5075 OPT
R5062 0
VR5003 OPT
R5015 0
R5012 3k
R5065 0
R5070 10K
R5014 10k
R5011 100k
R5009 1k
R5001 470k
C5001 0.01
VR5002 OPT
R5071 200K
C5003 0.01
IC5002 NJM2904M-W
OUT1 VCC IN1- OUT2 IN1+ IN2- GND IN2+
BUFFER
R5067 300
C5004 0.01
R5010 1k
R5006 1k
IC5001 NJM4556AM-XE
R5066 0
R5013 3k
Q5001 *TR1
R5068 2.2k
R5016 3k
R5072 2.7k
R5003 4.7k
R5008 470

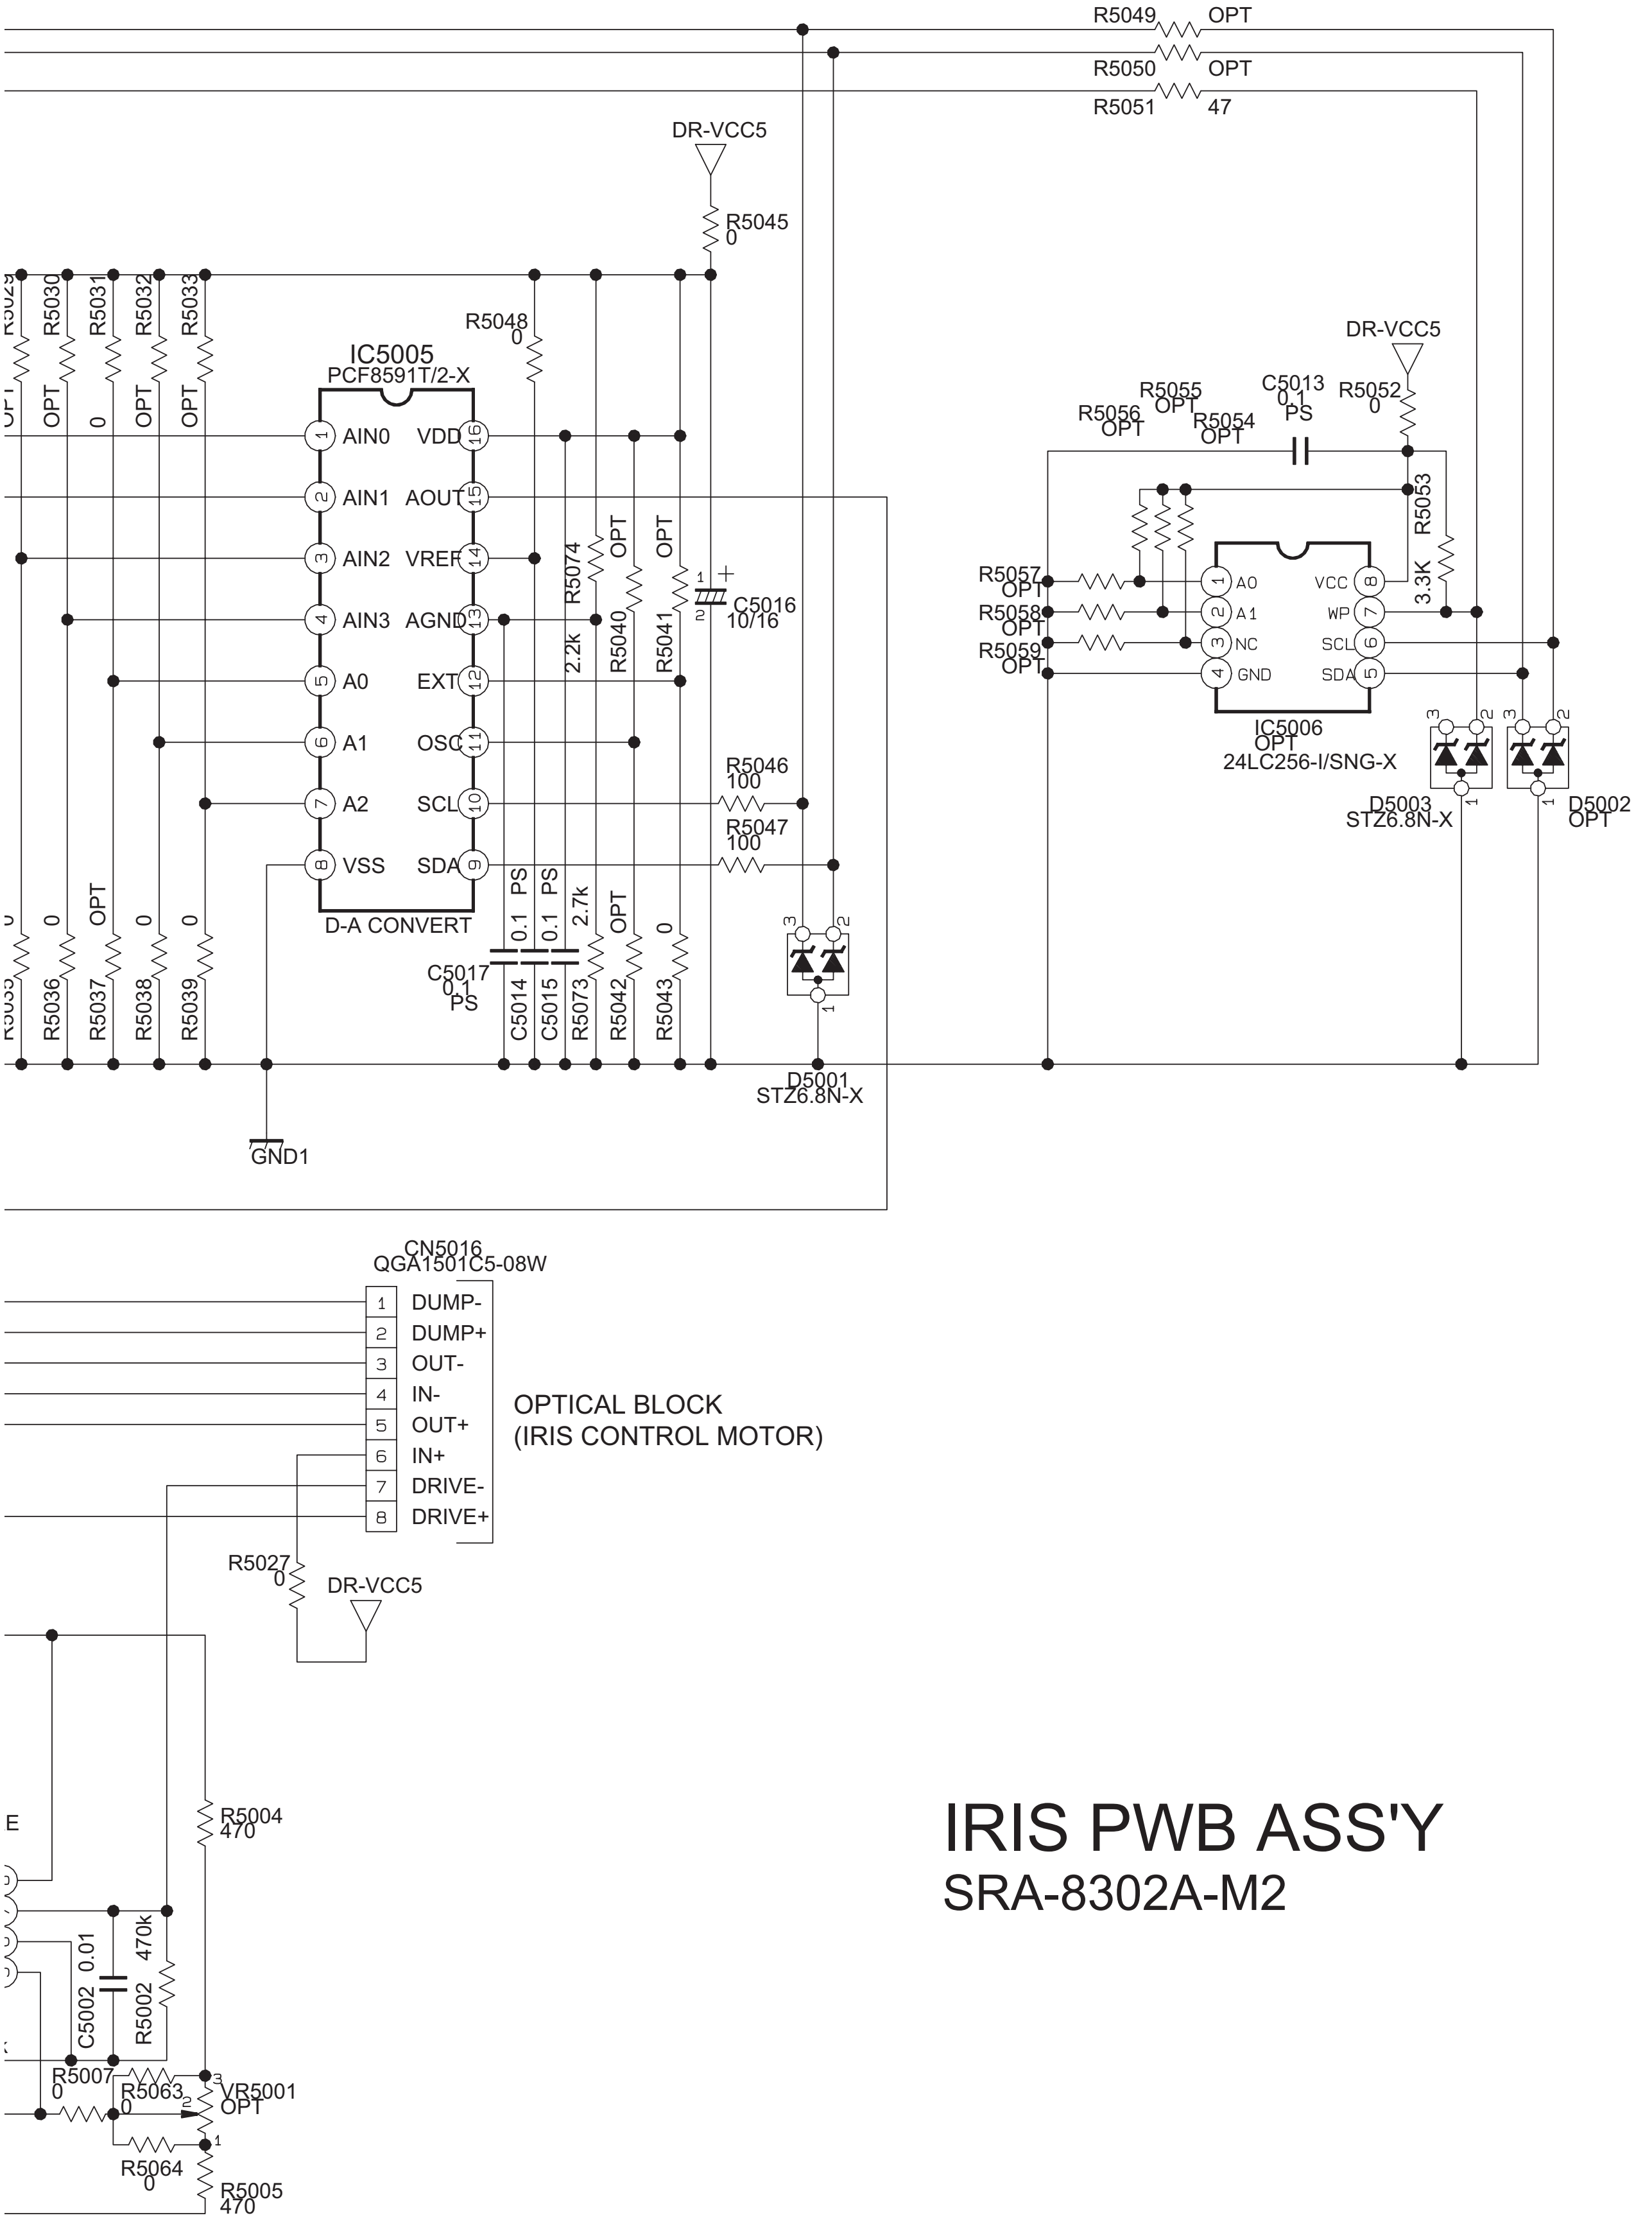
R5049 OPT
R5050 OPT
R5051 47
DR-VCC5
R5045 0
R5030 OPT
R5031 0
R5032 OPT
R5033 OPT
R5048 0
IC5005
PCF8591T/2-X
1 AIN0
2 AIN1
3 AIN2
4 AIN3
5 A0
6 A1
7 A2
8 VSS
16 VDD
15 AOUT
14 VREF
13 AGND
12 EXT
11 OSC
10 SCL
9 SDA
D-A CONVERT
R5074 2.2k
R5040 OPT
R5041 OPT
C5016 10/16
R5046 100
R5047 100
R5036 0
R5037 OPT
R5038 0
R5039 0
C5017 0.1 PS
C5014 0.1 PS
C5015 0.1 PS
R5073 2.7k
R5042 OPT
R5043 0
D5001
STZ6.8N-X
GND1
DR-VCC5
R5055 OPT
C5013 0.1 PS
R5052 0
R5056 OPT
R5054 OPT
R5053 3.3K
R5057 OPT
R5058 OPT
R5059 OPT
1 A0
2 A1
3 NC
4 GND
8 VCC
7 WP
6 SCL
5 SDA
IC5006
OPT
24LC256-I/SNG-X
D5003
STZ6.8N-X
D5002
OPT
CN5016
QGA1501C5-08W
1 DUMP-
2 DUMP+
3 OUT-
4 IN-
5 OUT+
6 IN+
7 DRIVE-
8 DRIVE+
OPTICAL BLOCK
(IRIS CONTROL MOTOR)
R5027 0
DR-VCC5
R5004 470
C5002 0.01
R5002 470k
R5007 0
R5063 0
VR5001 OPT
R5064 0
R5005 470

IRIS PWB ASS'Y

SRA-8302A-M2

c20182001_0216_1/1_0.0

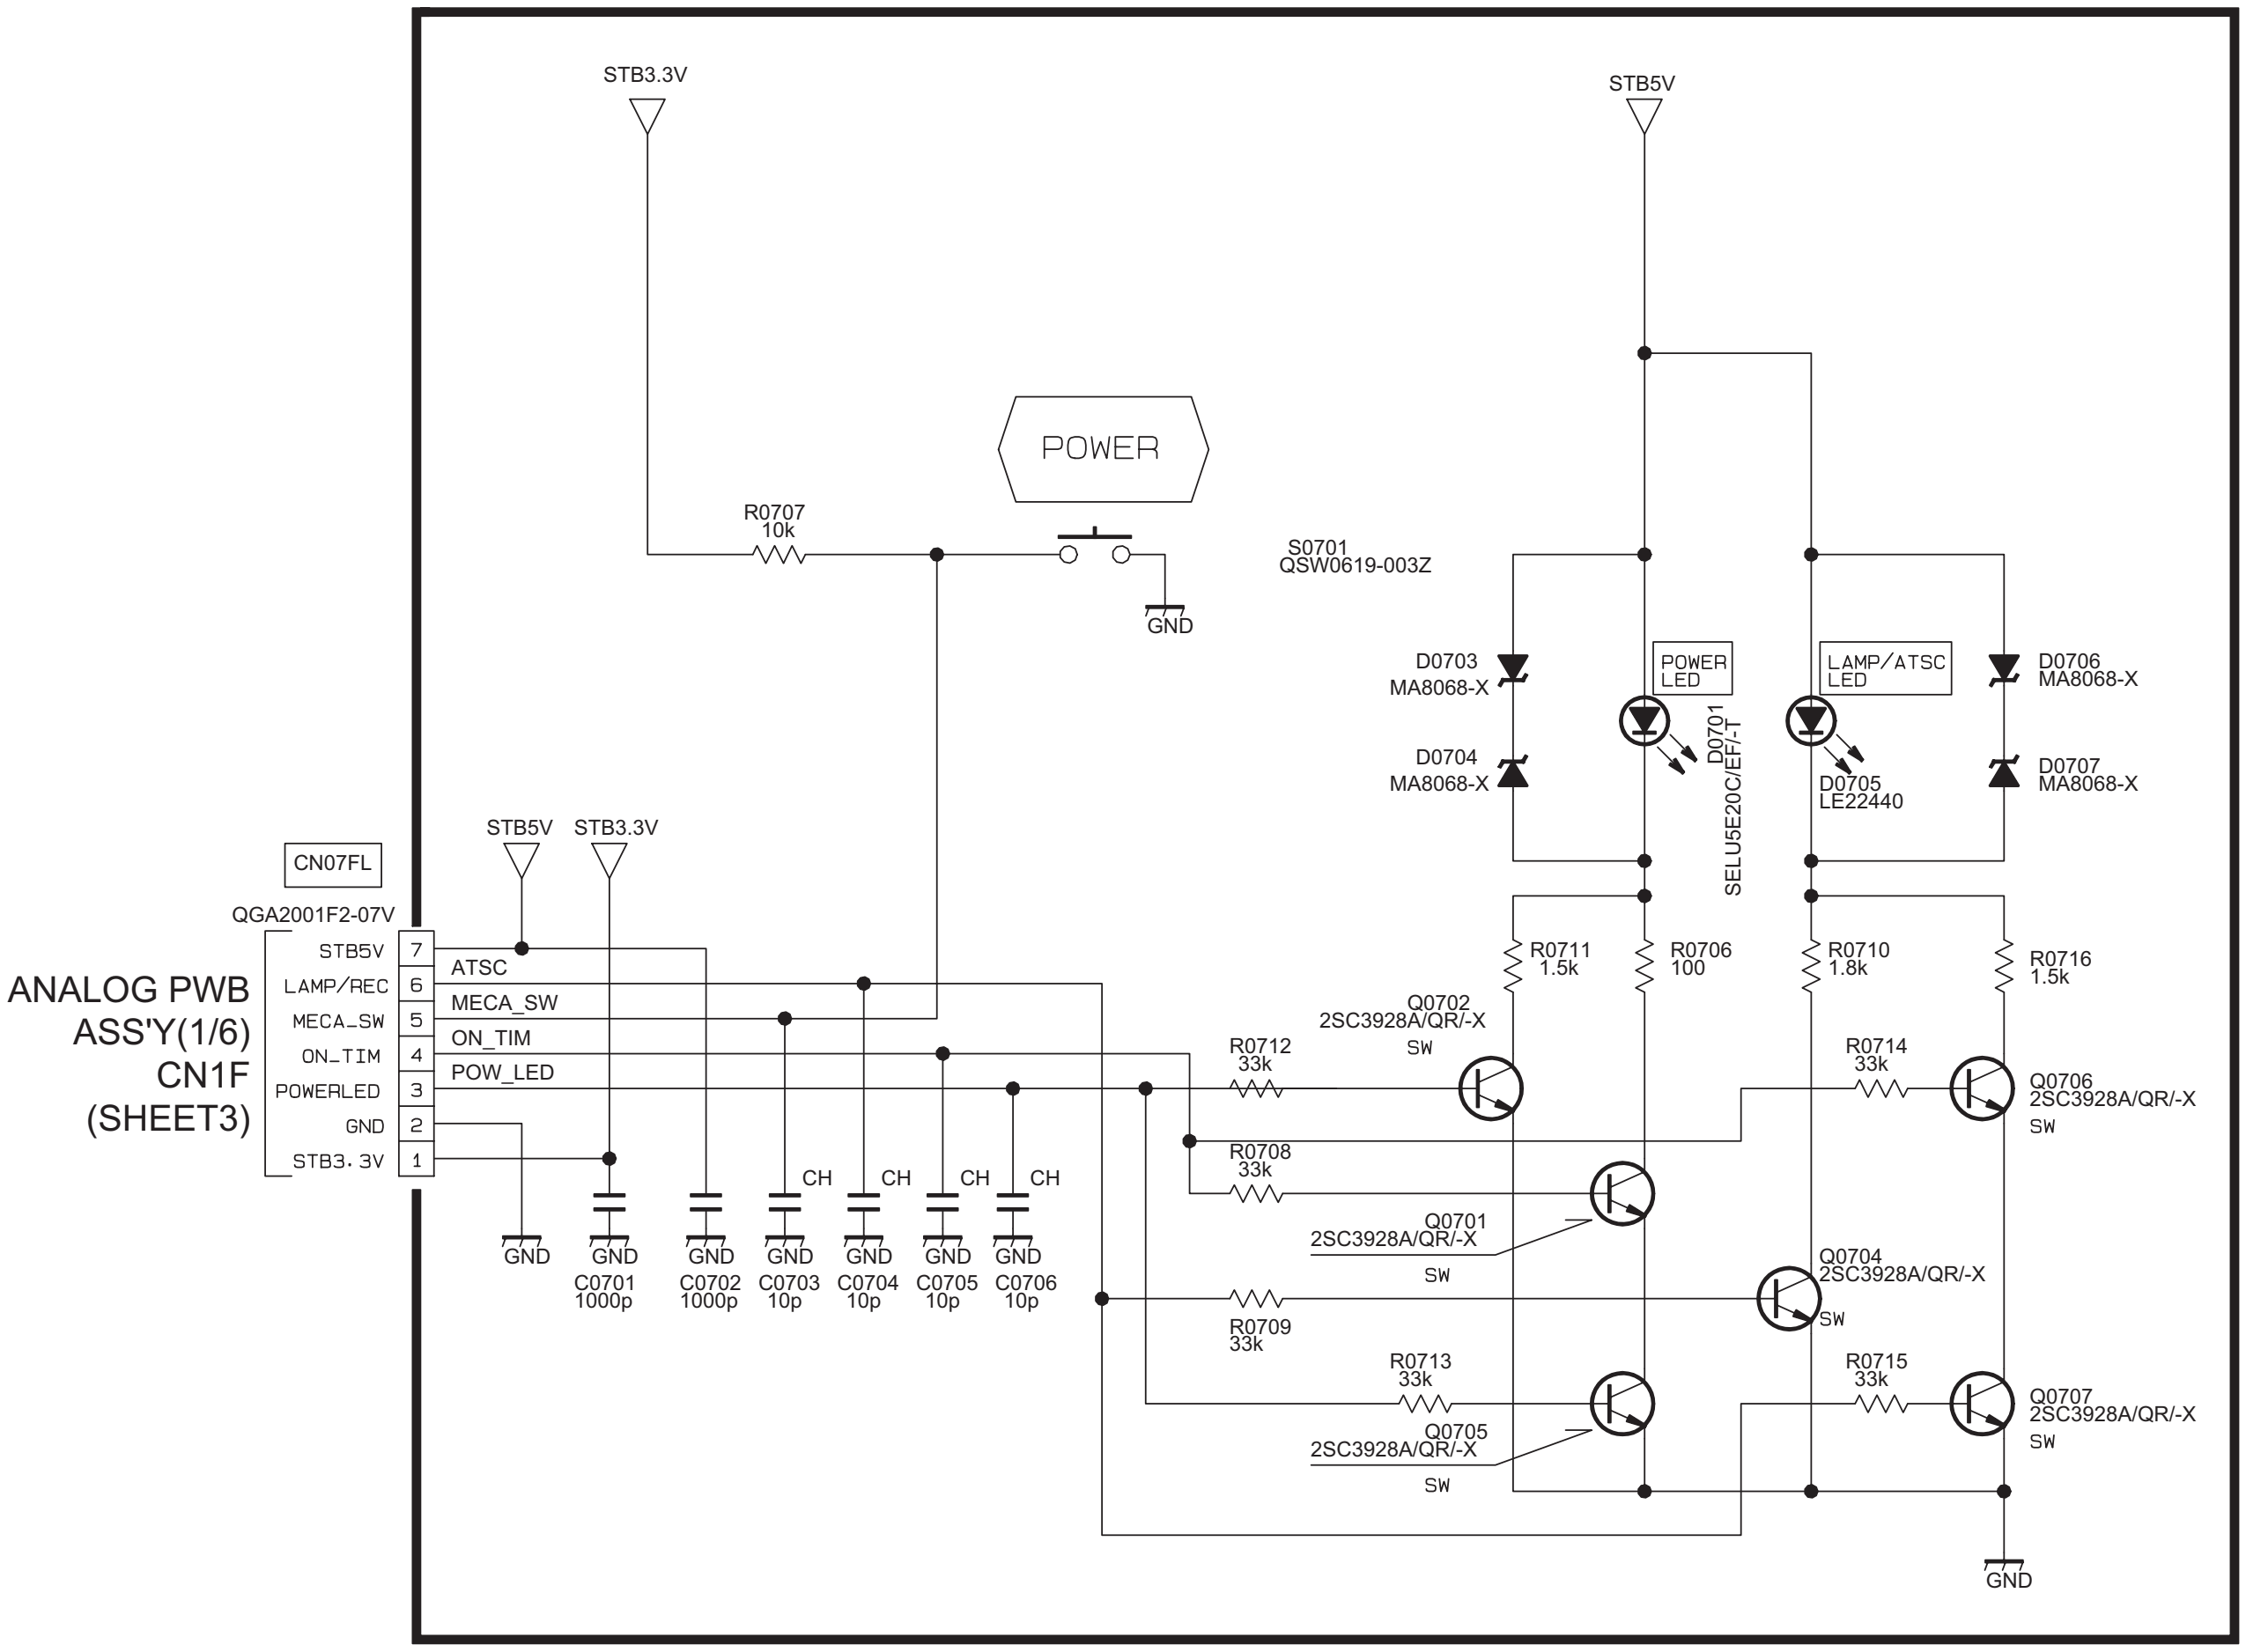
STB3.3V
STB5V
POWER
R0707
10k
S0701
QSW0619-003Z
GND
D0703
MA8068-X
D0704
MA8068-X
POWER LED
D0701
SELU5E20C/EF/-T
LAMP/ATSC LED
D0705
LE22440
D0706
MA8068-X
D0707
MA8068-X
CN07FL
QGA2001F2-07V
ANALOG PWB
ASS'Y(1/6)
CN1F
(SHEET3)
STB5V 7
LAMP/REC 6
MECA_SW 5
ON_TIM 4
POWERLED 3
GND 2
STB3.3V 1
ATSC
MECA_SW
ON_TIM
POW_LED
R0711
1.5k
R0706
100
R0710
1.8k
R0716
1.5k
Q0702
2SC3928A/QR/-X
SW
R0712
33k
R0714
33k
Q0706
2SC3928A/QR/-X
SW
R0708
33k
Q0701
2SC3928A/QR/-X
SW
Q0704
2SC3928A/QR/-X
SW
R0709
33k
R0713
33k
Q0705
2SC3928A/QR/-X
SW
R0715
33k
Q0707
2SC3928A/QR/-X
SW
CH
CH
CH
CH
C0701
1000p
C0702
1000p
C0703
10p
C0704
10p
C0705
10p
C0706
10p

FRONT LED PWB ASS'Y

SRA0L111A-M2

c30200001_0214_1/1_0.0

TEMP PWB CIRCUIT DIAGRAM SHEET 37

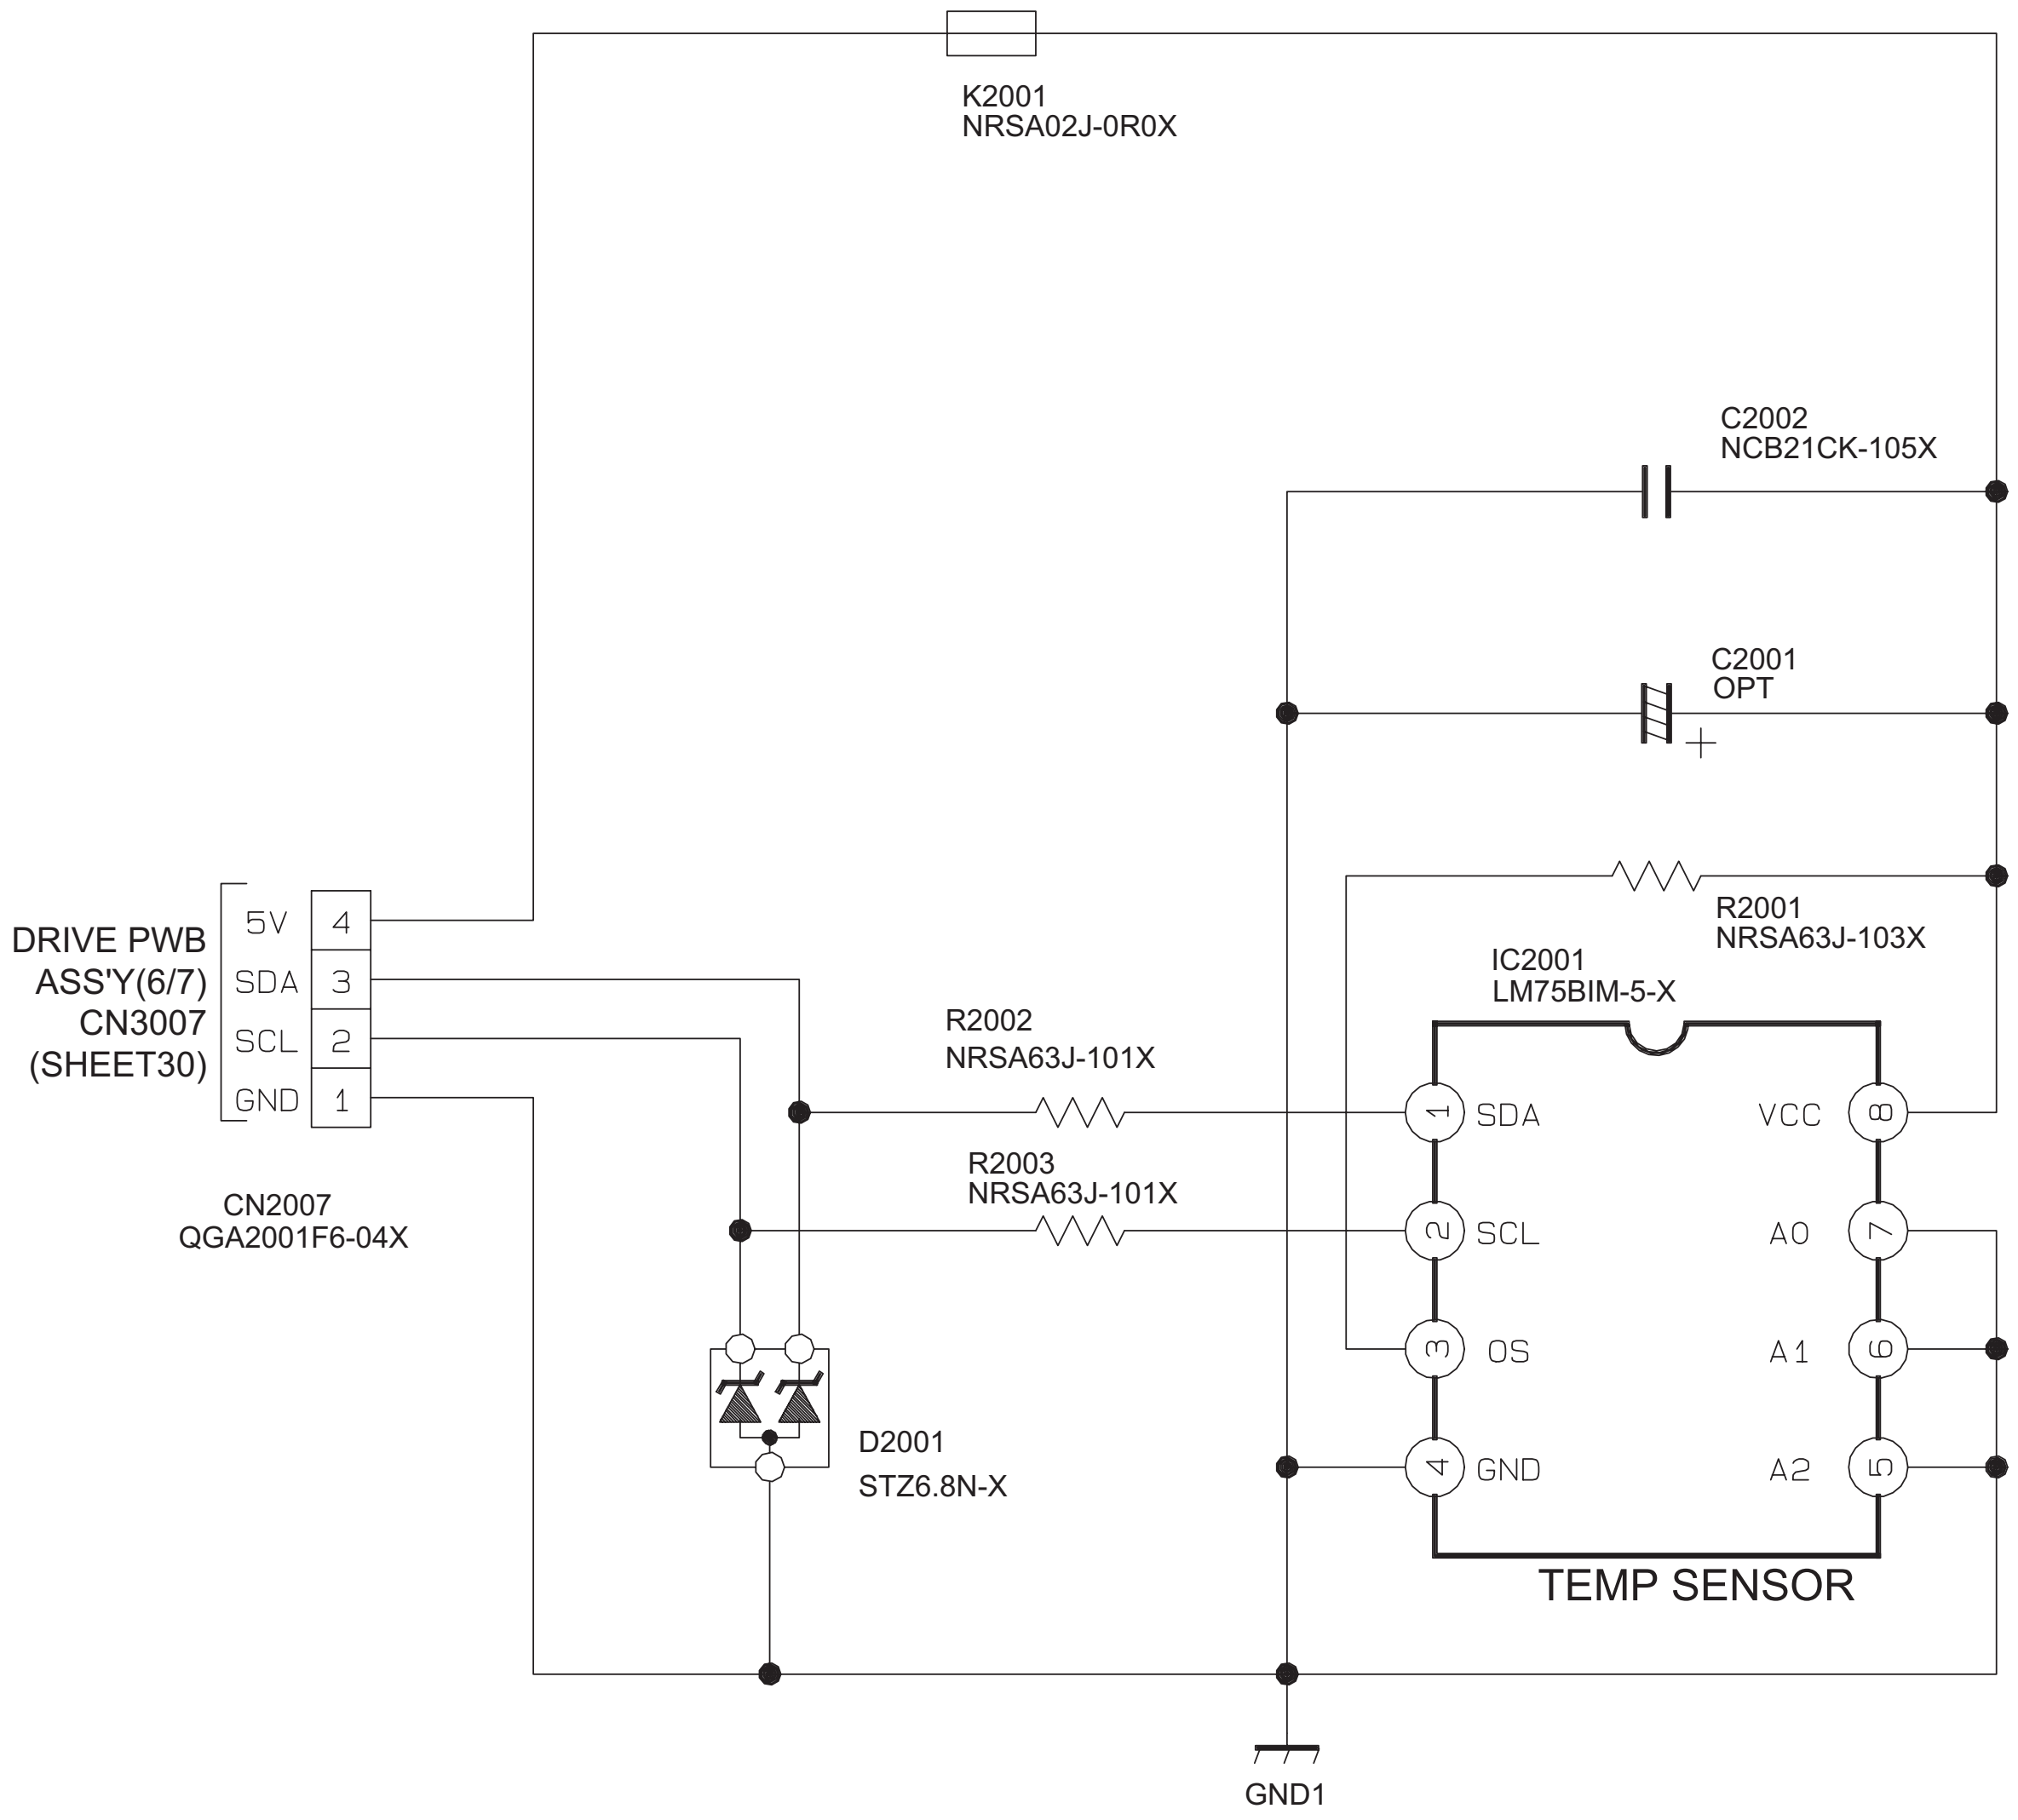
K2001
NRSA02J-0R0X
C2002
NCB21CK-105X
C2001
OPT
R2001
NRSA63J-103X
IC2001
LM75BIM-5-X
DRIVE PWB
ASS'Y(6/7)
CN3007
(SHEET30)
5V 4
SDA 3
SCL 2
GND 1
CN2007
QGA2001F6-04X
R2002
NRSA63J-101X
R2003
NRSA63J-101X
D2001
STZ6.8N-X
1 SDA
2 SCL
3 OS
4 GND
VCC 8
A0 7
A1 6
A2 5
TEMP SENSOR
GND1

TEMP PWB ASS'Y
SRA-8202A-M2

c40087001_0216_1/1_0.0

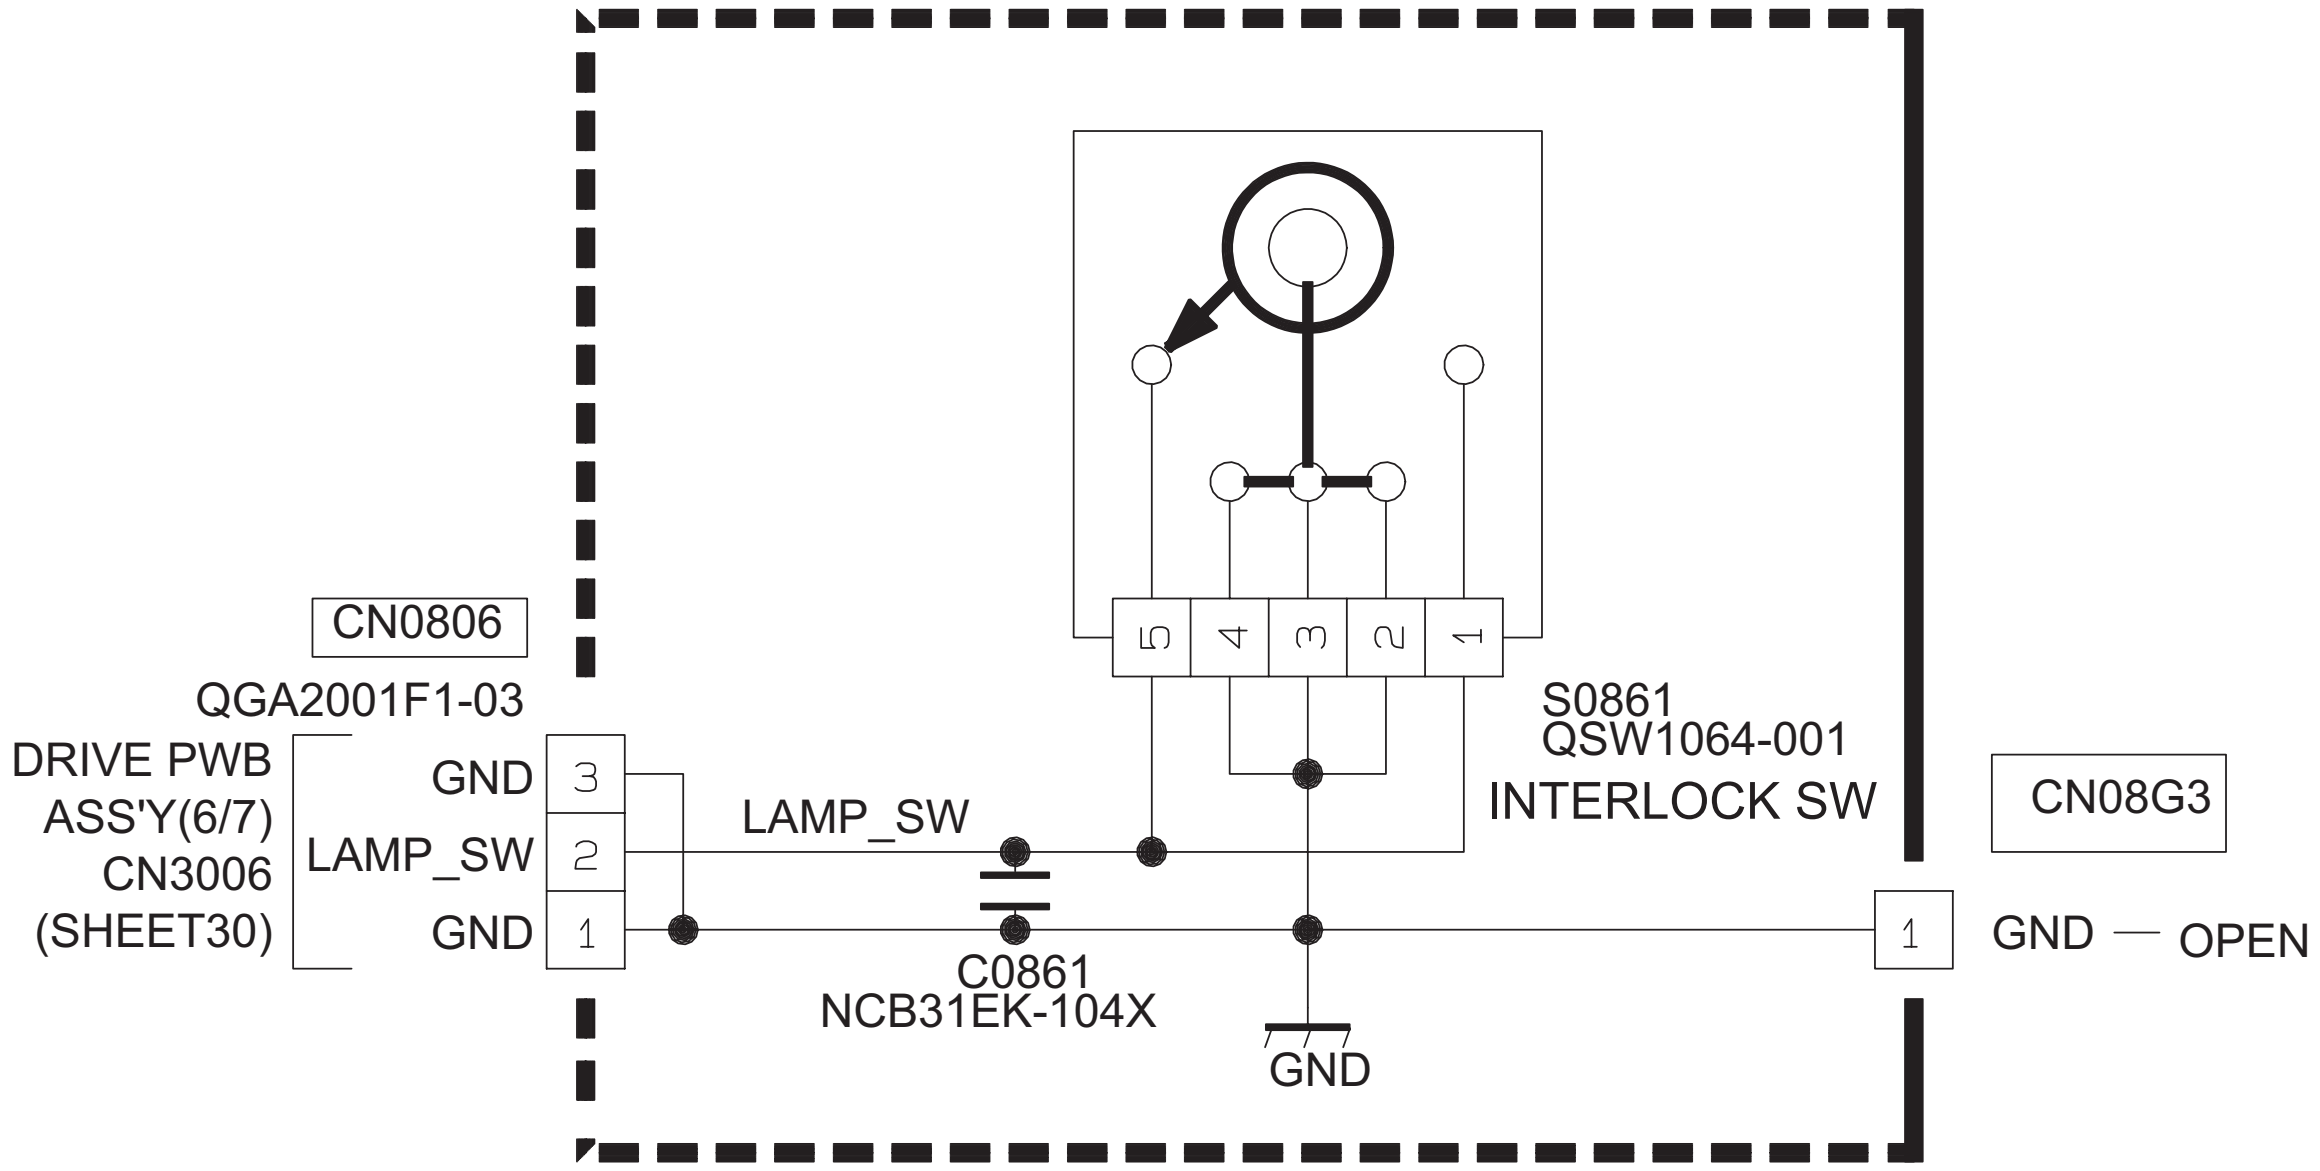
CN0806
QGA2001F1-03
DRIVE PWB
ASS'Y(6/7)
CN3006
(SHEET30)
GND
LAMP_SW
GND
3
2
1
LAMP_SW
C0861
NCB31EK-104X
GND
5
4
3
2
1
S0861
QSW1064-001
INTERLOCK SW
CN08G3
1
GND
OPEN

LAMP COVER PWB ASS'Y

SRA0L211A-M2

c40084001_0214_1/1_0.0

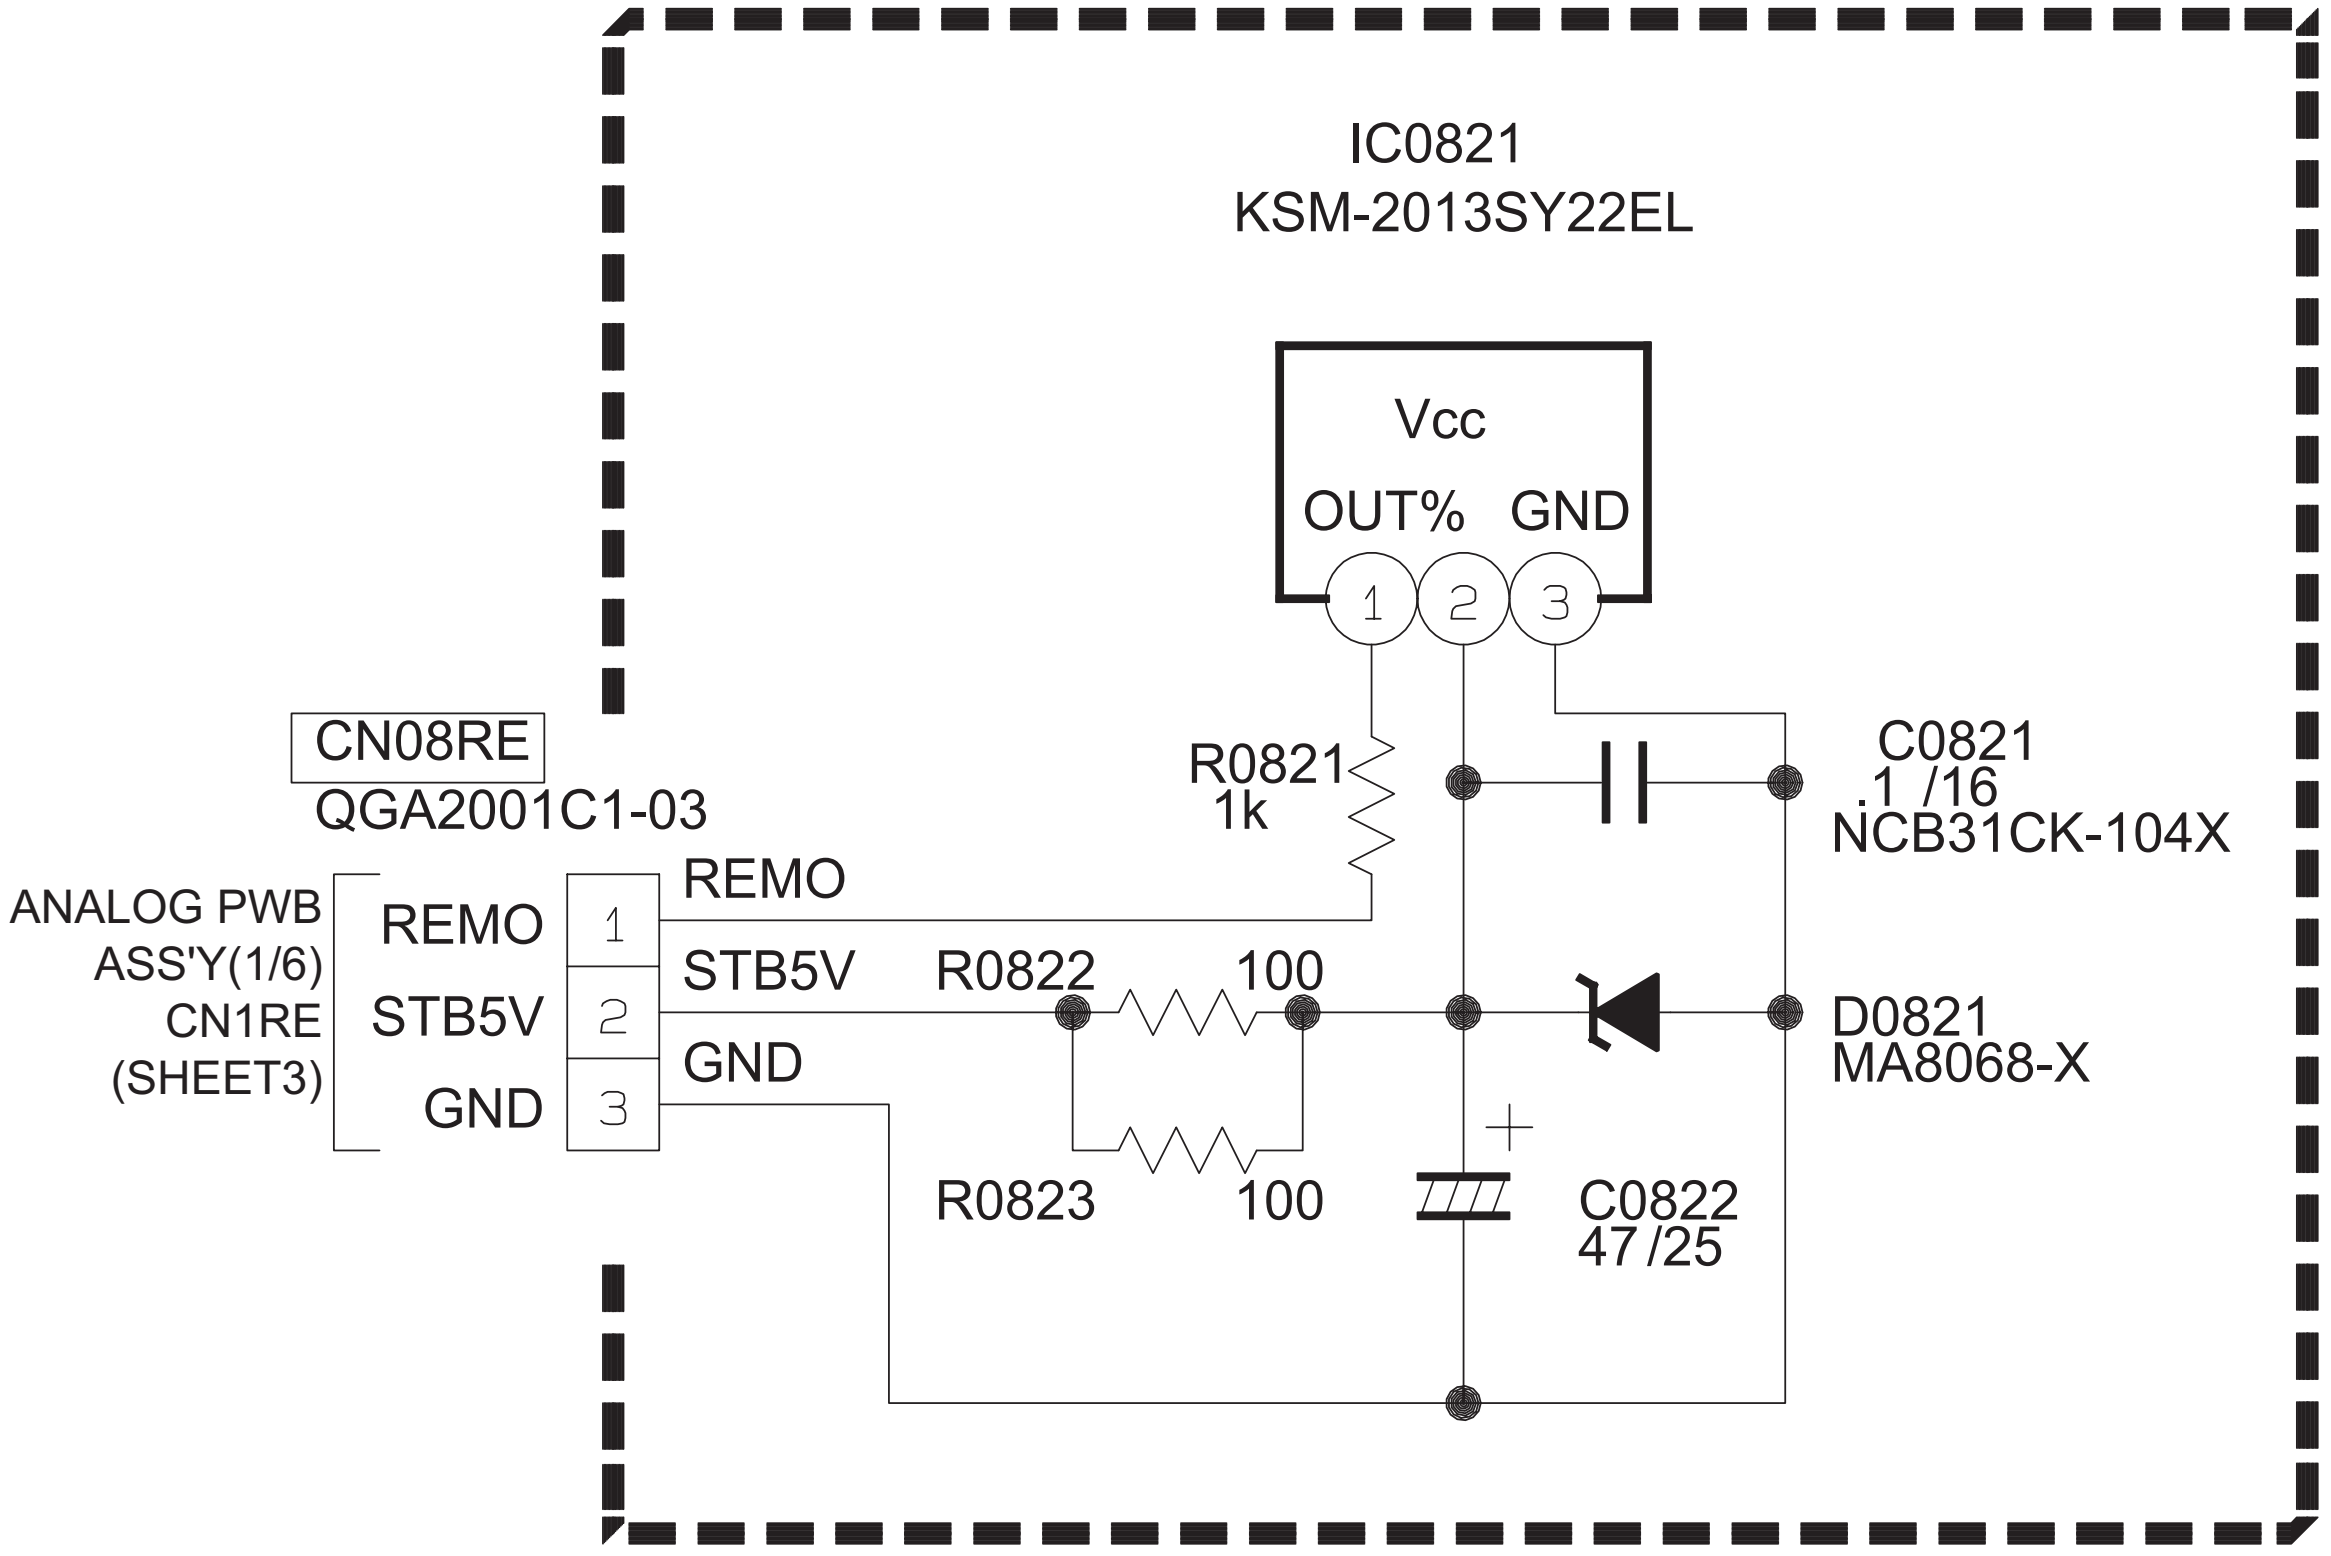
IC0821
KSM-2013SY22EL
Vcc
OUT%
GND
1
2
3
CN08RE
QGA2001C1-03
R0821
1k
C0821
.1 /16
NCB31CK-104X
ANALOG PWB
ASS'Y(1/6)
CN1RE
(SHEET3)
REMO
STB5V
GND
REMO
STB5V
GND
R0822
100
D0821
MA8068-X
R0823
100
C0822
47 /25

REMOCON PWB ASS'Y

SRA-8011A-M2

c40085001_0214_1/1_0.0

SIDE CONTROL PWB CIRCUIT DIAGRAM SHEET 40

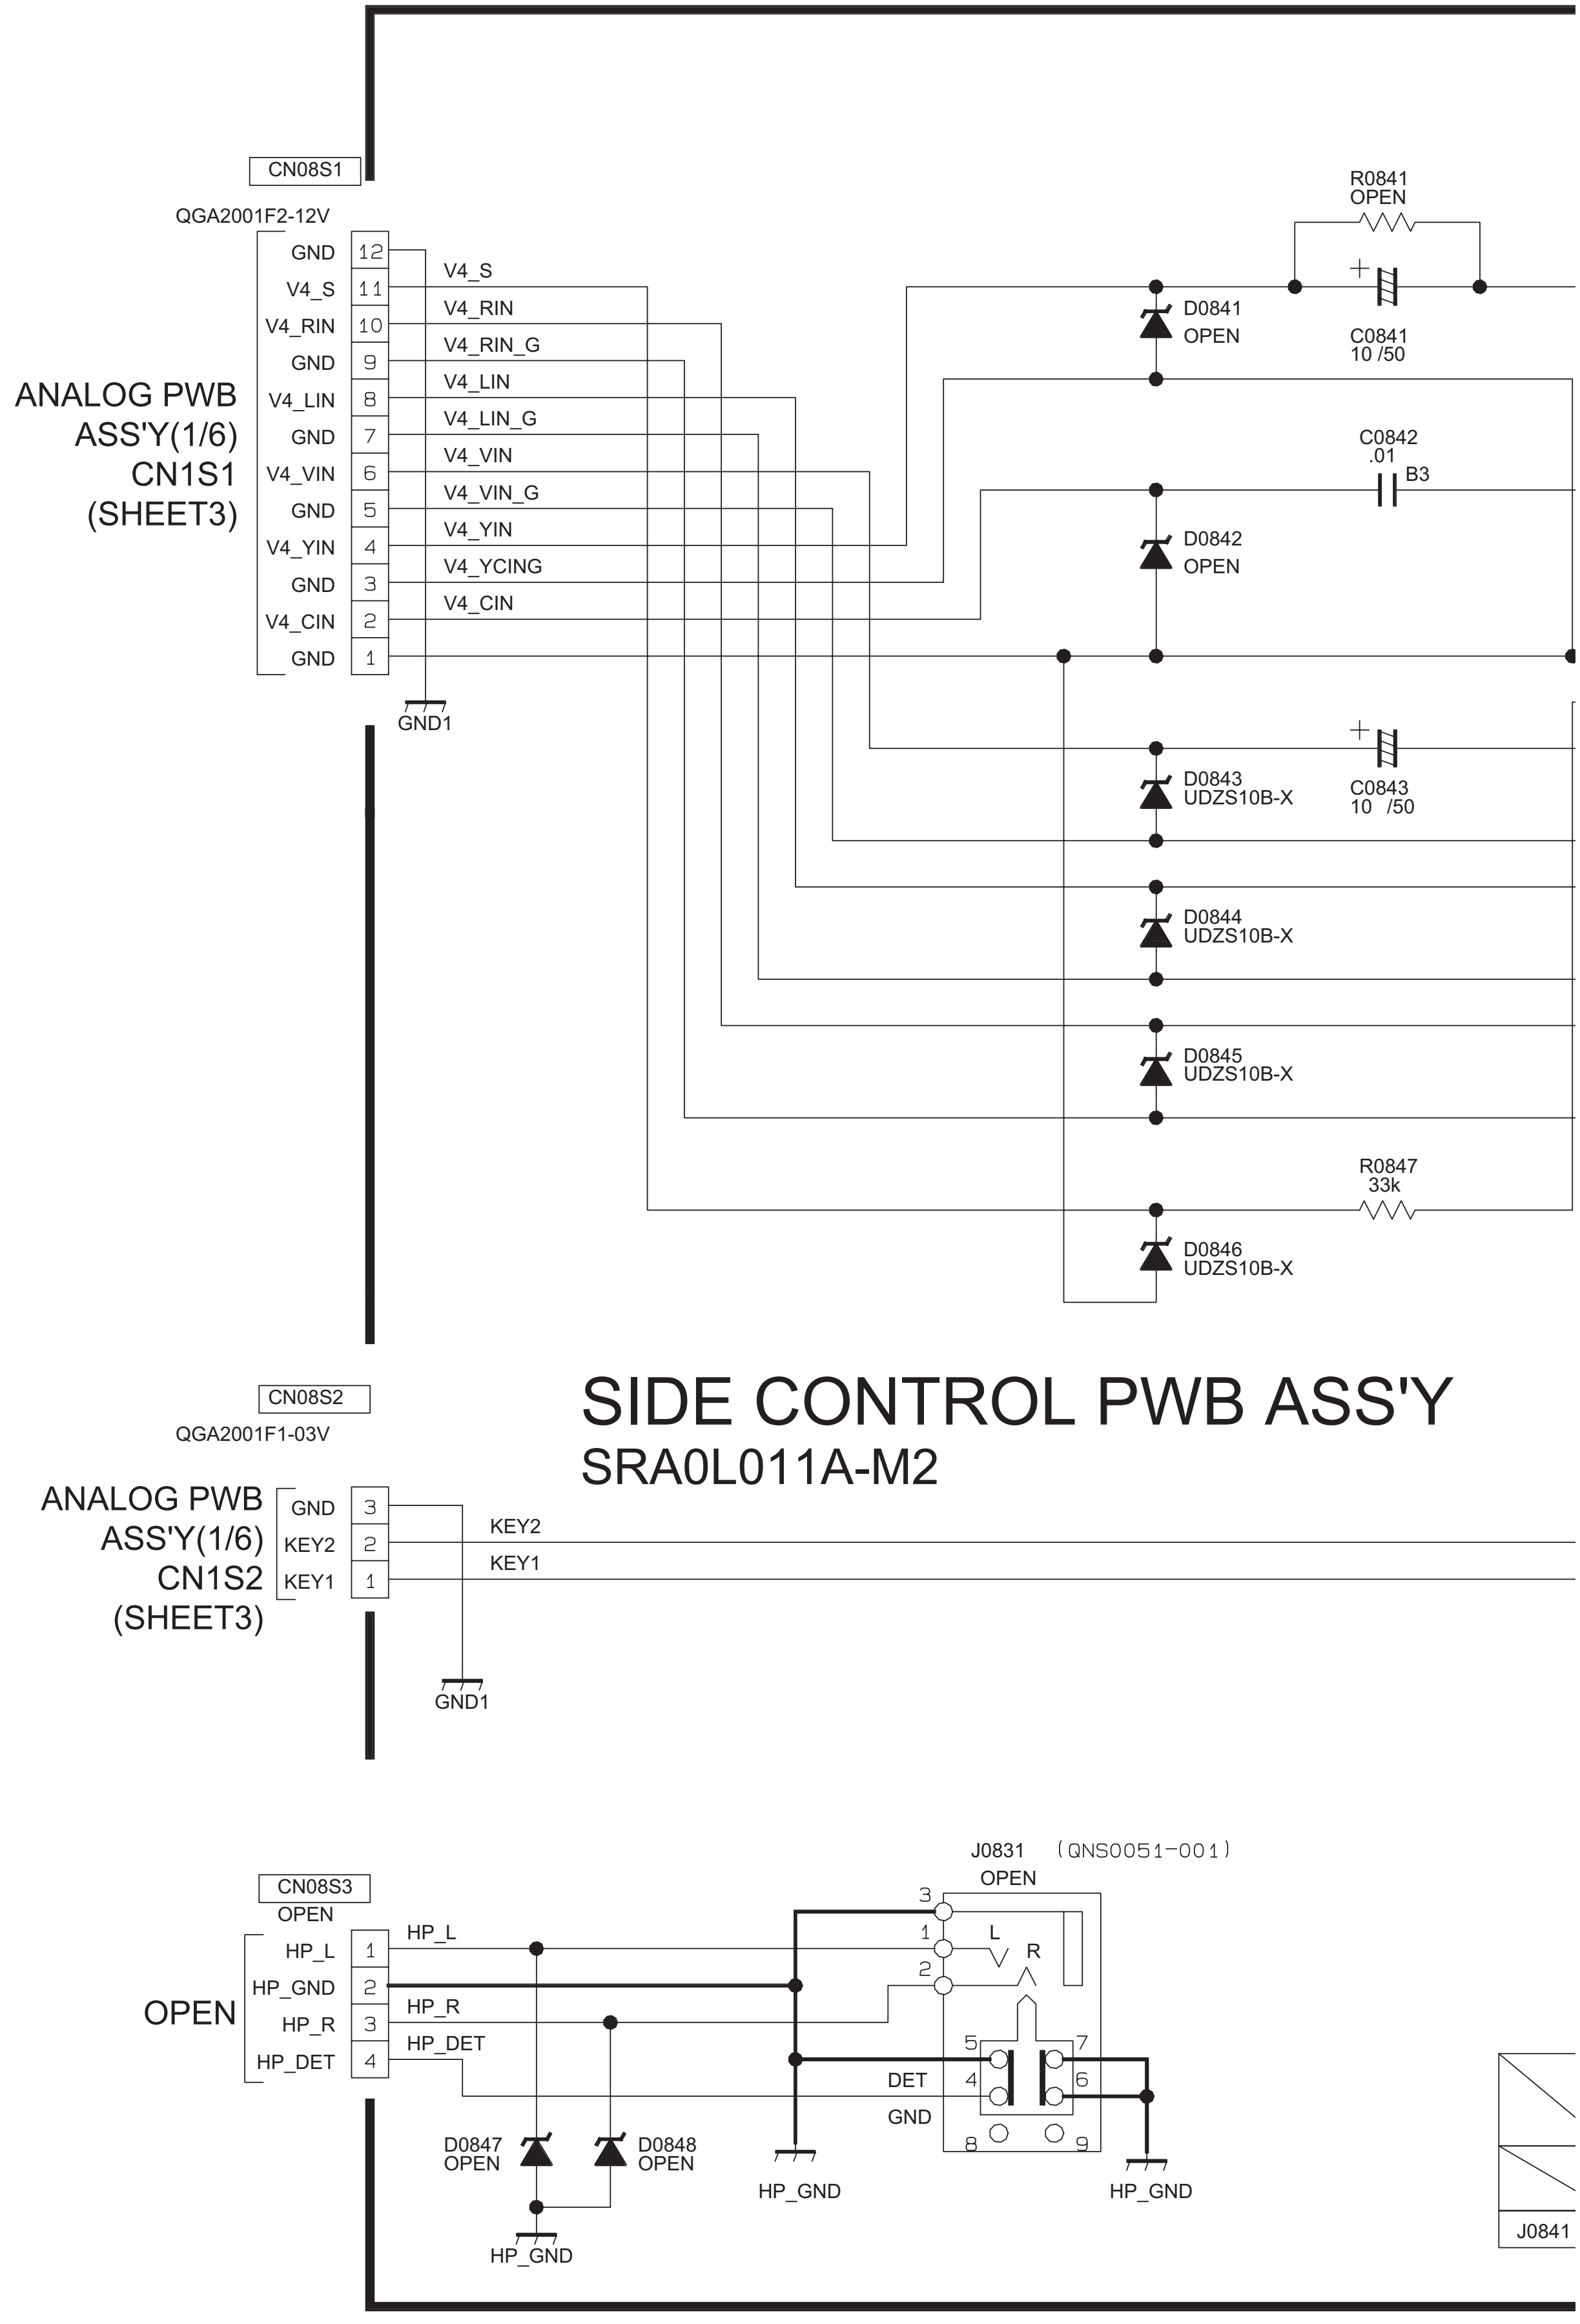

CN08S1
QGA2001F2-12V
ANALOG PWB ASS'Y(1/6) CN1S1 (SHEET3)
GND 12
V4_S 11
V4_RIN 10
GND 9
V4_LIN 8
GND 7
V4_VIN 6
GND 5
V4_YIN 4
GND 3
V4_CIN 2
GND 1
V4_S
V4_RIN
V4_RIN_G
V4_LIN
V4_LIN_G
V4_VIN
V4_VIN_G
V4_YIN
V4_YCING
V4_CIN
GND1
R0841 OPEN
C0841 10 /50
D0841 OPEN
C0842 .01 B3
D0842 OPEN
C0843 10 /50
D0843 UDZS10B-X
D0844 UDZS10B-X
D0845 UDZS10B-X
R0847 33k
D0846 UDZS10B-X
SIDE CONTROL PWB ASS'Y
SRA0L011A-M2
CN08S2
QGA2001F1-03V
ANALOG PWB ASS'Y(1/6) CN1S2 (SHEET3)
GND 3
KEY2 2
KEY1 1
KEY2
KEY1
GND1
J0831 (QNS0051-001)
OPEN
CN08S3
OPEN
OPEN
HP_L 1
HP_GND 2
HP_R 3
HP_DET 4
HP_L
HP_R
HP_DET
3
1
2
L
R
5
7
DET
4
6
GND
8
9
D0847 OPEN
D0848 OPEN
HP_GND
HP_GND
HP_GND
J0841

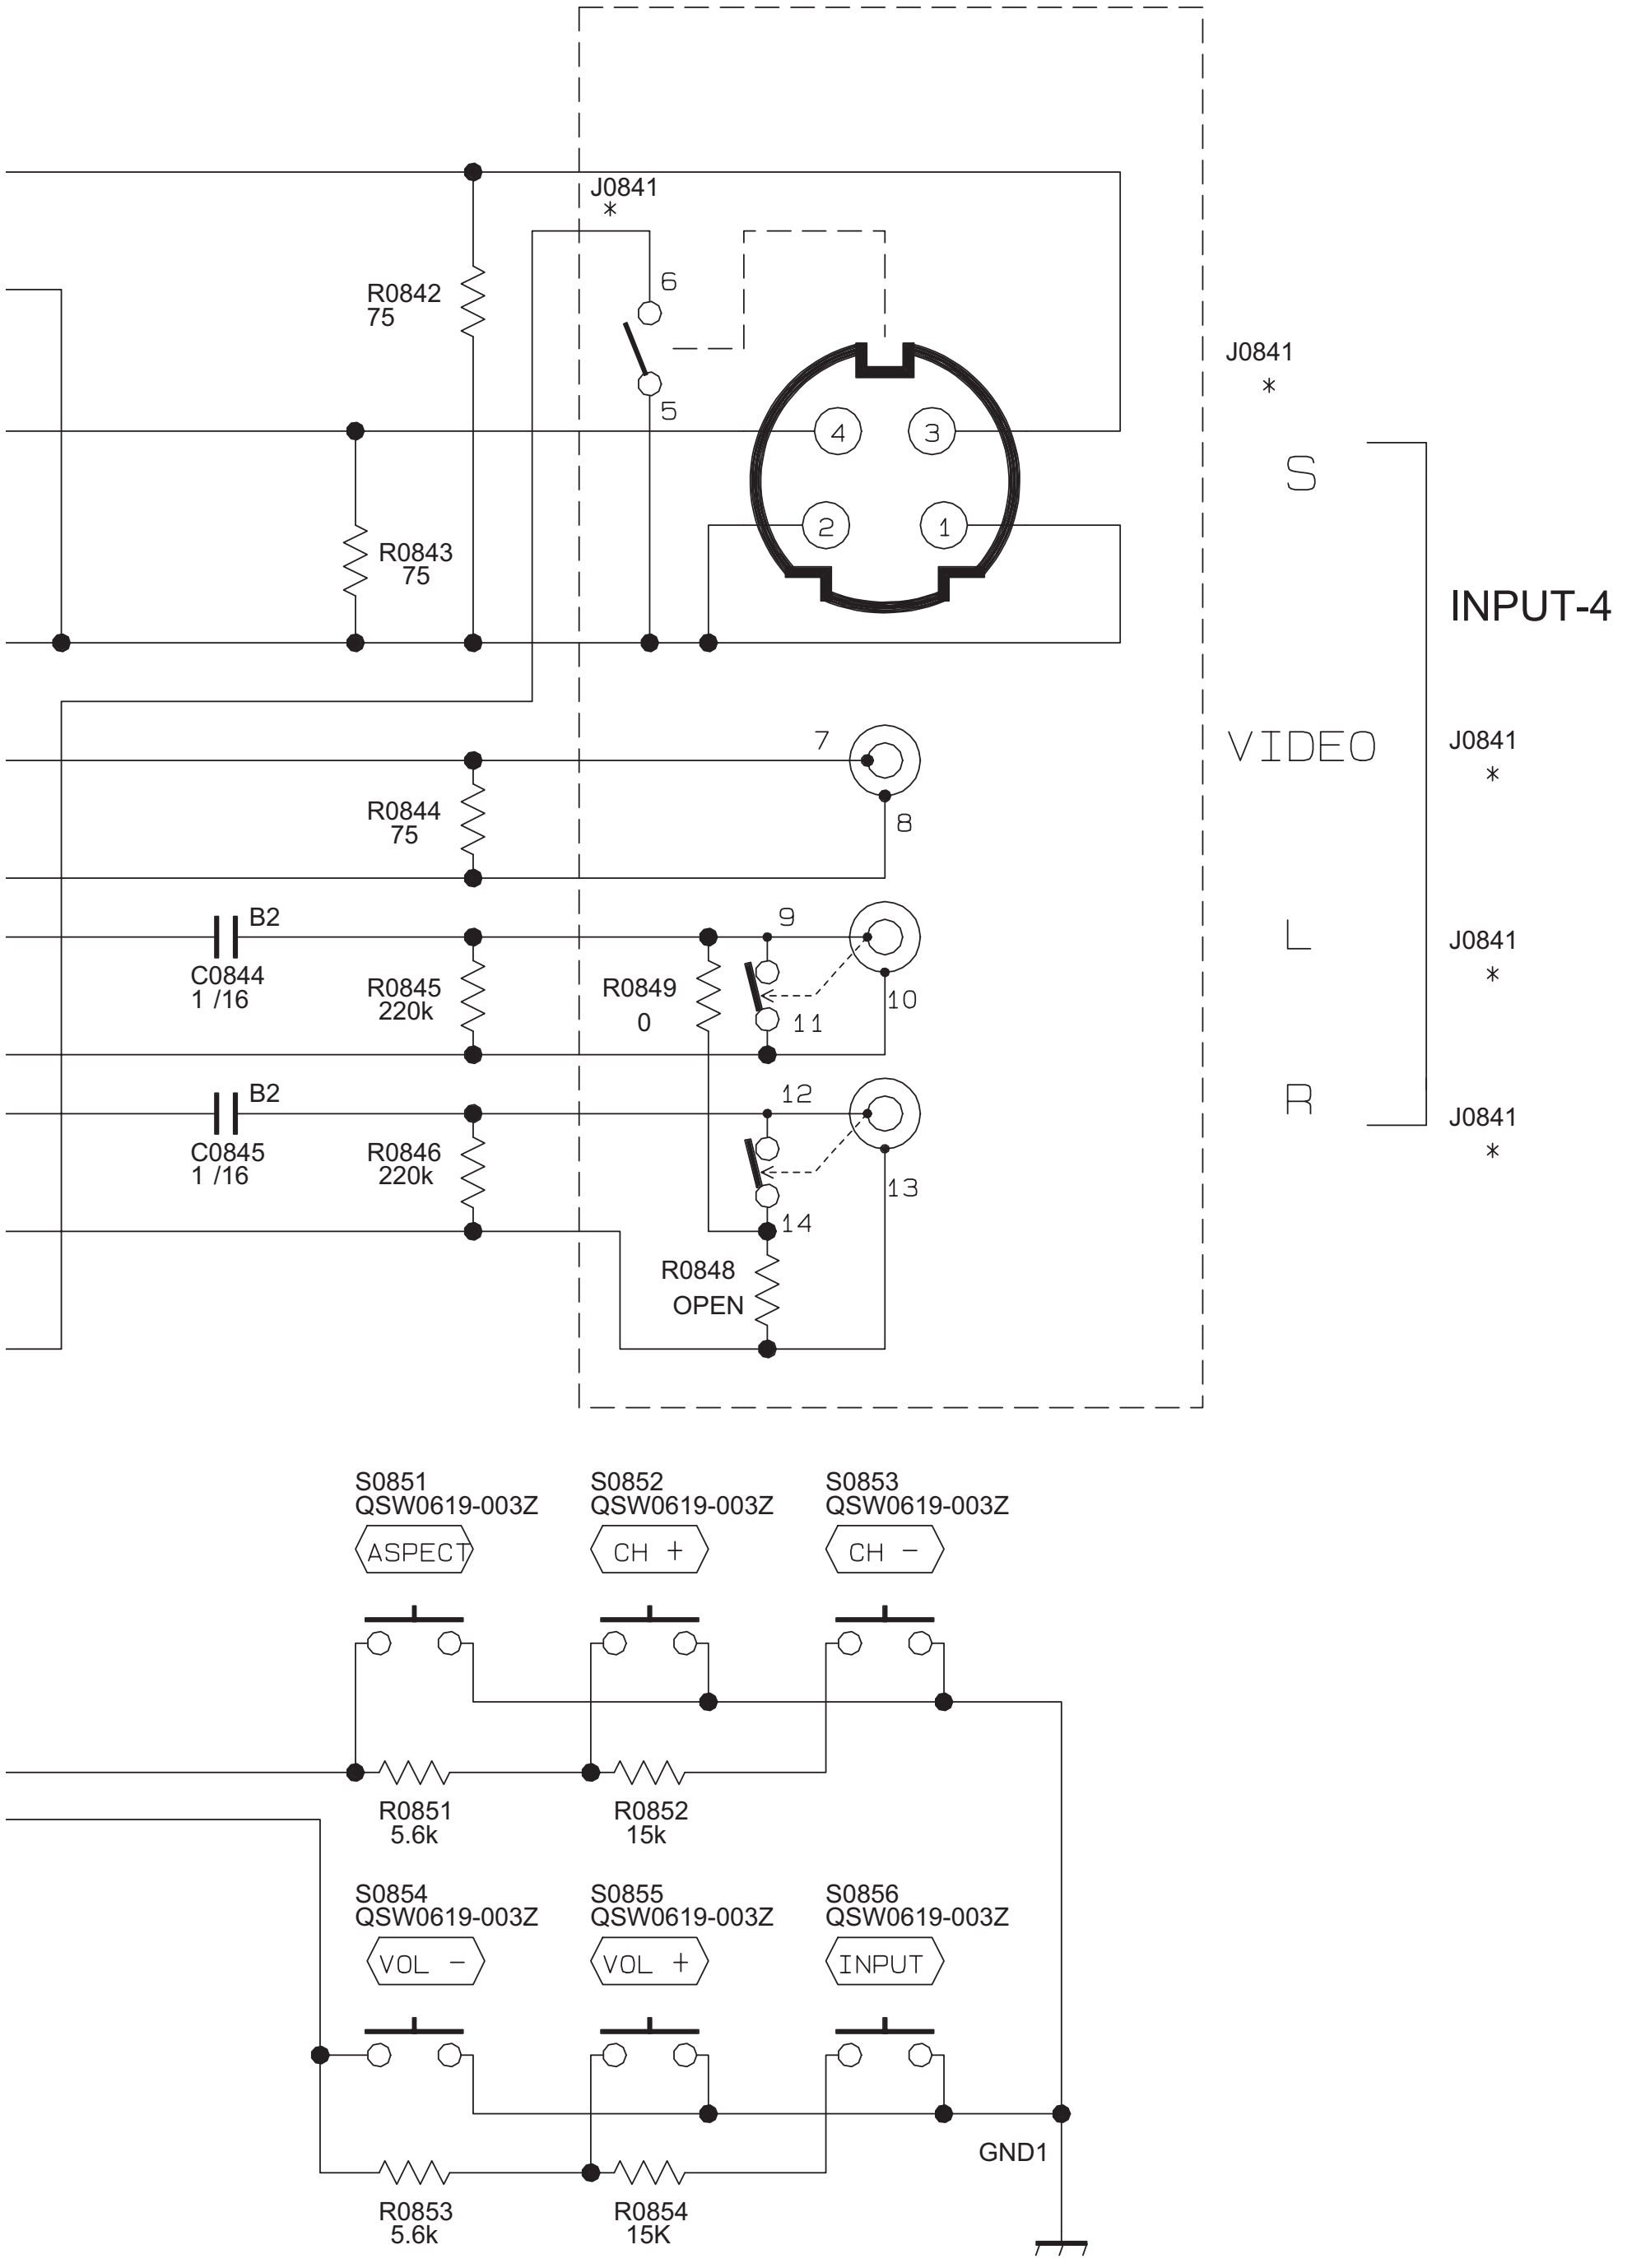

J0841
*
R0842
75
6
5
4
3
2
1
R0843
75
J0841
*
S
INPUT-4
VIDEO
J0841
*
7
R0844
75
8
B2
C0844
1 /16
R0845
220k
9
R0849
0
11
10
L
J0841
*
B2
12
C0845
1 /16
R0846
220k
13
14
R
J0841
*
R0848
OPEN
S0851
QSW0619-003Z
ASPECT
S0852
QSW0619-003Z
CH +
S0853
QSW0619-003Z
CH −
R0851
5.6k
R0852
15k
S0854
QSW0619-003Z
VOL −
S0855
QSW0619-003Z
VOL +
S0856
QSW0619-003Z
INPUT
GND1
R0853
5.6k
R0854
15K

	HD-61G887A HD-56G887A HD-52G887A	HD-61G657A HD-56G657A HD-52G657A	HD-61G587A HD-52G587A	HD-61G567A HD-52G567A	HD-70FH97A HD-61FH97A HD-56FH97A HD-52FH97A	HD-70FN97A HD-61FN97A HD-56FN97A HD-52FN97A	HD-61FC97A HD-56FC97A	HD-56FM97A
	OLLC09901	OLLC09901			OL-CX2749			
0841	QNN0787 -001	QNN0787 -001	QNN0787 -001	QNN0787 -001	QNN0787 -002	QNN0787 -001	QNN0787 -001	QNN0787 -001

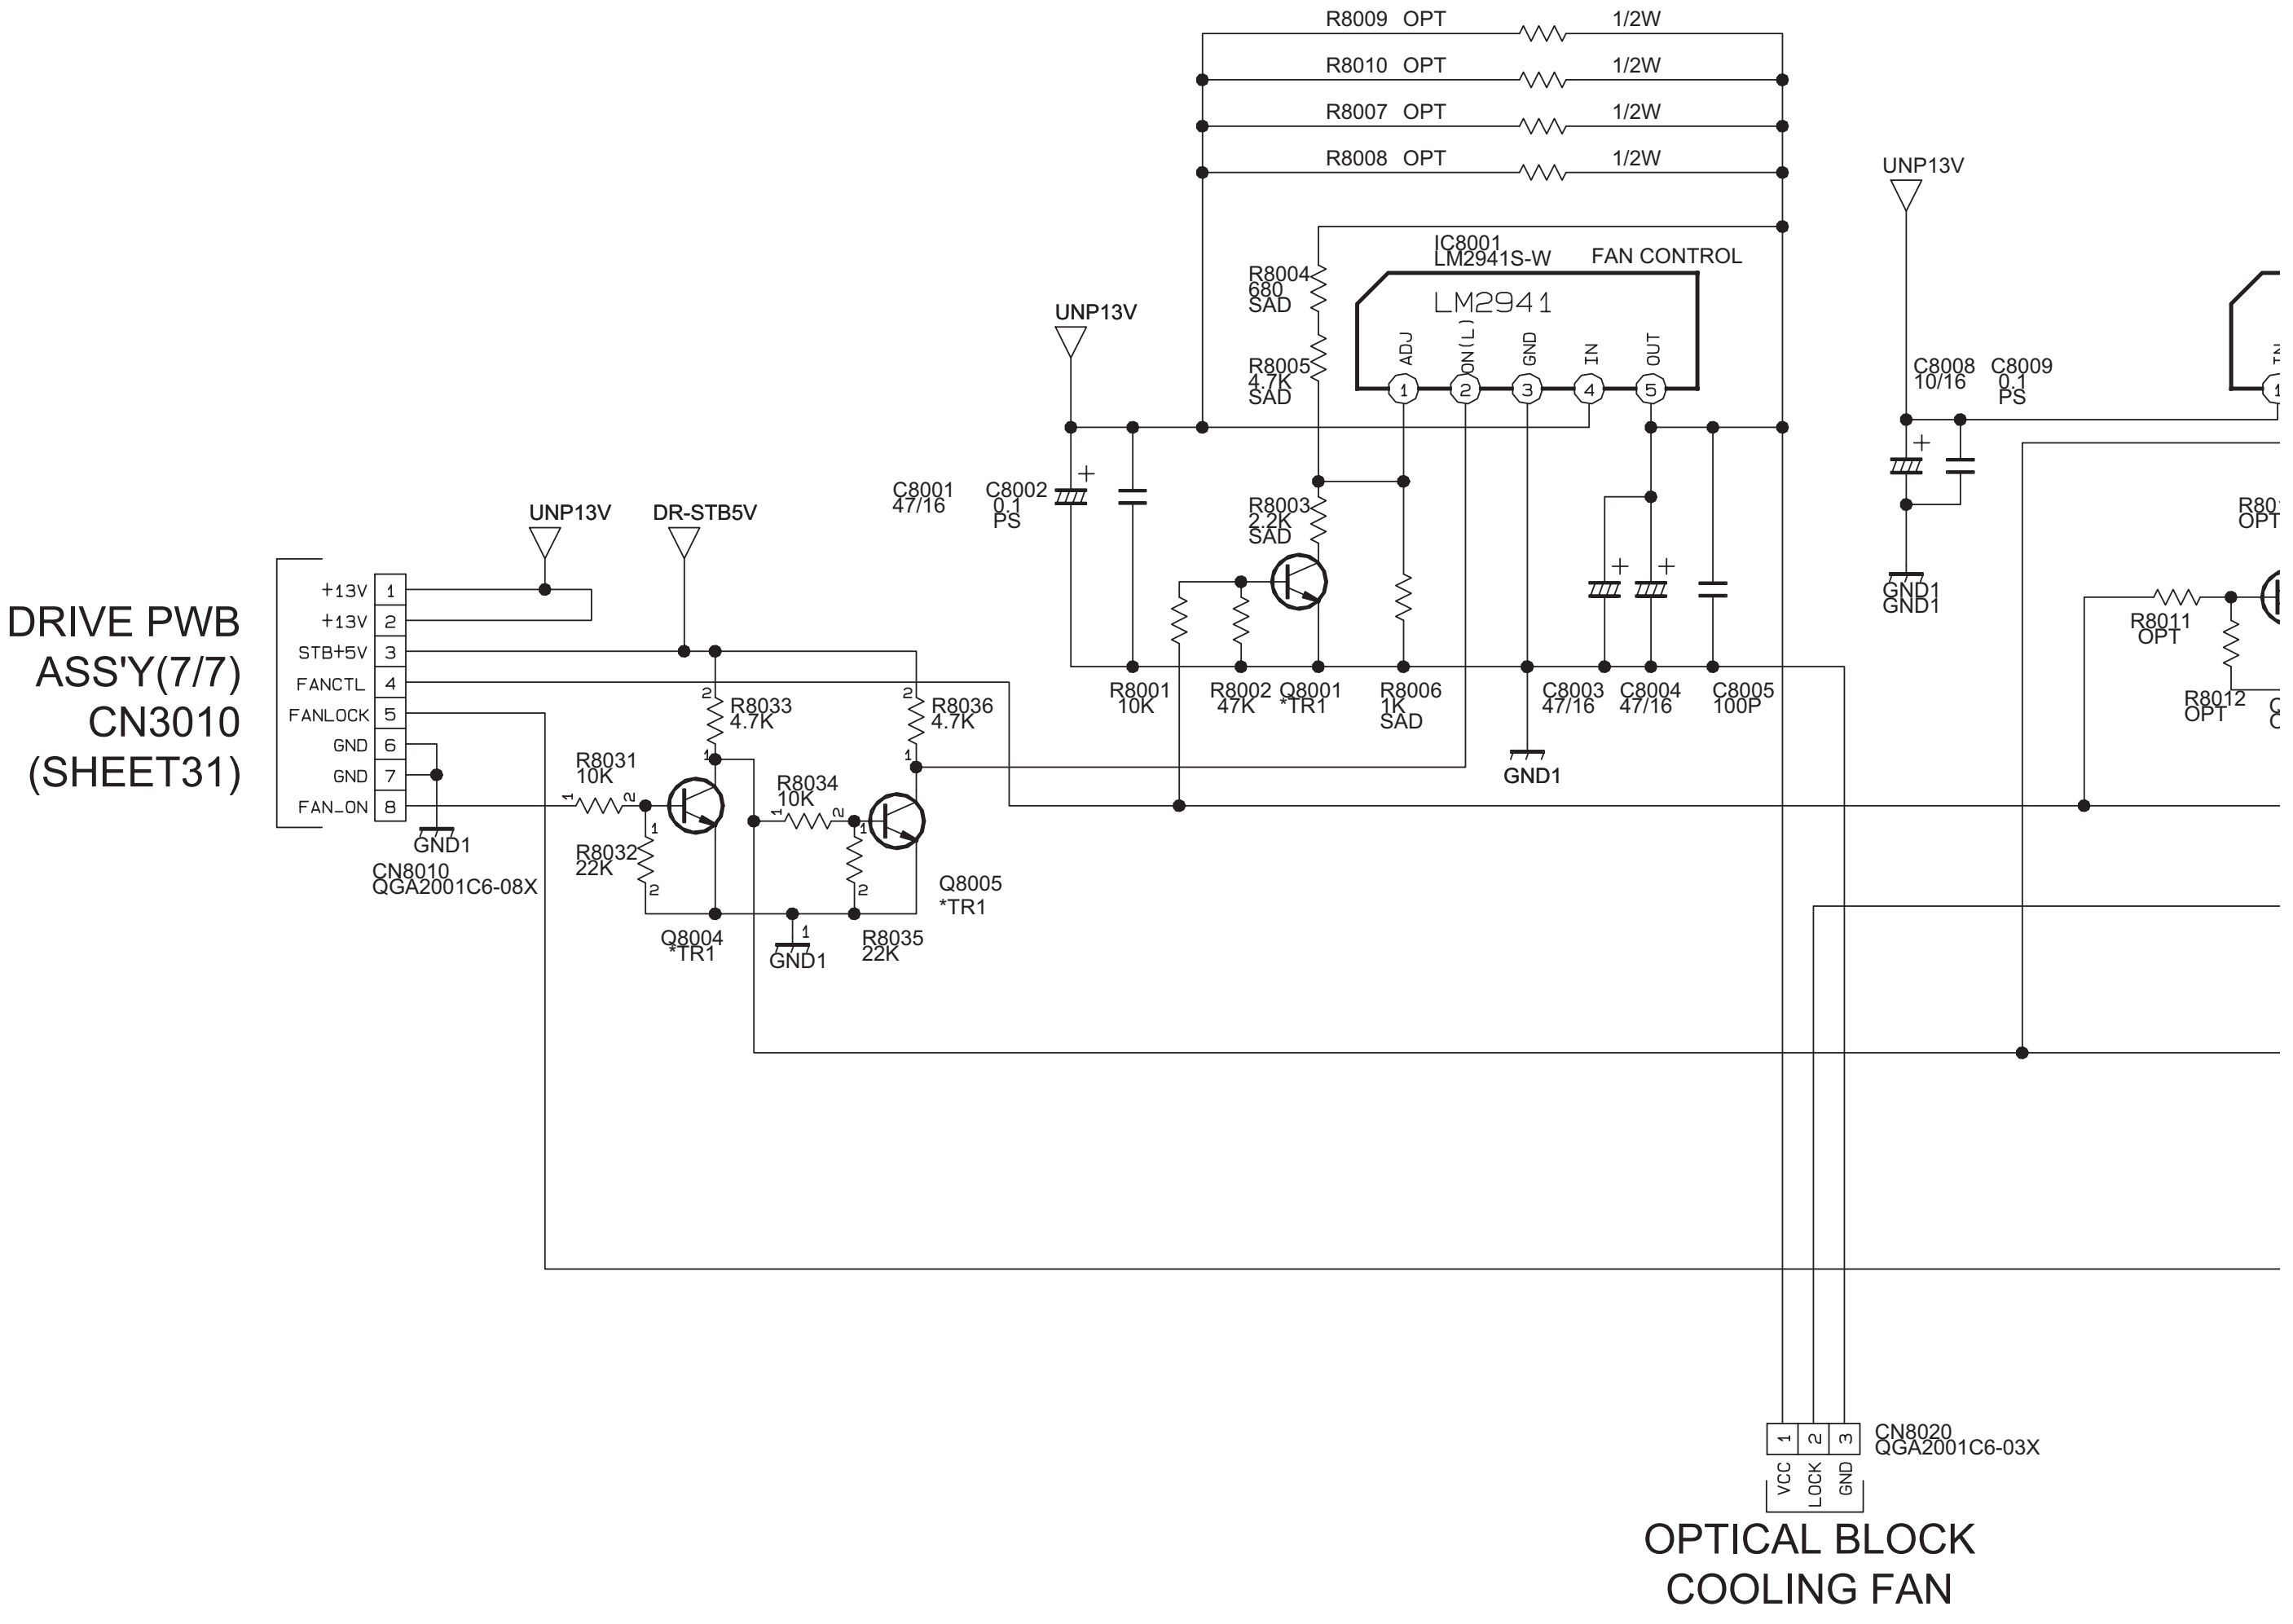
R8009 OPT 1/2W
R8010 OPT 1/2W
R8007 OPT 1/2W
R8008 OPT 1/2W
UNP13V
IC8001
LM2941S-W
FAN CONTROL
LM2941
ADJ
ON(L)
GND
IN
OUT
R8004
680
SAD
R8005
4.7K
SAD
UNP13V
C8008
10/16
C8009
0.1
PS
C8001
47/16
C8002
0.1
PS
R8003
2.2K
SAD
UNP13V
DR-STB5V
GND1
GND1
R8011
OPT
R8012
OPT
DRIVE PWB
ASS'Y(7/7)
CN3010
(SHEET31)
+13V
+13V
STB+5V
FANCTL
FANLOCK
GND
GND
FAN_ON
R8033
4.7K
R8036
4.7K
R8001
10K
R8002
47K
Q8001
*TR1
R8006
1K
SAD
C8003
47/16
C8004
47/16
C8005
100P
GND1
R8031
10K
R8034
10K
R8032
22K
GND1
CN8010
QGA2001C6-08X
Q8005
*TR1
Q8004
*TR1
GND1
R8035
22K
CN8020
QGA2001C6-03X
VCC
LOCK
GND
OPTICAL BLOCK
COOLING FAN

FAN PWB ASS'Y
SRA-8401A-M2

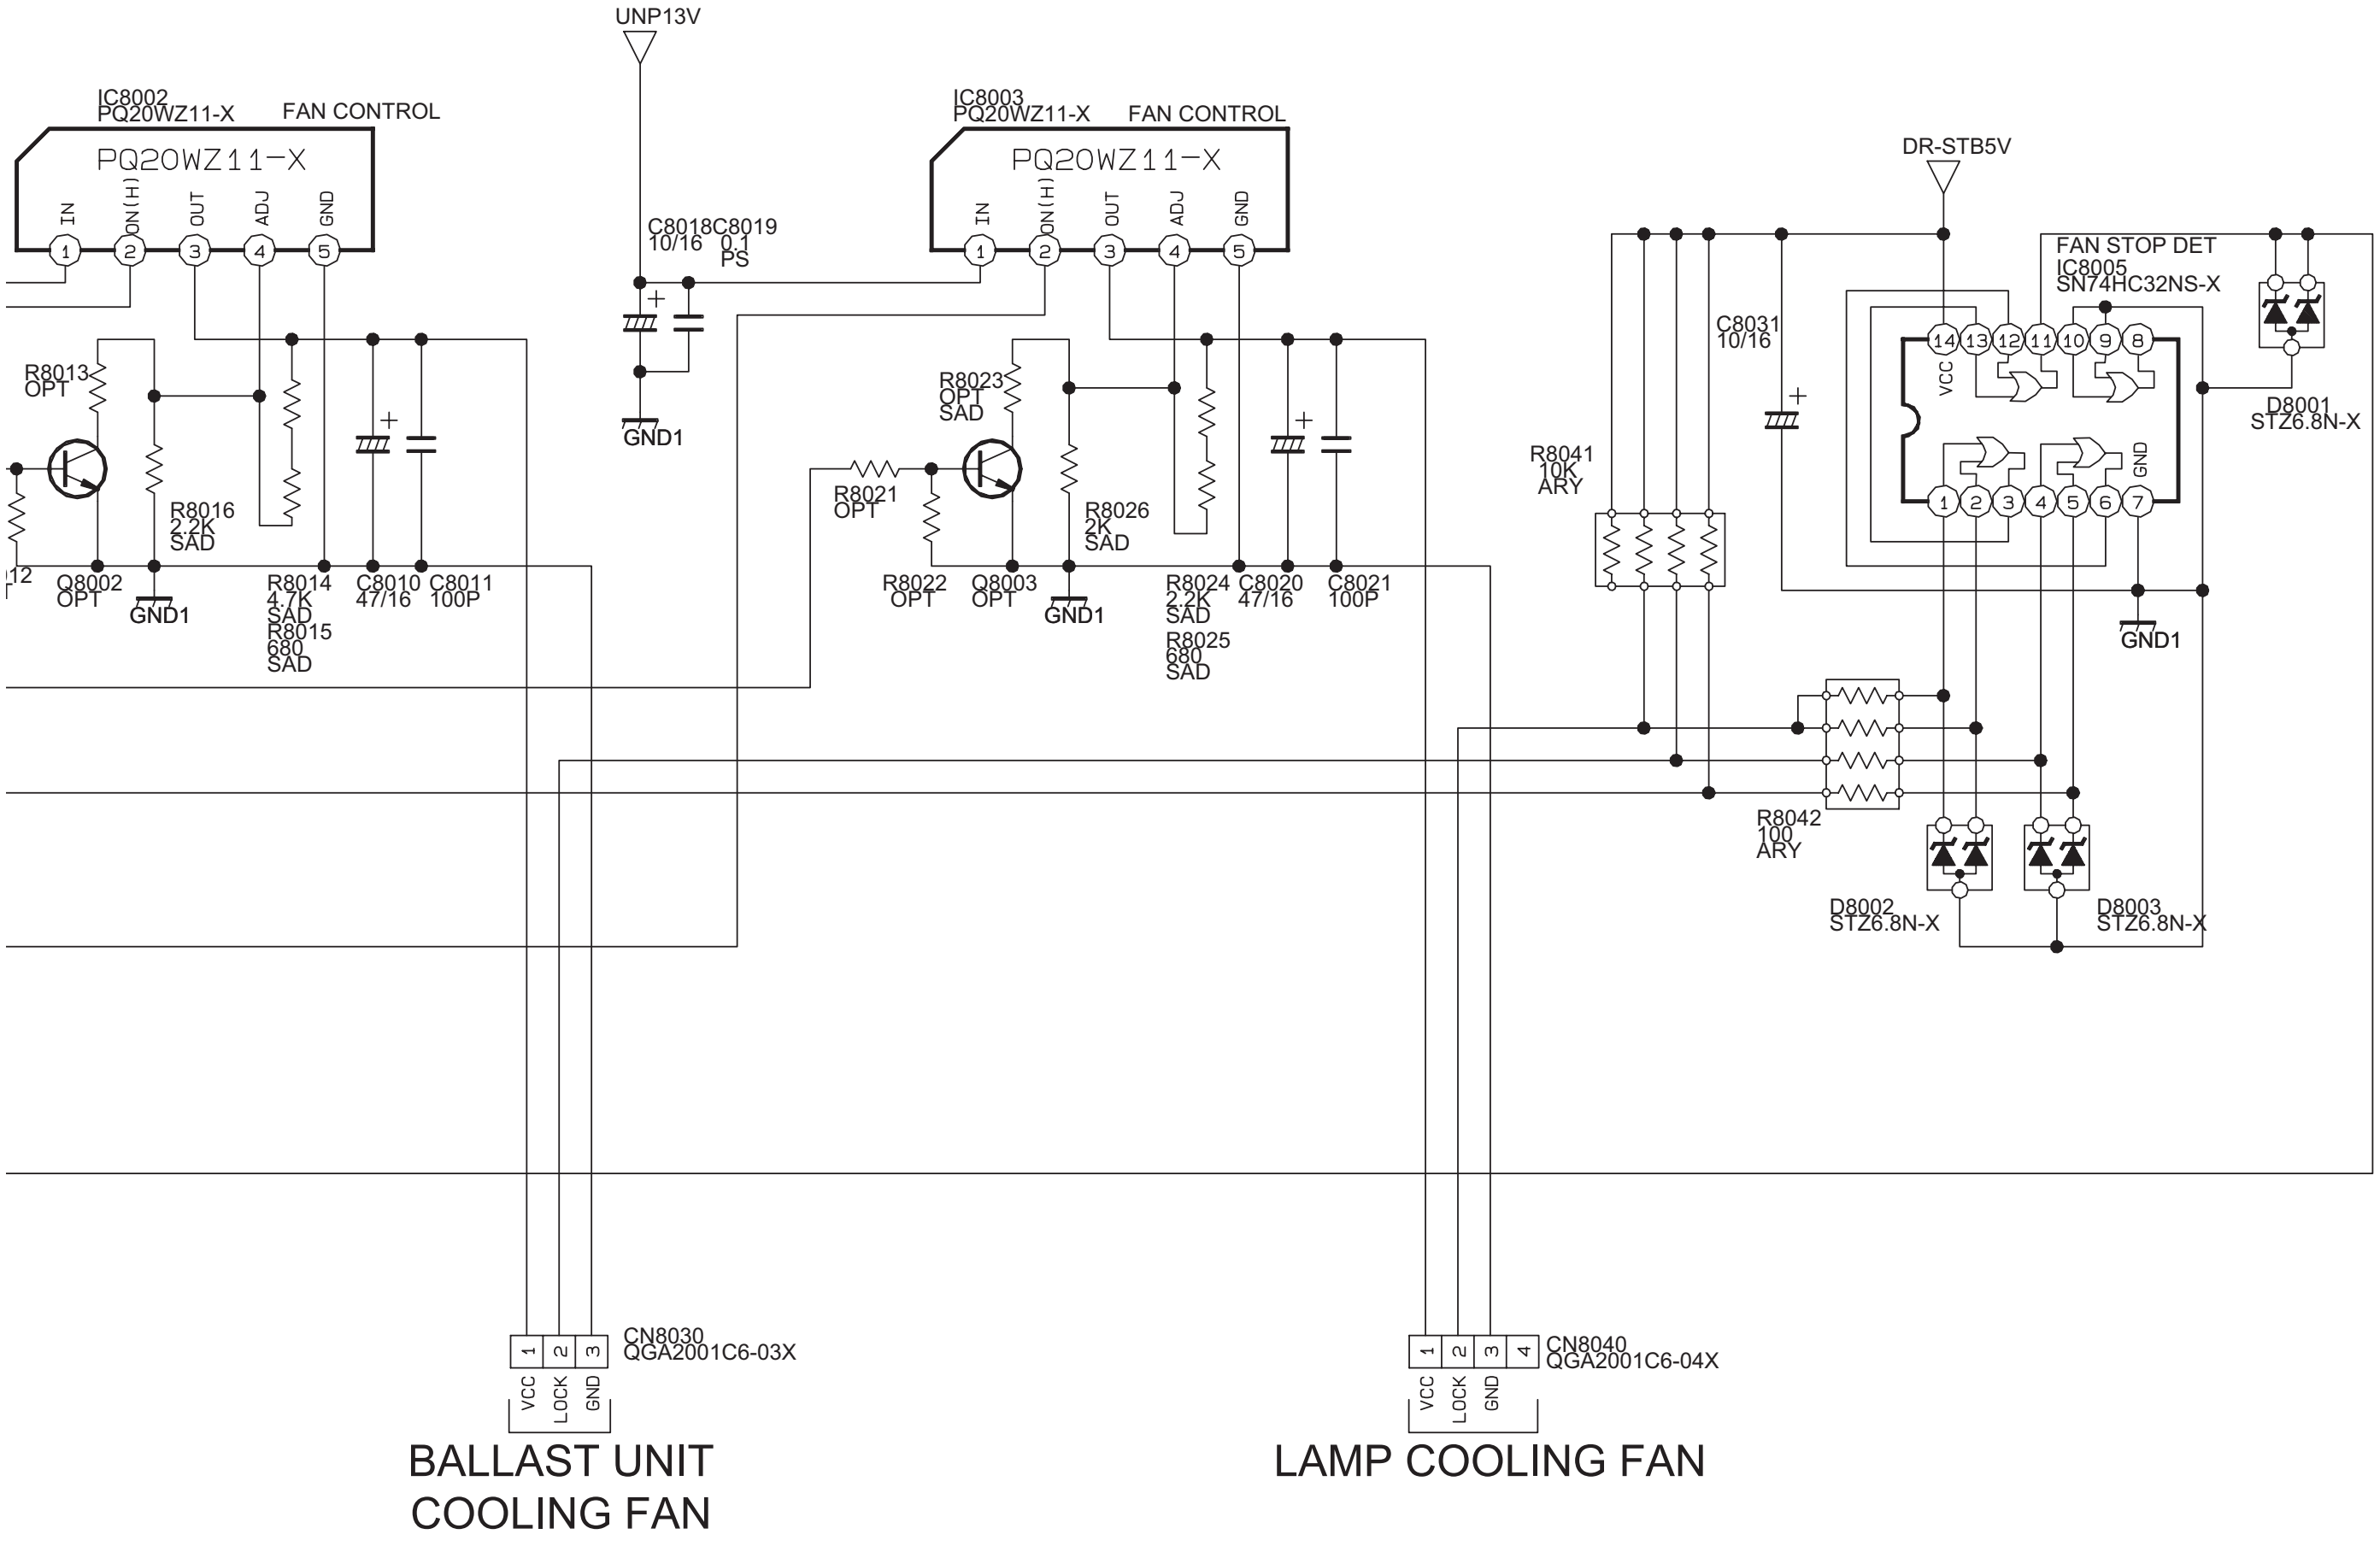
UNP13V
IC8002
PQ20WZ11-X
FAN CONTROL
PQ20WZ11-X
IN
ON(H)
OUT
ADJ
GND
1
2
3
4
5
R8013
OPT
R8016
2.2K
SAD
Q8002
OPT
GND1
R8014
4.7K
SAD
R8015
680
SAD
C8010
47/16
C8011
100P
C8018
10/16
C8019
0.1
PS
GND1
IC8003
PQ20WZ11-X
FAN CONTROL
PQ20WZ11-X
R8023
OPT
SAD
R8021
OPT
R8022
OPT
Q8003
OPT
GND1
R8026
2K
SAD
R8024
2.2K
SAD
R8025
680
SAD
C8020
47/16
C8021
100P
DR-STB5V
C8031
10/16
R8041
10K
ARY
FAN STOP DET
IC8005
SN74HC32NS-X
VCC
GND
14
13
12
11
10
9
8
1
2
3
4
5
6
7
GND1
D8001
STZ6.8N-X
R8042
100
ARY
D8002
STZ6.8N-X
D8003
STZ6.8N-X
CN8030
QGA2001C6-03X
VCC
LOCK
GND
CN8040
QGA2001C6-04X
VCC
LOCK
GND
BALLAST UNIT
COOLING FAN
LAMP COOLING FAN

SD CARD PWB CIRCUIT DIAGRAM SHEET 42

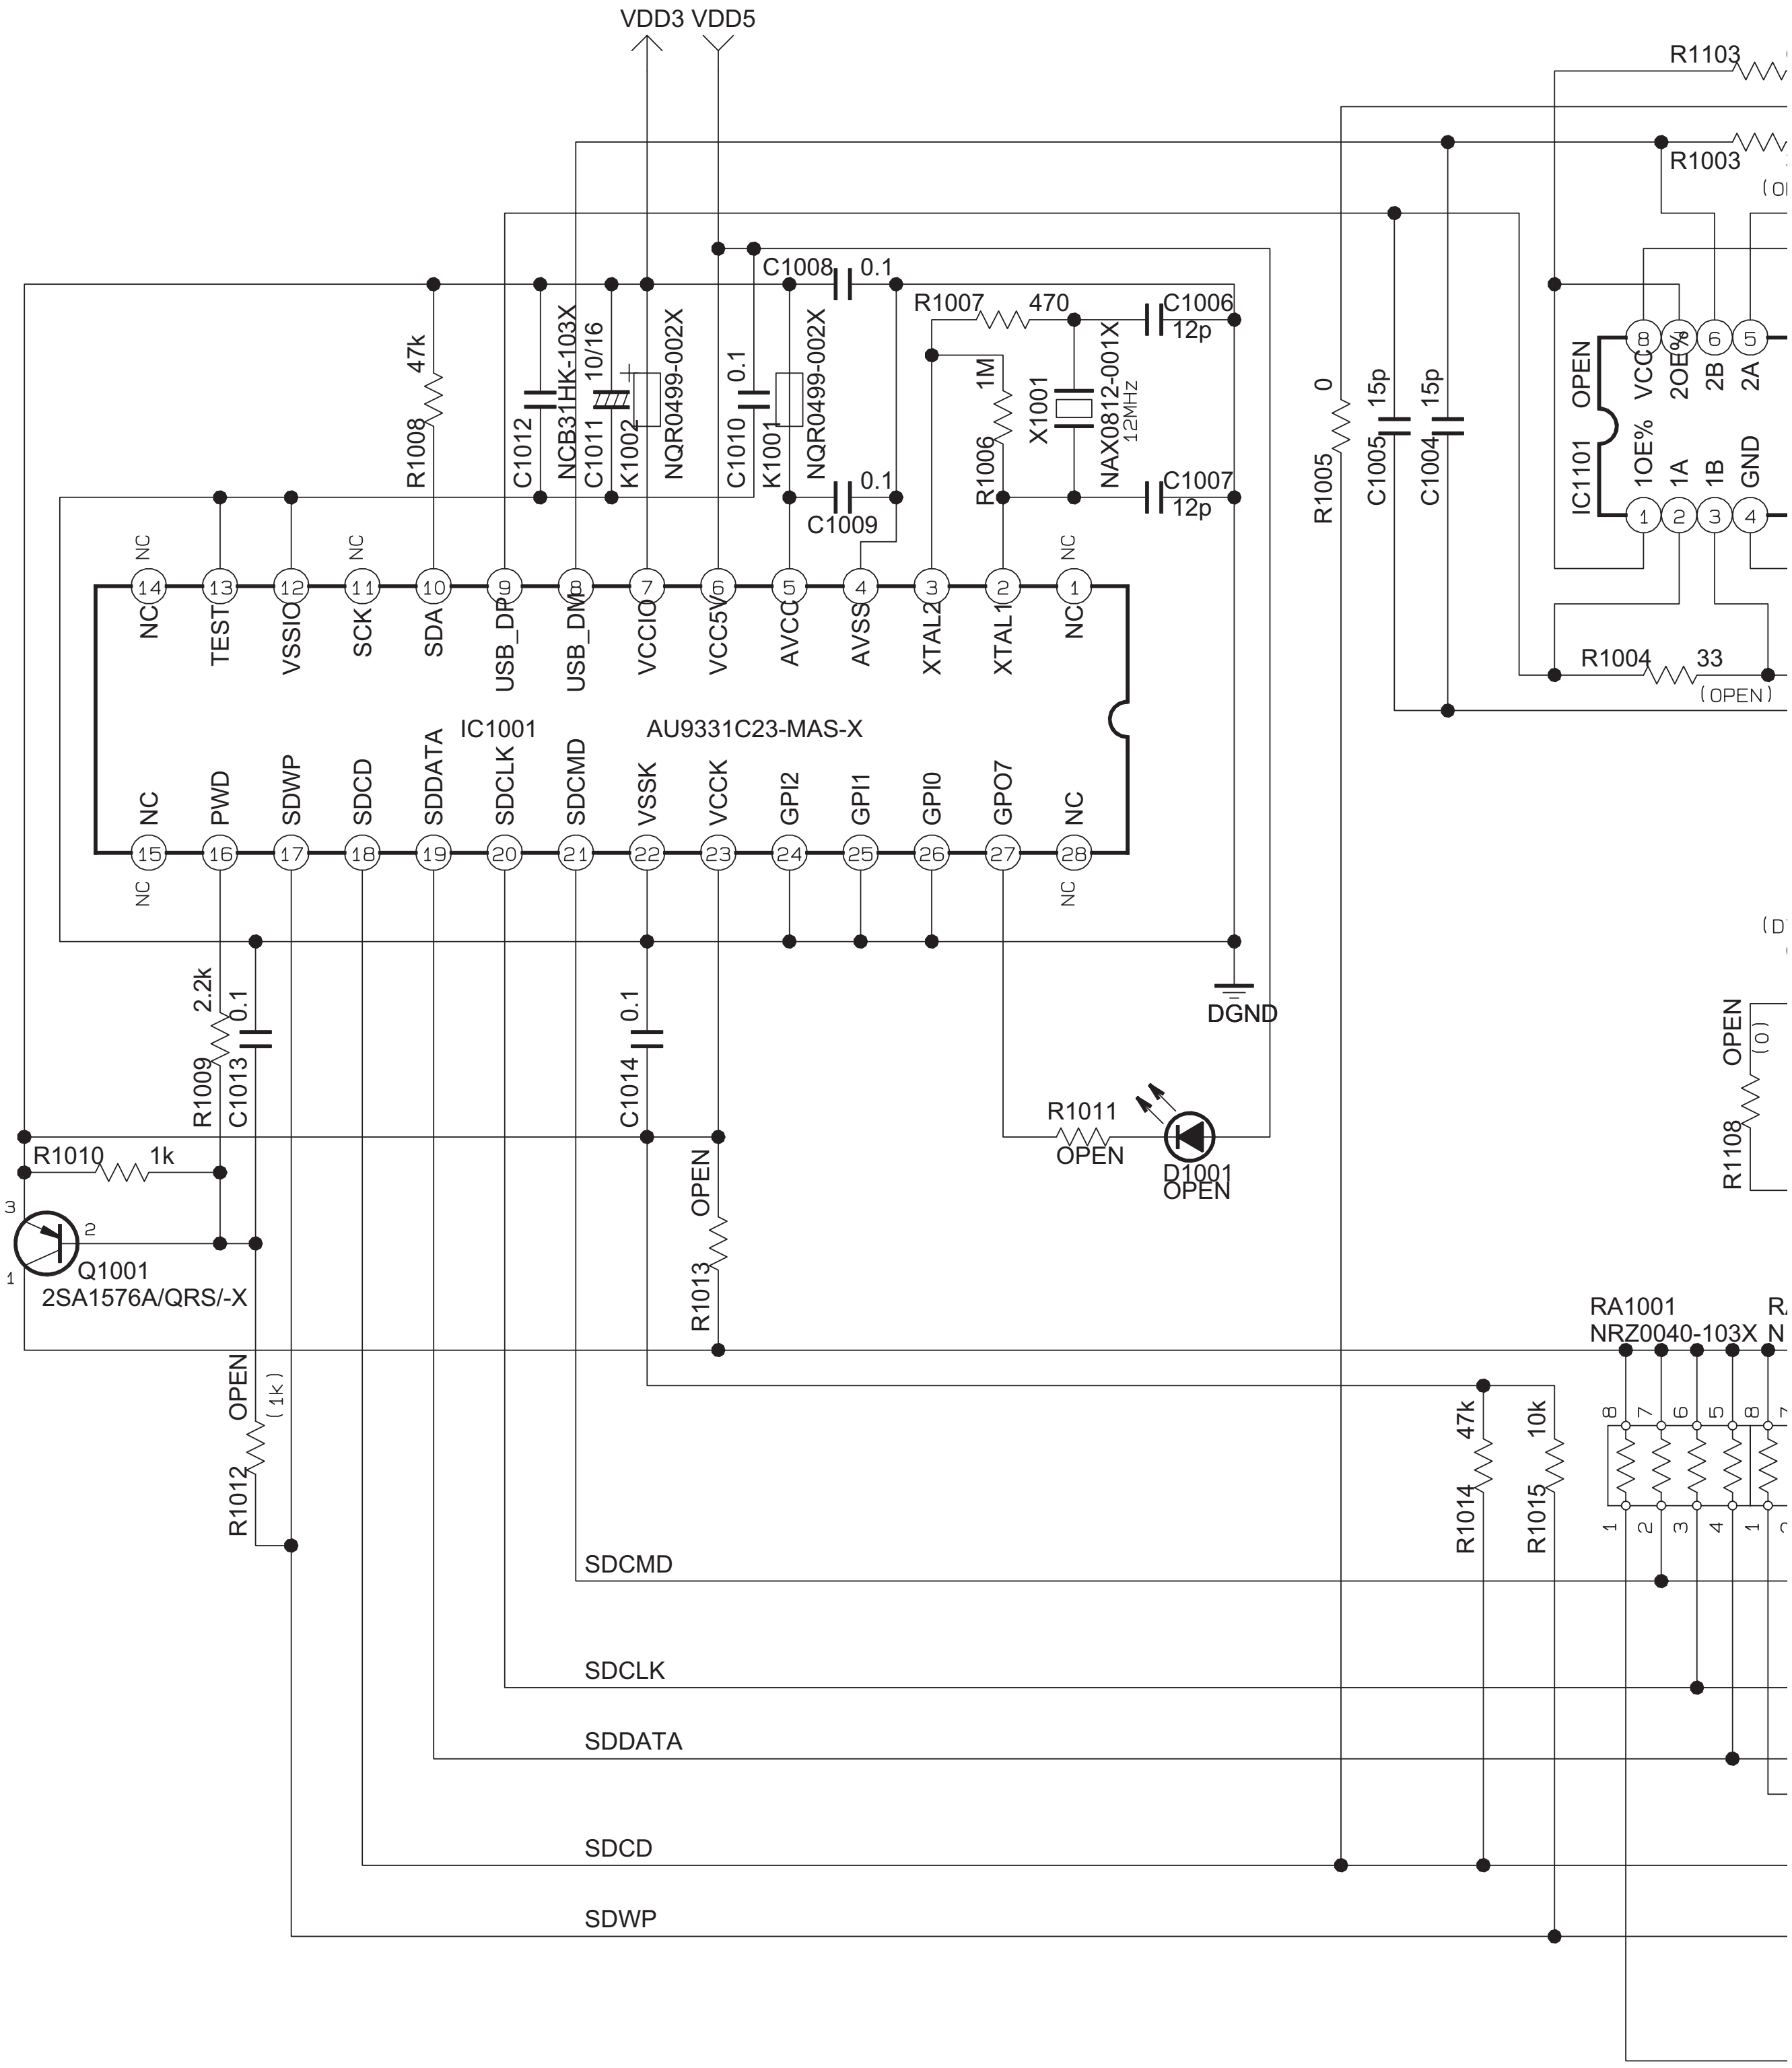
VDD3
VDD5
R1103
R1003
C1008
0.1
R1007
470
C1006
12p
47k
NCB31HK-103X
10/16
NQR0499-002X
0.1
NQR0499-002X
1M
X1001
NAX0812-001X
12MHz
R1008
C1012
C1011
K1002
C1010
K1001
0.1
C1009
R1006
C1007
12p
0
15p
15p
R1005
C1005
C1004
OPEN
VCC
2OE%
2B
2A
IC1101
1OE%
1A
1B
GND
NC
NC
TEST
VSSIO
SCK
SDA
USB_DP
USB_DM
VCCIO
VCC5V
AVCC
AVSS
XTAL2
XTAL1
NC
R1004
33
(OPEN)
IC1001
AU9331C23-MAS-X
NC
PWD
SDWP
SDCD
SDDATA
SDCLK
SDCMD
VSSK
VCCK
GPI2
GPI1
GPI0
GPO7
NC
NC
NC
DGND
2.2k
0.1
0.1
R1009
C1013
C1014
R1011
OPEN
D1001
OPEN
OPEN
(0)
R1108
R1010
1k
Q1001
2SA1576A/QRS/-X
OPEN
R1013
RA1001
NRZ0040-103X
OPEN
(1k)
R1012
47k
10k
R1014
R1015
SDCMD
SDCLK
SDDATA
SDCD
SDWP

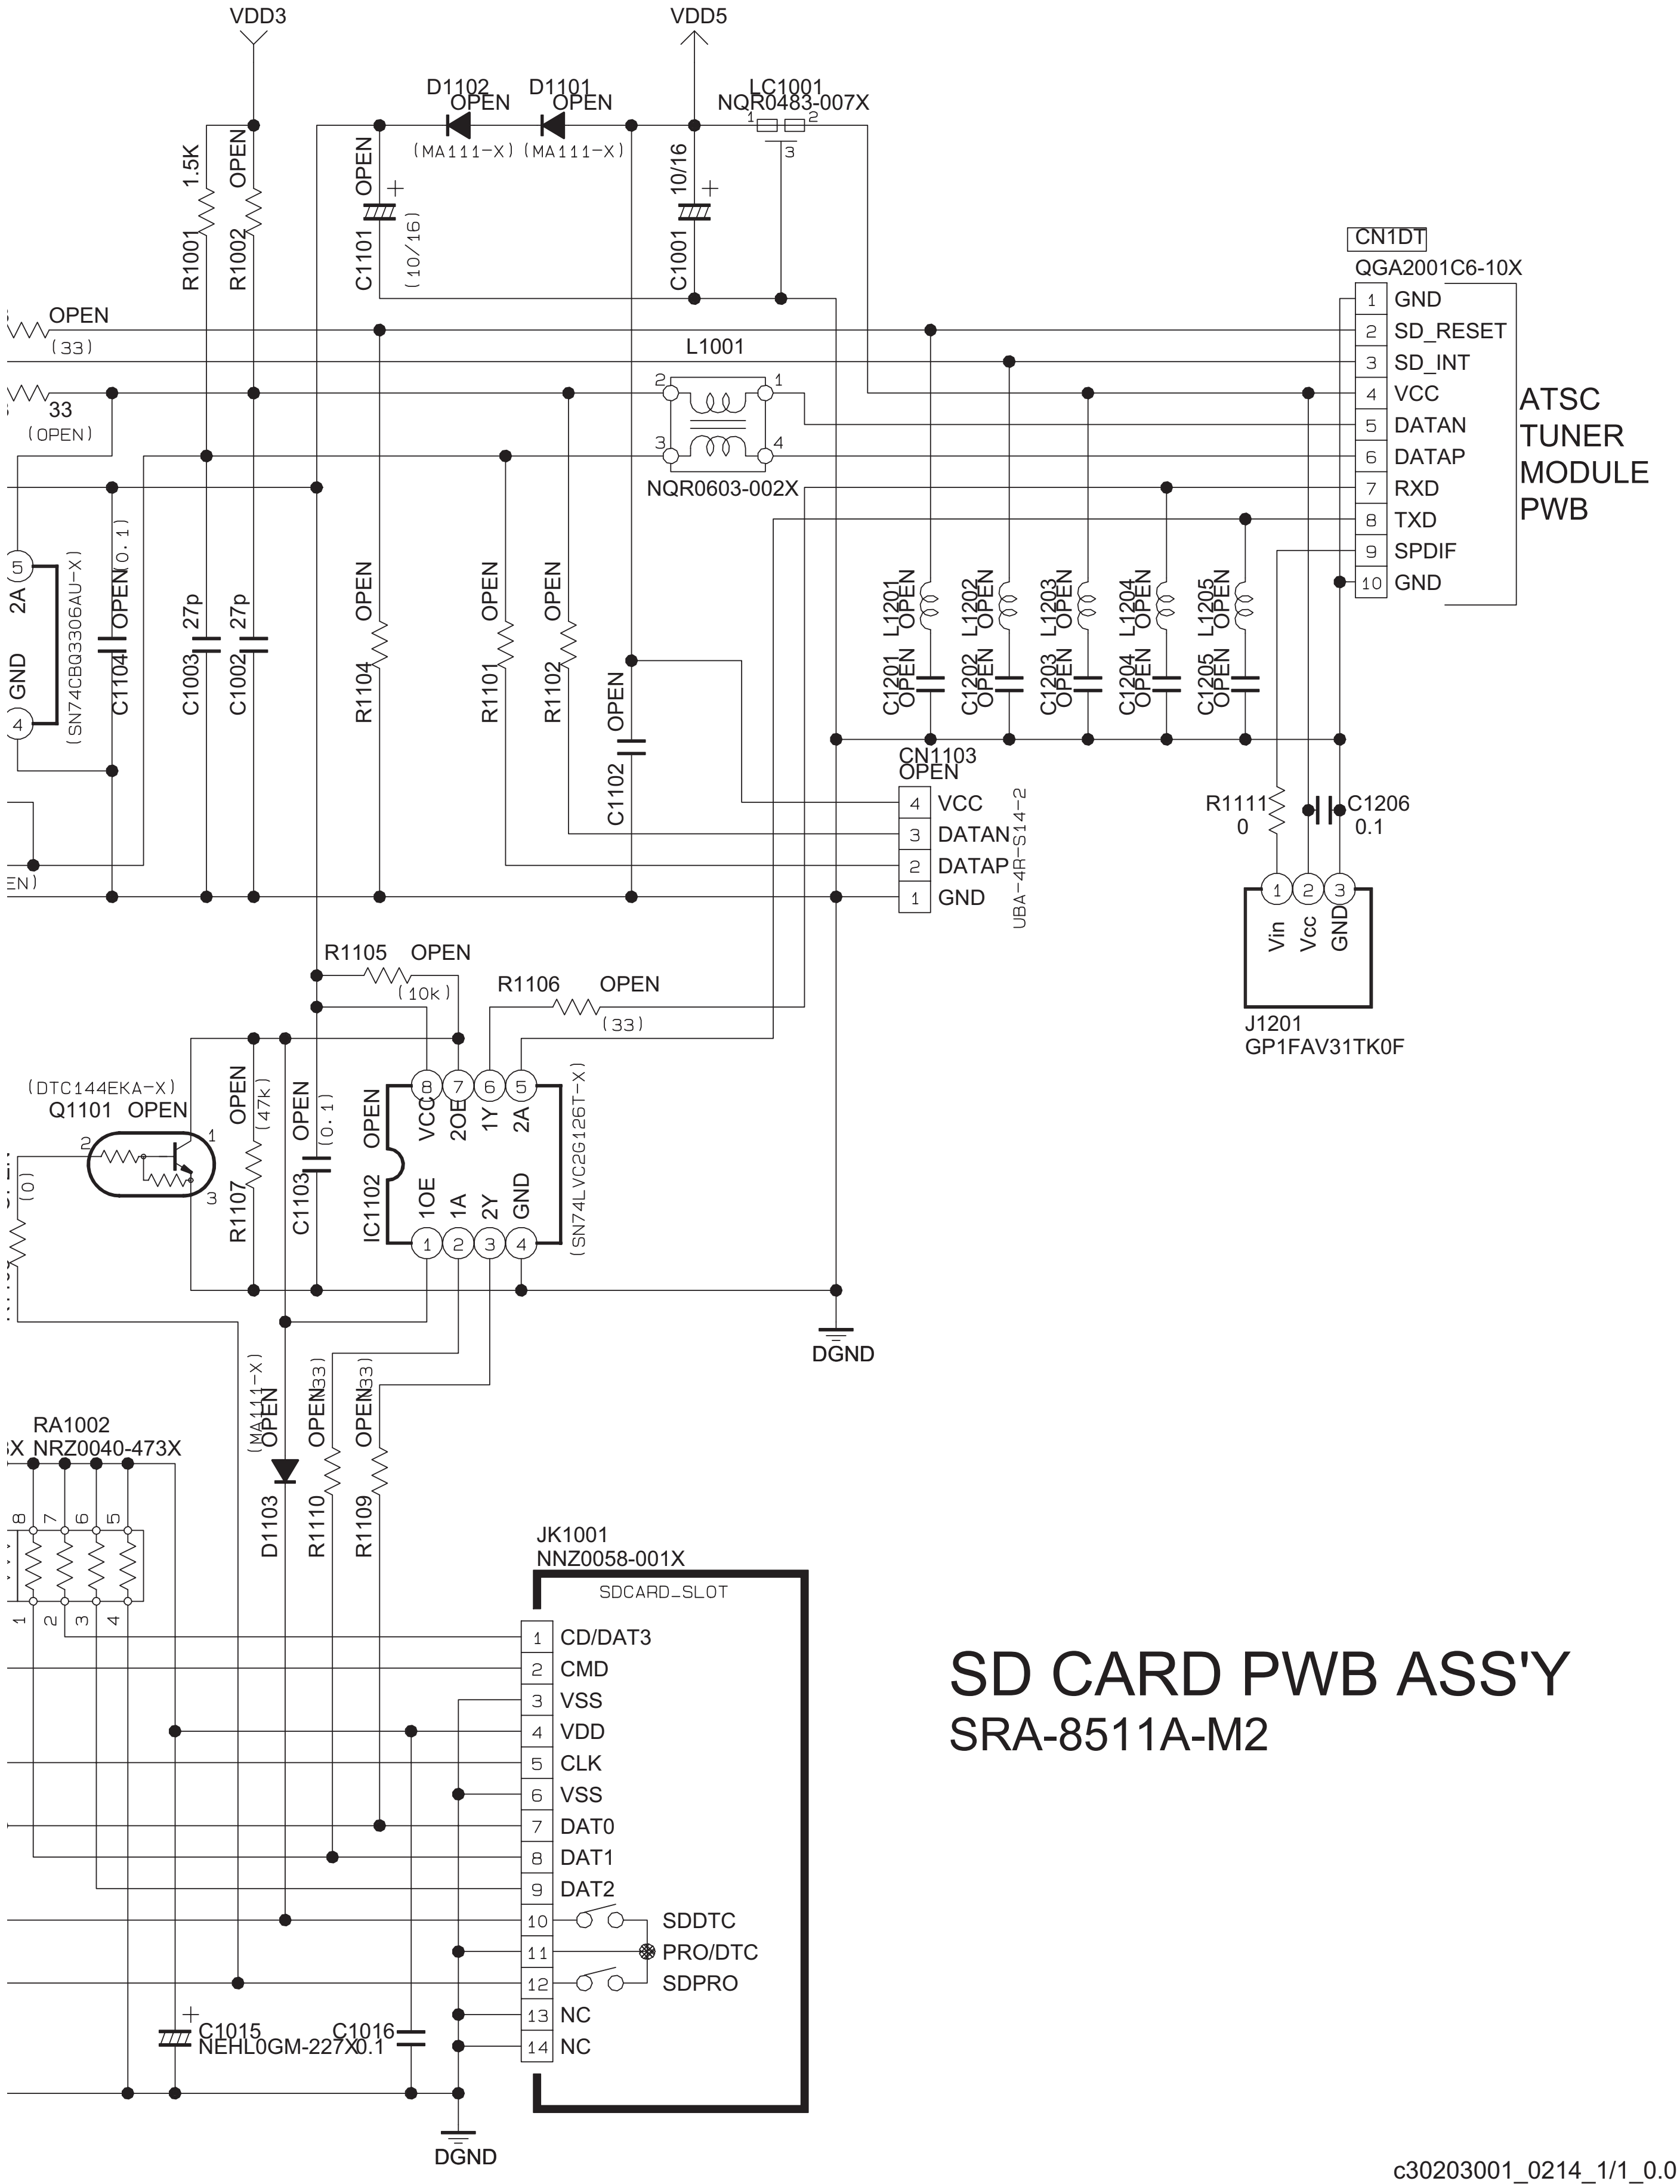
VDD3
VDD5
D1102 OPEN
D1101 OPEN
(MA111-X)
(MA111-X)
LC1001
NQR0483-007X
R1001 1.5K
R1002 OPEN
C1101 OPEN (10/16)
C1001 10/16
CN1DT
QGA2001C6-10X
1 GND
2 SD_RESET
3 SD_INT
4 VCC
5 DATAN
6 DATAP
7 RXD
8 TXD
9 SPDIF
10 GND
ATSC TUNER MODULE PWB
OPEN (33)
33 (OPEN)
L1001
NQR0603-002X
2A
GND
(SN74CBQ3306AU-X)
C1104 OPEN (0.1)
C1003 27p
C1002 27p
R1104 OPEN
R1101 OPEN
R1102 OPEN
C1102 OPEN
L1201 OPEN
L1202 OPEN
L1203 OPEN
L1204 OPEN
L1205 OPEN
C1201 OPEN
C1202 OPEN
C1203 OPEN
C1204 OPEN
C1205 OPEN
CN1103 OPEN
4 VCC
3 DATAN
2 DATAP
1 GND
UBA-4R-S14-2
R1111 0
C1206 0.1
Vin
Vcc
GND
J1201
GP1FAV31TK0F
R1105 OPEN (10k)
R1106 OPEN (33)
(DTC144EKA-X)
Q1101 OPEN
R1107 OPEN (47k)
C1103 OPEN (0.1)
IC1102 OPEN
VCC 2OE 1Y 2A
1OE 1A 2Y GND
(SN74LVC2G126T-X)
(0)
DGND
RA1002
NRZ0040-473X
(MA111-X)
D1103 OPEN
R1110 OPEN (33)
R1109 OPEN (33)
JK1001
NNZ0058-001X
SDCARD_SLOT
1 CD/DAT3
2 CMD
3 VSS
4 VDD
5 CLK
6 VSS
7 DAT0
8 DAT1
9 DAT2
10 SDDTC
11 PRO/DTC
12 SDPRO
13 NC
14 NC
C1015
NEHL0GM-227X
C1016
0.1
DGND

SD CARD PWB ASS'Y

SRA-8511A-M2

c30203001_0214_1/1_0.0

PATTERN DIAGRAMS

TUNER PWB PATTERN [SOLDER SIDE]

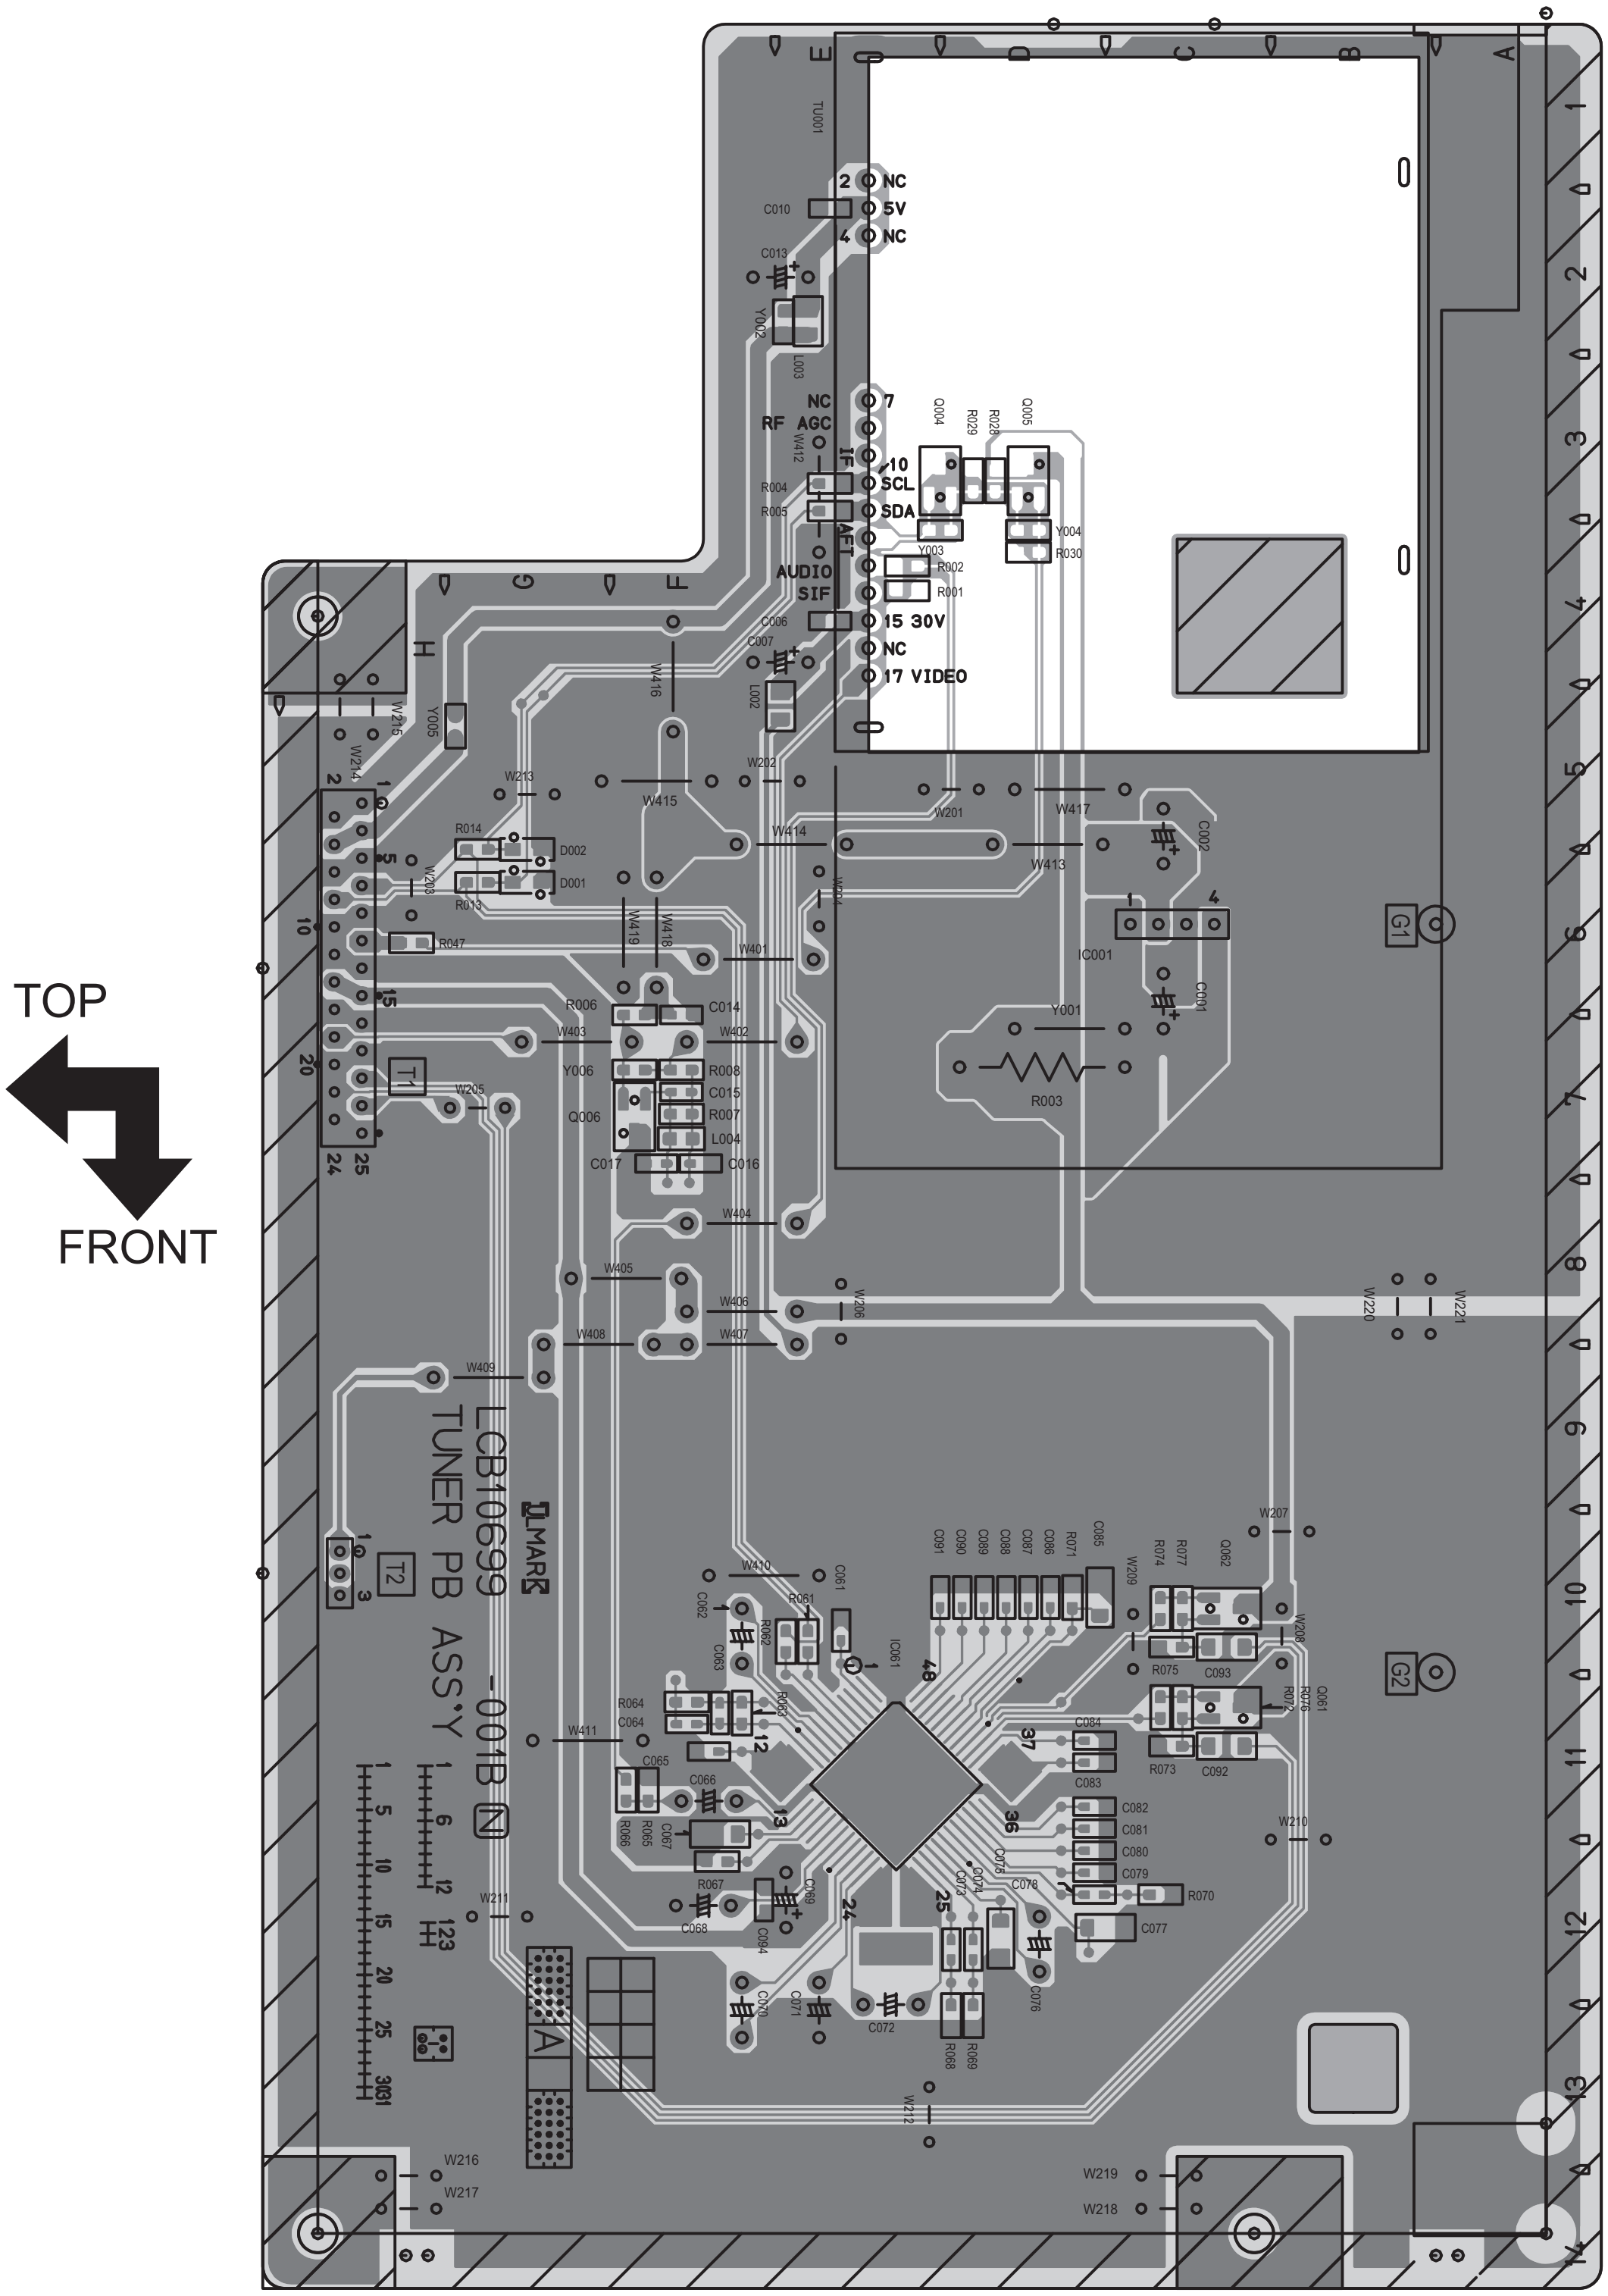

TOP
FRONT
TU001
NC
5V
NC
RF AGC
IF
SCL
SDA
AFT
AUDIO
SIF
15 30V
NC
17 VIDEO
IC001
IC061
G1
G2
T1
T2
LCB10699 -001B N
TUNER PB ASS'Y
A
B
C
D
E
F
G
H

TUNER PWB PATTERN [PARTS SIDE]

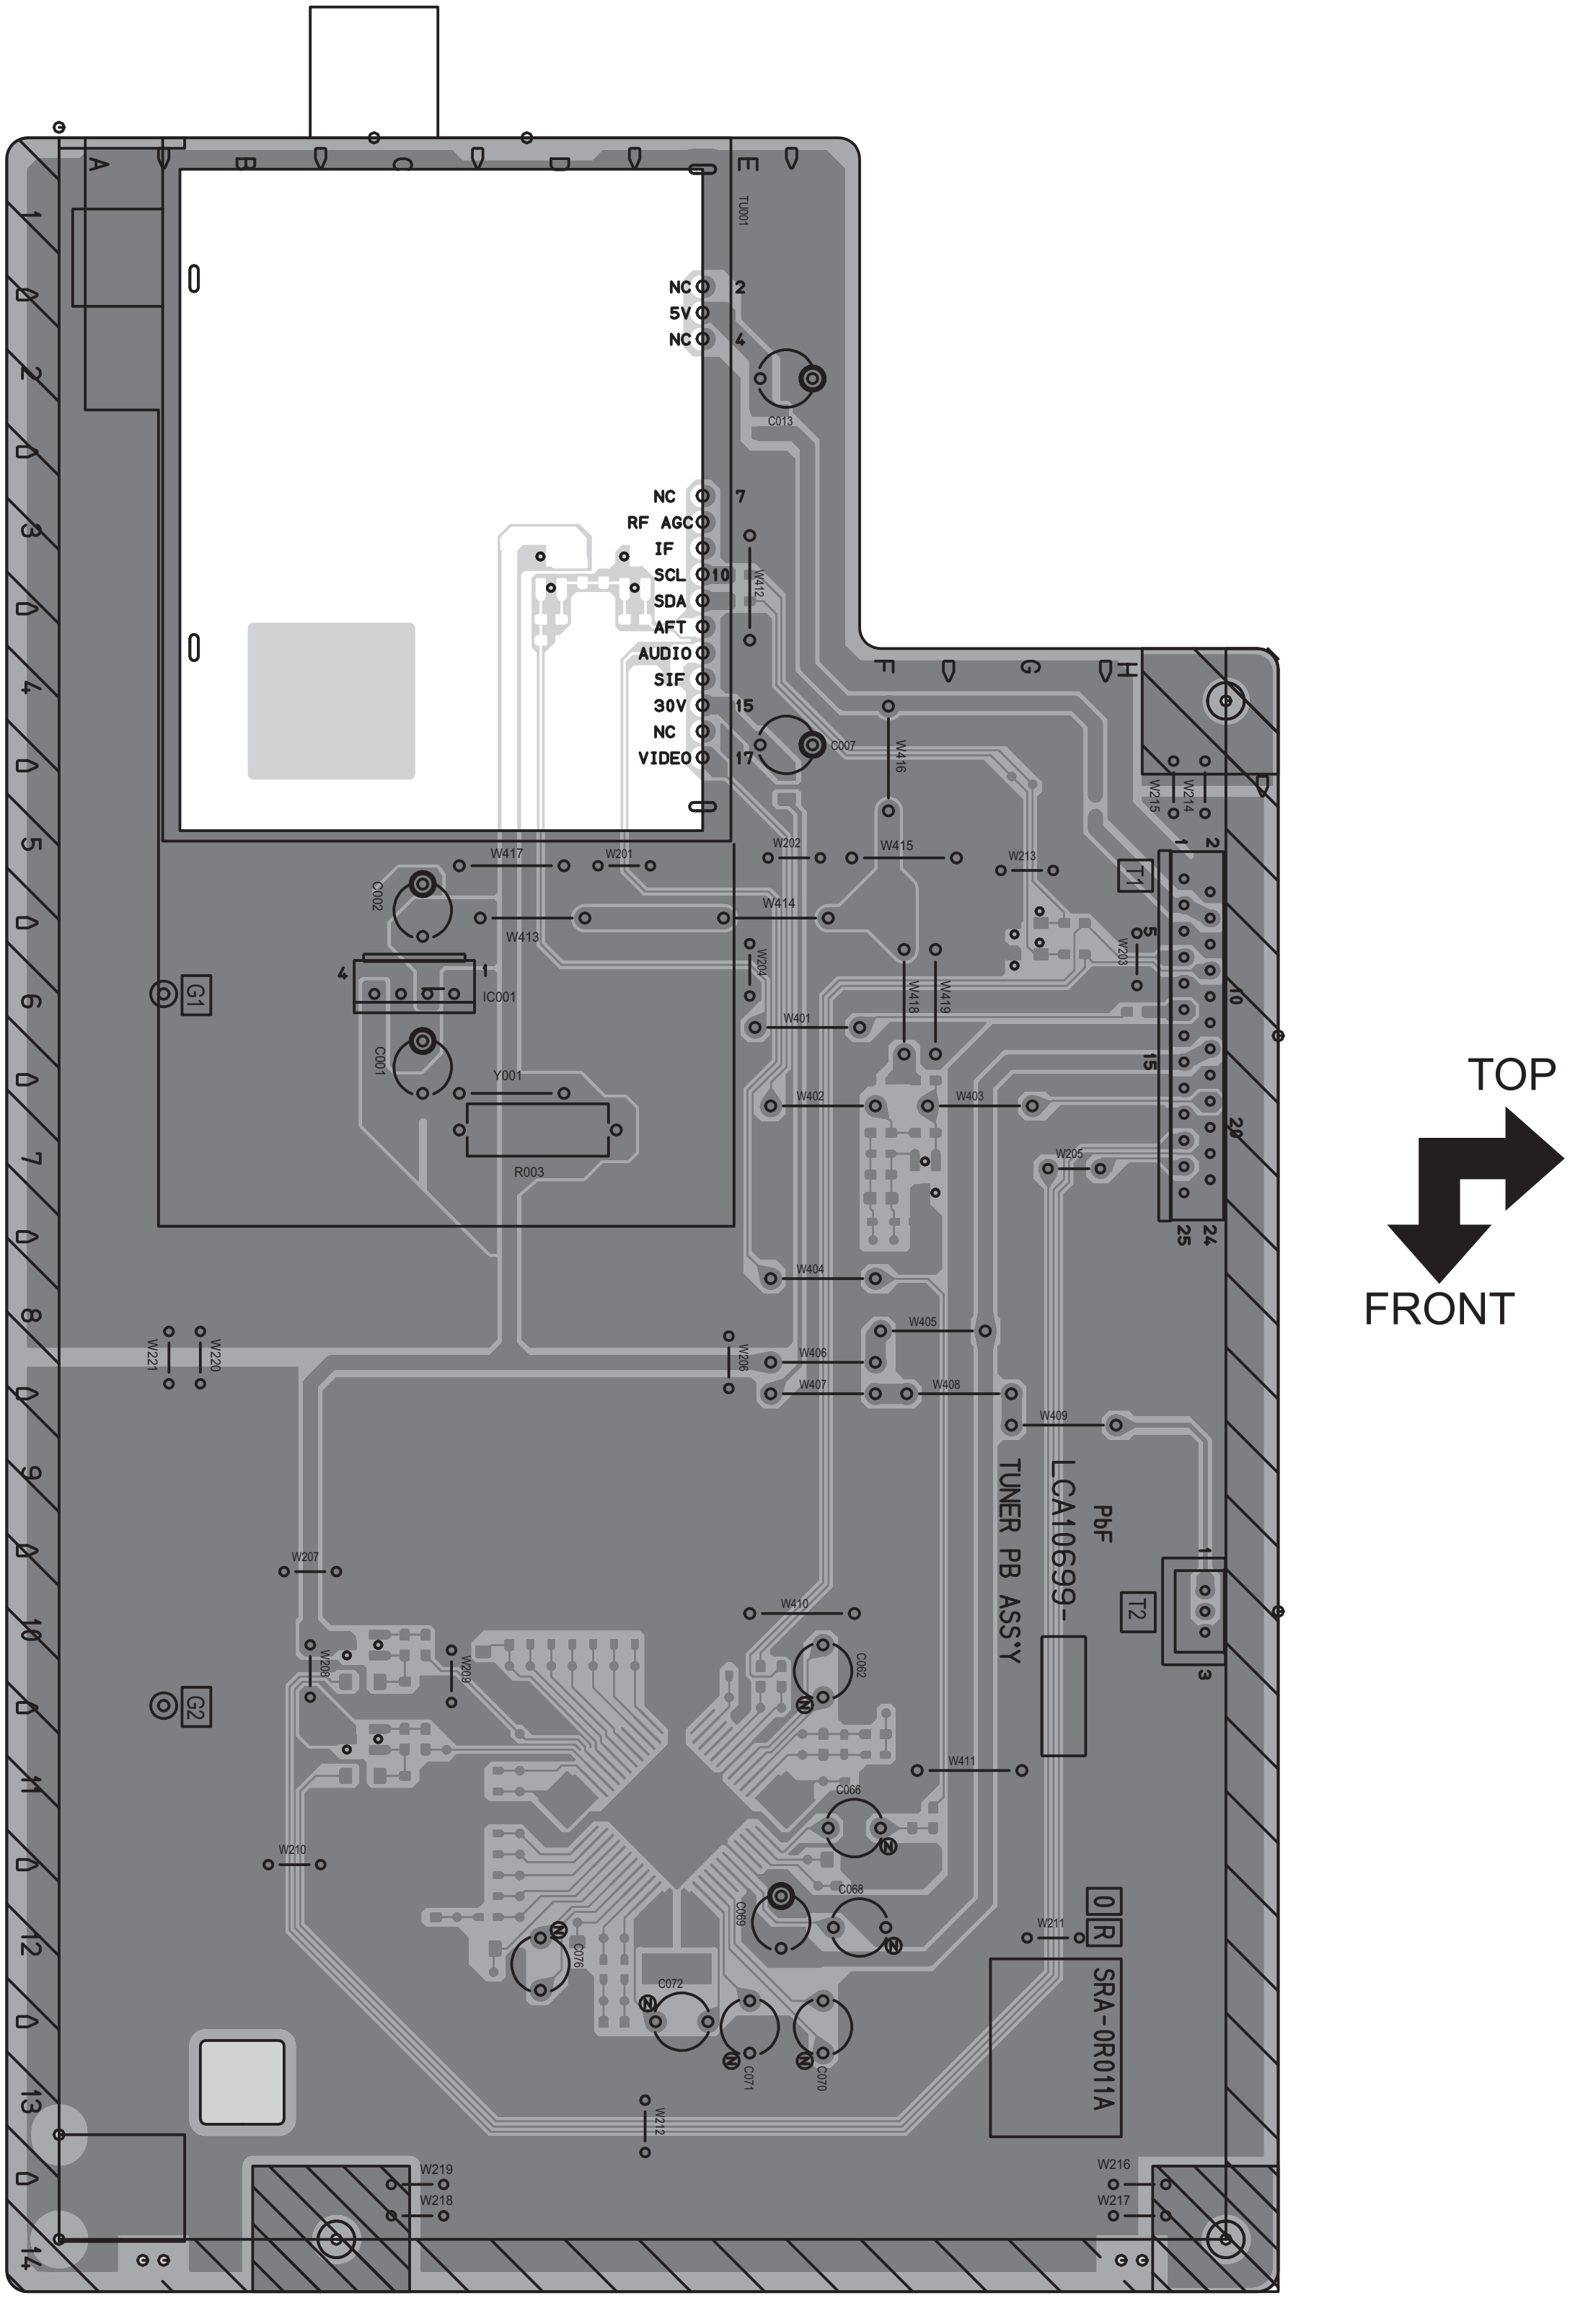
A
B
C
D
E
F
G
H
TU001
NC
5V
NC
NC
RF AGC
IF
SCL
SDA
AFT
AUDIO
SIF
30V
NC
VIDEO
2
4
7
10
15
17
C013
C007
W412
W416
W415
W202
W213
W215
W214
W417
W201
W414
W413
C002
IC001
C001
Y001
R003
W204
W401
W418
W419
W203
W402
W403
W205
W404
W405
W406
W407
W408
W409
W206
W220
W221
G1
G2
T1
T2
PbF
LCA10699-
TUNER PB ASS'Y
W207
W208
W209
W410
C062
W411
C066
W210
C068
C069
C076
C072
C071
C070
W211
SRA-0R011A
W212
W219
W218
W216
W217
TOP
FRONT
1
2
3
4
5
6
7
8
9
10
11
12
13
14
20
24
25

ANALOG PWB PATTERN [SOLDER SIDE]

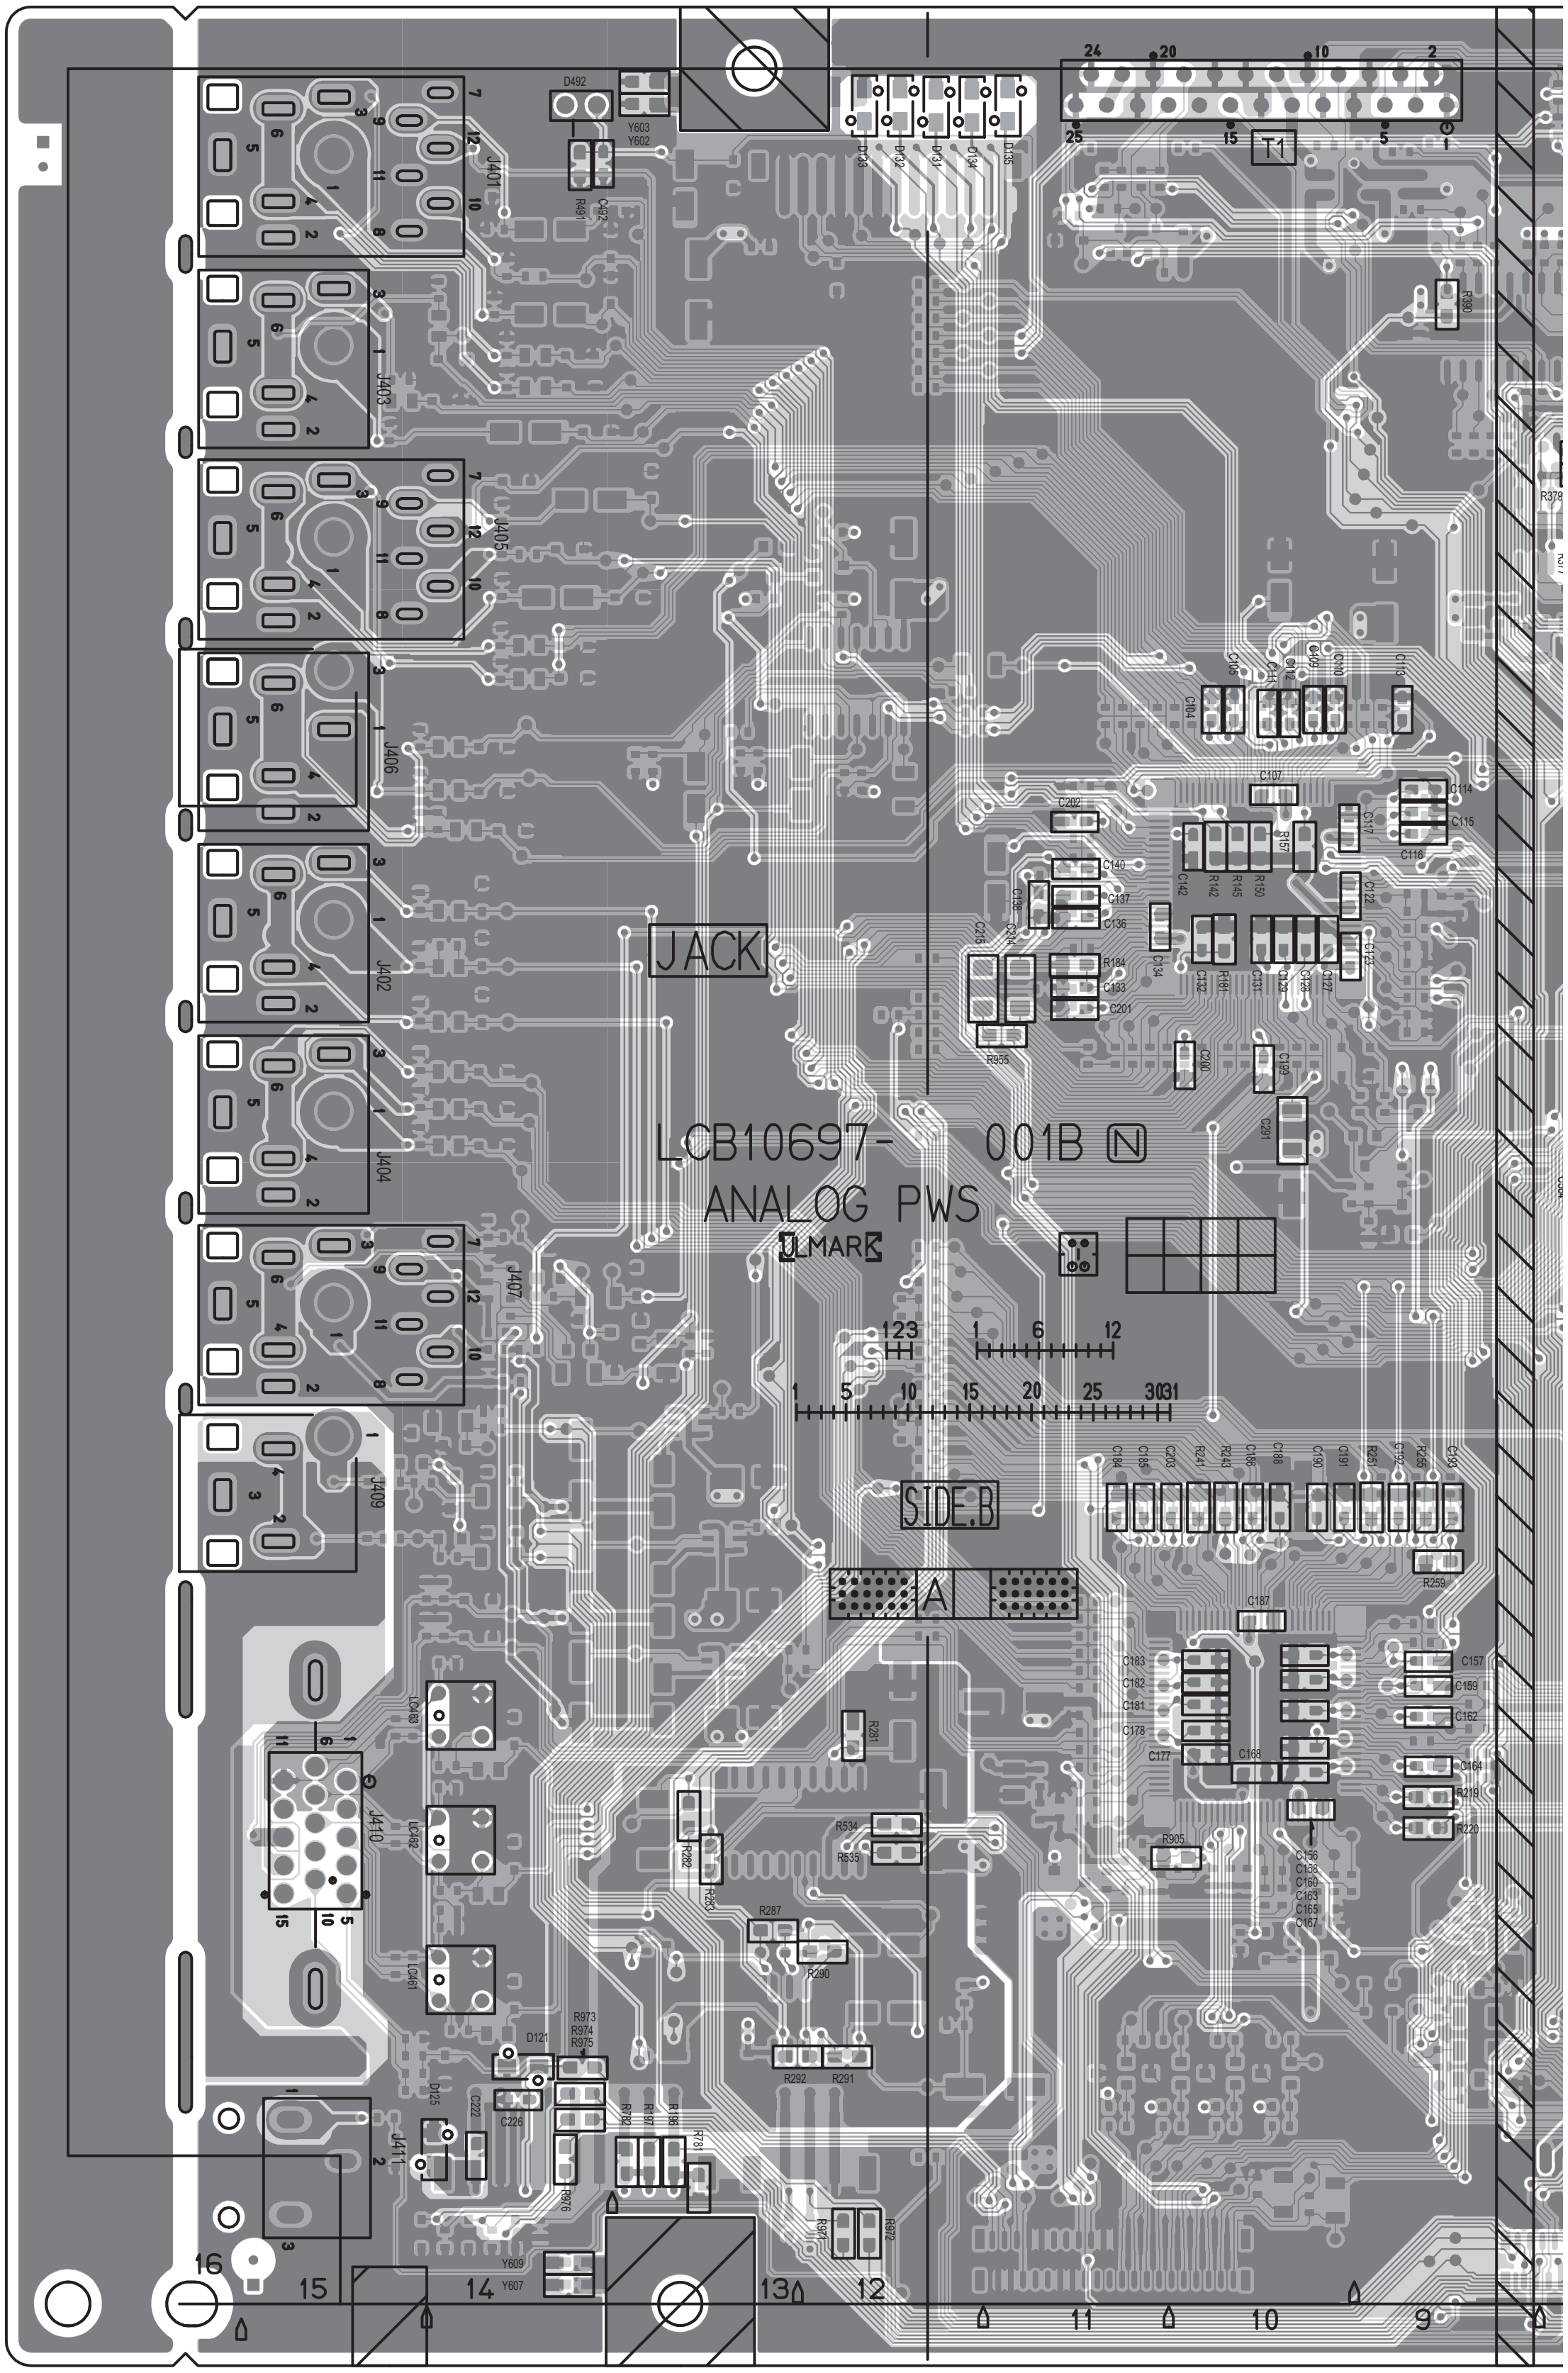
J401
J403
J405
J406
J402
J404
J407
J409
J410
J411
JACK
LCB10697- 001B N
ANALOG PWS
LMARK
SIDE.B
A
T1
24
20
10
2
25
15
5
1
D492
Y603
Y602
C202
C140
C137
C136
R184
C133
C201
C114
C115
C116
C187
C157
C159
C162
C164
R219
R220
R287
R290
R292
R291
R534
R535
D121
R973
R974
R975
C226
Y609
Y607
16
15
14
13
12
11
10
9

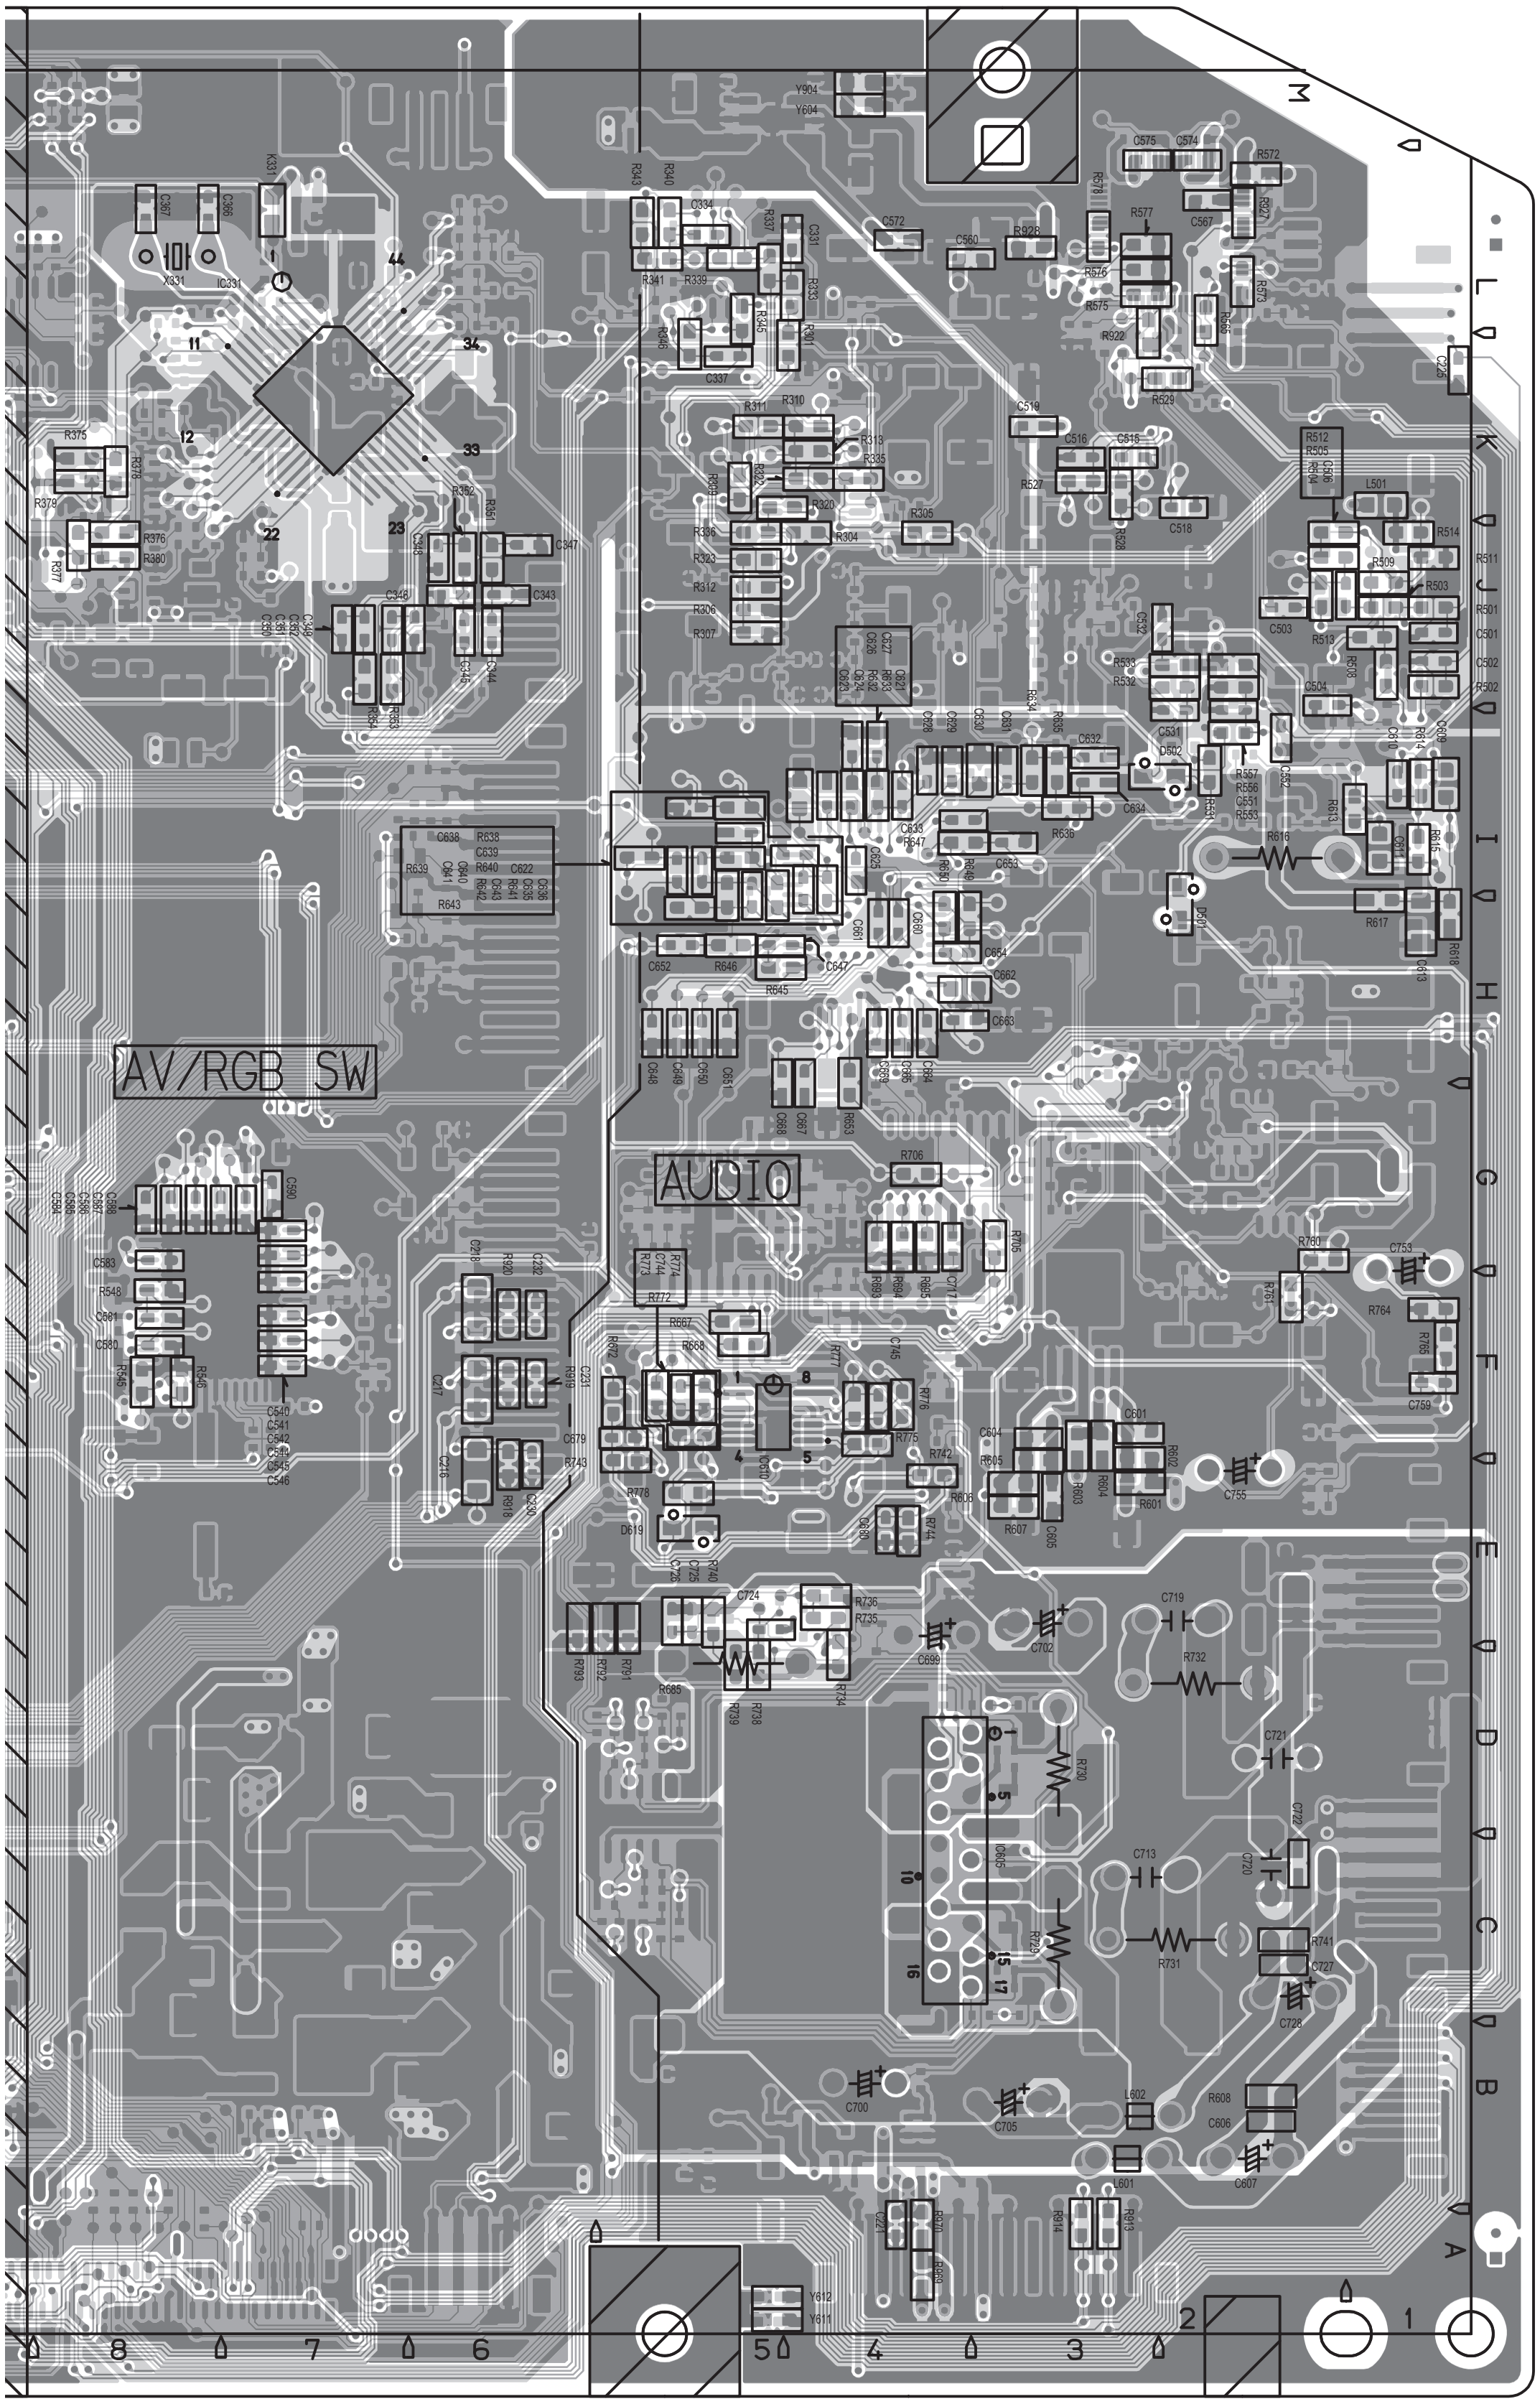
AV/RGB SW
AUDIO
M
L
K
J
I
H
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8


TOP
FRONT

ANALOG PWB PATTERN [PARTS SIDE]



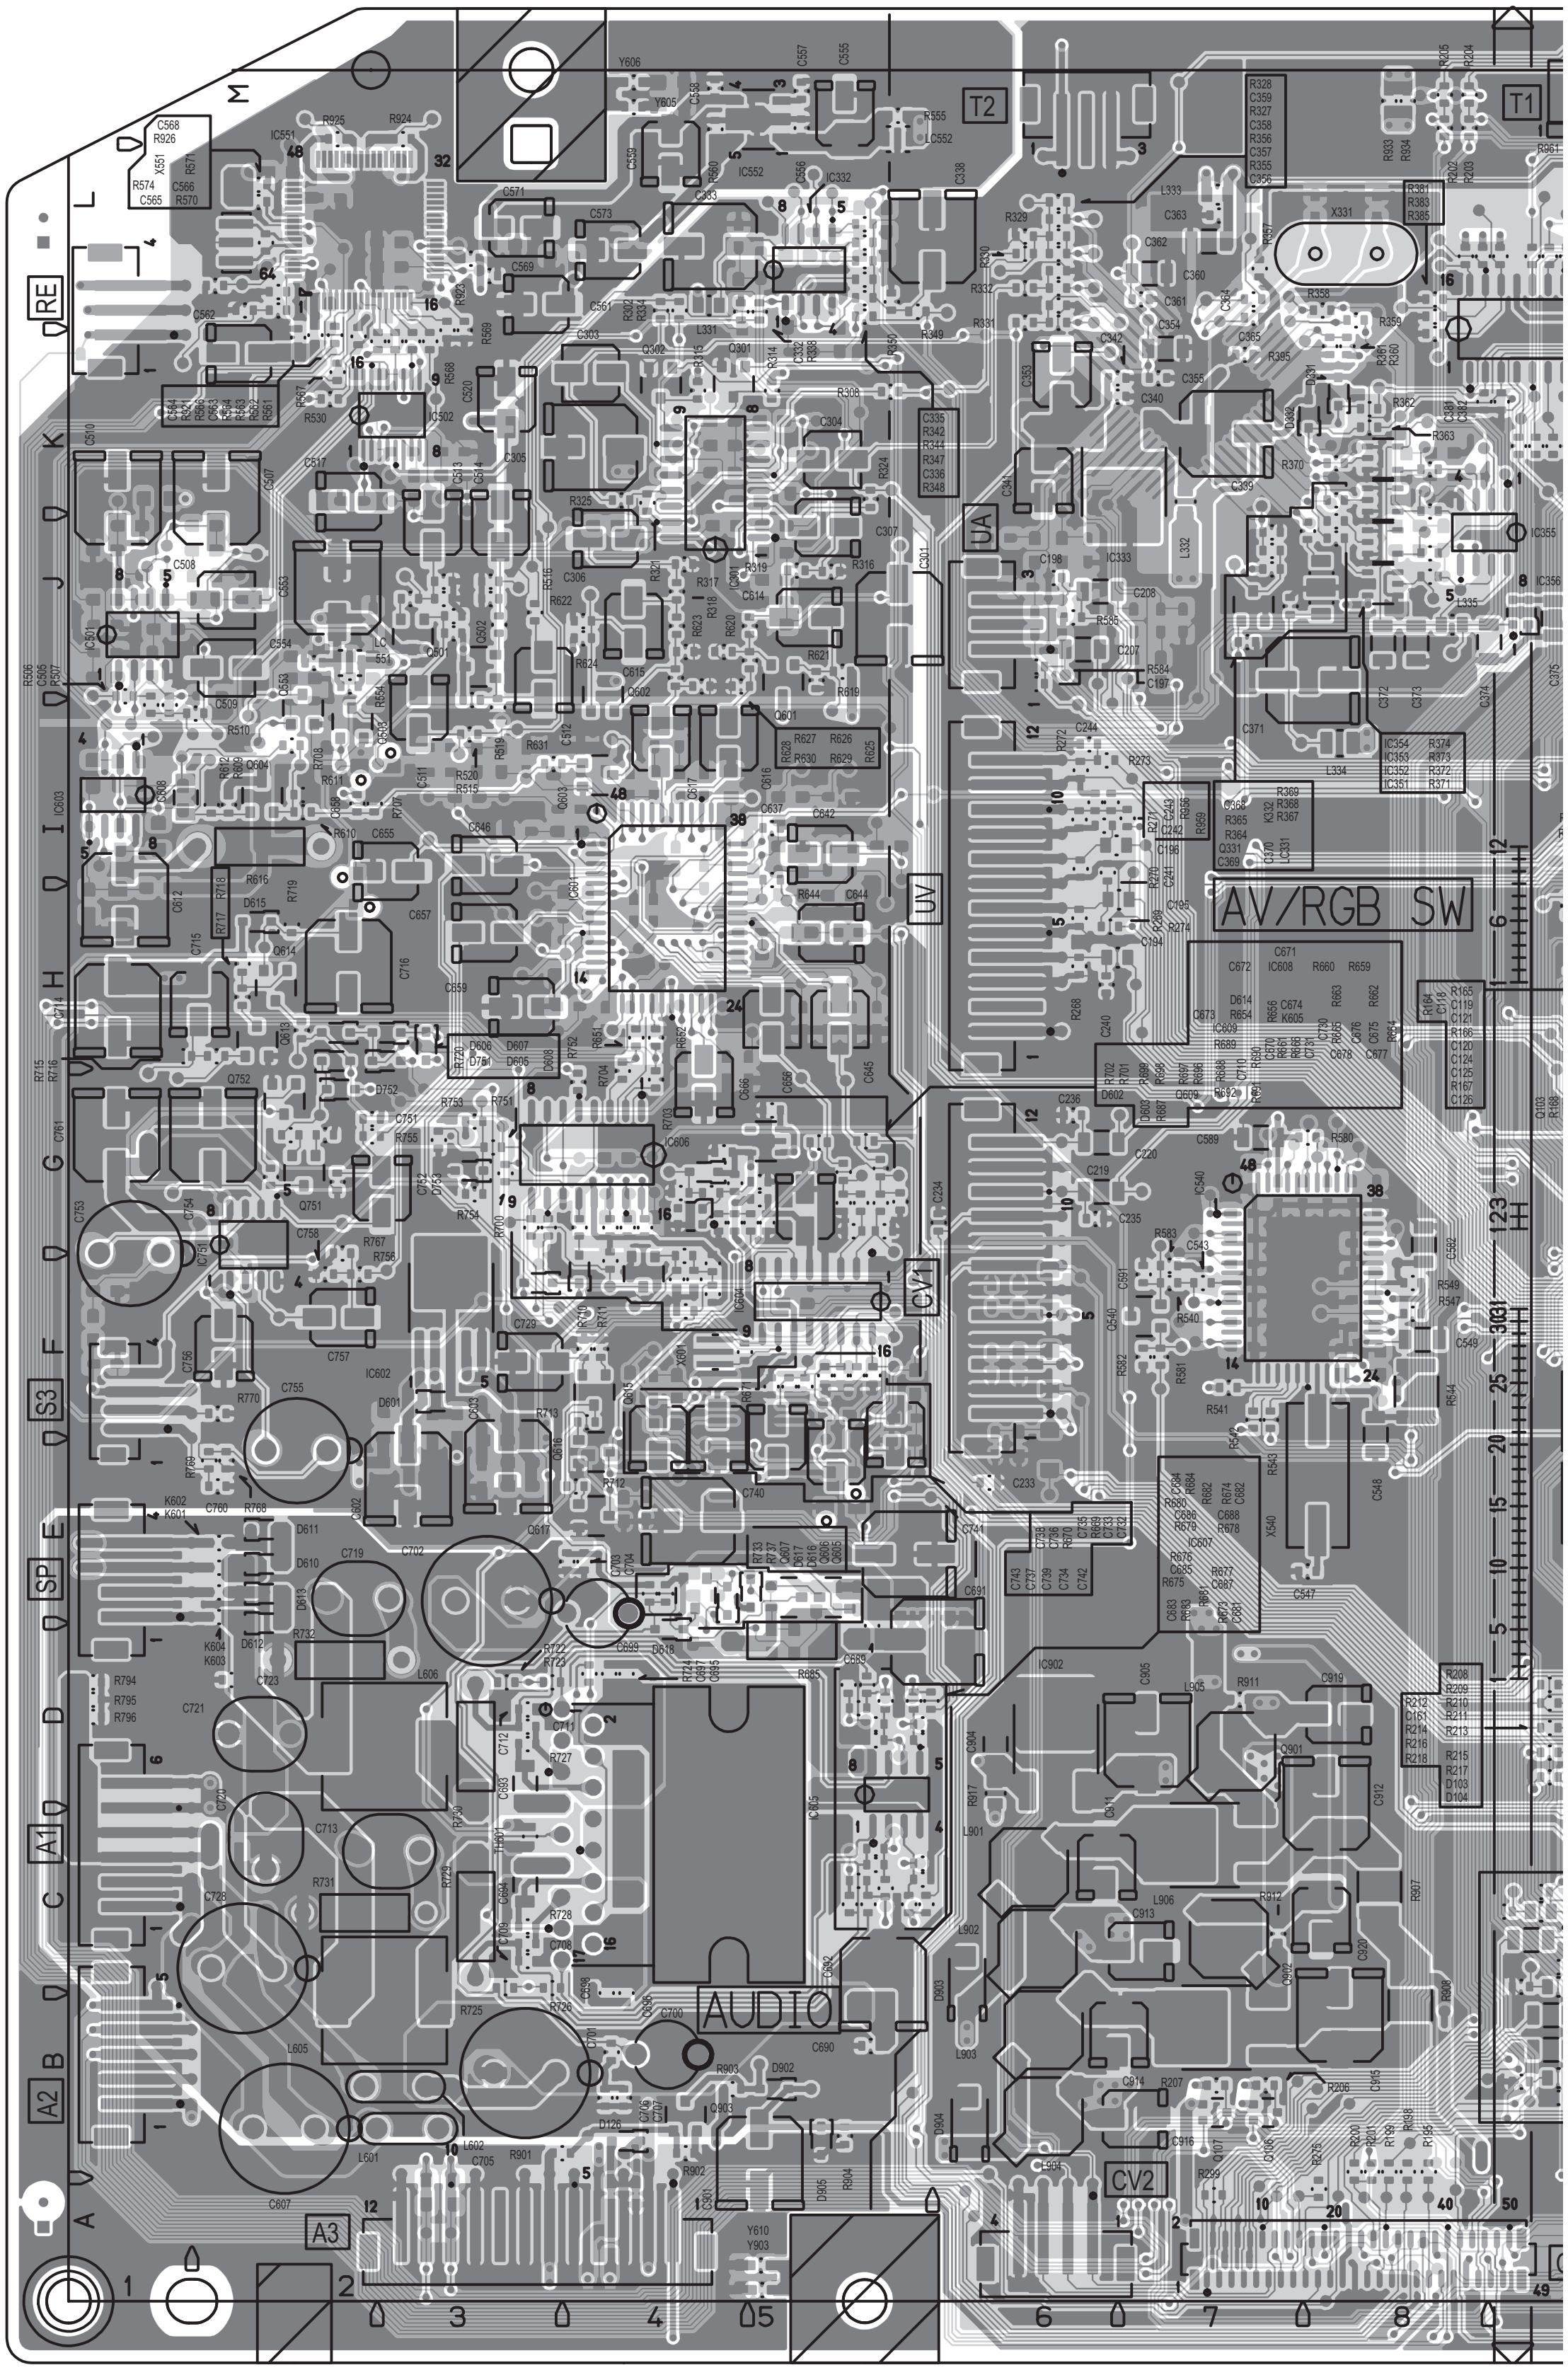
T2
T1
RE
UA
UV
CV1
CV2
AV/RGB SW
AUDIO
S3
SP
A1
A2
A3
M
L
K
J
I
H
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8

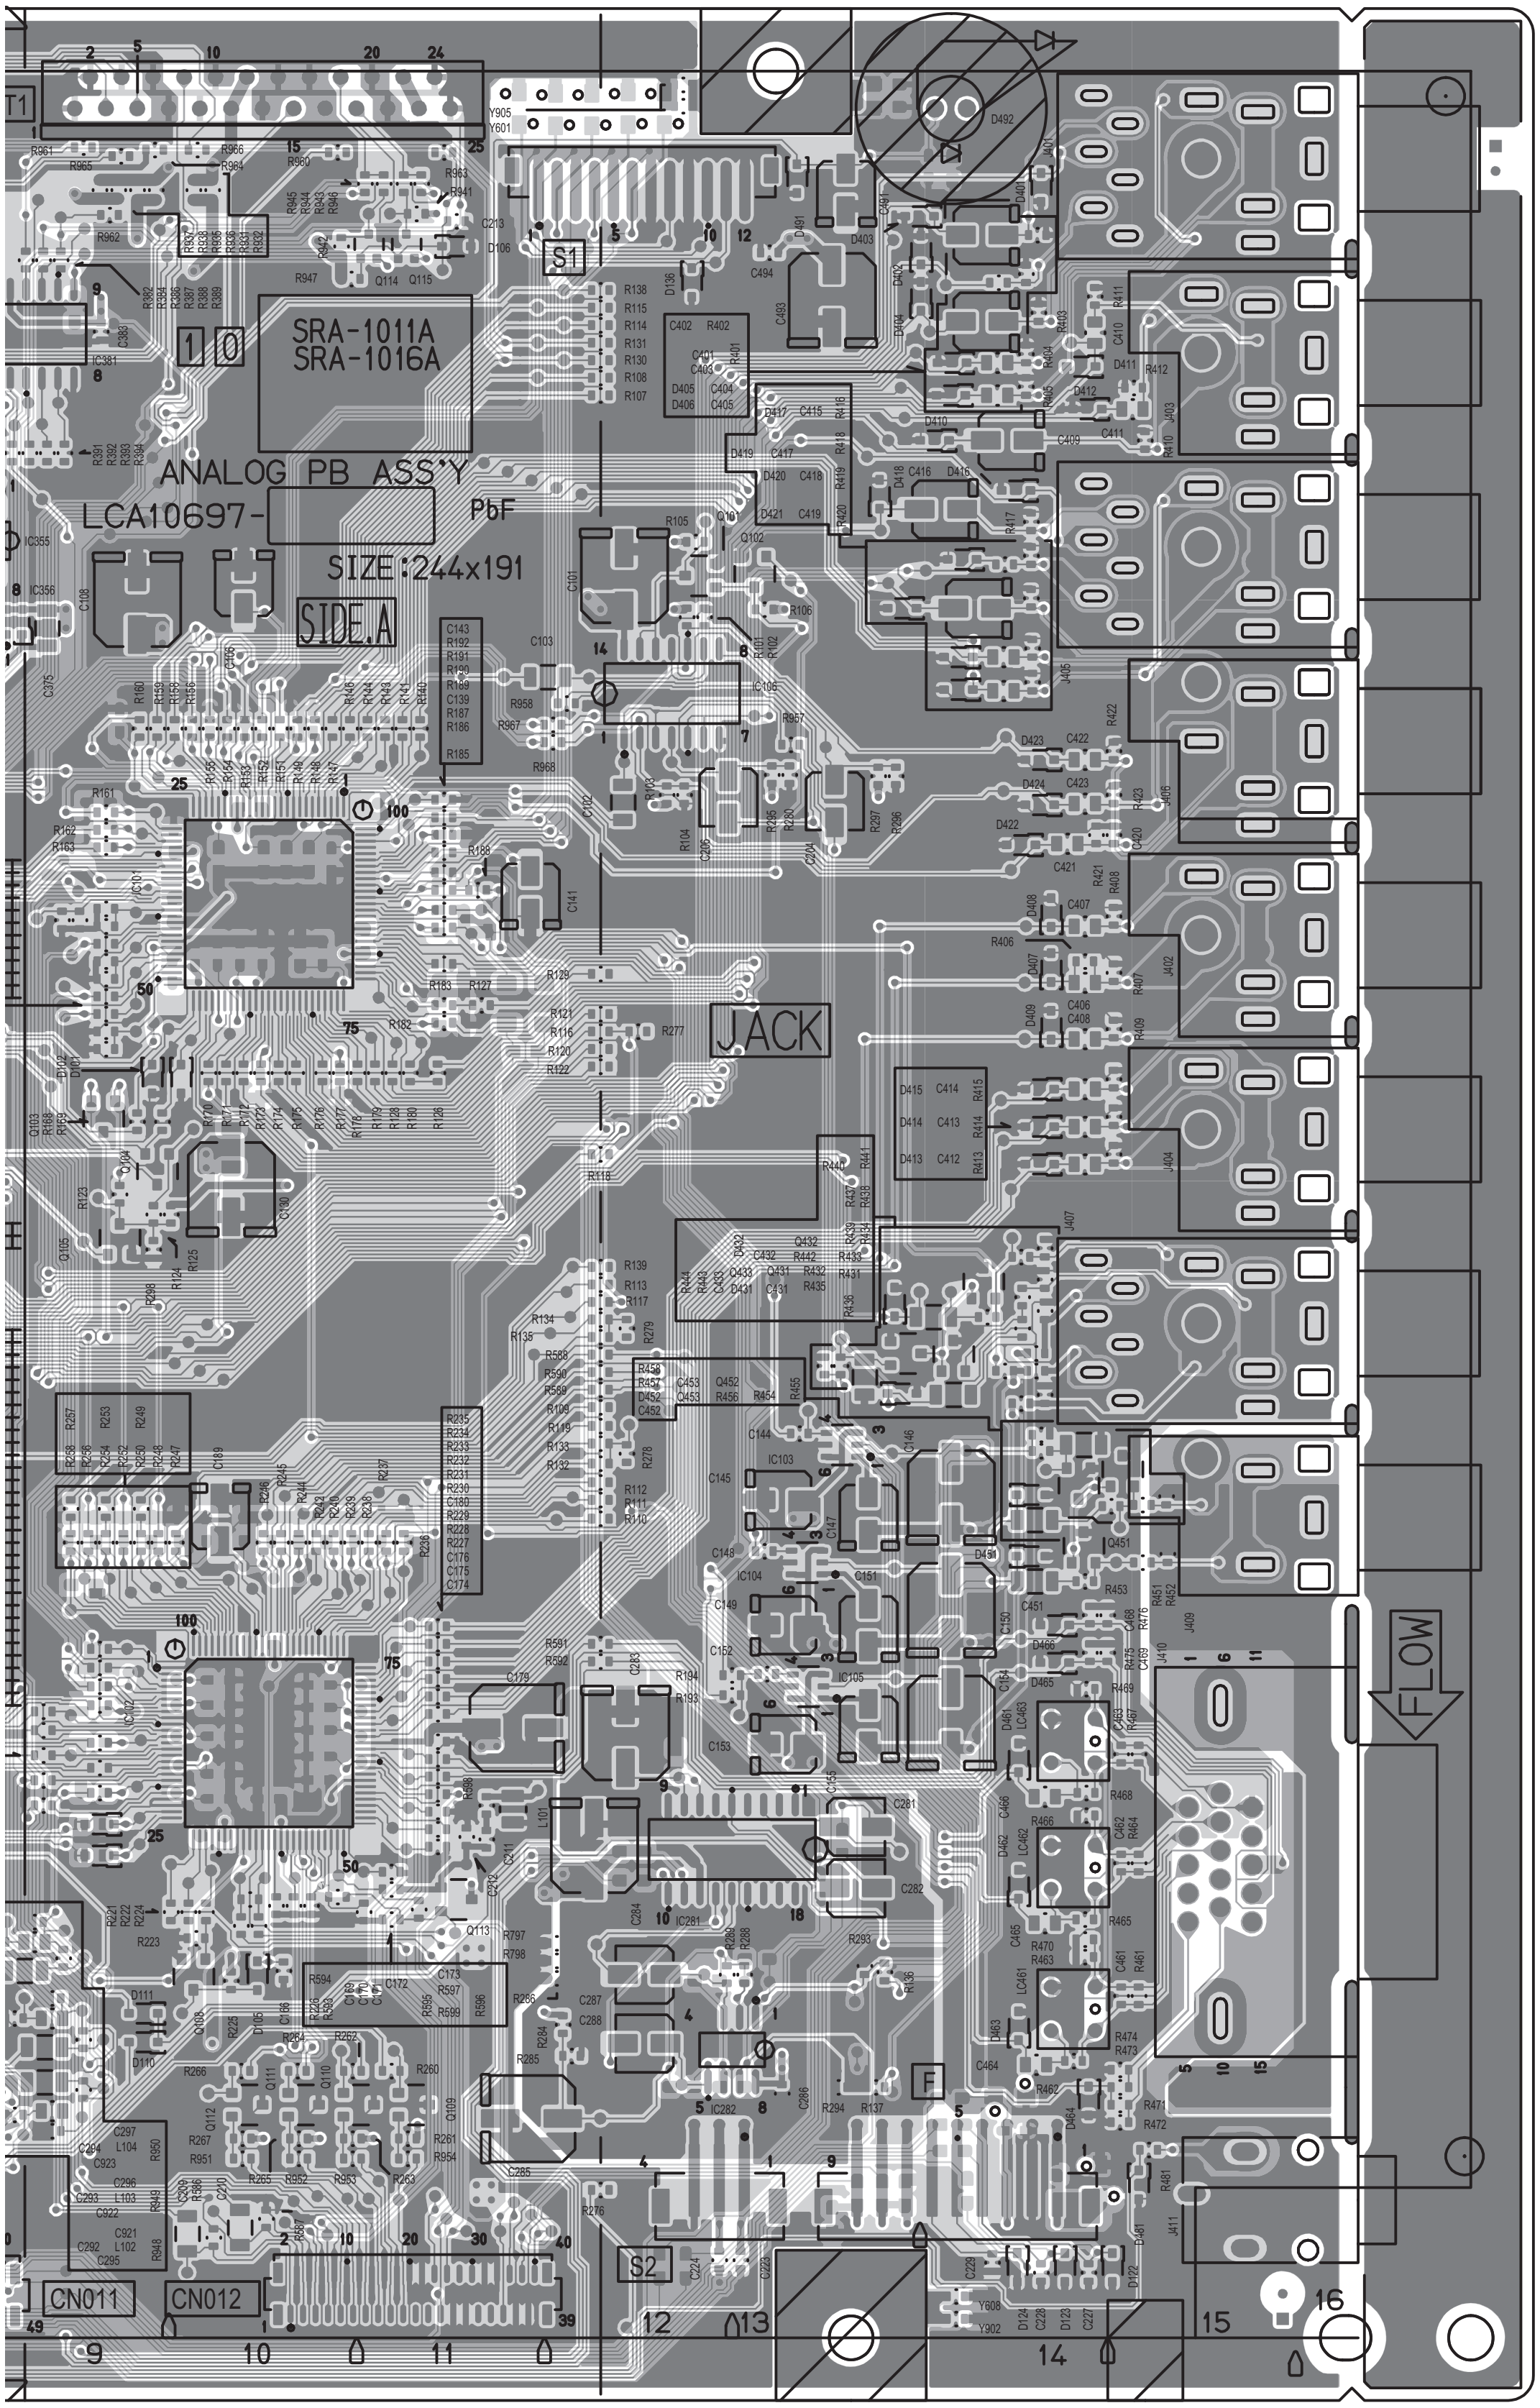
SRA-1011A
SRA-1016A
ANALOG PB ASS'Y
LCA10697-
PbF
SIZE:244x191
SIDE.A
JACK
FLOW
S1
S2
F
CN011
CN012
IC101
IC102
IC103
IC104
IC105
IC106
IC281
IC282
J401
J402
J403
J404
J405
J406
J407
J409
J410
J411
D492
9
10
11
12
13
14
15
16

DIGITAL PWB PATTERN [SOLDER SIDE]

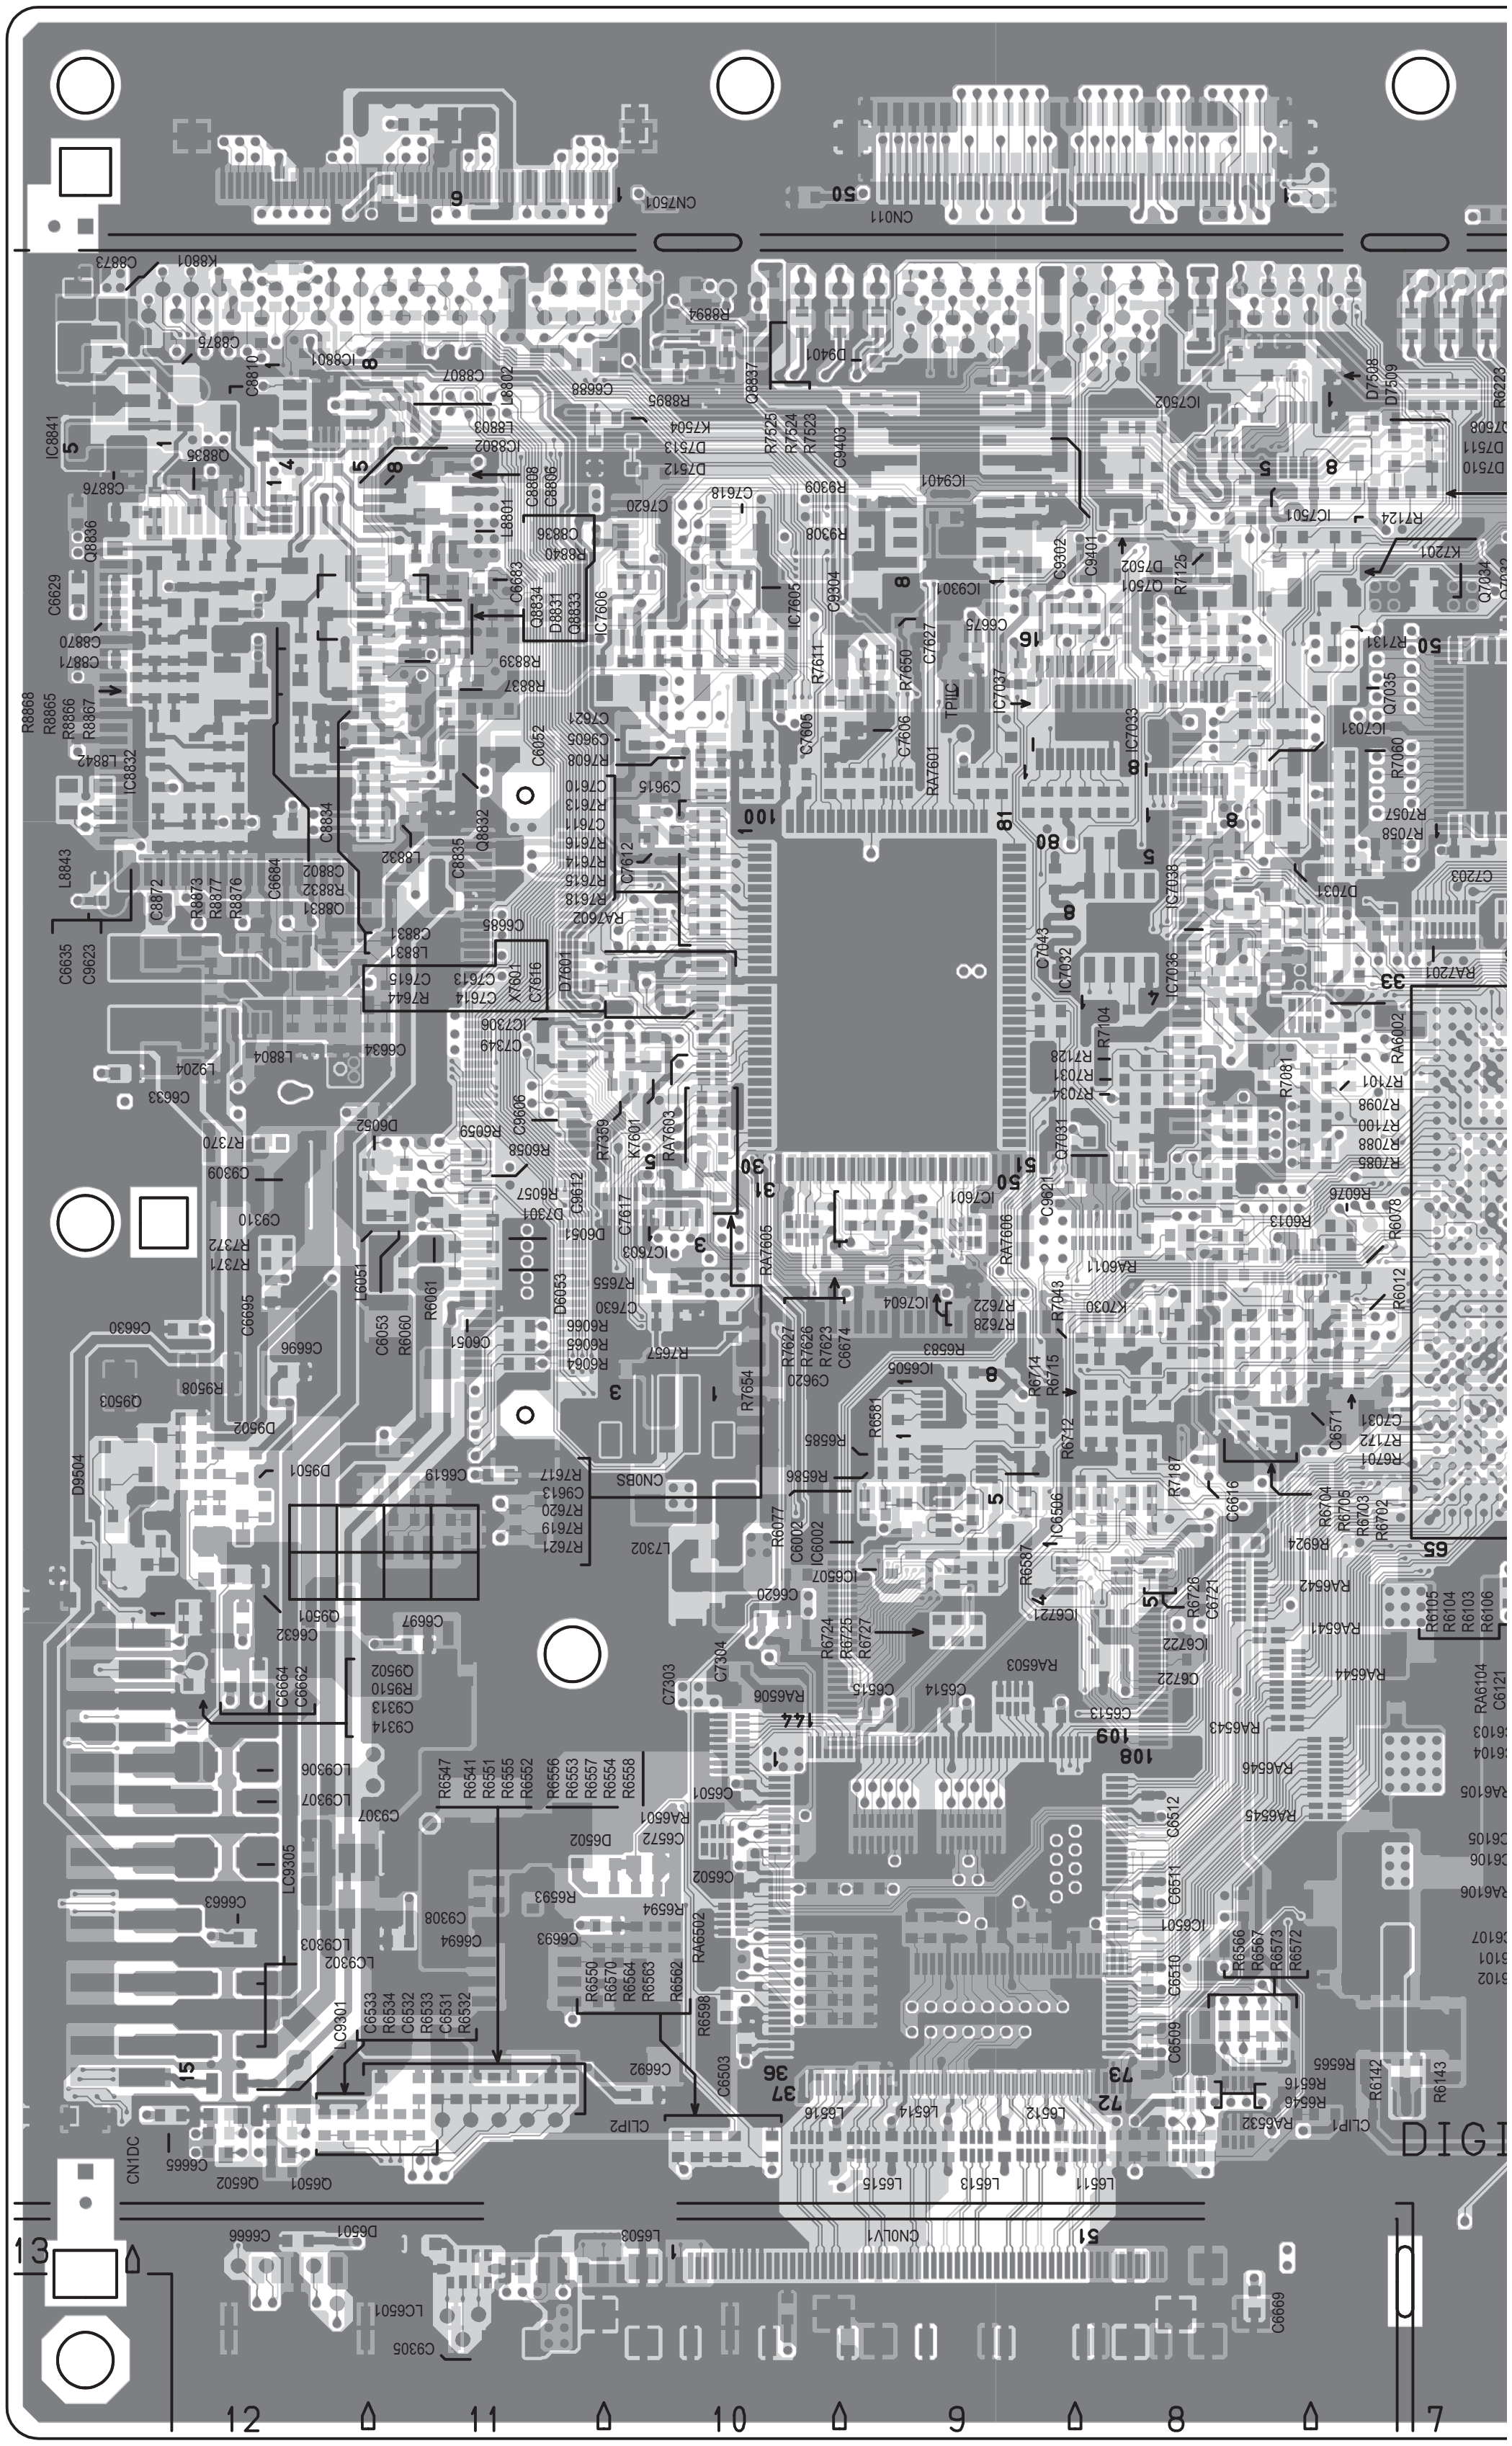

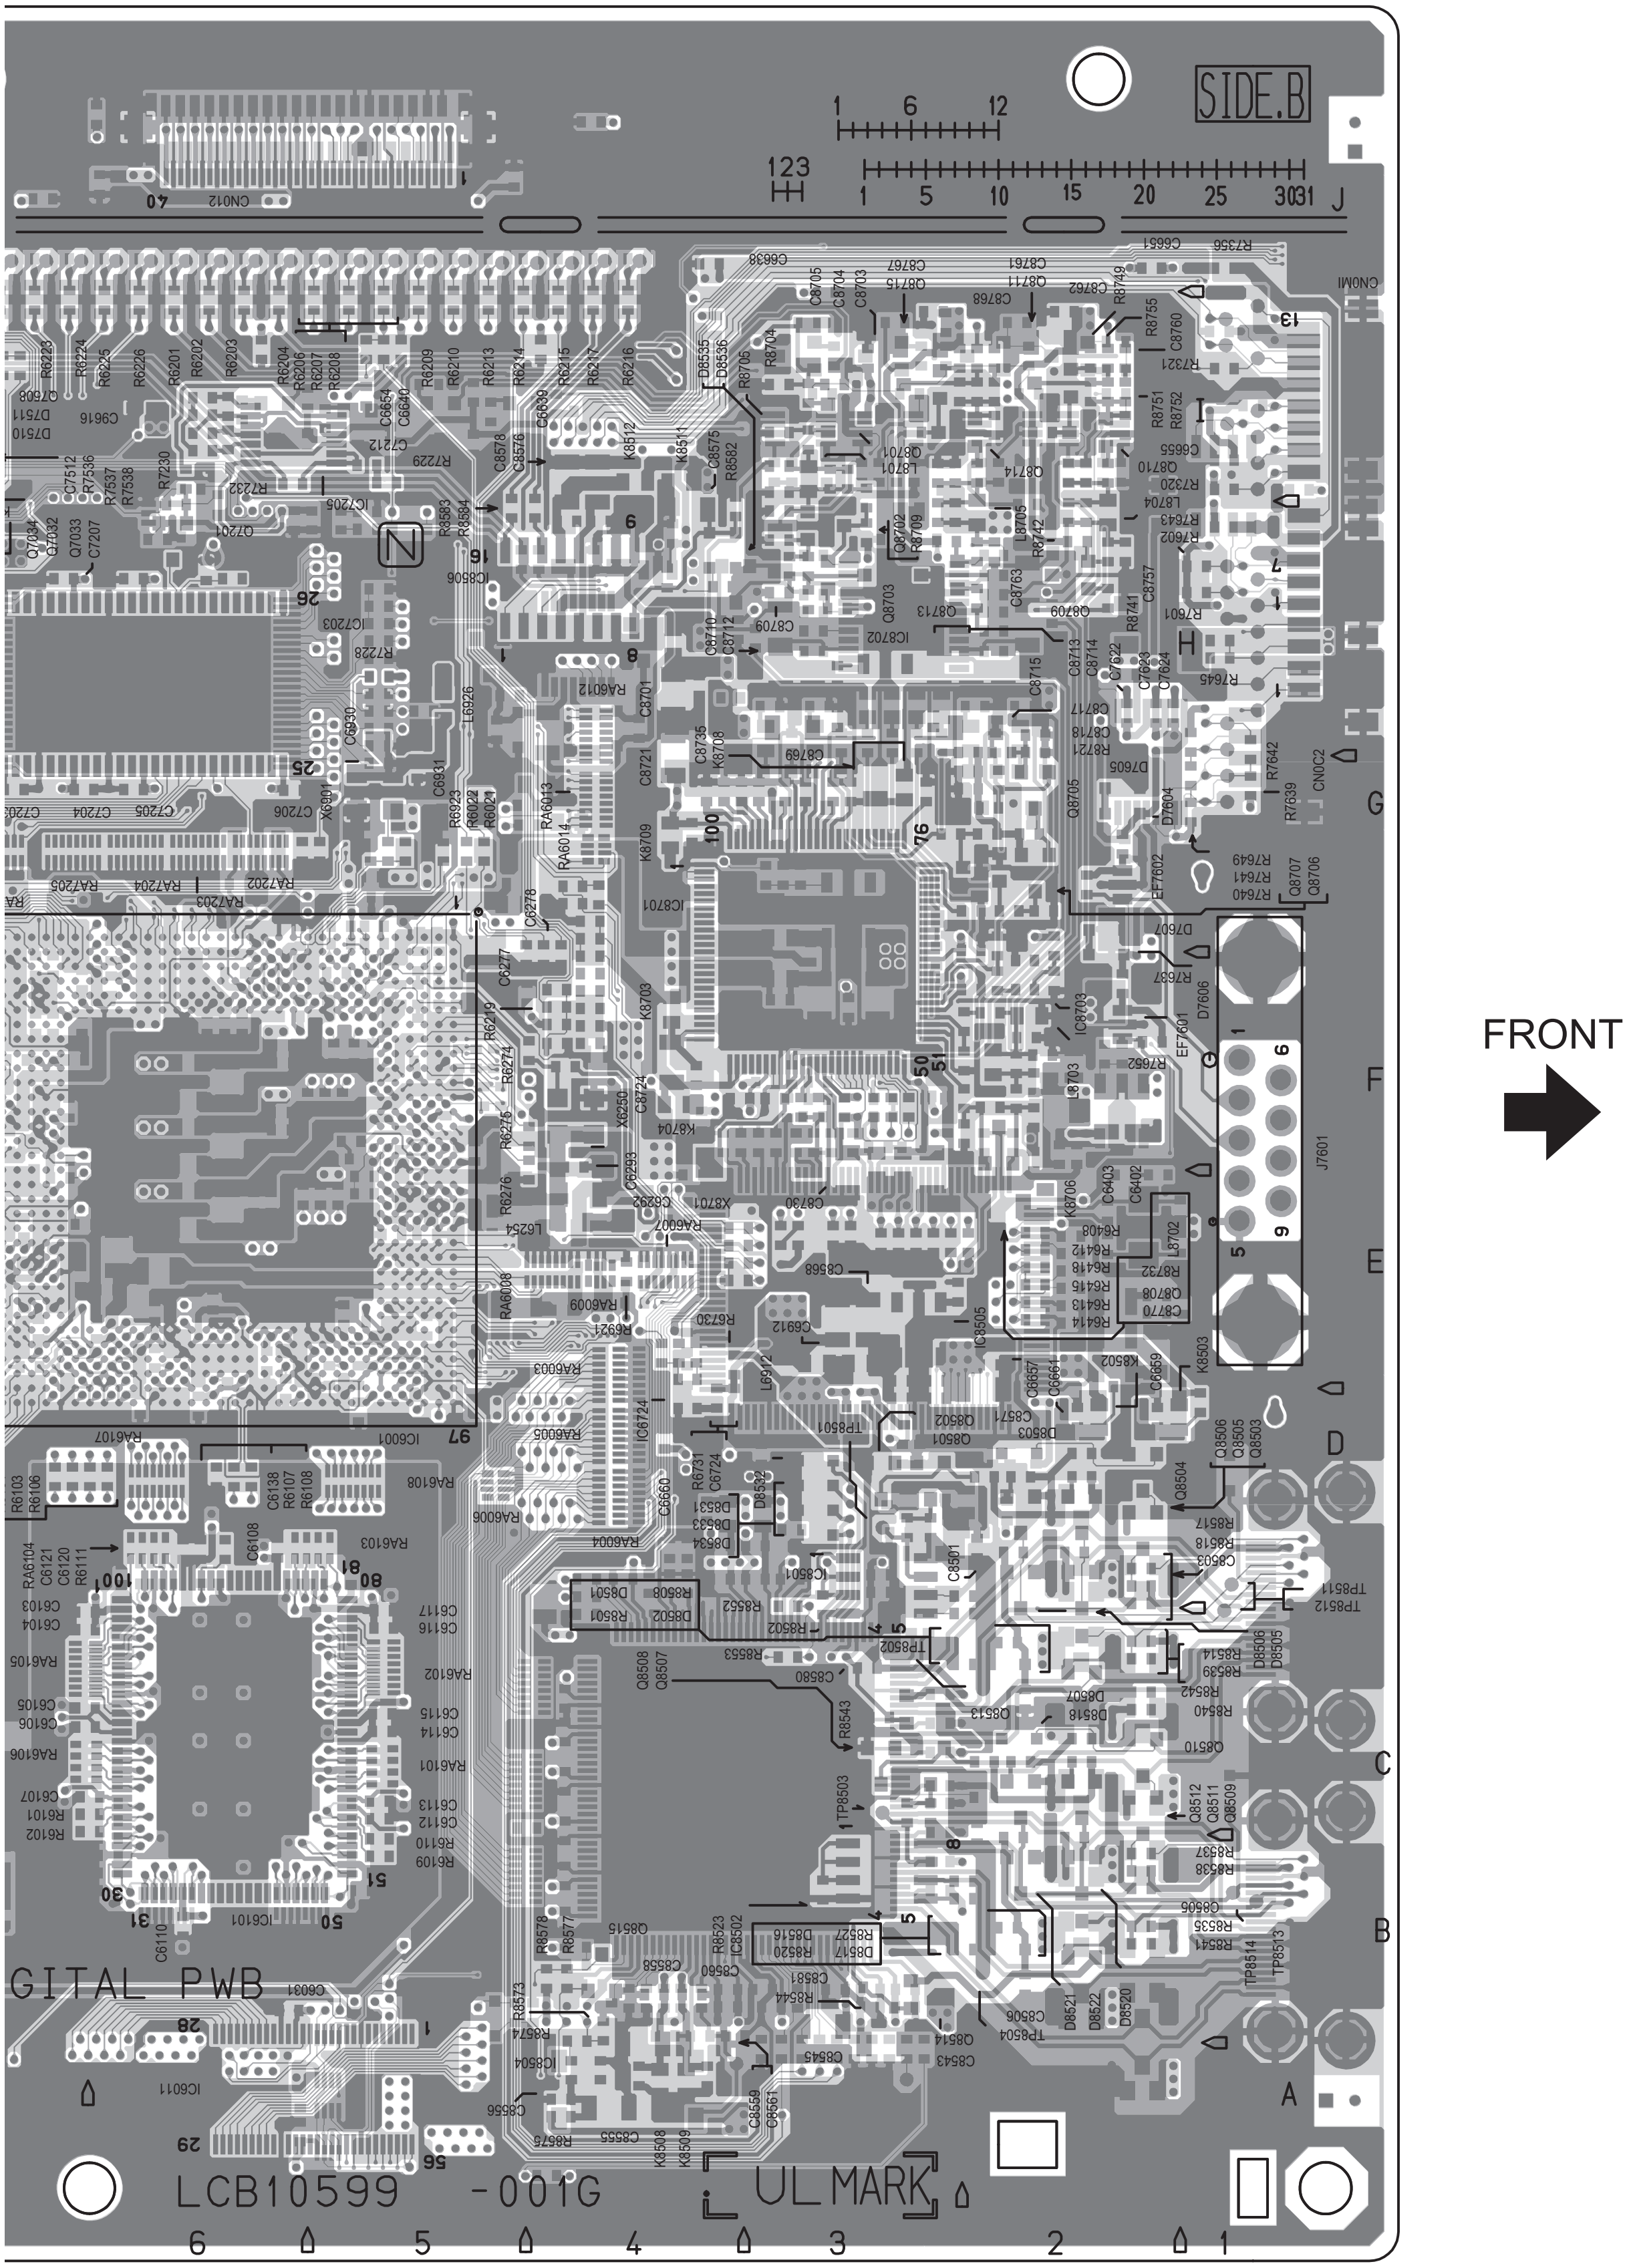
SIDE.B
CN012
1 6 12
123
1 5 10 15 20 25 30 31
J
H
G
F
E
D
C
B
A
IC8701
IC6001
IC6101
IC6724
IC8502
J7601
CN0M1
CN0C2
GITAL PWB
LCB10599 -001G
UL MARK
6 5 4 3 2 1
FRONT

DIGITAL PWB PATTERN [PARTS SIDE]

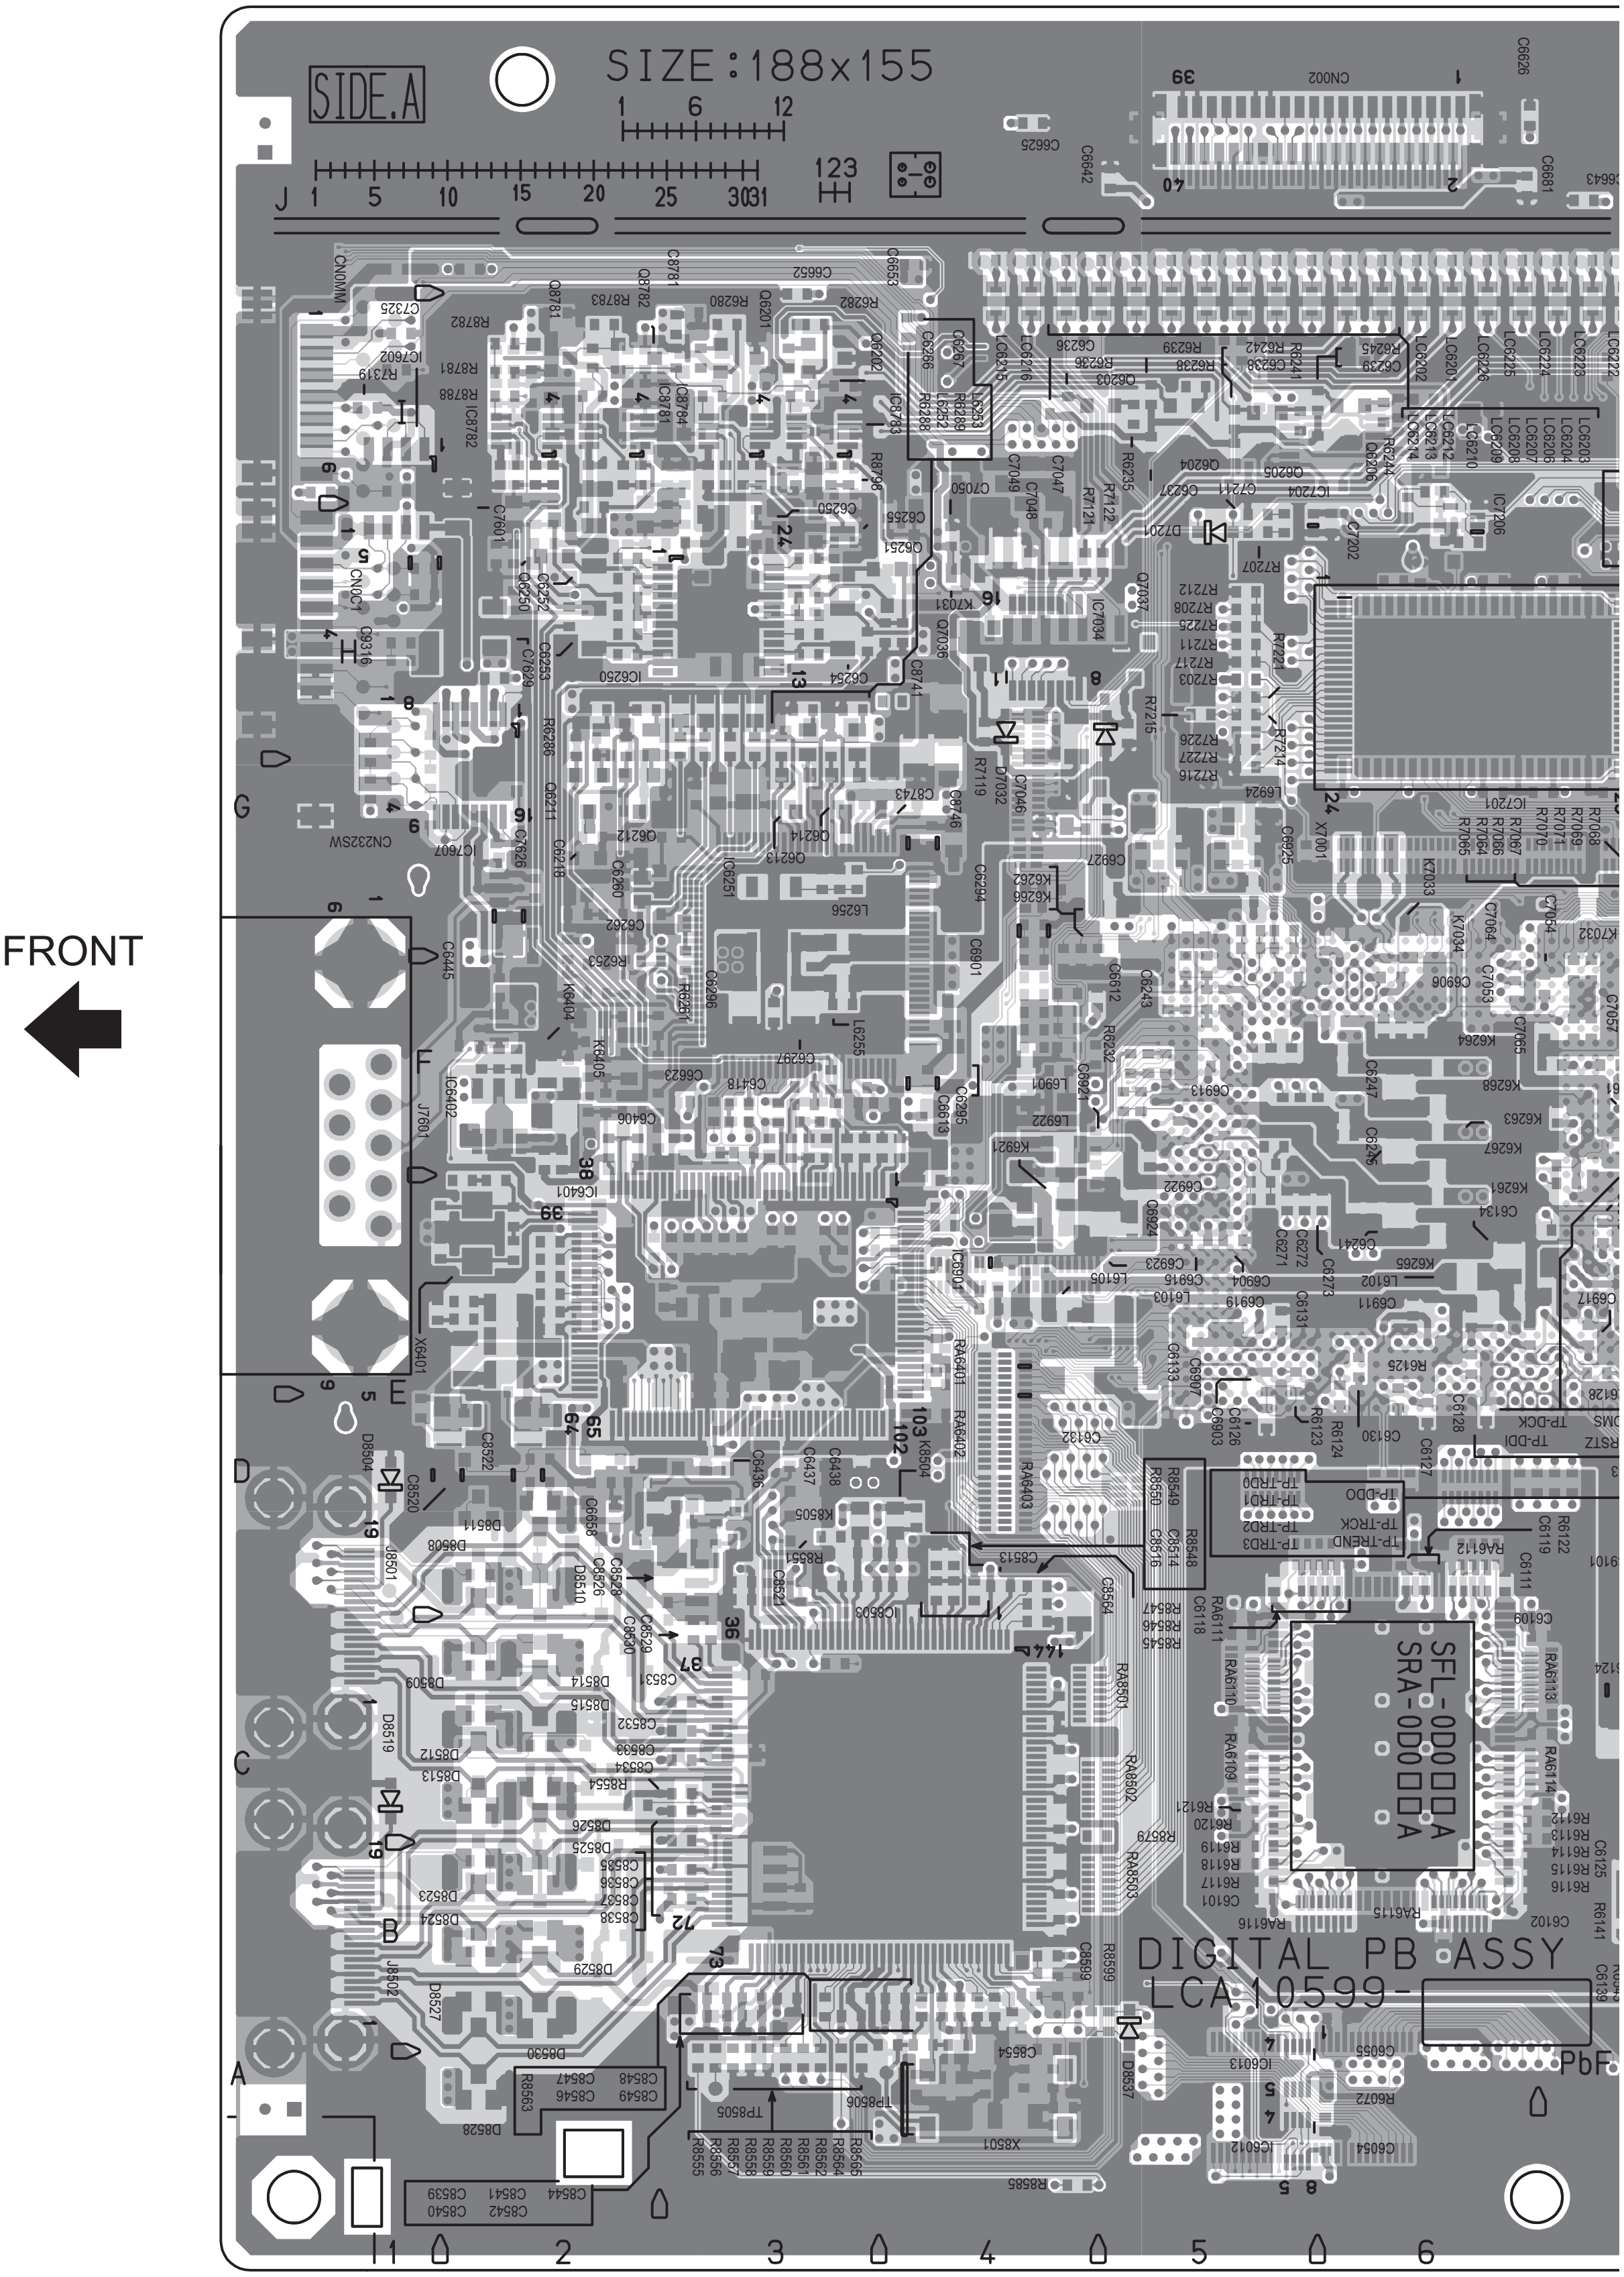
SIDE.A
SIZE:188x155
FRONT
DIGITAL PB ASSY
LCA10599-
PbF
SFL-0D□□□A
SRA-0D□□□A
CN002
IC7201
IC6401
IC6013
IC6012
J7601
J8501
J8502
X6401
X8501
A
B
C
D
E
F
G
H
I
J
1
2
3
4
5
6

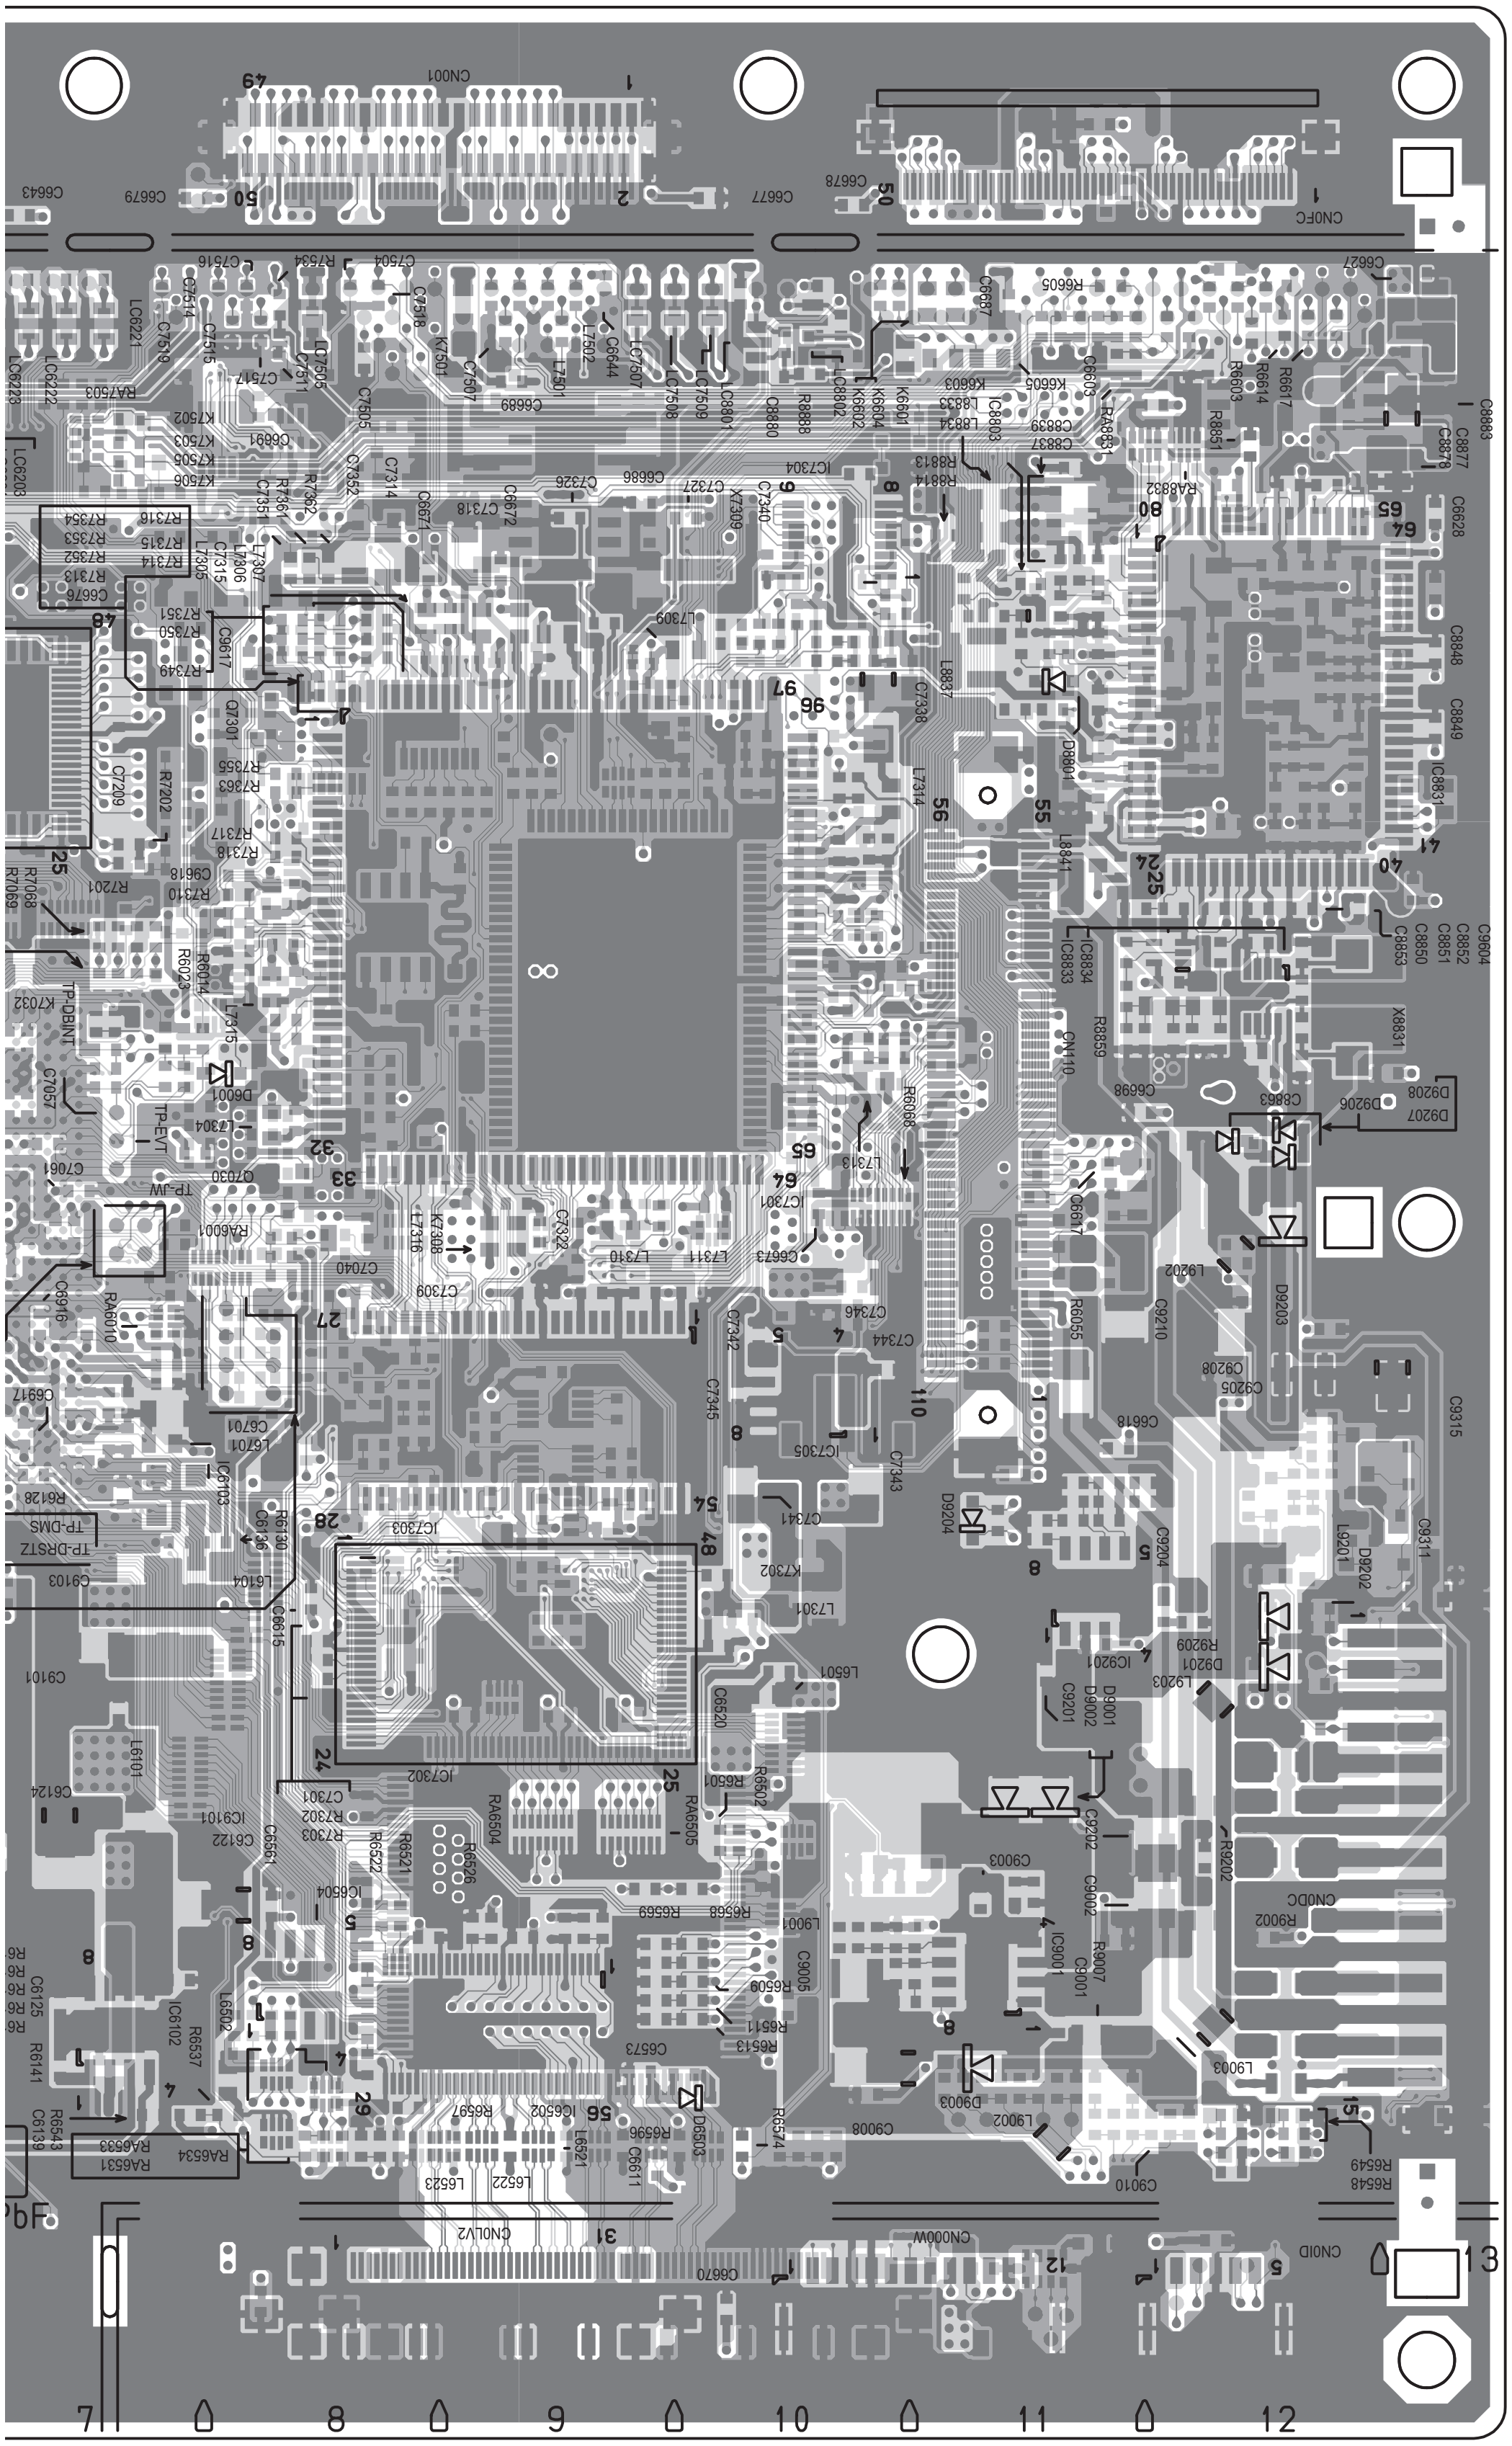
PbF

DRIVE PWB PATTERN [SOLDER SIDE]

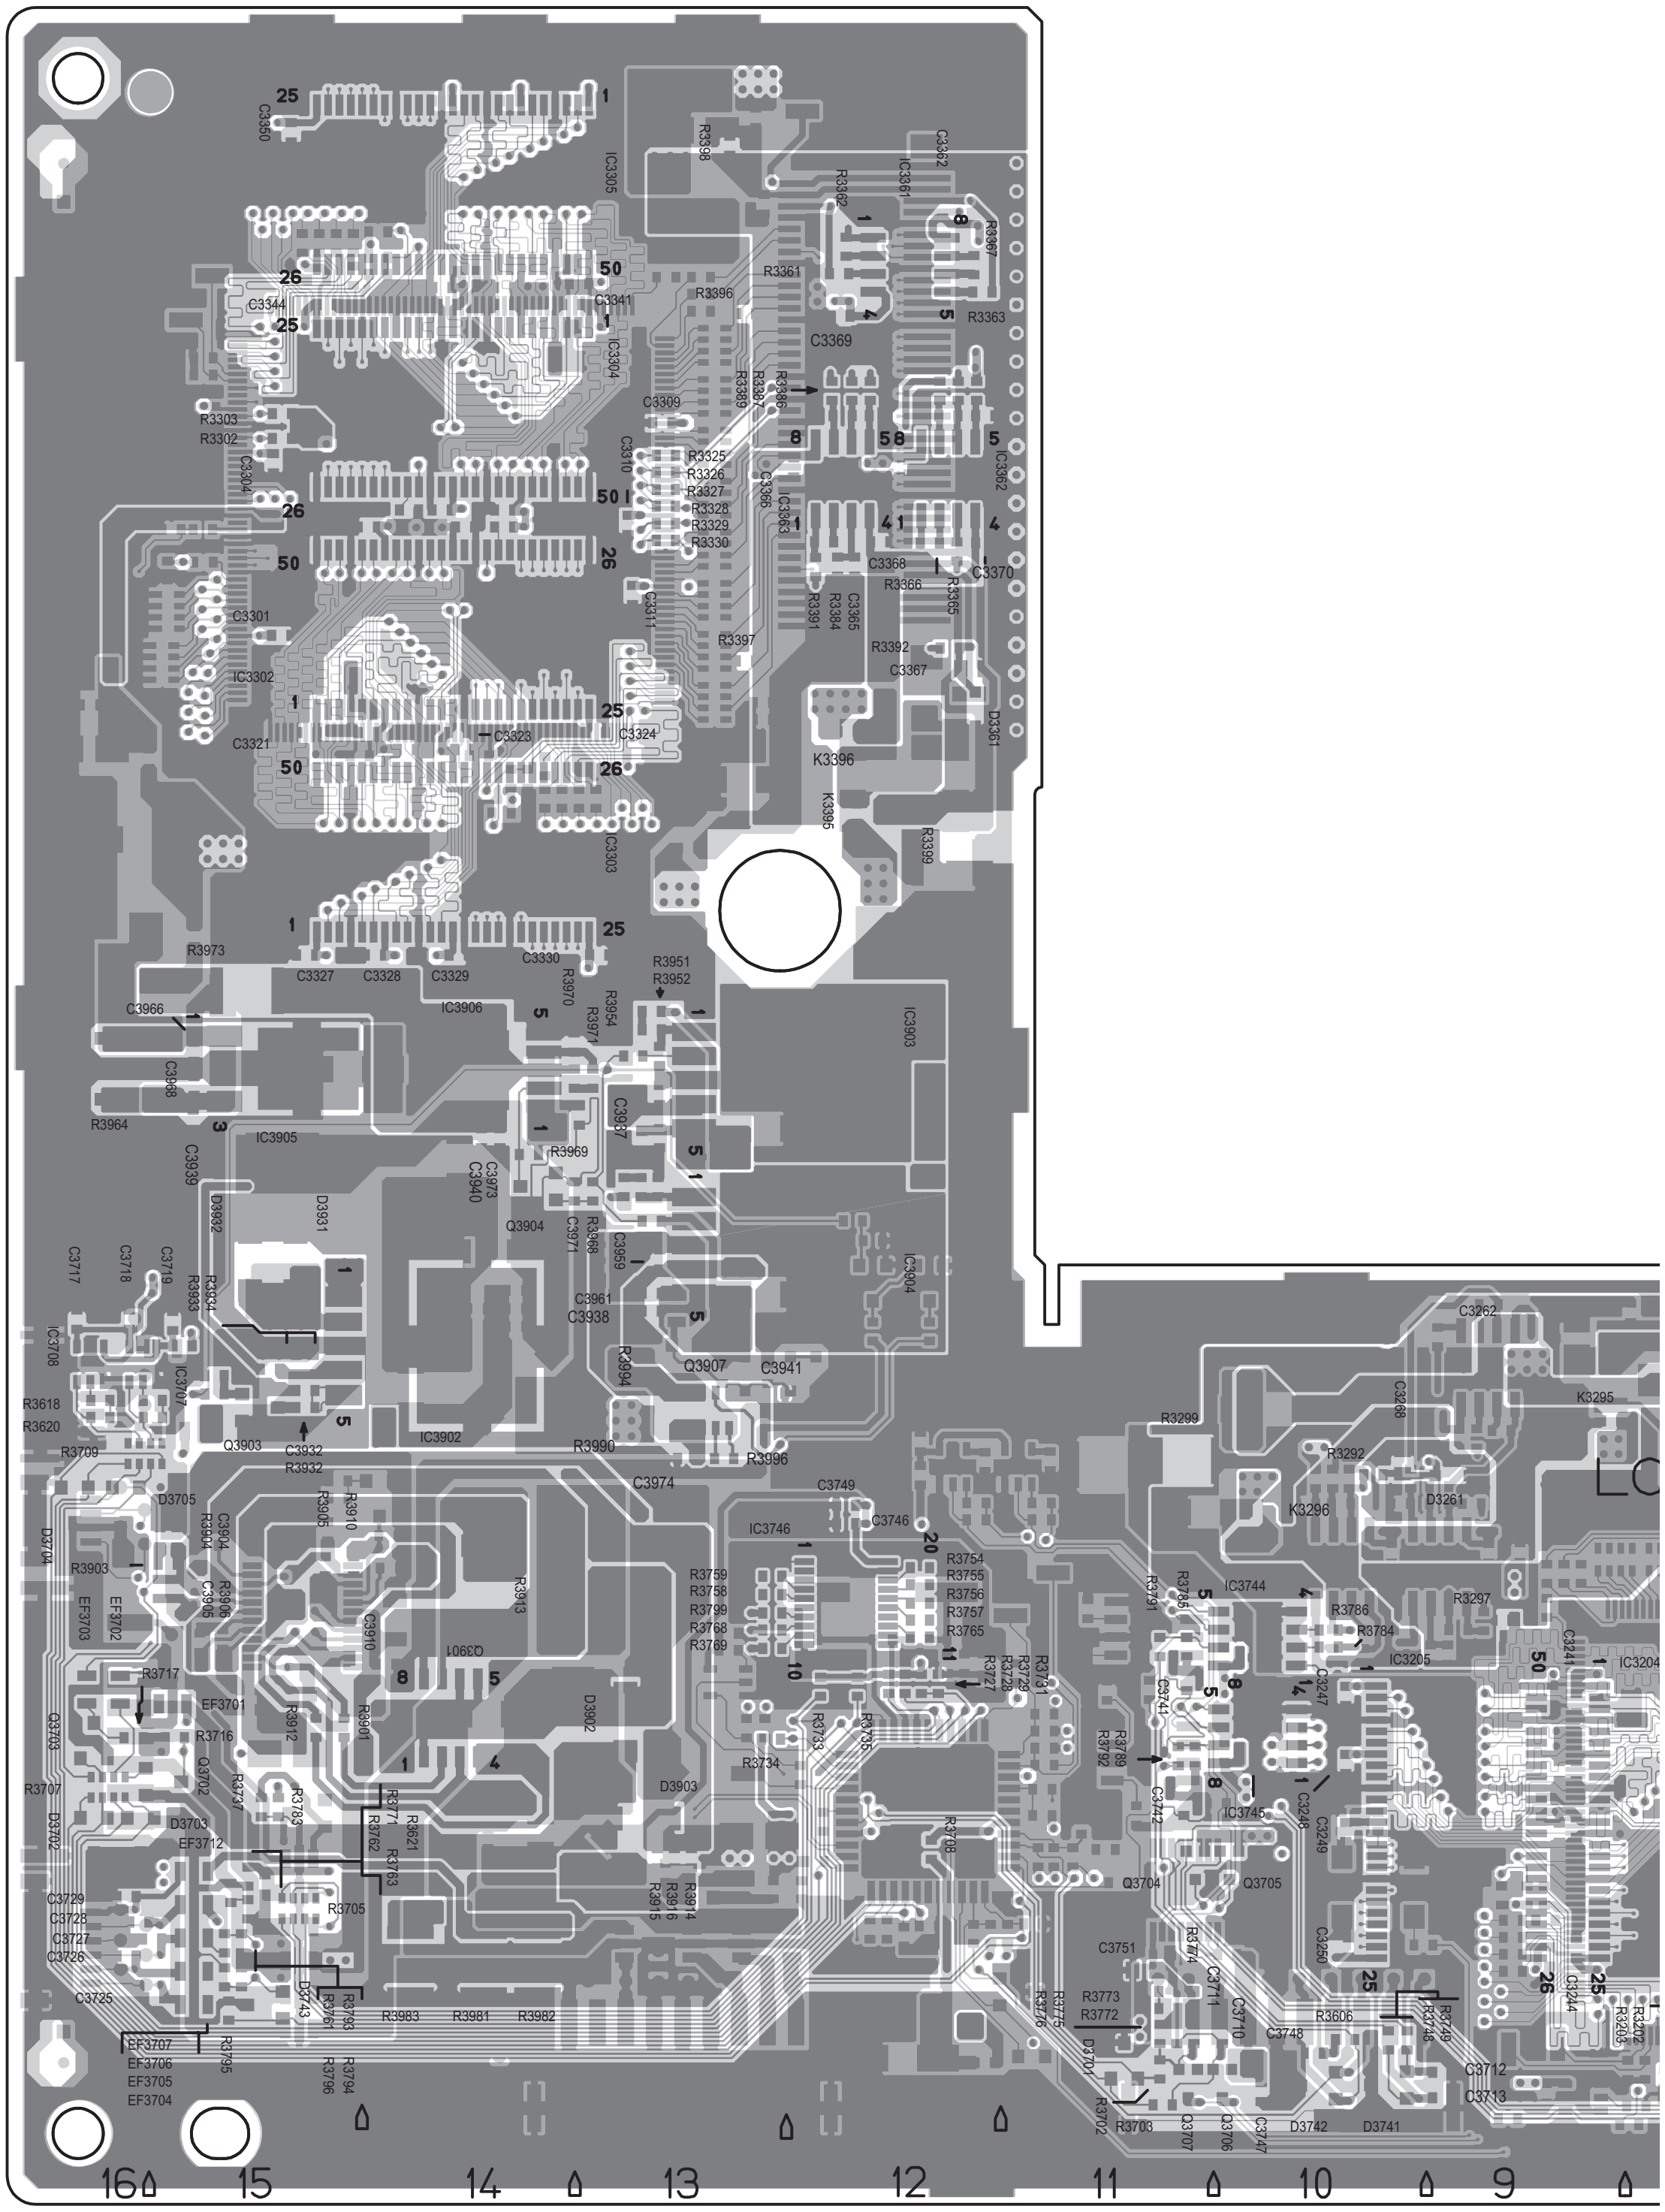

IC3305
IC3304
IC3302
IC3306
IC3361
IC3363
IC3903
IC3904
IC3905
IC3902
IC3746
IC3744
IC3745
IC3205
IC3204
C3350
C3344
C3341
C3301
C3321
C3323
C3324
C3303
C3327
C3328
C3329
C3330
C3309
C3310
C3311
C3369
C3368
C3370
C3367
C3362
C3966
C3968
C3939
C3940
C3941
C3932
C3974
C3749
C3746
C3262
C3712
C3713
R3303
R3302
R3361
R3363
R3386
R3397
R3392
R3366
R3399
R3973
R3964
R3951
R3952
R3969
R3990
R3996
R3983
R3981
R3982
R3299
R3292
R3297
R3786
R3784
R3606
K3396
K3395
K3296
K3295
Q3904
Q3907
Q3903
Q3704
Q3705
D3361
D3901
D3902
D3903
D3705
D3703
D3261
D3742
D3741
EF3701
EF3702
EF3703
EF3712
EF3707
EF3706
EF3705
EF3704
16
15
14
13
12
11
10
9

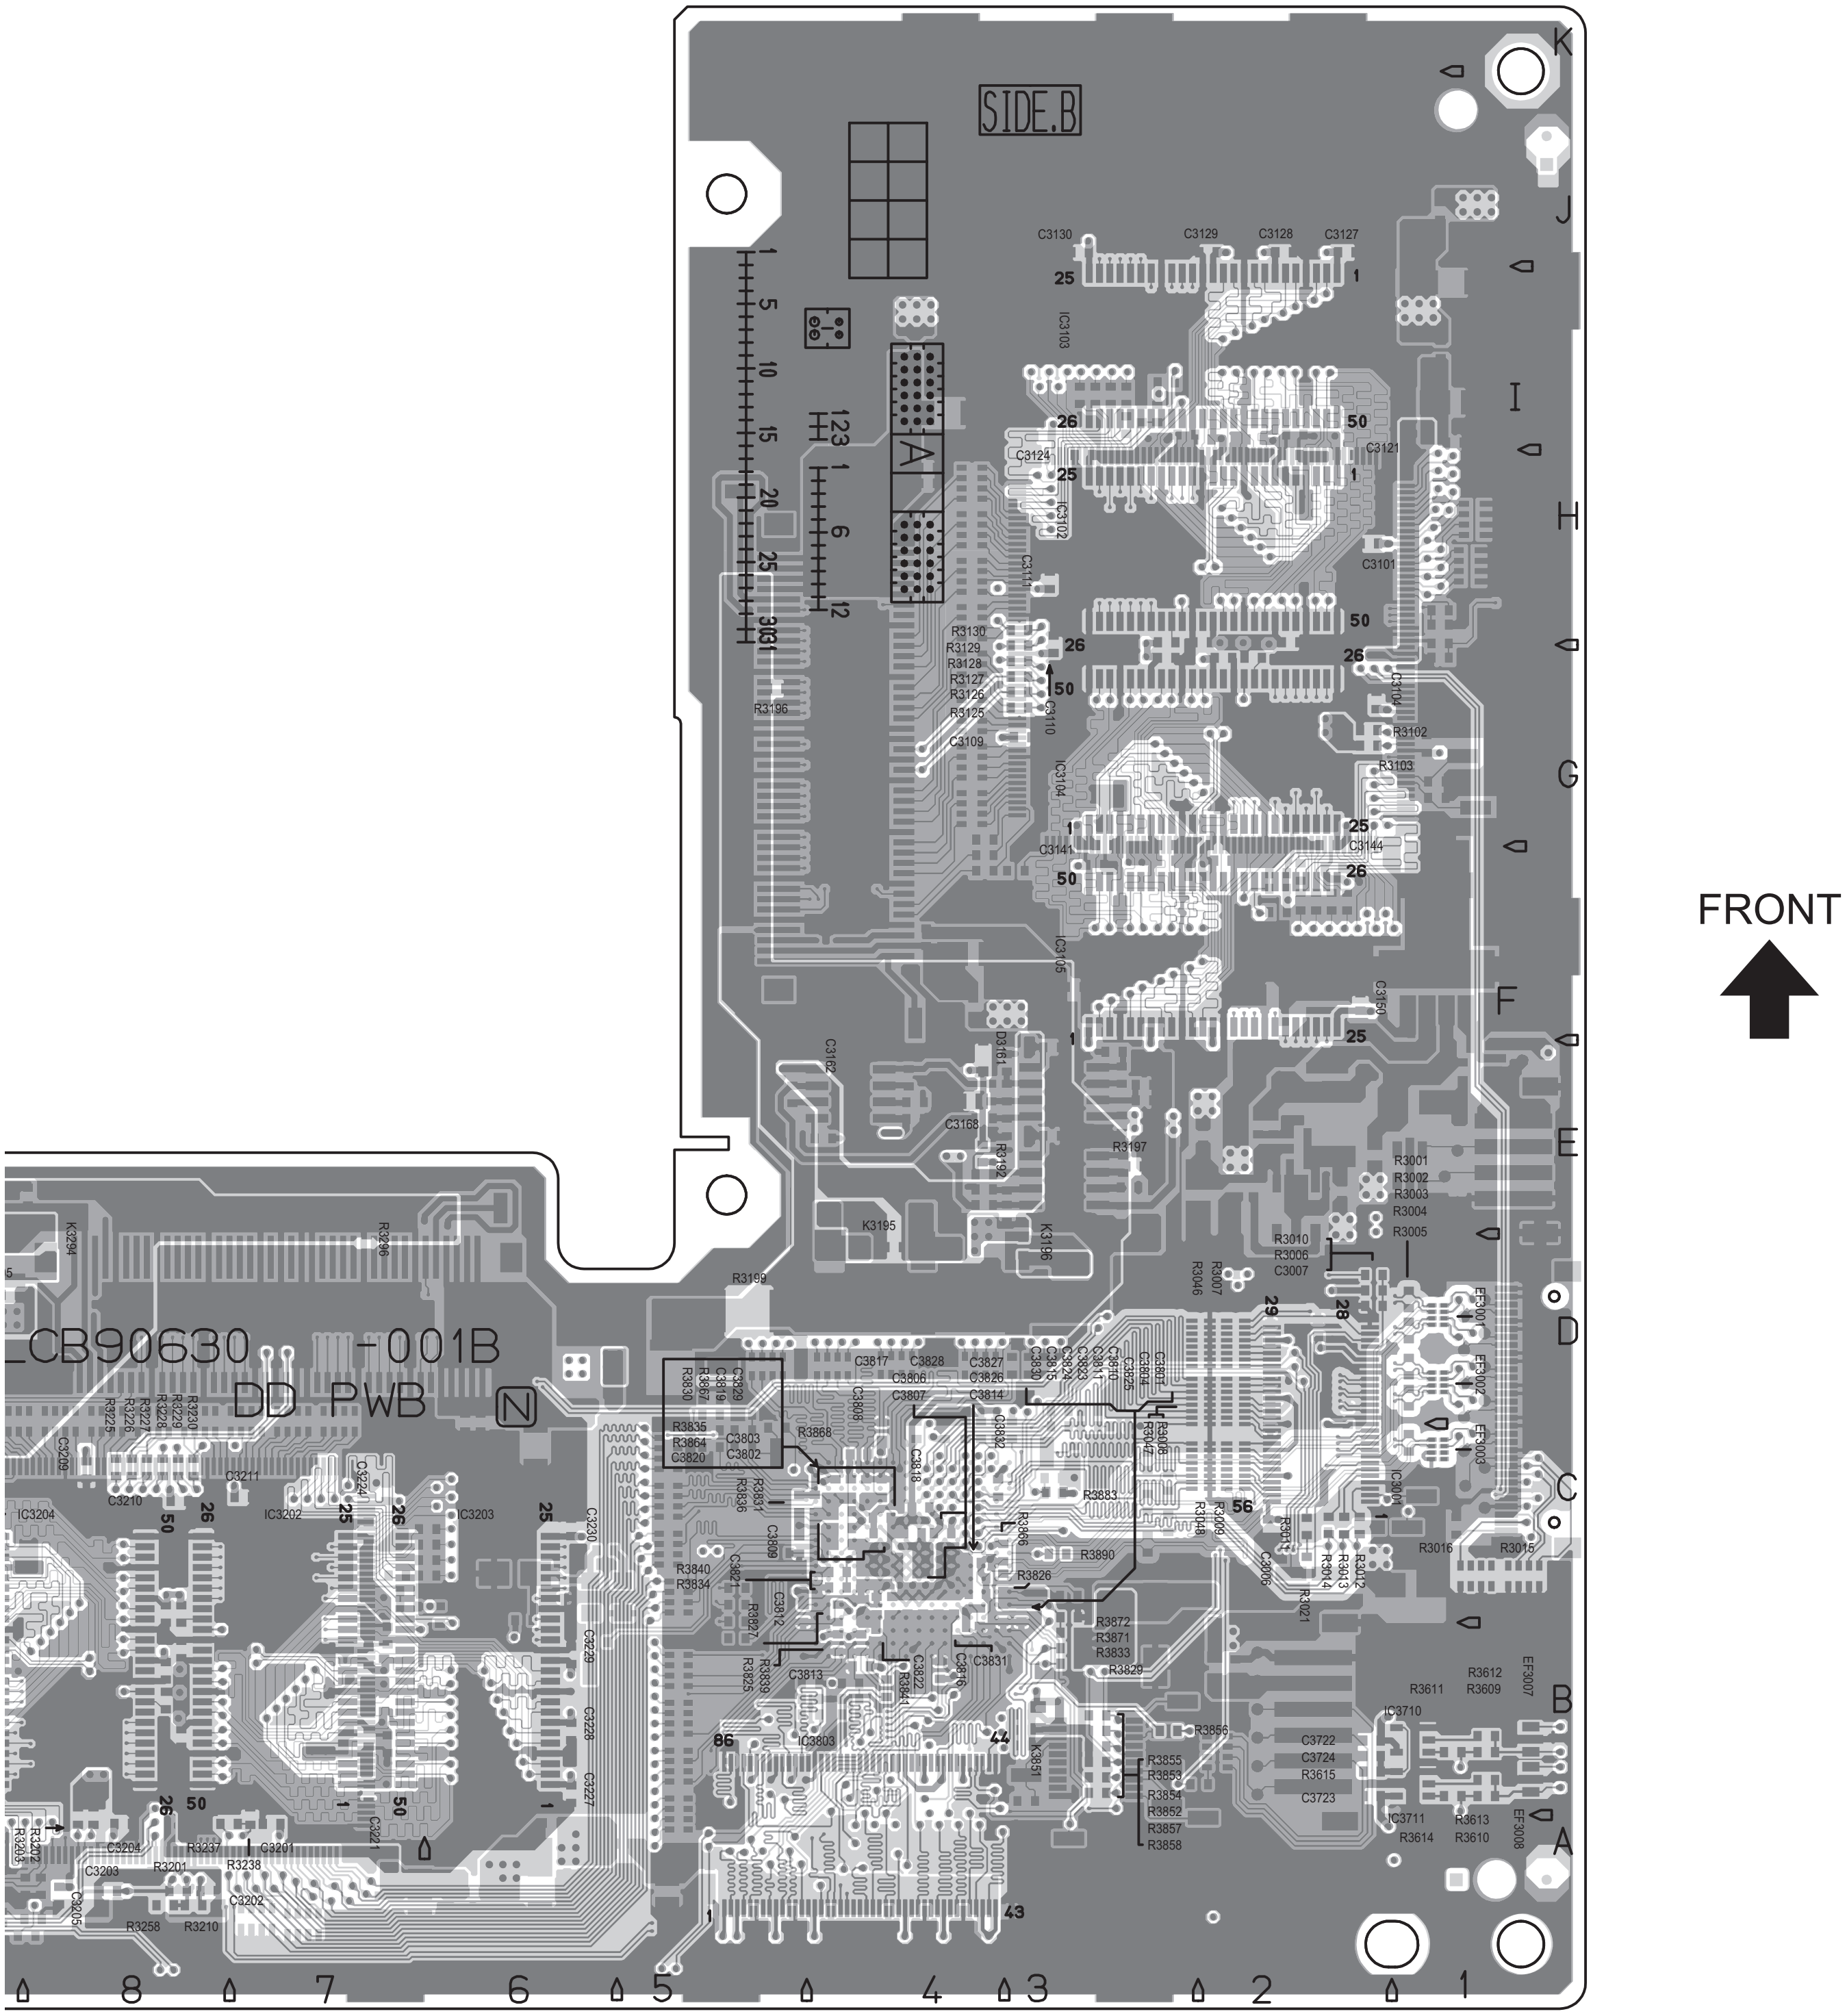
SIDE.B
LCB90630 -001B
DD PWB
N
A
FRONT
K
J
I
H
G
F
E
D
C
B
A
1
2
3
4
5
6
7
8
IC3103
IC3104
IC3001
IC3202
IC3204
IC3803
IC3710
IC3711
C3130
C3129
C3128
C3127
C3124
C3121
C3101
C3141
C3144
C3150
C3168
K3195
K3196
R3196
R3197
R3199
R3001
R3002
R3003
R3004
R3005
R3010
R3006
C3007
EF3001
EF3002
EF3003
EF3007
EF3008
R3016
R3015
R3611
R3612
R3609
C3722
C3724
R3615
C3723
R3613
R3610
R3614
C3210
C3211
C3203
C3204
C3201
C3202
R3201
R3237
R3238
R3258
R3210

DRIVE PWB PATTERN [PARTS SIDE]

FRONT

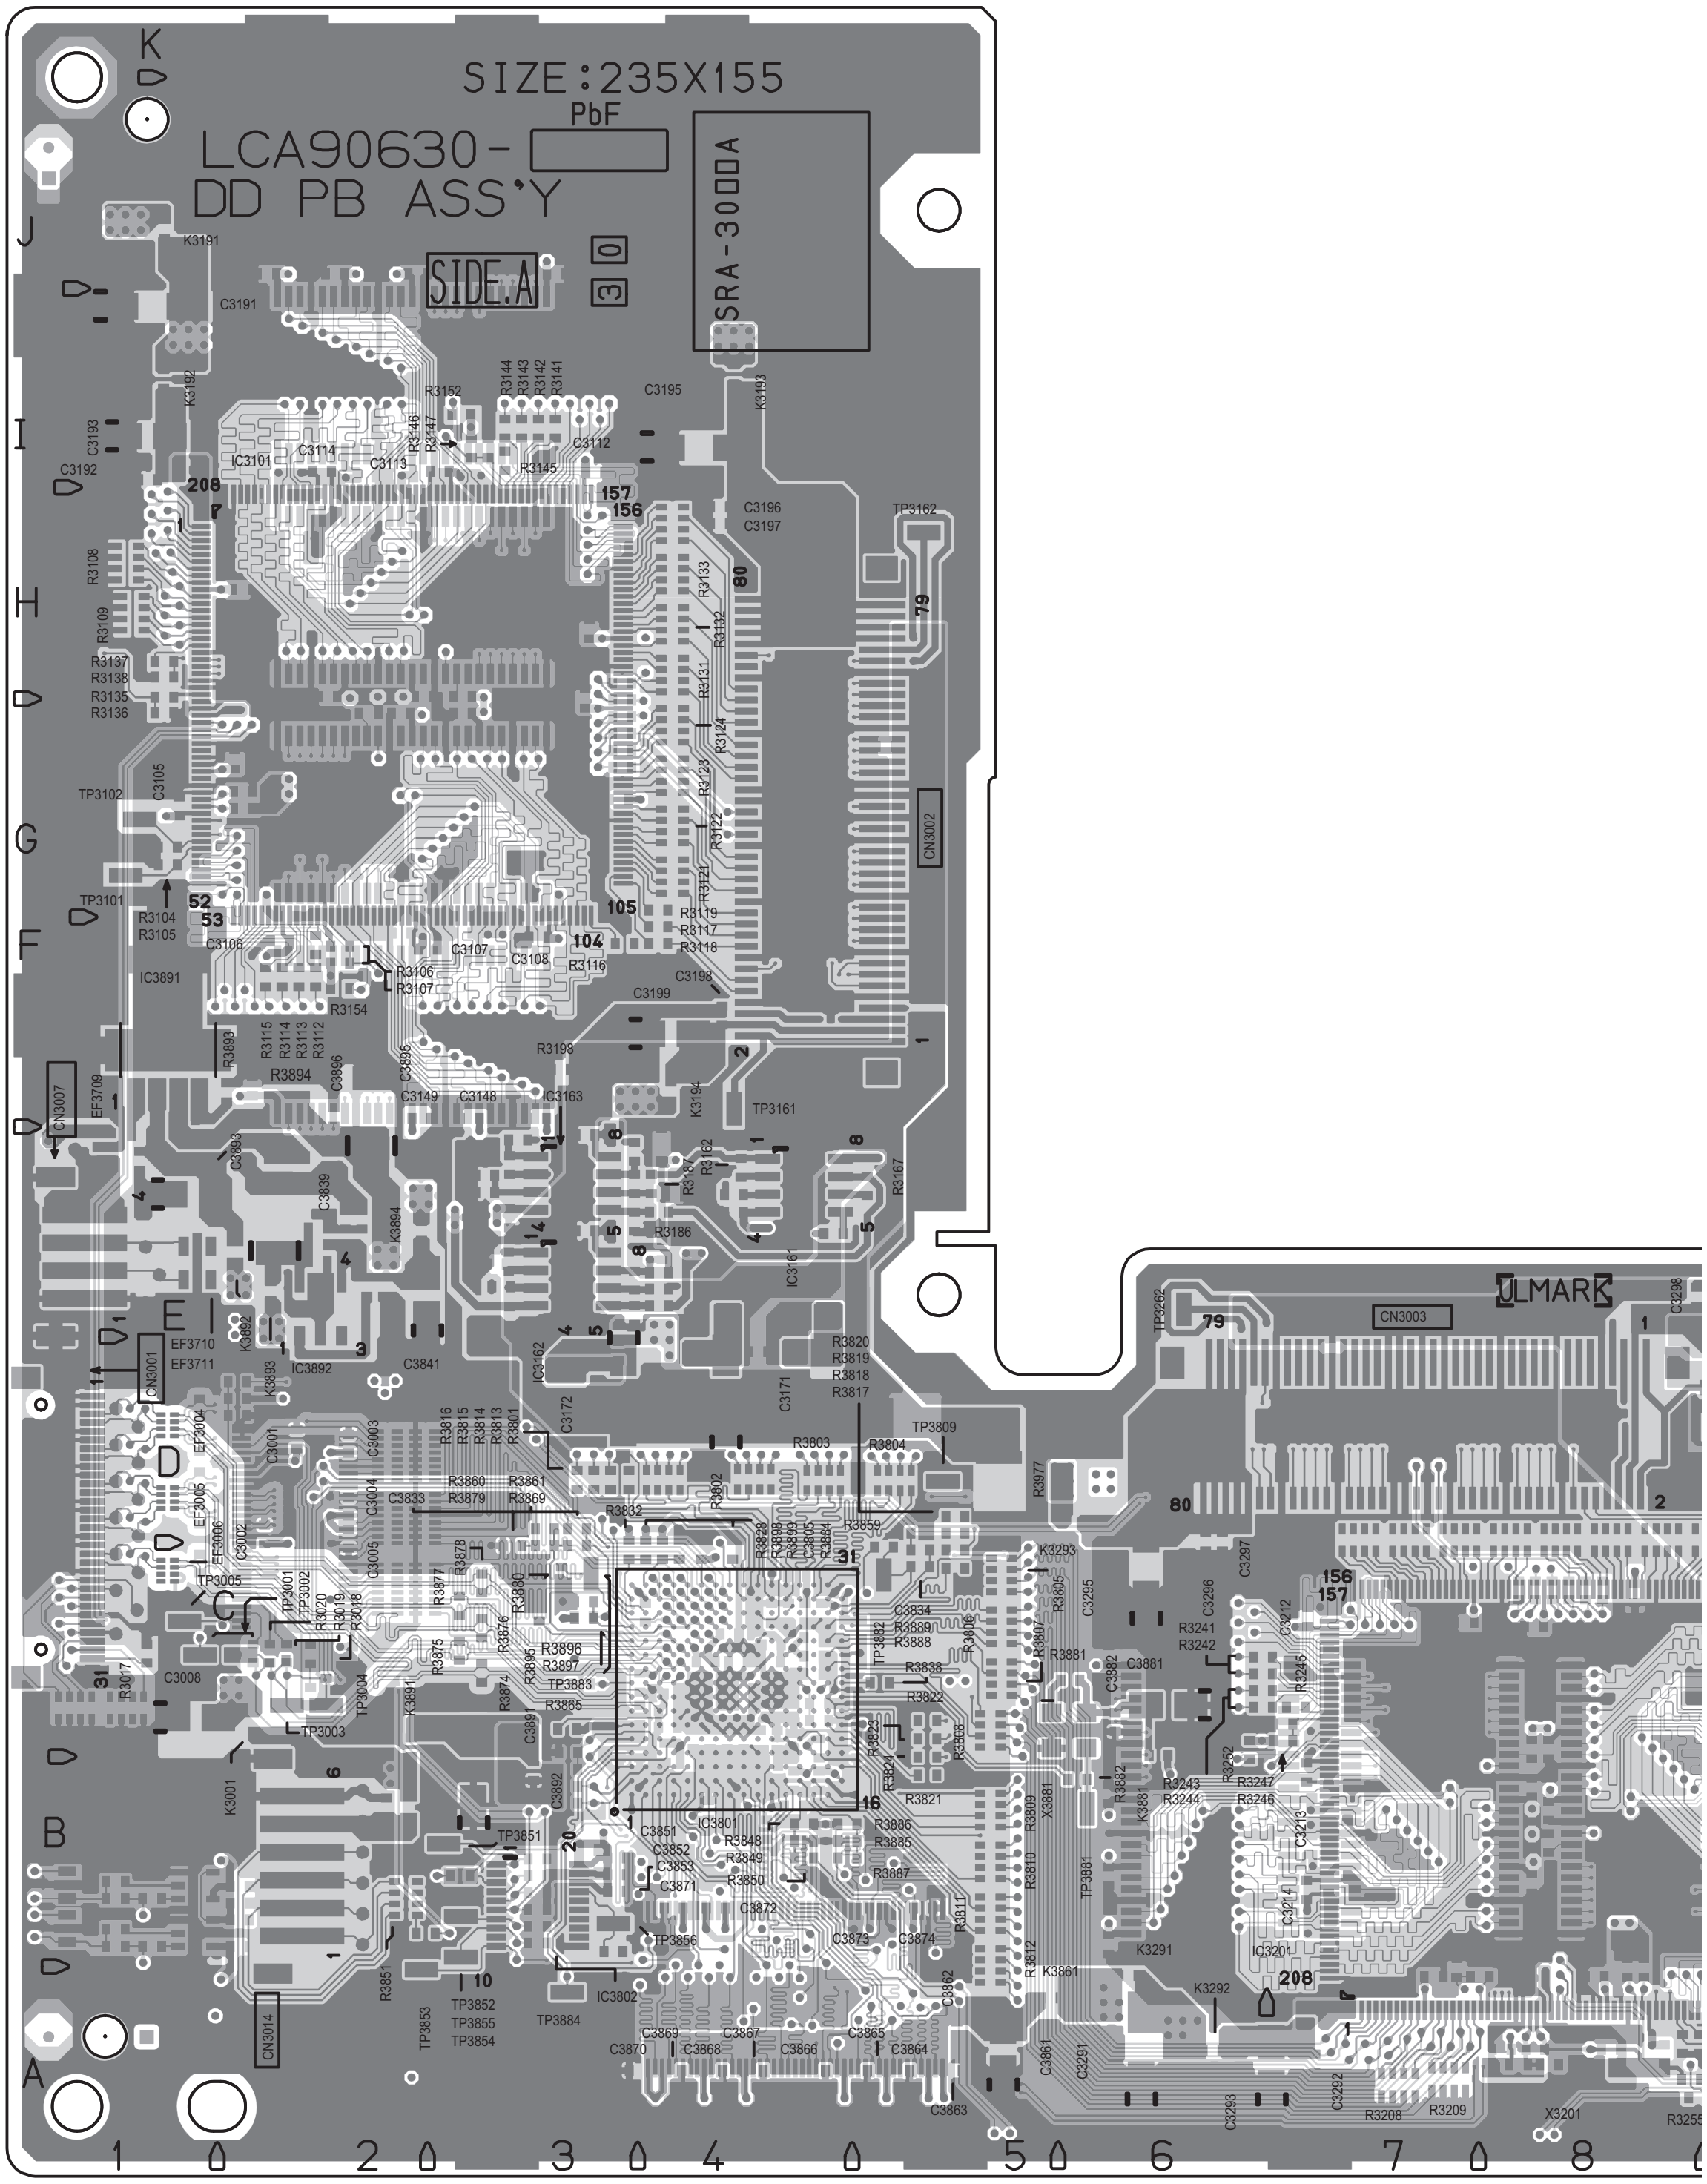
SIZE:235X155
LCA90630-
PbF
DD PB ASS'Y
SIDE.A
SRA-30□□A
ULMARK
CN3002
CN3003
CN3001
CN3007
CN3014
IC3101
IC3161
IC3162
IC3201
IC3801
IC3802
IC3891
IC3892
A
B
C
D
E
F
G
H
I
J
K
1
2
3
4
5
6
7
8

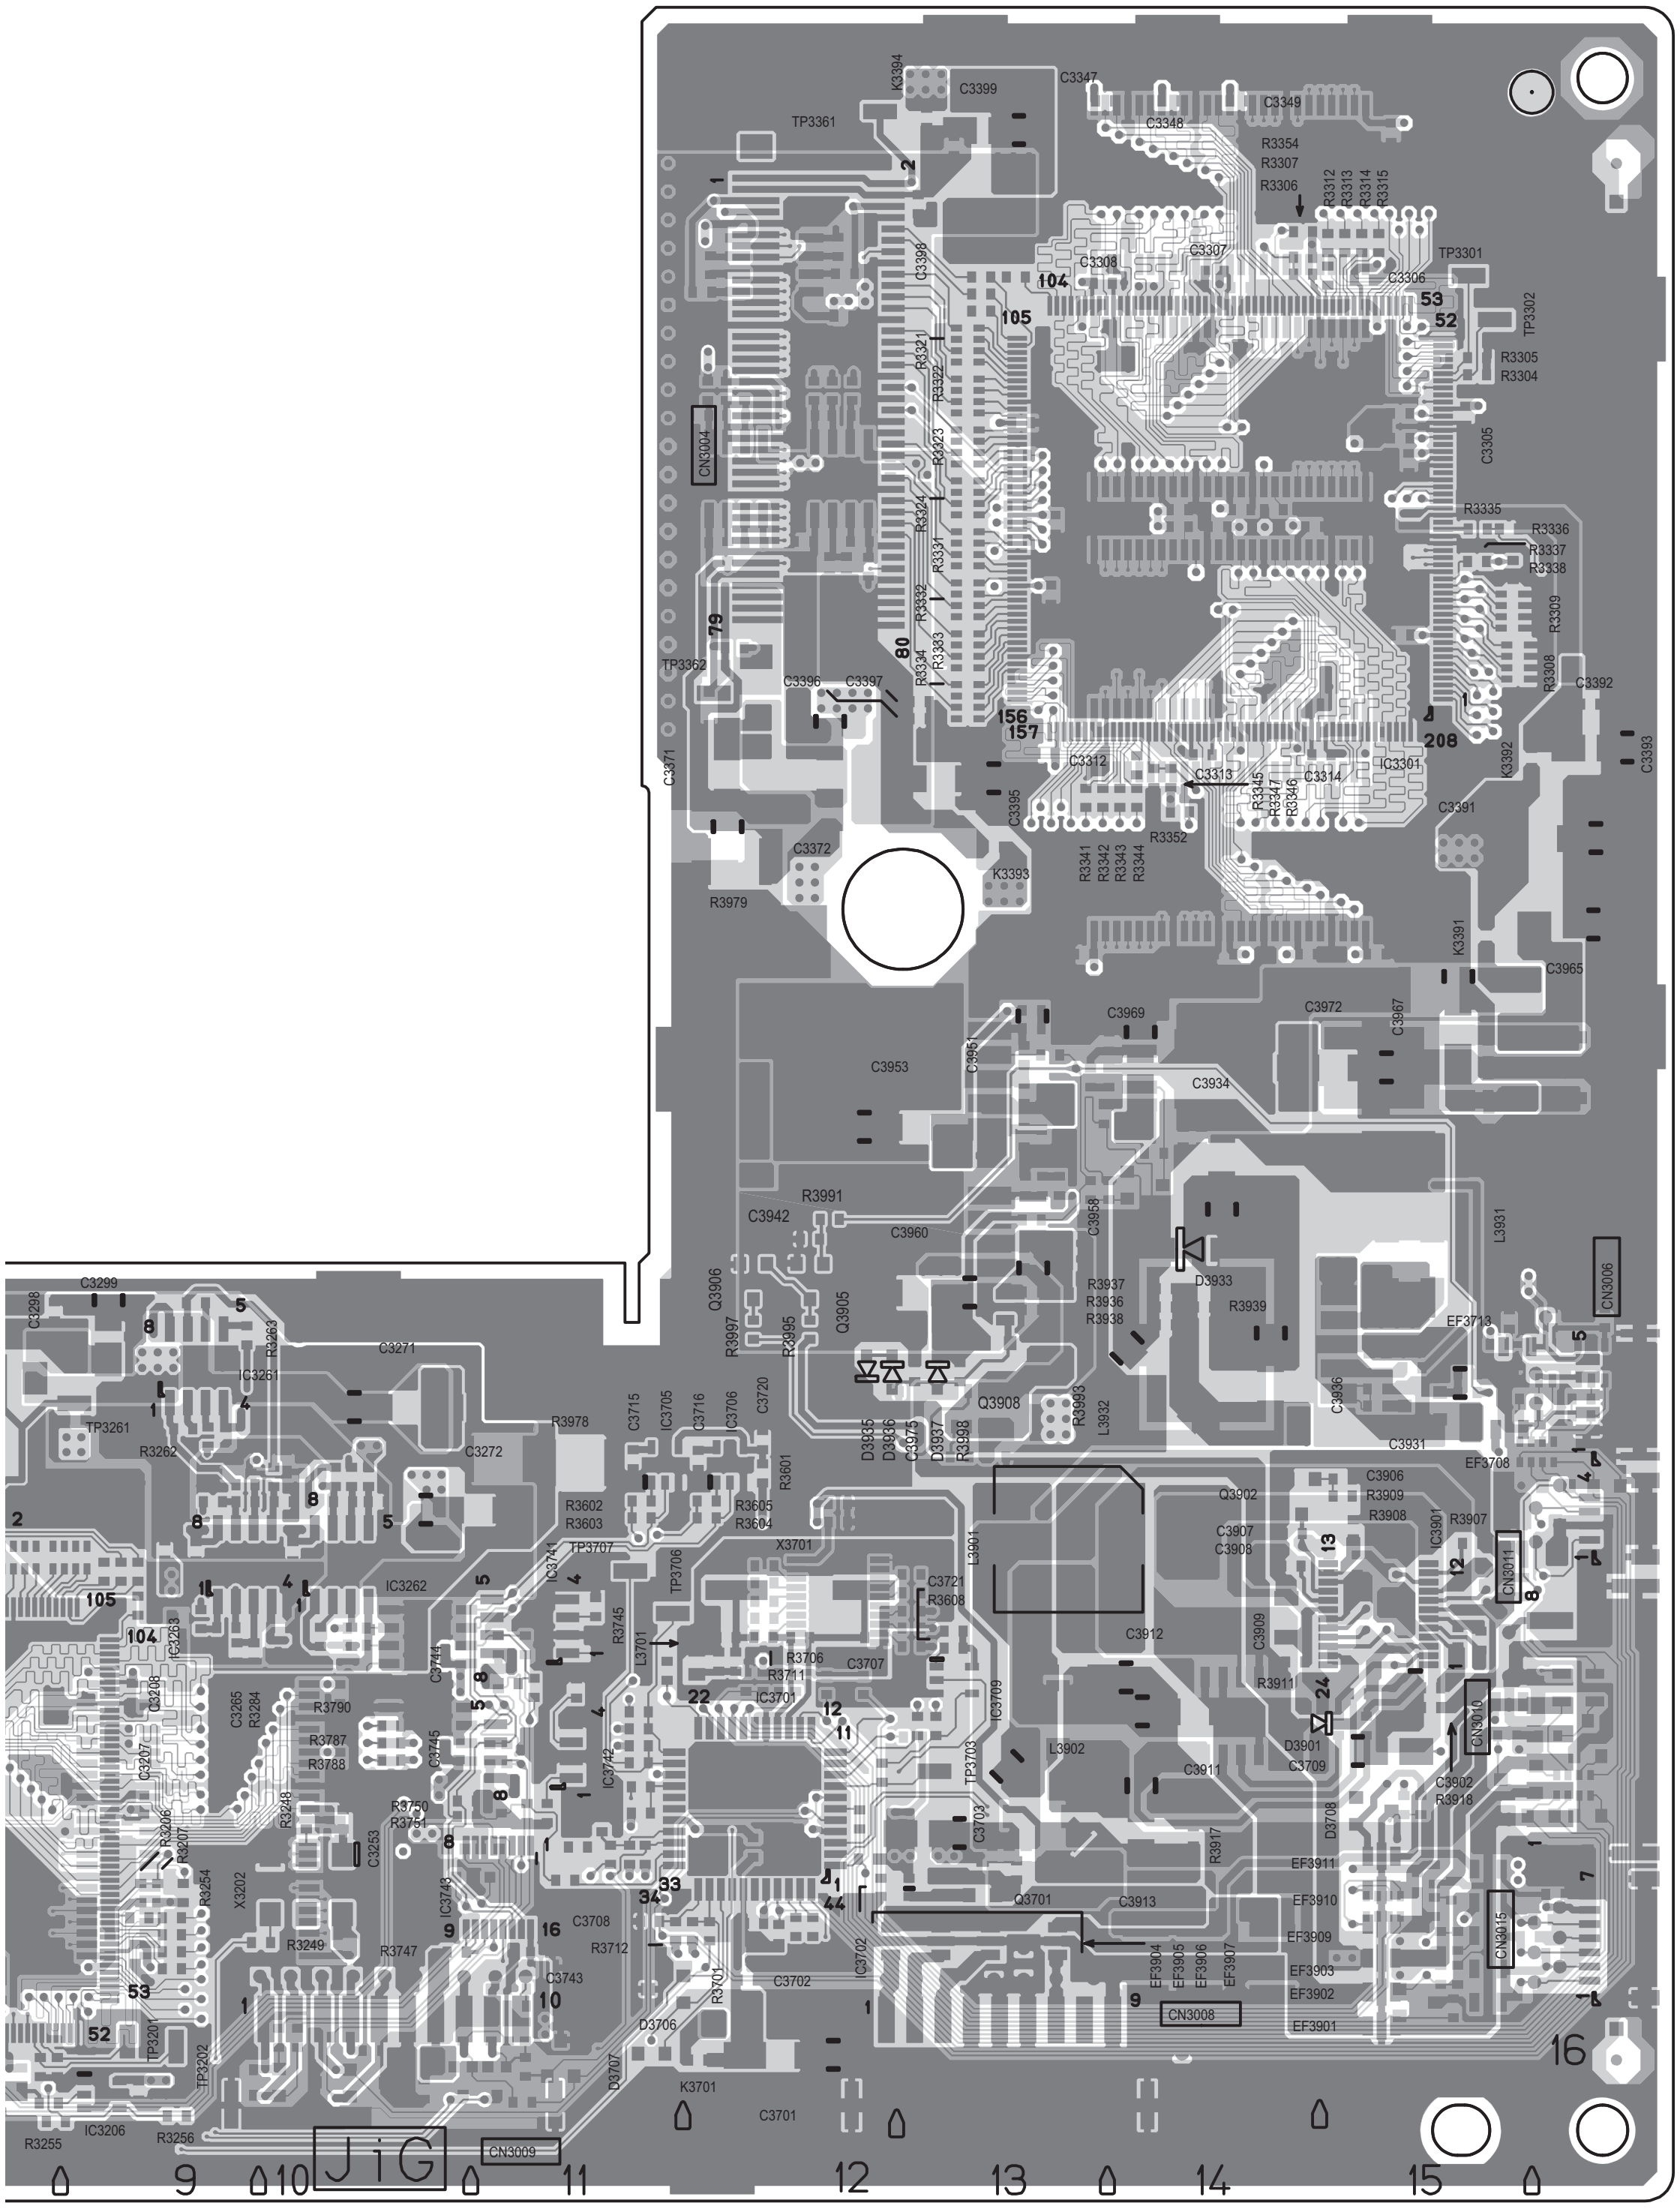

K3394
C3399
C3347
TP3361
C3348
C3349
R3354
R3307
R3306
R3312
R3313
R3314
R3315
C3307
C3308
TP3301
C3306
TP3302
104
105
53
52
R3305
R3304
CN3004
C3305
R3335
R3336
R3337
R3338
R3309
R3308
C3392
79
80
TP3362
C3396
C3397
156
157
208
C3312
C3313
C3314
IC3301
K3392
C3393
C3371
C3395
R3345
R3347
R3346
C3391
C3372
R3352
R3341
R3342
R3343
R3344
K3393
R3979
K3391
C3965
C3969
C3972
C3967
C3953
C3951
C3934
R3991
C3942
C3960
C3958
L3931
D3933
R3937
R3936
R3938
R3939
CN3006
EF3713
Q3906
Q3905
R3997
R3995
C3720
C3706
C3716
IC3705
C3715
R3978
Q3908
R3993
L3932
C3936
C3931
EF3708
C3906
R3909
R3908
Q3902
C3907
C3903
IC3901
R3907
CN3011
R3601
R3605
R3604
R3602
R3603
TP3707
X3701
C3721
R3608
L3901
C3912
C3909
C3299
C3298
C3271
IC3261
TP3261
R3262
C3272
IC3262
IC3711
TP3708
R3745
L3701
R3706
R3711
C3707
IC3701
IC3709
TP3703
L3902
C3911
R3911
D3901
C3709
CN3010
C3902
R3918
C3744
C3745
IC3742
R3790
R3787
R3788
C3265
R3284
C3208
C3207
R3206
R3207
R3248
R3750
R3751
C3253
R3254
X3202
IC3743
R3249
R3747
C3708
R3712
C3743
C3703
C3702
R3917
D3708
Q3701
C3913
EF3911
EF3910
EF3909
EF3903
EF3902
EF3901
EF3904
EF3905
EF3906
EF3907
CN3008
CN3015
D3706
R3701
K3701
C3701
D3707
TP3201
TP3202
R3255
IC3206
R3256
JiG
CN3009
9
10
11
12
13
14
15
16

POWER PWB PATTERN [SOLDER SIDE]

CAUTION :
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH SAME TYPE AND RATED FUSE(S)
AND ROHM'S MFR'S TYPE CP(S).

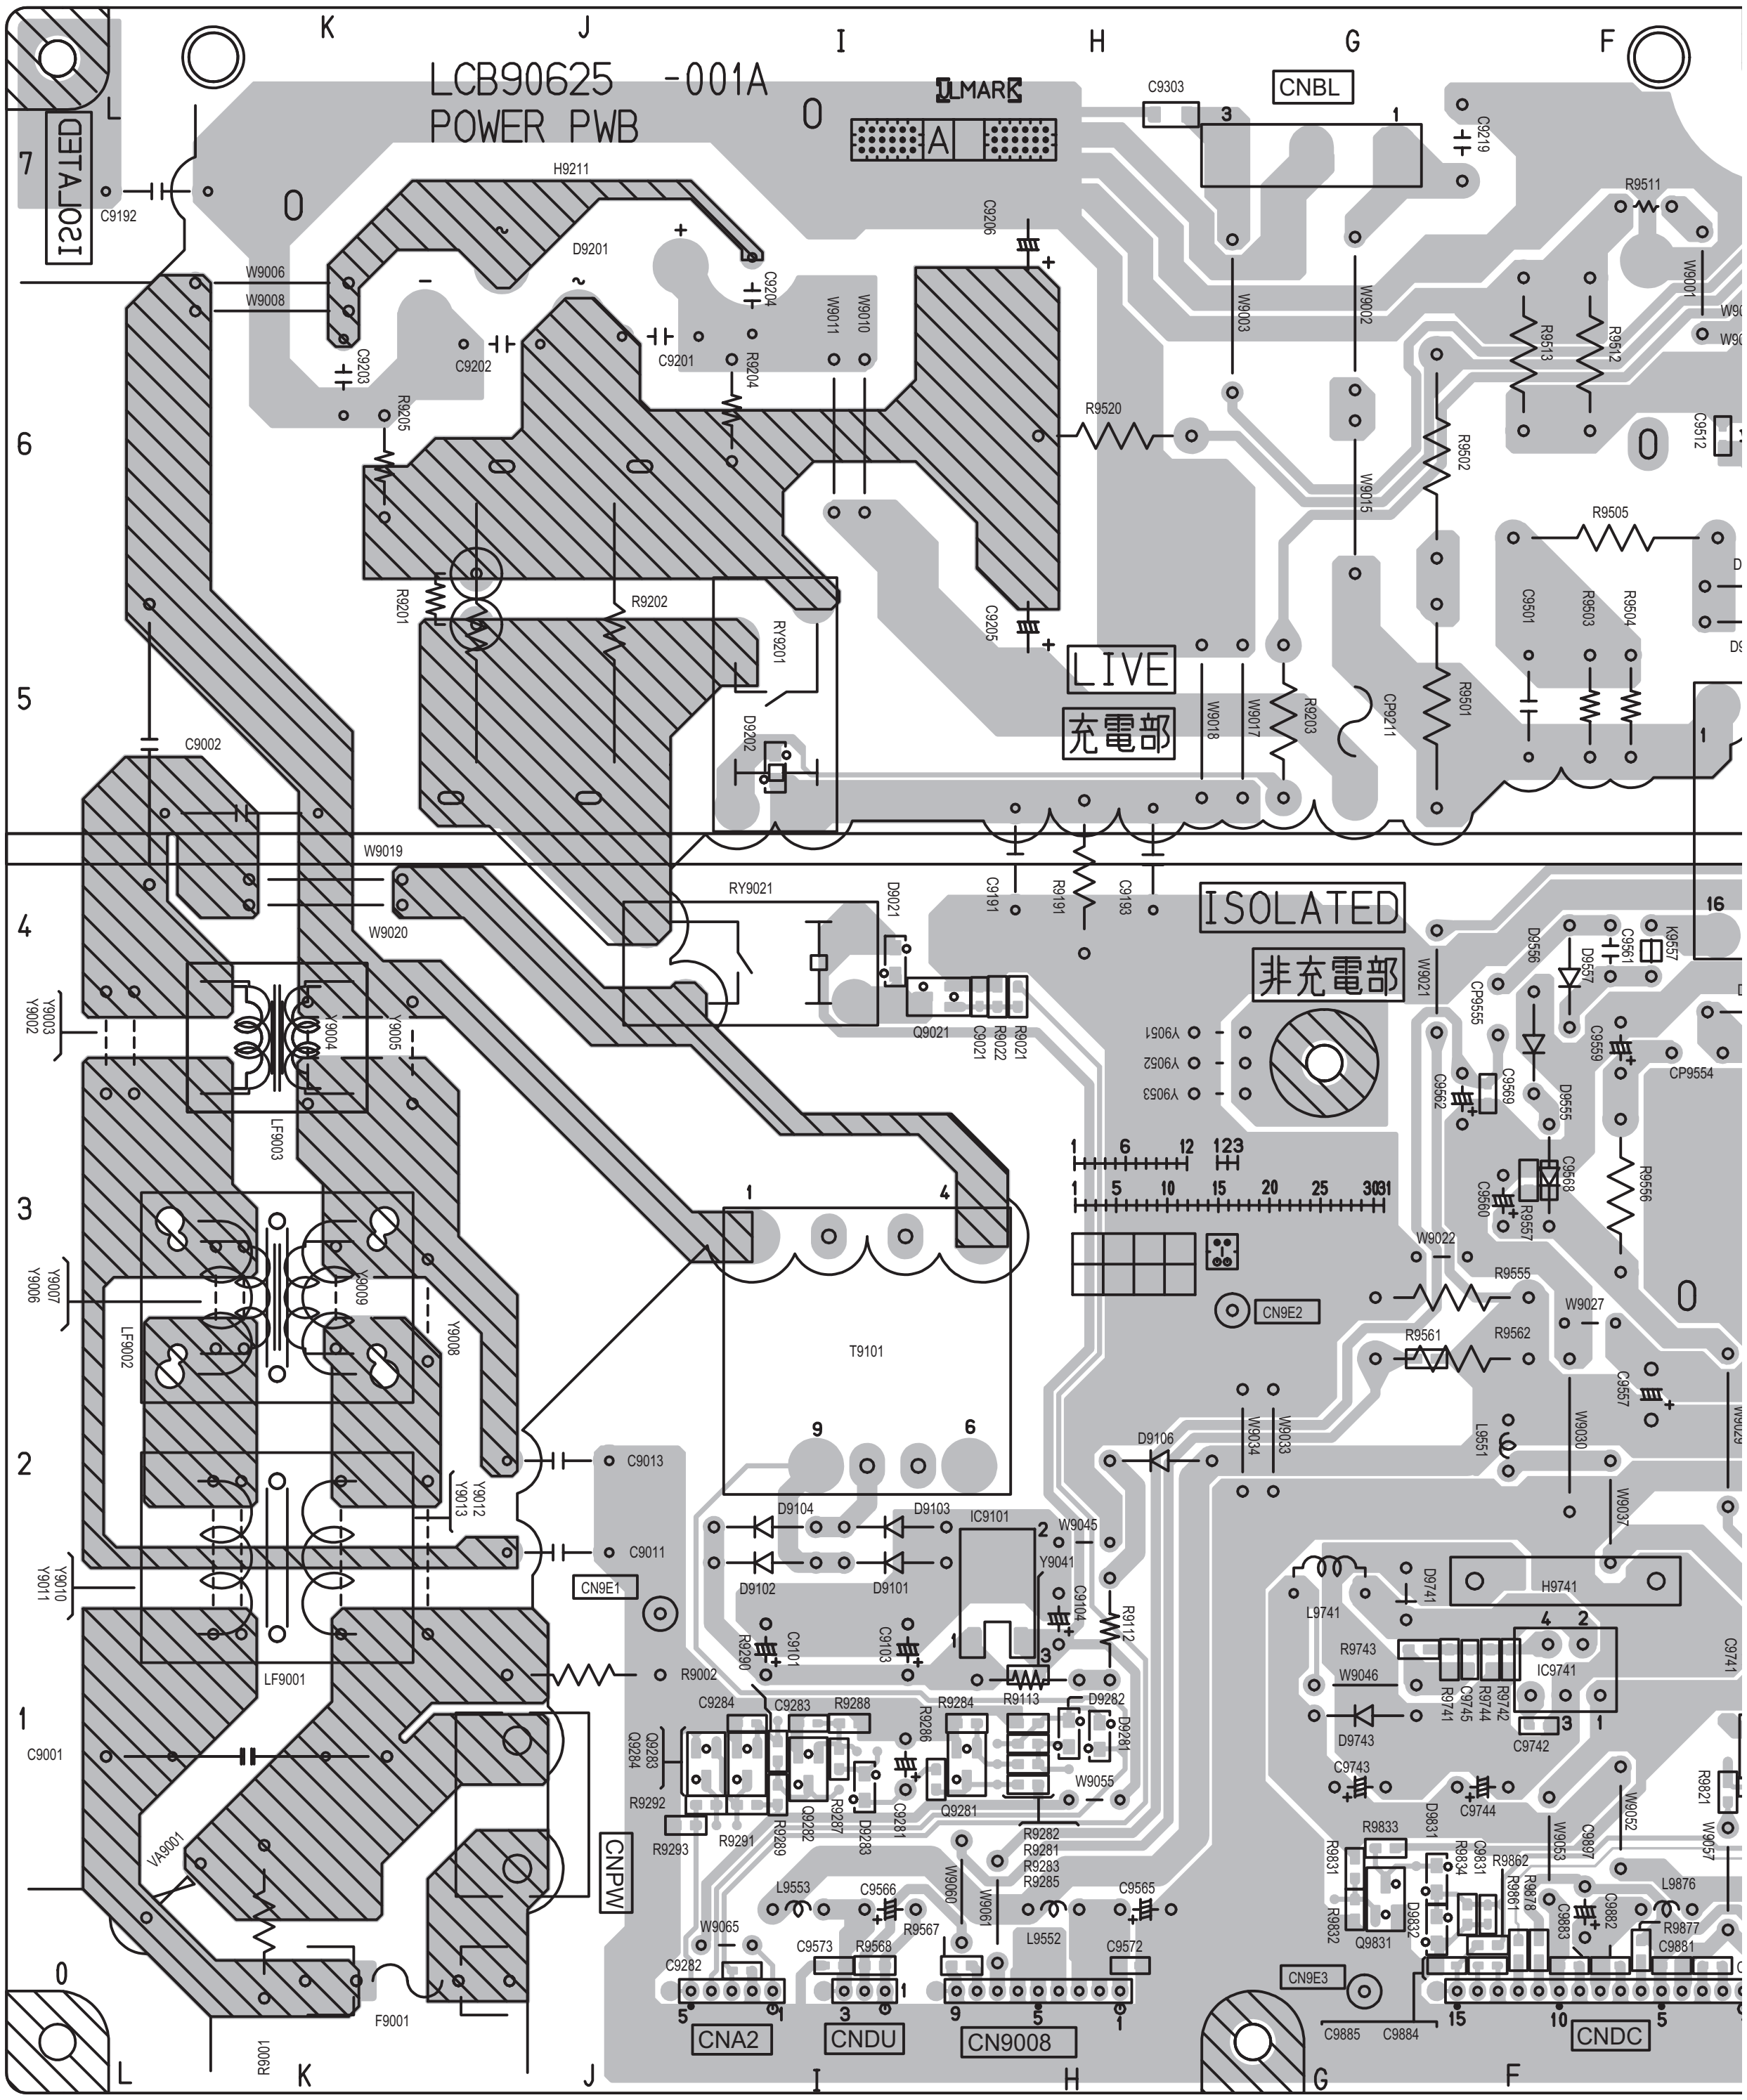
LCB90625 -001A
POWER PWB
K
J
I
H
G
F
L
7
6
5
4
3
2
1
0
ISOLATED
LIVE
充電部
ISOLATED
非充電部
CNBL
C9303
C9219
R9511
H9211
D9201
C9192
W9006
W9008
C9203
C9202
C9201
C9204
R9204
R9205
W9011
W9010
C9206
W9003
W9002
W9001
R9513
R9512
R9520
W9015
R9502
C9512
R9505
R9201
R9202
RY9201
D9202
C9205
W9018
W9017
R9203
CP9211
R9501
C9501
R9503
R9504
C9002
W9019
W9020
RY9021
D9021
C9191
R9191
C9193
Q9021
C9021
R9022
R9021
Y9051
Y9052
Y9053
W9021
D9556
D9557
C9561
K9557
CP9555
C9559
CP9554
C9562
C9569
D9555
C9568
R9556
C9560
R9557
Y9003
Y9002
Y9004
Y9005
LF9003
T9101
W9022
R9555
CN9E2
W9027
R9561
R9562
C9557
Y9007
Y9006
Y9009
LF9002
Y9008
L9551
W9030
W9034
W9033
D9106
C9013
Y9012
Y9013
C9011
CN9E1
D9104
D9103
IC9101
W9045
Y9041
D9102
D9101
C9104
R9112
W9037
D9741
H9741
L9741
IC9741
Y9010
Y9011
LF9001
R9002
R9290
C9101
C9103
R9113
R9743
W9046
R9741
C9745
R9744
R9742
C9742
C9741
C9001
C9284
C9283
R9288
R9284
D9282
Q9283
Q9284
R9286
D9281
D9743
C9743
R9292
Q9282
D9283
C9281
Q9281
W9055
C9744
W9052
R9821
R9293
R9291
R9289
R9287
R9282
R9281
R9283
R9285
R9833
D9831
C9831
R9834
R9862
R9861
W9053
C9897
W9057
VA9001
CNPW
L9553
C9566
W9060
W9061
C9565
R9831
R9878
C9883
C9882
L9876
R9877
W9065
C9573
R9568
R9567
L9552
C9572
R9832
Q9831
D9832
C9881
C9282
CN9E3
F9001
R9001
CNA2
CNDU
CN9008
C9885
C9884
CNDC

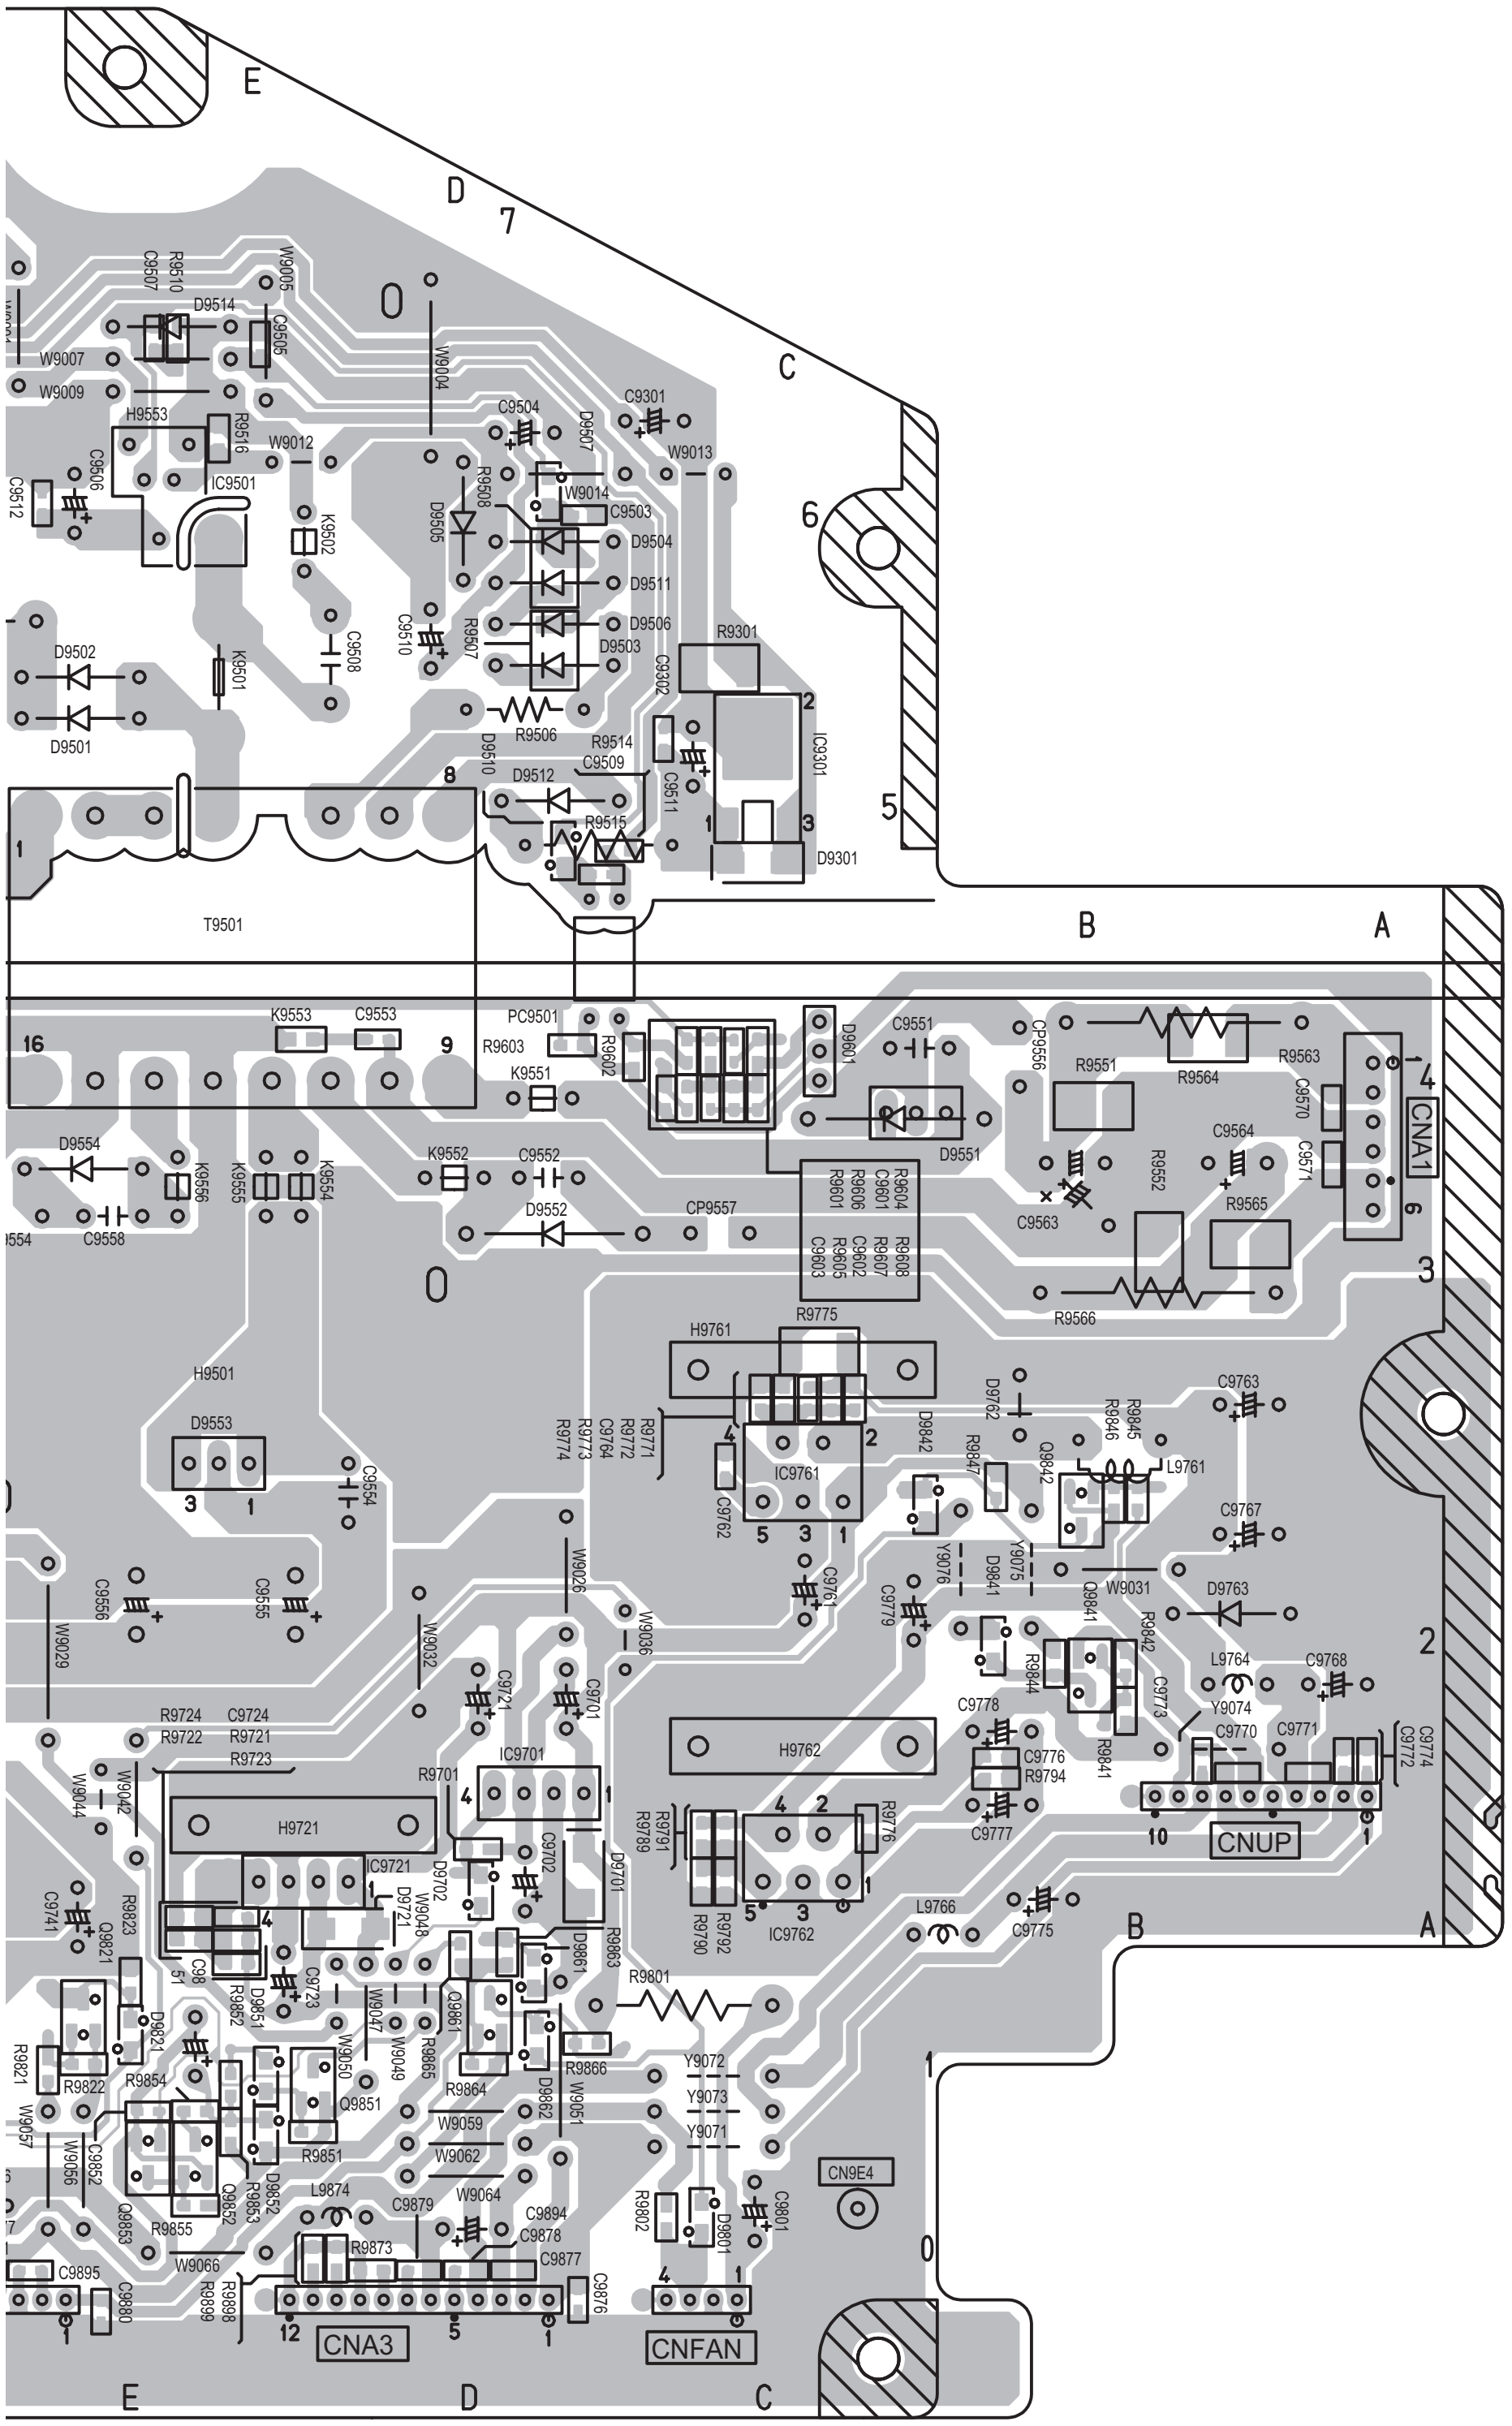
E
D
7
C
6
5
B
A
3
2
1
0
T9501
IC9501
IC9301
D9301
H9553
H9501
H9761
H9762
H9721
IC9761
IC9701
IC9721
IC9762
PC9501
CNA1
CNUP
CNA3
CNFAN
CN9E4
W9004
W9005
W9007
W9009
W9012
W9013
W9014
W9026
W9029
W9031
W9032
W9036
W9042
W9044
W9047
W9048
W9049
W9050
W9051
W9056
W9057
W9059
W9062
W9064
W9066
D9501
D9502
D9503
D9504
D9505
D9506
D9507
D9510
D9511
D9512
D9514
D9551
D9552
D9553
D9554
D9601
D9701
D9702
D9721
D9762
D9763
D9801
D9821
D9841
D9842
D9851
D9852
D9861
D9862
C9301
C9302
C9503
C9504
C9505
C9506
C9507
C9508
C9509
C9510
C9511
C9512
C9551
C9552
C9553
C9554
C9555
C9556
C9558
C9563
C9564
C9570
C9571
C9601
C9602
C9603
C9701
C9702
C9721
C9723
C9724
C9741
C9761
C9762
C9763
C9764
C9767
C9768
C9770
C9771
C9772
C9773
C9774
C9775
C9776
C9777
C9778
C9779
C9801
C9852
C9876
C9877
C9878
C9879
C9880
C9894
C9895
R9301
R9506
R9507
R9508
R9510
R9514
R9515
R9516
R9551
R9552
R9563
R9564
R9565
R9566
R9601
R9602
R9603
R9604
R9605
R9606
R9607
R9608
R9701
R9721
R9722
R9723
R9724
R9771
R9772
R9773
R9774
R9775
R9776
R9789
R9790
R9791
R9792
R9794
R9801
R9802
R9821
R9822
R9823
R9841
R9842
R9844
R9845
R9846
R9847
R9851
R9852
R9853
R9854
R9855
R9863
R9864
R9865
R9866
R9873
R9898
R9899
K9501
K9502
K9551
K9552
K9553
K9554
K9555
K9556
CP9556
CP9557
L9761
L9764
L9766
L9874
Q9821
Q9841
Q9842
Q9851
Q9852
Q9853
Q9861
Y9071
Y9072
Y9073
Y9074
Y9075
Y9076
8
16
9
4
10
12


TOP
FRONT

POWER PWB PATTERN [PARTS SIDE]



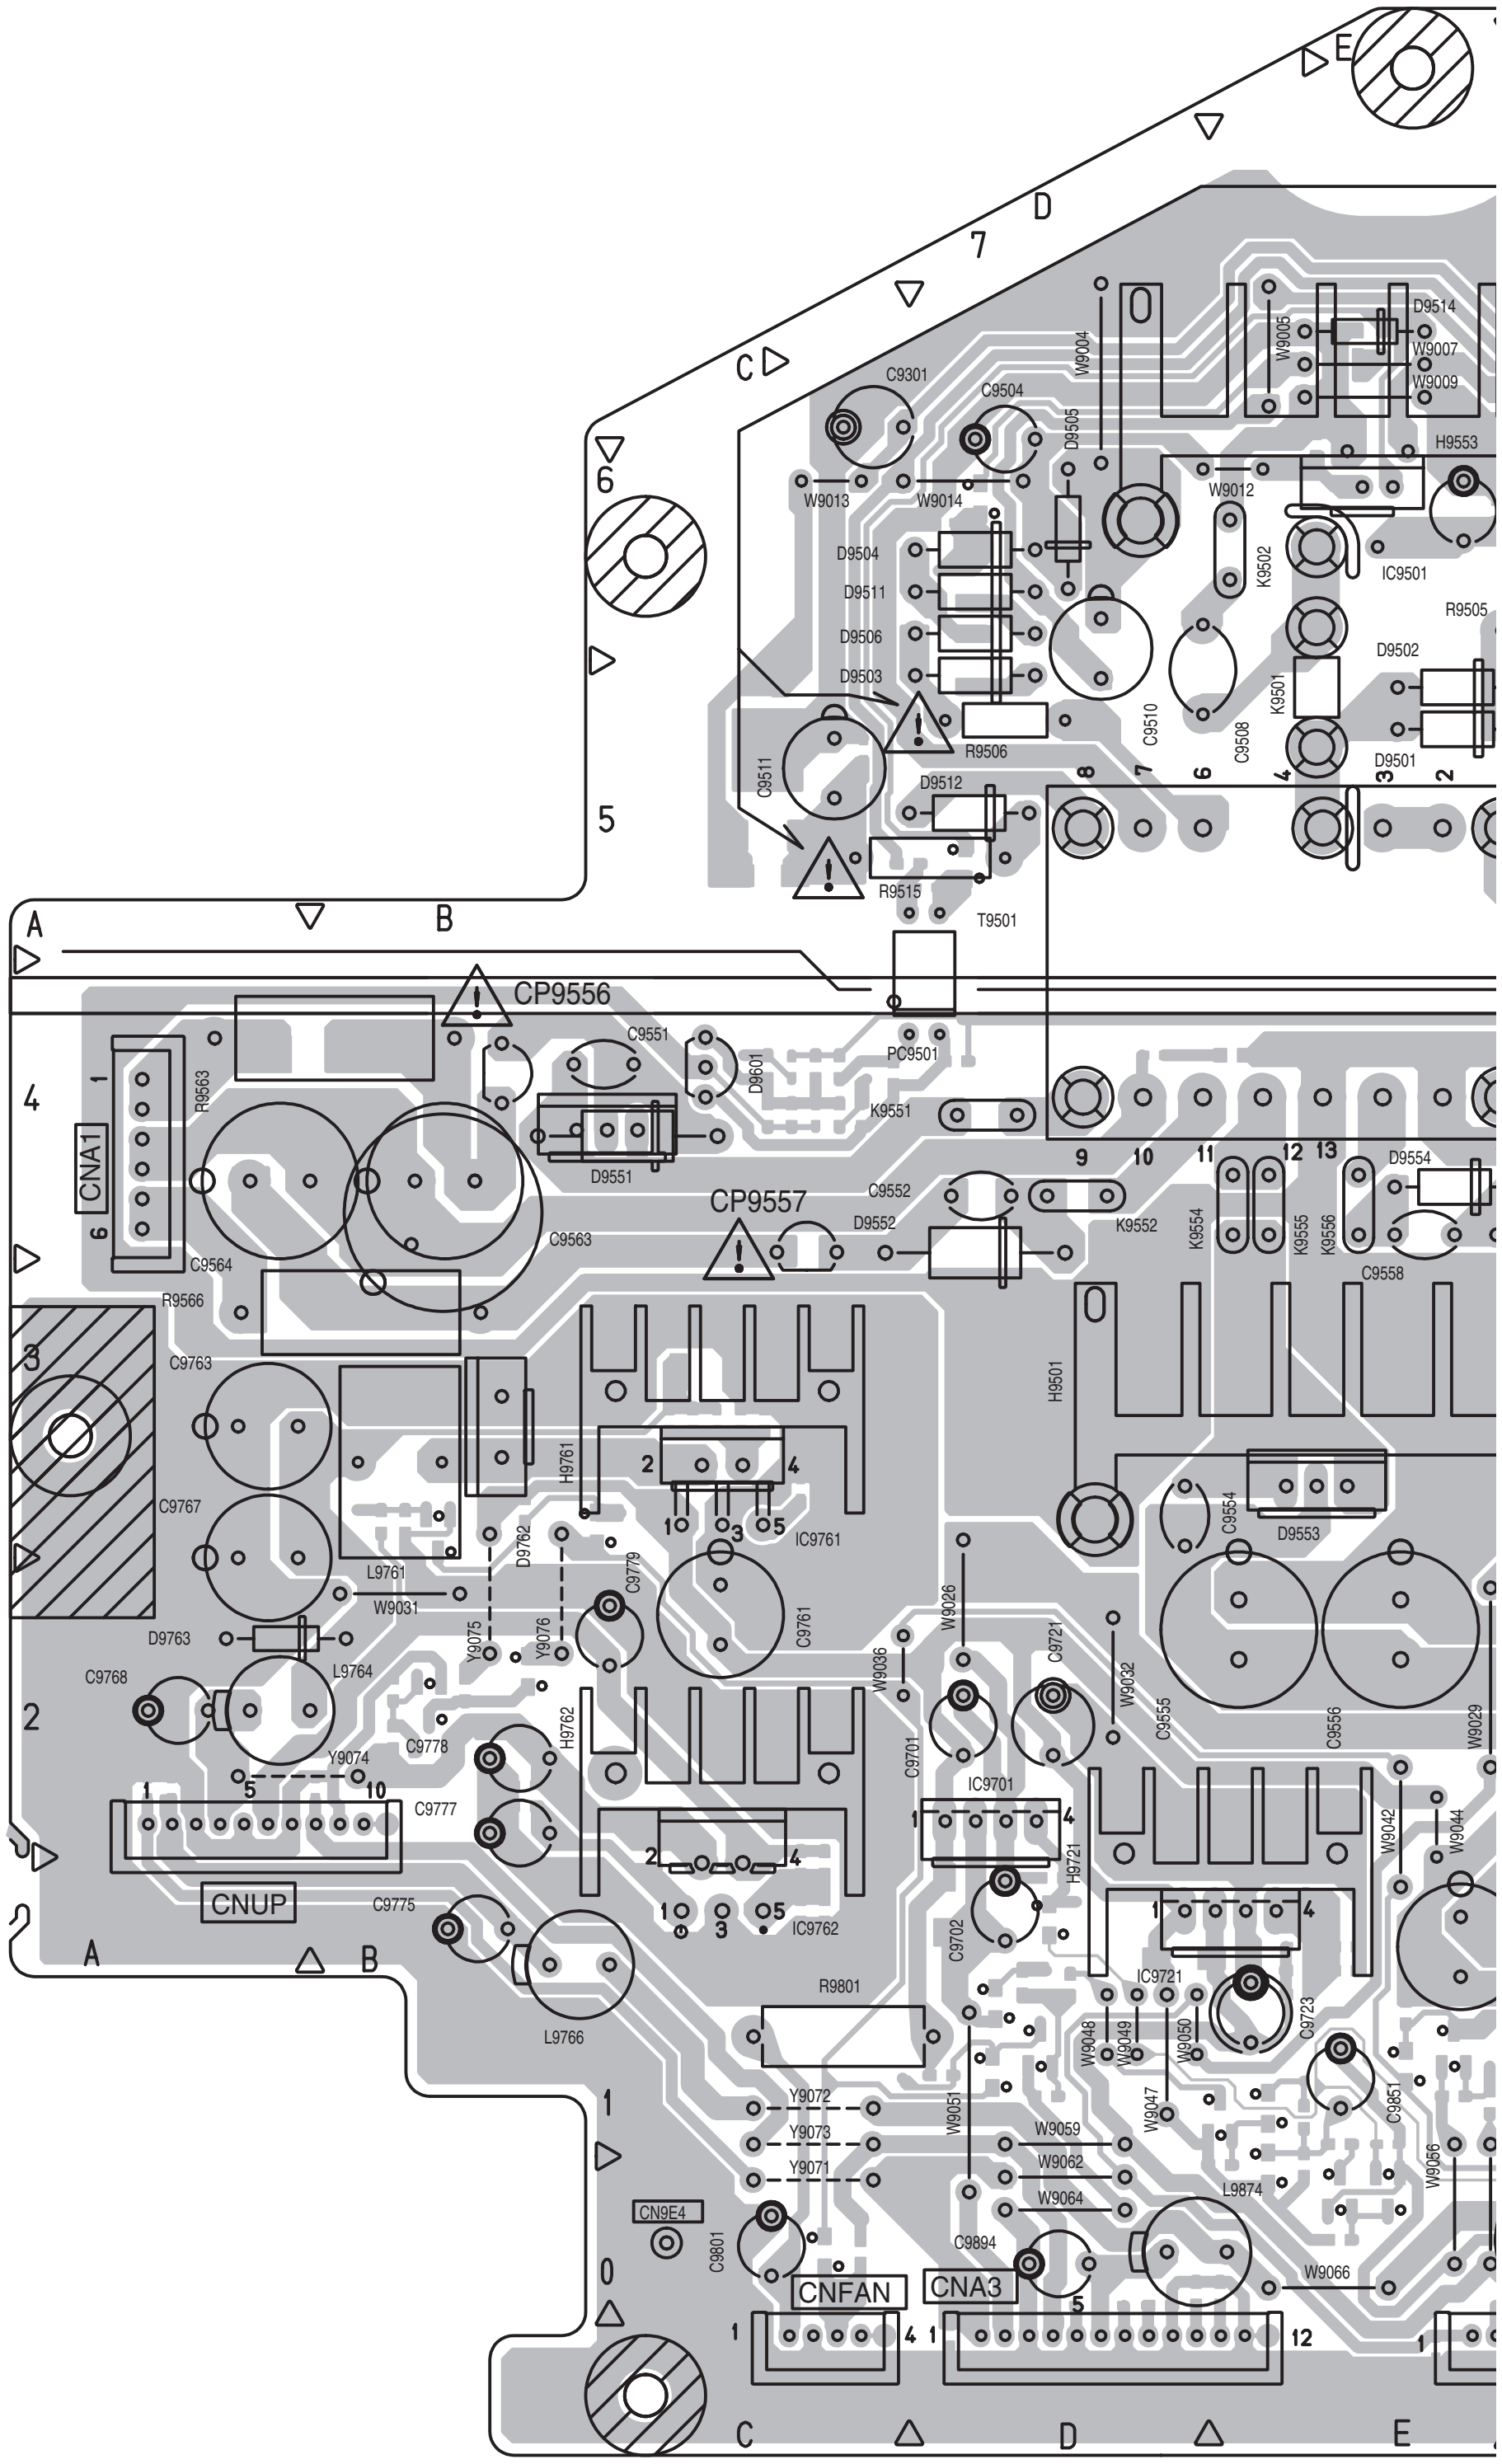
A
B
C
D
E
0
1
2
3
4
5
6
7
CP9556
CP9557
CNA1
CNUP
CNFAN
CNA3
CN9E4
T9501
PC9501
IC9501
IC9701
IC9721
IC9761
IC9762
C9301
C9504
C9511
C9551
C9552
C9563
C9564
C9763
C9767
C9768
C9775
C9777
C9778
C9779
C9761
C9701
C9702
C9721
C9723
C9555
C9556
C9554
C9558
C9508
C9510
C9801
C9851
C9894
D9501
D9502
D9503
D9504
D9505
D9506
D9511
D9512
D9514
D9551
D9552
D9553
D9554
D9601
D9762
D9763
R9505
R9506
R9515
R9563
R9566
R9801
K9501
K9502
K9551
K9552
K9554
K9555
K9556
H9501
H9553
H9721
H9761
H9762
L9761
L9764
L9766
L9874
W9004
W9005
W9007
W9009
W9012
W9013
W9014
W9026
W9029
W9031
W9032
W9036
W9042
W9044
W9047
W9048
W9049
W9050
W9051
W9056
W9059
W9062
W9064
W9066
Y9071
Y9072
Y9073
Y9074
Y9075
Y9076

CAUTION :
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH SAME TYPE AND RATED FUSE(S)
AND ROHM'S MFR'S TYPE CP(S).

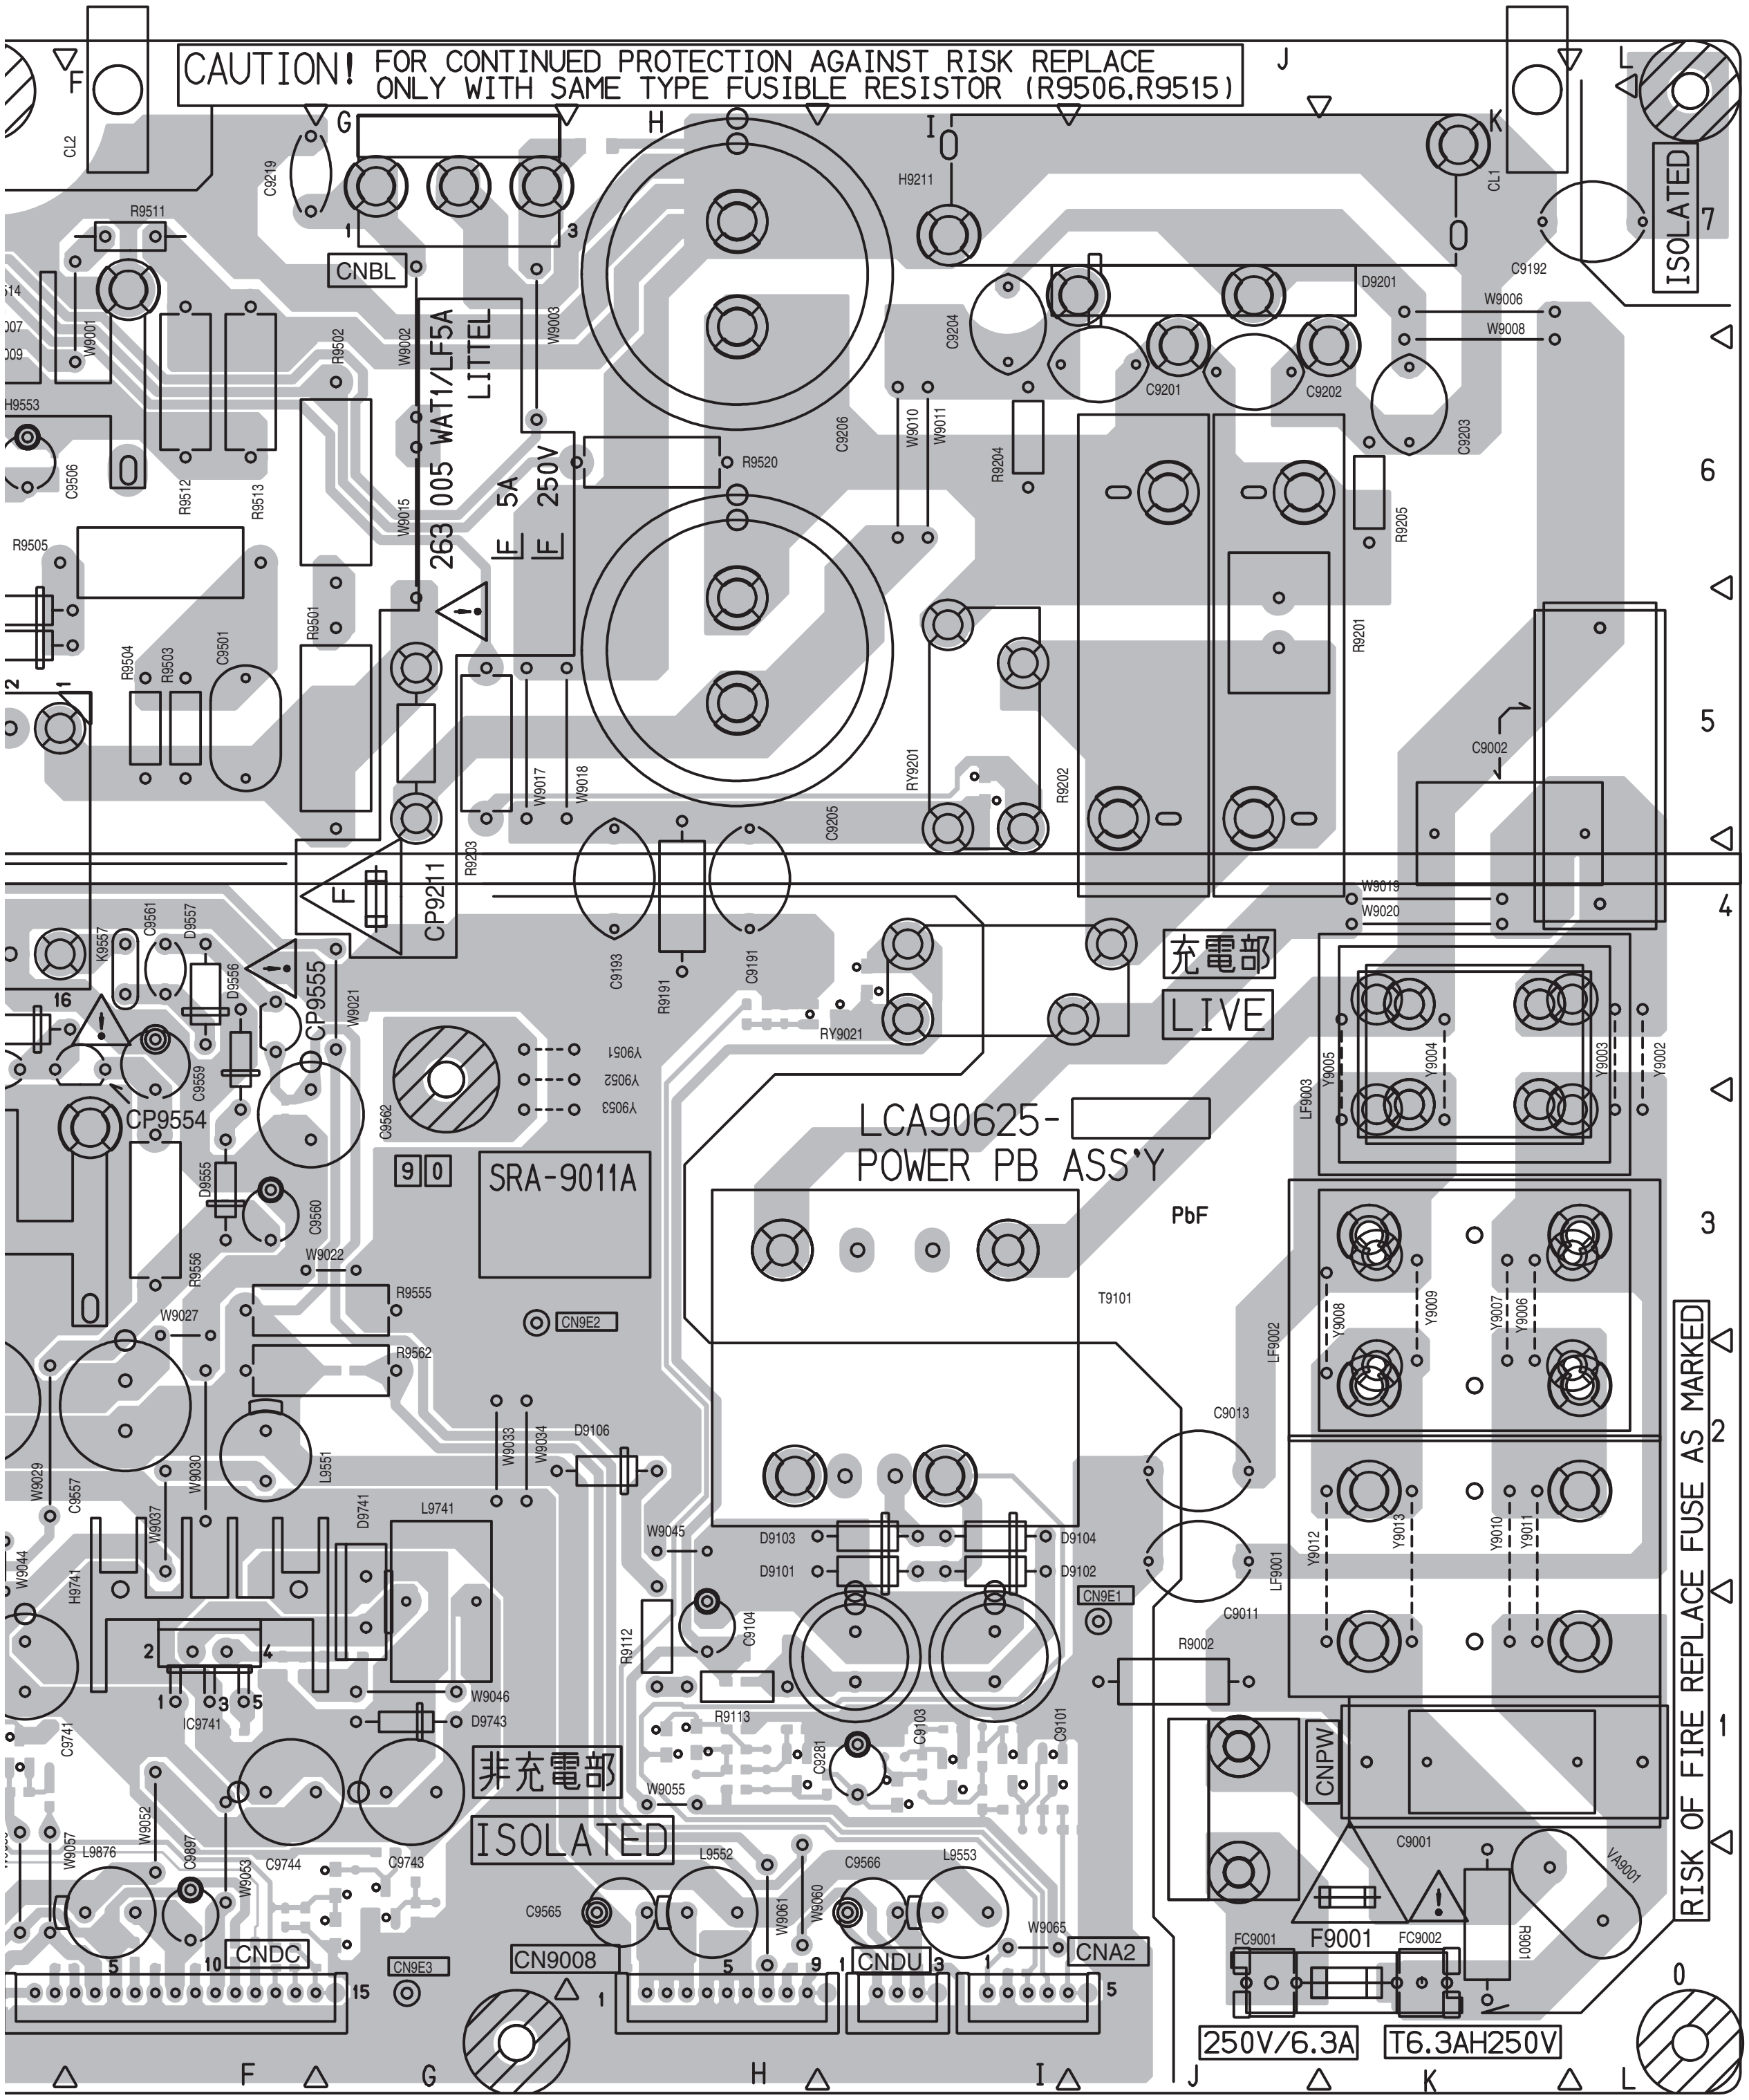

CAUTION! FOR CONTINUED PROTECTION AGAINST RISK REPLACE
ONLY WITH SAME TYPE FUSIBLE RESISTOR (R9506,R9515)
ISOLATED
CNBL
263 005 WAT1/LF5A
LITTEL
F 5A
F 250V
CP9211
CP9555
CP9554
充電部
LIVE
LCA90625-
POWER PB ASS'Y
PbF
SRA-9011A
T9101
RY9201
RY9021
C9205
C9206
R9520
D9201
C9201
C9202
C9203
C9204
C9192
C9193
C9191
C9002
C9013
C9011
C9001
R9002
R9001
R9191
F9001
FC9001
FC9002
VA9001
LF9001
LF9002
LF9003
CNPW
CN9E1
CN9E2
CN9E3
CN9008
CNDU
CNA2
CNDC
IC9741
L9741
L9552
L9553
L9876
D9101
D9102
D9103
D9104
D9106
D9743
C9565
C9566
C9744
C9743
非充電部
ISOLATED
RISK OF FIRE REPLACE FUSE AS MARKED
250V/6.3A
T6.3AH250V
F
G
H
I
J
K
L
1
2
3
4
5
6
7

FRONT LED PWB PATTERN

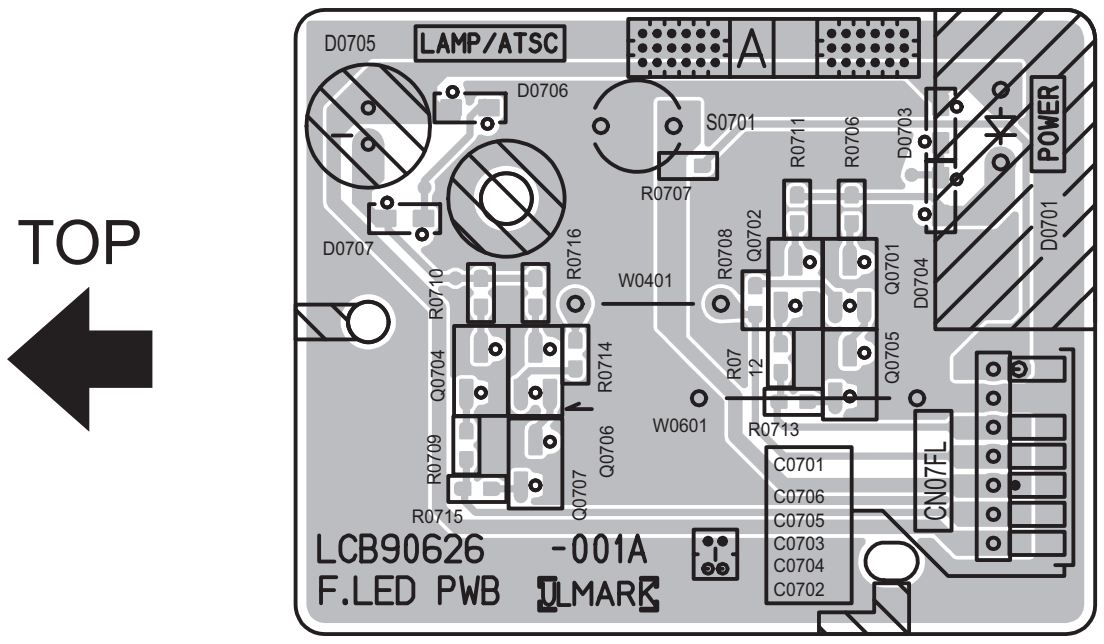
TOP
LAMP/ATSC
POWER
D0705
D0706
S0701
R0711
R0706
D0703
R0707
D0707
R0716
R0710
W0401
R0708
Q0702
Q0701
D0704
D0701
Q0704
R0714
R0712
Q0705
R0709
W0601
R0713
Q0706
Q0707
R0715
C0701
C0706
C0705
C0703
C0704
C0702
CN07FL
LCB90626 -001A
F.LED PWB

TEMP PWB PATTERN
[SOLDER SIDE]


TOP
TEMP PWB
LCB90632 -001A
C2001
C2002
R2001
R2002
R2003
IC2001
N

TEMP SENSOR PWB PATTERN
[PARTS SIDE]


TOP
TEMP PB ASS'Y
SRA-8202A
CN2007
LCA90632-01A
PbF

LAMP COVER PWB PATTERN


TOP
A
G3
LCB90627 -001B
S0861
C0861
CN0806
LAMP COVER PWB

REMOCON PWB PATTERN

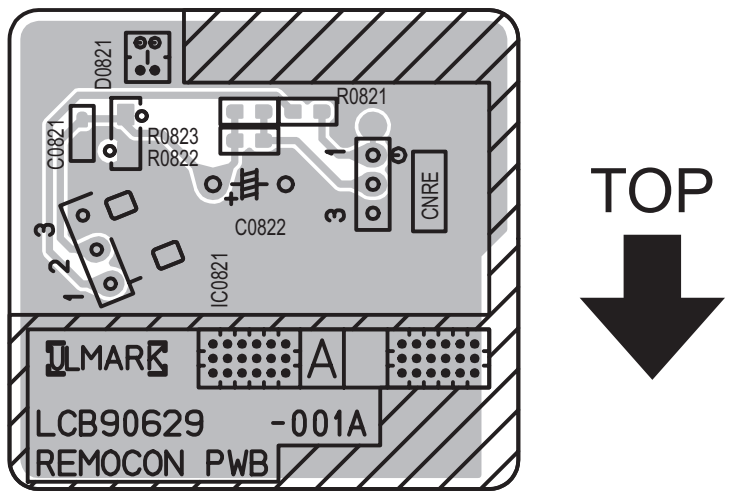
D0821
R0821
R0823
R0822
C0821
C0822
IC0821
CNRE
TOP
A
LCB90629 -001A
REMOCON PWB

SIDE CONTROL PWB PATTERN

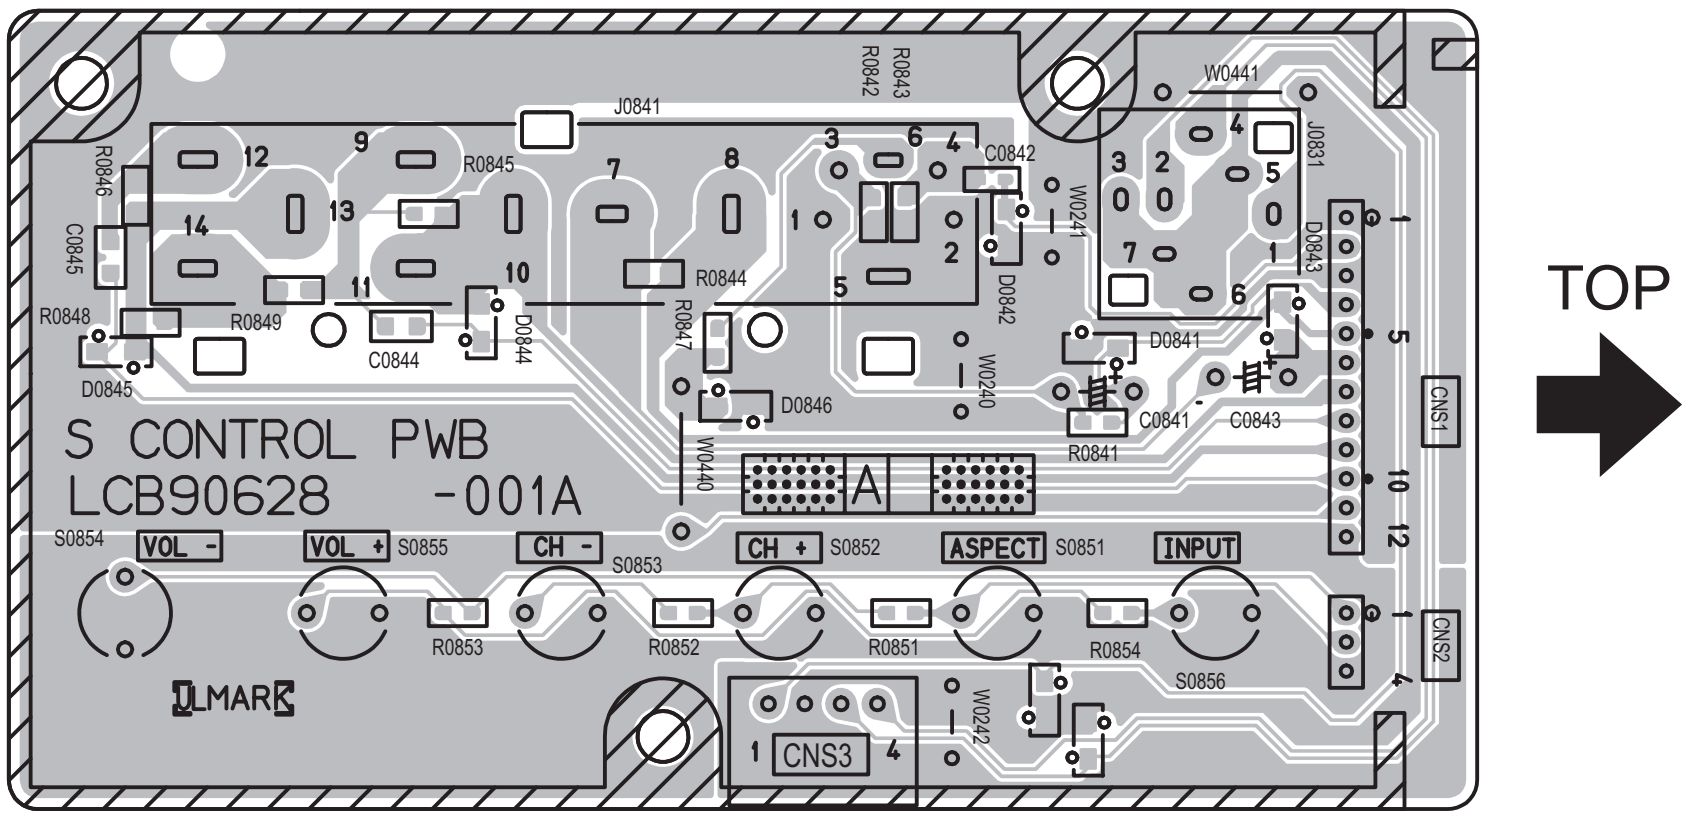
R0843
R0842
W0441
J0841
J0831
R0846
R0845
C0842
W0241
C0845
D0843
R0844
D0842
R0848
R0849
R0847
D0844
D0841
C0844
D0846
W0240
D0845
C0841
C0843
R0841
CNS1
S CONTROL PWB
LCB90628 -001A
W0440
A
S0854
VOL -
VOL +
S0855
CH -
S0853
CH +
S0852
ASPECT
S0851
INPUT
R0853
R0852
R0851
R0854
S0856
CNS2
CNS3
W0242
TOP

FAN PWB PATTERN [SOLDER SIDE]

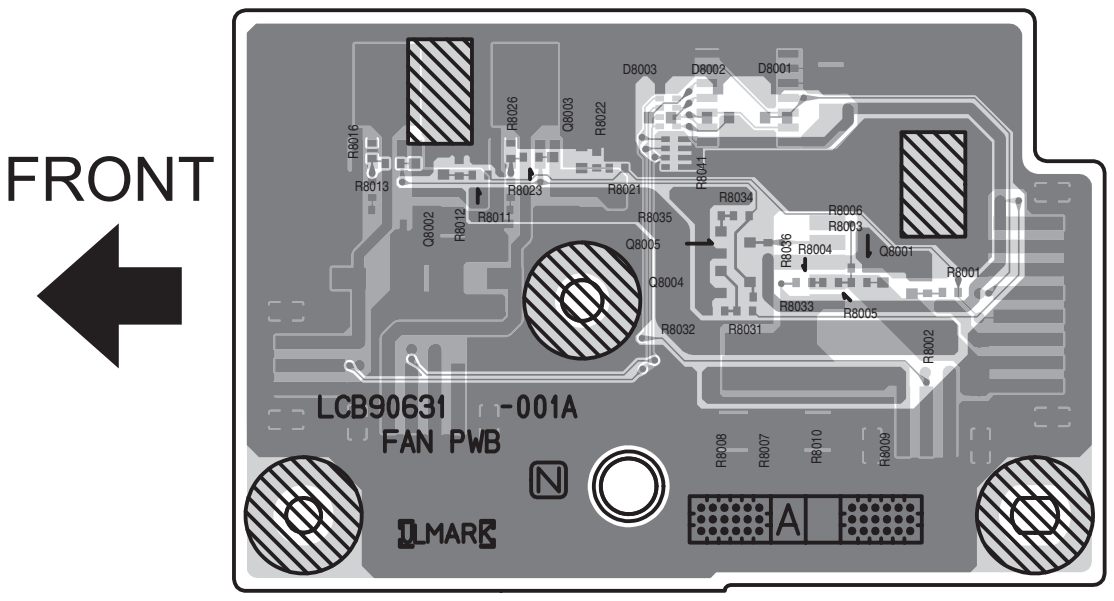
FRONT
LCB90631 -001A
FAN PWB
A

FAN PWB PATTERN [PARTS SIDE]

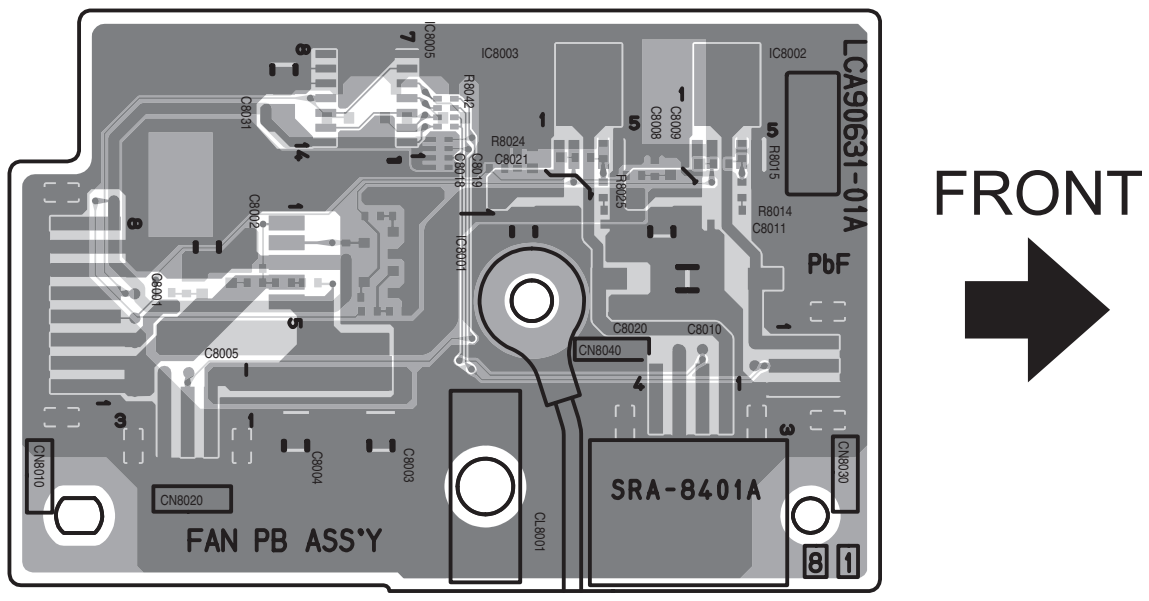
LCA90631-01A
PbF
FRONT
SRA-8401A
FAN PB ASS'Y
8 1

SD CARD PWB PATTERN [SOLDER SIDE]

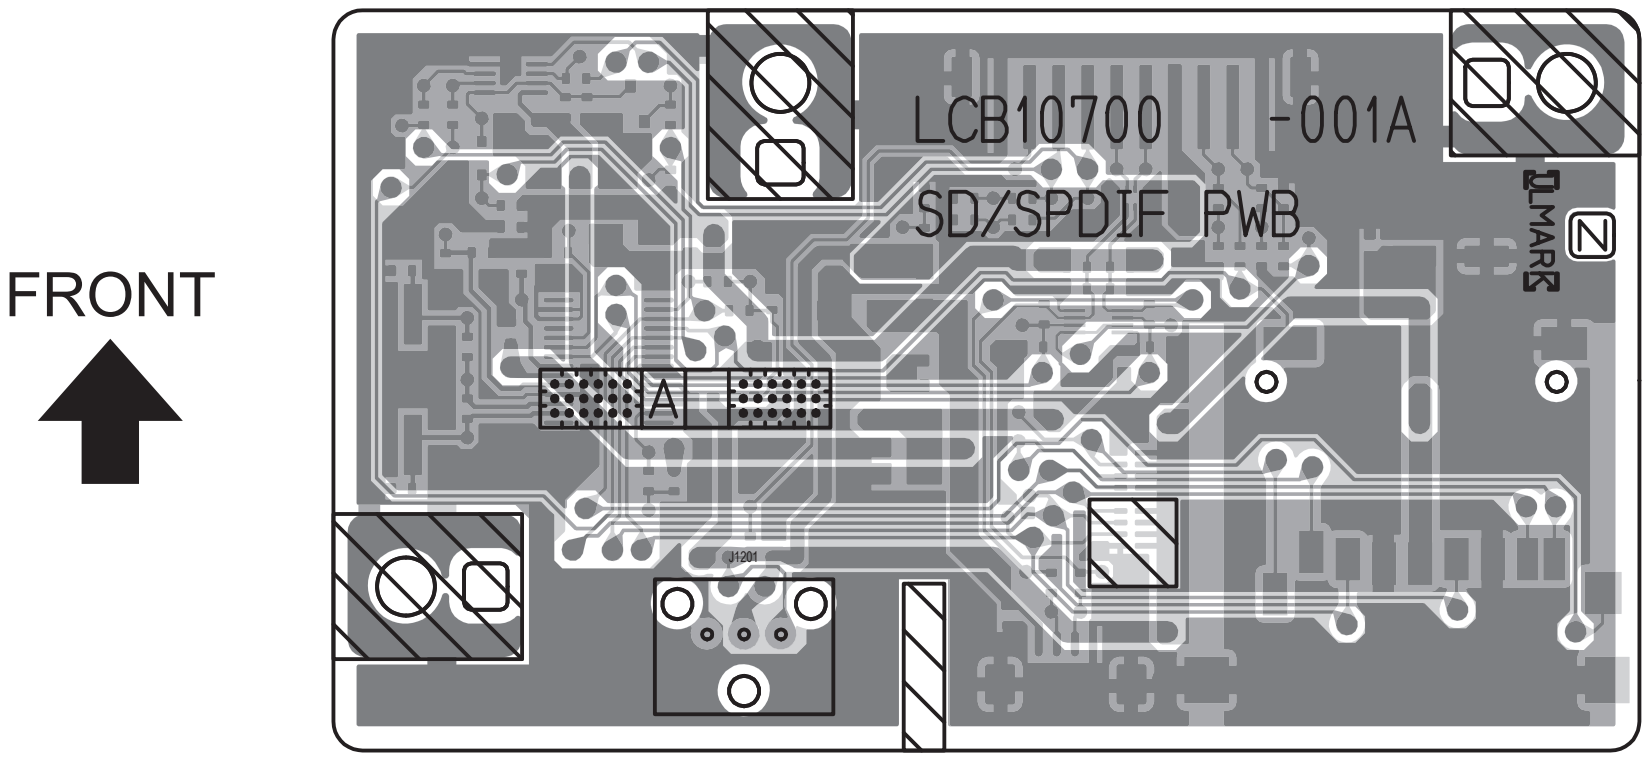
LCB10700 -001A
SD/SPDIF PWB
FRONT
A
J1201

SD CARD PWB PATTERN [PARTS SIDE]

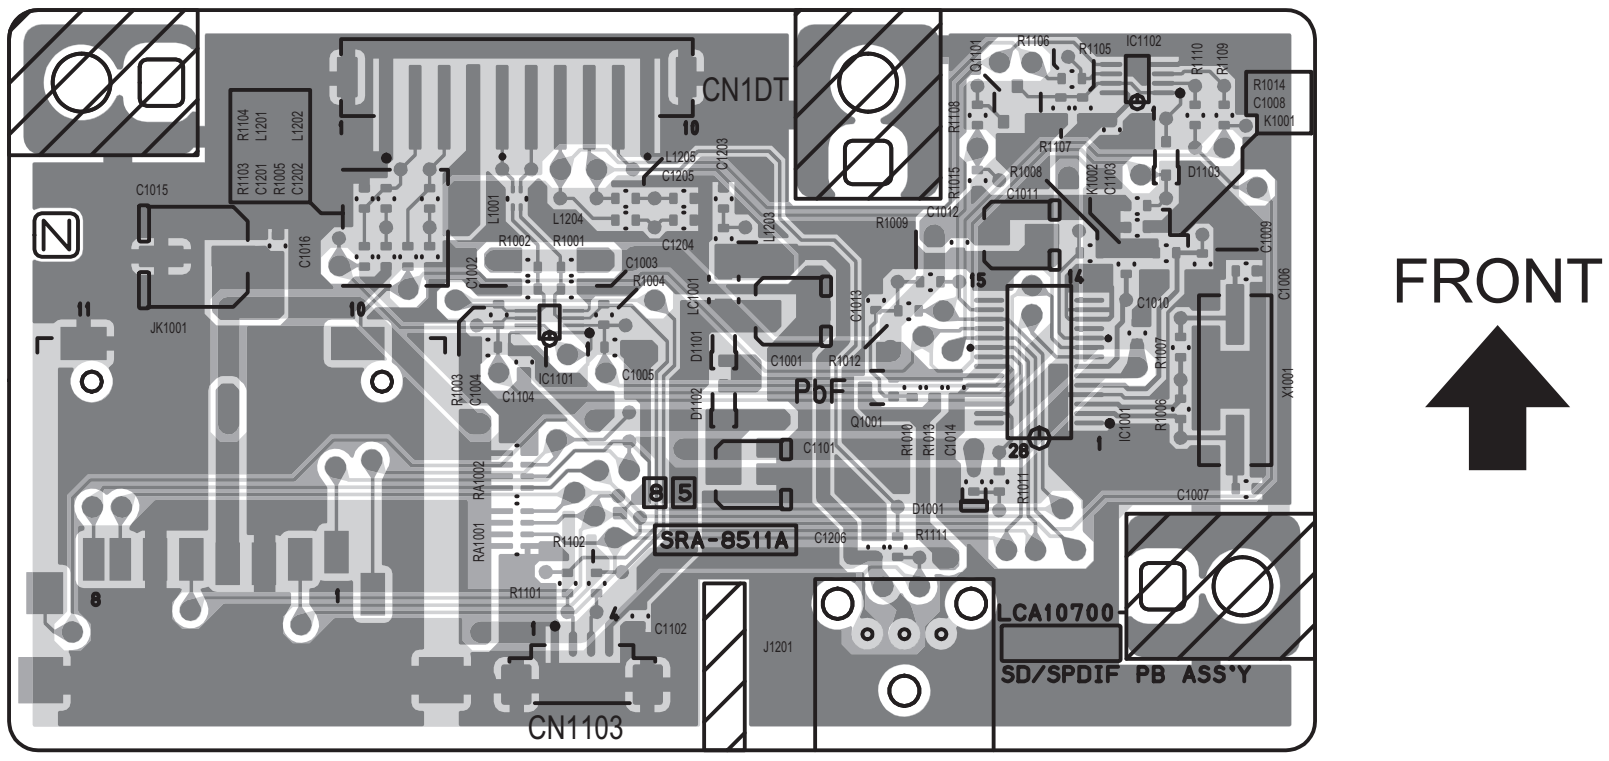
CN1DT
JK1001
PbF
8 5
SRA-8511A
LCA10700-
SD/SPDIF PB ASS'Y
CN1103
FRONT

IRIS PWB PATTERN [SOLDER SIDE]

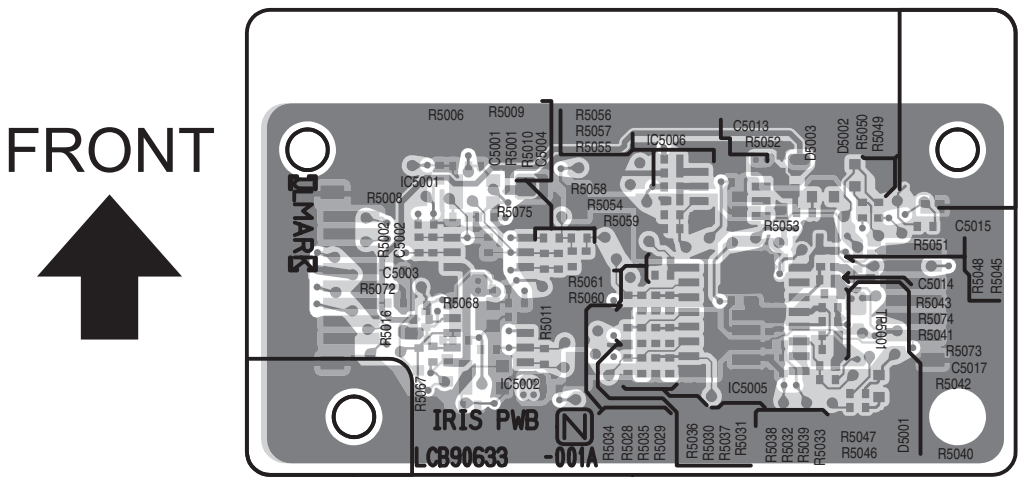
FRONT
IRIS PWB
LCB90633 -001A

IRIS PWB PATTERN [PARTS SIDE]

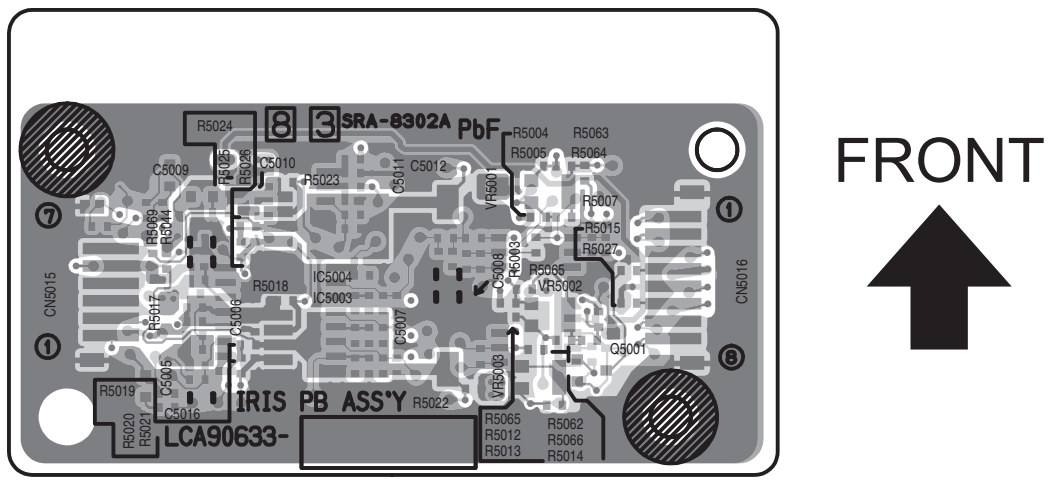
8 3 SRA-8302A
PbF
IRIS PB ASS'Y
LCA90633-
FRONT

VOLTAGE CHARTS

<TUNER PWB>

[P.2-9 - P.2-10]

MODE PIN NO.	DC (V)
IC001	
1	6.9
2	4.9
3	0
4	6.9
Q004	
E	2.8
C	0
B	0
Q005	
E	2.2
C	8.7
B	2.8
TU001	
1	NC
2	NC
3	4.9
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	4.4
11	4.3
12	0
13	2.8
14	0
15	31.1
16	NC
17	2.4

[P.2-11 - P.2-12]

MODE PIN NO.	DC (V)
IC061	
1	4
2	4
3	4
4	4
5	4.9
6	4.9
7	0
8	3.9
9	3.9
10	4
11	3.8
12	3.2
13	4
14	1.2
15	1.3
16	NC
17	0
18	3.2
19	8.8
20	NC
21	4
22	4
23	4
24	3.8
25	4
26	3.9
27	4
28	1.9
29	4
30	4
31	1.8
32	4
33	4
34	4
35	4
36	4
37	4
38	4
39	3.9
40	3.9
41	1.1
42	4
43	4
44	4
45	NC
46	4
47	4
48	4

<ANALOG PWB>

[P.2-9 - P.2-10]

MODE PIN NO.	DC (V)
IC101	
1	4.5
2	4.5
3	0
4	4.5
5	4.5
6	0
7	4.5
8	4.5
9	0
10	4.5
11	4.5
12	0
13	4.5
14	4.5
15	4.5
16	4.5
17	4.5
18	9
19	4.5
20	4.5
21	0
22	4.5
23	4.5
24	0
25	4.5
26	4.5
27	0
28	4.5
29	4.5
30	9
31	0
32	4.5
33	4.5
34	4.5
35	4.5
36	4.5
37	1.4
38	1.9
39	1.4
40	1.9
41	0
42	2.1
43	1.6
44	5
45	1.9
46	0
47	2
48	5
49	1.9
50	1.6
51	0.1
52	5
53	4.9
54	4.9
55	2.5
56	2.1
57	2.5
58	2.1
59	2.1
60	2.5
61	5
62	2.5
63	0.2
64	2.1
65	0
66	2.5
67	4.9
68	2.5
69	0.2
70	2.1
71	4.9
72	2.5
73	4.9
74	2.5
75	0
76	0
77	2.1
78	1.4
79	2.8
80	5
81	2.3
82	0
83	2.8
84	0
85	2.5
86	4.6
87	2.5
88	2.2
89	2.1
90	0
91	2.5
92	2.8
93	2.5
94	0.2
95	2.1
96	4.5
97	2.5
98	4.8
99	2.5
100	2.5
IC102	
1	0
2	2.4
3	2.5
4	2.4
5	2.4
6	2.5
7	2.5
8	2.4
9	0
10	2.4
11	2.2
12	2.4
13	0
14	0.3
15	0.3
16	0
17	2.4
18	0
19	2.4
20	0
21	2.4
22	0
23	0
24	0.1
25	5
26	0
27	4
28	3.9
29	0
30	1.8
31	6.3
32	1.8
33	0
34	1.2
35	0
36	3.4
37	4.1
38	3.4
39	1.7
40	6.4
41	1.8
42	2.9
43	1.8
44	0
45	1.3
46	2.8
47	2.5
48	2.5
49	3.9
50	6.4
51	4.9
52	1.9
53	1.9
54	3
55	2.4
56	2.5
57	2.5
58	0
59	0
60	2.2
61	0
62	0
63	2.5
64	2.5
65	2.5
66	2.5
67	2.5
68	2.4
69	2.5
70	2.4
71	4.9
72	2.4
73	4.9
74	2.4
75	0.1
76	0.6
77	0.1
78	2.4
79	4.6
80	2.4
81	4.6
82	2.4
83	0.3
84	0.6
85	0.5
86	2.4
87	5
88	2.4
89	2.8
90	2.4
91	0
92	0.6
93	5
94	2.4
95	0
96	2.4
97	0
98	2.4
99	0
100	4.6
Q106	
S	0.1
D	0.1
G	0
Q107	
S	3.2
D	5
G	3.3
Q109	
E	2.6
C	0
B	1.9
Q110	
E	2.2
C	0
B	1.4
Q111	
E	2.2
C	0
B	1.4
Q112	
E	1.7
C	0
B	1
Q113	
E	0
C	5
B	2.9

[P.2-15 - P.2-16]

MODE PIN NO.	DC (V)
Q541	
E	0
C	0
B	2.4
Q542	
E	0
C	0
B	2.4
Q543	
E	2.4
C	2.5
B	0

[P.2-17 - P.2-18]

MODE PIN NO.	DC (V)
IC381	
1	0
2	5
3	0.1
4	0
5	0.1
6	0.1
7	0
8	0
9	0.2
10	0.2
11	0.2
12	0.9
13	0.2
14	0.9
15	5
16	4.9

[P.2-21 - P.2-22]

MODE PIN NO.	DC (V)
IC601	
1	6
2	6.1
3	6.1
4	6.1
5	6.1
6	6.1
7	0.7
8	6.1
9	6.1
10	6.1
11	1.1
12	0
13	1
14	6.1
15	0
16	5.2
17	0.1
18	5
19	0
20	12.1
21	5.9
22	0
23	0
24	4.9
25	3.9
26	4.7
27	4.7
28	6.1
29	6.1
30	6.1
31	6.1
32	6.1
33	6.1
34	0
35	0
36	6.1
37	6.1
38	0
39	6.1
40	6.1
41	6.1
42	6.1
43	6.1
44	6
45	6
46	6
47	6.1
48	6.1
IC602	
1	14.4
2	2.8
3	12.1
4	2.6
5	0
IC603	
1	5.9
2	4.7
3	4.8
4	0
5	6
6	6.1
7	8
8	11.7
IC604	
1	0
2	1.2
3	1.2
4	0
5	3.3
6	3.3
7	0
8	3.3
9	1.4
10	1.4
11	3.3
12	0
13	1.6
14	1.6
15	1.2
16	1.2
IC605	
1	-15.4
2	-15.4
3	-15.4
4	-15.4
5	14.4
6	10.3
7	1.6
8	-15.4
9	-15.4
10	-15.4
11	1.5
12	10.2
13	14.4
14	-14.4
15	-13.7
16	-15.1
17	-15.3
IC606	
1	0
2	5
3	0.1
4	5
5	4.9
6	0
7	0
8	0
9	4.8
10	4.9
11	0
12	5
13	5
14	0
15	0
16	5
IC607	
1	-15.3
2	0
3	0
4	-15.4
5	0
6	0.1
7	-15.3
8	13.6
IC608	
1	5
2	0
3	5
4	NC
5	3.2
IC610	
1	6.2
2	6.1
3	6.1
4	0
5	6.1
6	6.1
7	6.2
8	12.2
Q603	
E	0
C	0
B	0.6
Q604	
E	0
C	12.1
B	8
Q605	
E	0
C	0
B	4.4
Q606	
E	0
C	14.3
B	0
Q607	
E	-14.4
C	-14.3
B	-14.3
Q614	
E	11.5
C	0
B	11.9
Q615	
E	0.7
C	0.6
B	0.1
Q616	
E	0
C	0
B	0.6
Q617	
E	0
C	0
B	0.6

[P.2-23 - P.2-24]

MODE PIN NO.	DC (V)
IC902	
1	3.3
2	0
3	4.9
Q901	
E	9
C	9
B	9.7
Q902	
E	5
C	5
B	5.7

<DIGITAL PWB>

[P.2-25 - P.2-26]

MODE PIN NO.	DC (V)
Q7501	
E	0
C	1
B	2.1

[P.2-31 - P.2-32]

MODE PIN NO.	DC (V)
IC6401	
1	0
2	0
3	0
4	2
5	0
6	3.6
7	2
8	0
9	2.1
10	0
11	3.6
12	0.2
13	0
14	0.7
15	0
16	2.1
17	0
18	3.6
19	2
20	3.6
21	0
22	2.2
23	0
24	2.2
25	0
26	0.7
27	0
28	2.2
29	3.6
30	0
31	2.1
32	0.1
33	2.7
34	0
35	3.6
36	0
37	0
38	3.6
39	2
40	0
41	0
42	2.1
43	0
44	3.6
45	0
46	3.6
47	2.2
48	0
49	0.2
50	3.6
51	0
52	2.1
53	0
54	3.6
55	0
56	0
57	0
58	0
59	0
60	0
61	0
62	0
63	0
64	2.1
65	3.7
66	0
67	3.7
68	1.1
69	0
70	0
71	0
72	0.2
73	0
74	0
75	0.8
76	0
77	0
78	0
79	0
80	0
81	0
82	0
83	0
84	0
85	0
86	0
87	0
88	0
89	3.7
90	0
91	0
92	0
93	0
94	0
95	0
96	0.1
97	0.8
98	0
99	3.7
100	0
101	0
102	0
103	0
104	0
105	0
106	0
107	0
108	0
109	2.1
110	3.7
111	0
112	0
113	0
114	0
115	0
116	0
117	0
118	0.2
119	1
120	0
121	2
122	2
123	0
124	3.7
125	0.1
126	3.7
127	3.6
128	3.6
IC6402	
1	1.6
2	0
3	0
4	5
5	3

[P.2-33 - P.2-34]

MODE PIN NO.	DC (V)
IC6250	
1	0
2	5.4
3	1.6
4	0
5	0
6	0
7	0
8	0
9	5.3
10	0.7
11	0
12	3.5
13	0
14	0
15	0
16	5.3
17	0
18	0
19	0
20	2.2
21	0
22	0
23	5.3
24	5.3
IC6251	
1	1.6
2	0
3	0
4	5
5	3.3
Q6201	
E	0.5
C	0
B	0.5
Q6202	
E	3.3
C	0
B	2.6
Q6203	
E	0.5
C	0
B	0.5
Q6204	
E	2.9
C	0
B	2.2
Q6205	
E	2.9
C	0
B	2.2
Q6206	
E	3.3
C	0
B	2.6
Q6211	
E	0.8
C	5
B	1.5
Q6212	
E	0
C	5
B	0.07
Q6213	
E	0
C	5
B	0.7
Q6214	
E	1.5
C	5
B	2.2
Q6250	
E	1.5
C	5
B	2
Q6251	
E	2.2
C	5
B	2

[P.2-35 - P.2-36]

MODE PIN NO.	DC (V)
IC6724	
1	0
2	3.3
3	0
4	3.3

[P.2-39 - P.2-40]

MODE PIN NO.	DC (V)
IC6101	
1	1.2
2	2.4
3	0
4	1.2
5	0
6	1.2
7	1.2
8	2.4
9	1.2
10	1.2
11	0
12	1.2
13	1.2
14	0
15	2.4
16	0
17	1.2
18	1.2
19	0
20	0
21	1.2
22	1.2
23	0.6
24	0.6
25	1.7
26	1.7
27	1.8
28	0
29	0.7
30	0.7
31	0.6
32	0.6
33	0.7
34	0.7
35	2.4
36	0
37	0
38	0
39	0
40	0
41	0
42	0
43	0
44	0
45	0.6
46	0
47	0.7
48	0.7
49	0.7
50	0.7
51	0.6
52	0
53	1.8
54	1.3
55	1.3
56	0.6
57	0.6
58	1.2
59	0
60	1.2
61	0
62	0
63	1.2
64	1.2
65	2.5
66	0
67	2.4
68	1.2
69	1.2
70	0
71	1.2
72	1.2
73	2.4
74	1.2
75	1.2
76	0
77	1.2
78	1.2
79	0
80	1.2
81	1.2
82	0
83	1.2
84	1.2
85	0
86	2.4
87	0
88	0
89	0
90	0
91	0
92	0
93	0
94	1.2
95	2.4
96	2.4
97	1.2
98	1.2
99	0
100	1.2
IC6102	
1	0
2	2.6
3	1.3
4	1.3
5	2.6
6	2.6
7	2.6
8	2.6

[P.2-41 - P.2-42]

MODE PIN NO.	DC (V)
IC7201	
1	0.1
2	0.2
3	0.2
4	0.2
5	0.2
6	0.1
7	0.3
8	0.2
9	0
10	0
11	3.2
12	3.3
13	0
14	0
15	0
16	0
17	0.1
18	0.2
19	0.2
20	0.2
21	0.2
22	0.2
23	0.2
24	0.2
25	0.2
26	3.3
27	0
28	3.3
29	0.2
30	0.2
31	0.2
32	0.2
33	0.2
34	0.2
35	0.2
36	0.2
37	3.2
38	0.1
39	0.2
40	0.2
41	0.1
42	0.2
43	0.2
44	0.2
45	0.1
46	0
47	3.3
48	0.2
IC7203	
1	3.2
2	0
3	0.3
4	0
5	0.4
6	0
7	3.3
8	0.2
9	0.4
10	0
11	0.3
12	0
13	3.2
14	2.7
15	3.2
16	3
17	3.2
18	2.6
19	0
20	0.1
21	0.3
22	0.3
23	0.3
24	0.3
25	3.2
26	0
27	0.3
28	0.3
29	0.3
30	0.3
31	0.4
32	0.4
33	0
34	3.2
35	3
36	2.7
37	0
38	3.2
39	0.4
40	0.4
41	0
42	0.4
43	0.2
44	3.3
45	0.3
46	0.2
47	0
48	0.3
49	0.2
50	0
IC7204	
1	0
2	3.3
3	0
4	3.3
IC7205	
1	2.9
2	3
3	0
4	3.3
5	3.3
6	0
7	0
8	0
9	3.3
10	3.3
11	3.3
12	3.2
13	0
14	3.2
IC7206	
1	NC
2	3.3
3	0
4	3.3
5	3.3
Q7201	
E	0
C	2.9
B	0

[P.2-43 - P.2-44]

MODE PIN NO.	DC (V)
IC7033	
1	0
2	3.2
3	3.2
4	3.2
5	3.2
6	3.2
7	3.2
8	0
9	0
10	3.2
11	0
12	3.2
13	3.2
14	3.3
15	0
16	3.2
IC7036	
1	3.3
2	0
3	0
4	0

MODE PIN NO.	DC (V)
5	3.3
6	0
Q7032	
E	3.3
C	3.3
B	0
Q7033	
E	3.2
C	3.2
B	0
Q7034	
E	3.3
C	-0.1
B	3.2
Q7035	
E	3.2
C	-0.3
B	0

[P.2-45 - P.2-46]

MODE PIN NO.	DC (V)
IC6502	
1	0
2	0.8
3	0.9
4	2.5
5	0
6	2.3
7	2.5
8	0.9
9	3.2
10	0.7
11	1.1
12	1.1
13	0
14	1.2
15	3.2
16	1
17	3.2
18	1
19	3.2
20	3.2
21	0
22	1
23	1
24	1
25	1.6
26	3.2
27	3.2
28	0
29	0
30	0
31	2
32	3.2
33	0
34	3.2
35	0
36	0
37	1.2
38	1.2
39	1.2
40	1.2
41	1.2
42	1.2
43	0
44	3.2
45	1.2
46	1.2
47	1.2
48	1.2
49	0
50	0.9
51	2.6
52	2.6
53	0
54	2.6
55	0.8
56	0.7

[P.2-51 - P.2-52]

MODE PIN NO.	DC (V)
IC6901	
1	3
2	0
3	3
4	5
IC9001	
1	8.6
2	13.3
3	3.5
4	0
5	0.9
6	1.3
7	3.4
8	0.9
IC9101	
1	3.3
2	0
3	2.5
IC9201	
1	6.5
2	13.3
3	1.3
4	0
5	0.9
6	1.3
7	3.3
8	0.9
IC9301	
1	1.2
2	0
3	0
4	0.3
5	3.2
6	0
7	0
8	3.2
Q9501	
E	0
C	0
B	3.2
Q9502	
E	0
C	0
B	0.6
Q9503	
E	0
C	0
B	0.6

[P.2-53 - P.2-54]

MODE PIN NO.	DC (V)
IC7601	
1	0
2	0
3	0
4	0
5	0
6	1
7	2.8
8	0
9	0
10	0
11	0
12	0
13	1.9
14	0
15	1.4
16	3.2
17	1.8
18	1.1
19	3.2
20	3.2
21	0
22	0
23	0
24	0
25	0
26	0
27	0
28	0
29	4.9
30	3.2
31	0
32	0
33	0
34	0
35	0
36	3.2
37	0
38	0
39	0
40	0
41	3.2
42	0
43	0
44	0
45	0
46	0
47	3.2
48	0
49	3.2
50	0
51	0
52	0
53	0
54	0
55	0
56	0
57	0
58	0
59	0
60	0
61	0
62	3.9
63	0
64	3.2
65	0
66	0
67	0
68	0
69	0
70	0
71	0
72	0
73	0
74	0
75	0
76	0
77	0
78	0
79	0
80	0
81	0
82	3.2
83	0
84	3.2
85	0
86	3.2
87	3.2
88	3.2
89	0
90	0
91	0
92	0
93	3.2
94	3.2
95	0
96	0.2
97	0
98	0
99	4.9
100	0
IC7602	
1	0
2	0
3	0
4	0
5	3.2
6	3.2
7	0
8	3.2
IC7603	
1	3.3
2	0
3	0
4	5
5	5
IC7604	
1	0
2	0
3	0
4	3.2
5	3.2
IC7605	
1	5
2	0
3	0
4	0
5	0
6	5
IC7606	
1	5
2	0
3	0
4	0
5	0
6	5

<POWER PWB>
[P.2-71 - P.2-72]

MODE PIN NO.	DC (V)
IC9101	
1	7
2	0
3	5
IC9301	
1	15.4
2	0
3	17.8
Q9021	
E	0
C	0.1
B	0.7
Q9281	
E	1.3
C	0
B	2.3
Q9282	
E	0
C	3.7
B	0.2
Q9283	
E	0
C	3.8
B	0.2
Q9284	
E	0
C	0
B	2.5

[P.2-73 - P.2-74]

MODE PIN NO.	DC (V)
IC9501	
1	385
2	NC
3	0
4	15.7
5	0.1
6	1.1
7	0.8
PC9501	
1	11.1
2	10.1
3	13.6
4	1

[P.2-75 - P.2-76]

MODE PIN NO.	DC (V)
IC9701	
1	12.9
2	11.9
3	0
4	2.6
IC9721	
1	13.2
2	9.2
3	0
4	1.2
5	6.8
IC9761	
1	0
2	4.3
3	15.8
4	2.6
5	17.3
IC9762	
1	3.3
2	3.4
3	0
4	2.6
5	1.1
Q9831	
E	0
C	0
B	0.6
Q9841	
E	0
C	0
B	0.6
Q9842	
E	0
C	0
B	0.7
Q9851	
E	13.1
C	6
B	13.1
Q9852	
E	0
C	13.1
B	0
Q9853	
E	0
C	0
B	3.1
Q9861	
E	0
C	0
B	0.6

<IRIS PWB>
[P.2-77 - P.2-78]

MODE PIN NO.	DC (V)
IC5001	
1	2.2
2	4.4
3	4.4
4	0
5	4.4
6	4.4
7	6.6
8	0
IC5002	
1	5.2
2	4.6
3	4.6
4	0
5	3.2
6	3.2
7	4.2
8	9
IC5003	
1	19.3
2	19
3	11.9
4	3.8
5	0
IC5005	
1	5.3
2	0
3	0
4	0
5	6
6	0
7	0
8	0
9	5.7
10	5.7
11	2.8
12	0
13	3.3
14	5.9
15	3.7
16	5.9
Q5001	
E	3.7
C	3.7
B	4.6

<FRONT LED PWB>
[P.2-79]

MODE PIN NO.	DC (V)
Q0701	
E	0.2
C	0.4
B	0.9
Q0702	
E	0
C	0
B	0.6
Q0704	
E	0
C	4.9
B	0
Q0705	
E	0
C	0.2
B	0.7
Q0706	
E	4.5
C	4.9
B	3.3
Q0707	
E	0
C	4.4
B	0

<TEMP PWB>
[P.2-80]

MODE PIN NO.	DC (V)
IC2001	
1	4.5
2	4.5
3	4
4	0
5	0
6	0
7	0
8	4.9

<REMOCON PWB>
[P.2-85- P.2-86]

MODE PIN NO.	DC (V)
IC0821	
1	2.8
2	4.9
3	0

<FAN PWB>
[P.2-85 - P.2-86]

MODE PIN NO.	DC (V)
IC8001	
1	1.2
2	0
3	0
4	13.3
5	8.1
IC8002	
1	13.3
2	3
3	10
4	2.6
5	0
IC8003	
1	13.3
2	3
3	6.4
4	2.6
5	0
IC8005	
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0
11	0
12	0
13	0
14	5
Q8001	
E	0
C	1.2
B	0
Q8004	
E	0
C	3
B	0
Q8005	
E	0
C	0
B	0

<SD CARD PWB>
[P.2-87 - P.2-88]

MODE PIN NO.	DC (V)
IC1001	
1	NC
2	1.4
3	1.6
4	0
5	3.3
6	5
7	3.3
8	0
9	3
10	3.4
11	NC
12	0
13	0
14	NC
15	NC
16	3.3
17	3.3
18	3.3
19	0.7
20	1.7
21	0.7
22	0
23	3.3
24	0
25	0
26	0
27	0
28	NC
Q1001	
E	3.4
C	0.7
B	3.4

WAVEFORMS

TUNER PWB(1/2)

TU001-17



1 Vp-p

ANALOG PWB(1/6)

IC101-45



6 Vp-p

IC101-49



6 Vp-p

IC101-57



1 Vp-p

IC101-79



1 Vp-p

ANALOG PWB(1/6)

IC102-2



6 Vp-p

IC102-28



3.0 Vp-p

IC102-37



3.4 Vp-p

IC102-38



2.5 Vp-p

IC102-41



0.6 Vp-p

IC102-43



0.6 Vp-p

IC102-45



0.8 Vp-p

DIGITAL PWB(4/16)

IC6401-33



3.0 Vp-p

IC6401-44



3.4 Vp-p

DIGITAL PWB(11/16)

IC6502-27



3.0 Vp-p

IC6502-28



3.0 Vp-p

DIGITAL PWB(15/16)

IC7601-13



6 Vp-p

IC7601-15



6 Vp-p

IC7601-62



3.5 Vp-p

IC7601-64



3.5 Vp-p

IC7601-97



0.8 Vp-p

DIGITAL PWB(15/16)

IC7605-2



2.0 Vp-p

IC7605-4



0.5 Vp-p

Victor Company of Japan, Limited
ILA Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

Printed in Japan
VPT

PARTS LIST

CAUTION

- The parts identified by the ⚠ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

USING P.W. BOARD & REMOTE CONTROL UNIT

EXPLODED VIEW PARTS LIST -1 [HD-52G787, HD-52G887, HD-56G787, HD-56G887] 3-4
EXPLODED VIEW -1 [HD-52G787, HD-52G887, HD-56G787, HD-56G887] 3-5
EXPLODED VIEW PARTS LIST -2 [HD-52G787, HD-52G887, HD-56G787, HD-56G887] 3-6
EXPLODED VIEW -2 [HD-52G787, HD-52G887, HD-56G787, HD-56G887] 3-7
EXPLODED VIEW PARTS LIST -3 [HD-61G787, HD-61G887] 3-8
EXPLODED VIEW -3 [HD-61G787, HD-61G887] 3-9
EXPLODED VIEW PARTS LIST - 4 [HD-61G787, HD-61G887] 3-10
EXPLODED VIEW - 4 [HD-61G787, HD-61G887] 3-10
EXPLODED VIEW PARTS LIST -5 3-11
EXPLODED VIEW -5 3-12
EXPLODED VIEW PARTS LIST -6 3-13
EXPLODED VIEW -6 3-14

PRINTED WIRING BOARD PARTS LIST [HD-52G787] 3-15
- ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-15
- DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-18
- REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-23
- TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-23
- IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-23
- FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-24
- SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-24
- POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-24
- DIGITAL P.W. BOARD ASS'Y (SRA0D016A-M2) 3-26
- SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-30
- FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-31
- LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2) 3-31
- TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-31
- ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-31

PRINTED WIRING BOARD PARTS LIST [HD-52G887] 3-32
- ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-32
- DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-32
- REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-32
- TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-32
- IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-32
- FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-32
- SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-32
- POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-32
- DIGITAL P.W. BOARD ASS'Y (SRA0D013A-M2) 3-32
- SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-36
- FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-36
- LAMP COVER P.W. BOARD ASS'Y(SRA0L211A-M2) 3-36
- TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-36
- ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-36

PRINTED WIRING BOARD PARTS LIST [HD-56G787] 3-37
- ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-37
- DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-37
- REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-37
- TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-37
- IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-37
- FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-37
- SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-37
- POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-37
- DIGITAL P.W. BOARD ASS'Y (SRA0D015A-M2) 3-37
- SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-41
- FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-41
- LAMP COVER P.W. BOARD ASS'Y(SRA0L211A-M2) 3-41
- TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-41
- ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-41

PRINTED WIRING BOARD PARTS LIST [HD-56G887] 3-42
ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-42
DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-42
REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-42
TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-42
IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-42
FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-42
SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-42
POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-42
DIGITAL P.W. BOARD ASS'Y (SRA0D012A-M2) 3-42
SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-46
FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-46
LAMP COVER P.W. BOARD ASS'Y(SRA0L211A-M2) 3-46
TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-46
ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-46

PRINTED WIRING BOARD PARTS LIST [HD-61G787] 3-47
ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-47
DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-47
REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-47
TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-47
IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-47
FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-47
SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-47
POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-47
DIGITAL P.W. BOARD ASS'Y (SRA0D014A-M2) 3-47
SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-51
FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-51
LAMP COVER P.W. BOARD ASS'Y(SRA0L211A-M2) 3-51
TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-51
ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-51

PRINTED WIRING BOARD PARTS LIST [HD-61G887] 3-52
ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2) 3-52
DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2) 3-52
REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2) 3-52
TEMP P.W. BOARD ASS'Y (SRA-8202A-M2) 3-52
IRIS P.W. BOARD ASS'Y (SRA-8302A-M2) 3-52
FAN P.W. BOARD ASS'Y (SRA-8401A-M2) 3-52
SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2) 3-52
POWER P.W. BOARD ASS'Y (SRA-9011A-M2) 3-52
DIGITAL P.W. BOARD ASS'Y (SRA0D011A-M2) 3-52
SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2) 3-56
FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2) 3-56
LAMP COVER P.W. BOARD ASS'Y(SRA0L211A-M2) 3-56
TUNER P.W. BOARD ASS'Y (SRA0R011A-M2) 3-56
ATSC TUNER MODULE P.W. BOARD ASS'Y(SSD-2203A-M2) 3-56

REMOTE CONTROL UNIT PARTS LIST (RM-C18G-1H) 3-57
PACKING 3-57
PACKING PARTS LIST 3-57

USING P.W. BOARD & REMOTE CONTROL UNIT

P.W.B ASS'Y name	P.W.B ASS'Y No.					
	HD-52G787	HD-52G887	HD-56G787	HD-56G887	HD-61G787	HD-61G887
ANALOG P.W.B	SRA-1011A-M2	←	←	←	←	←
DRIVE P.W.B	SRA-3003A-M2	←	←	←	←	←
REMOCON P.W.B	SRA-8011A-M2	←	←	←	←	←
TEMP P.W.B	SRA-8202A-M2	←	←	←	←	←
IRIS P.W.B	SRA-8302A-M2	←	←	←	←	←
FAN P.W.B	SRA-8401A-M2	←	←	←	←	←
SD CARD P.W.B	SRA-8511A-M2	←	←	←	←	←
POWER P.W.B	SRA-9011A-M2	←	←	←	←	←
DIGITAL P.W.B	SRA0D016A-M2	SRA0D013A-M2	SRA0D015A-M2	SRA0D012A-M2	SRA0D014A-M2	SRA0D011A-M2
SIDE CONTROL P.W.B	SRA0L011A-M2	←	←	←	←	←
FRONT LED P.W.B	SRA0L111A-M2	←	←	←	←	←
LAMP COVER P.W.B	SRA0L211A-M2	←	←	←	←	←
TUNER P.W.B	SRA0R011A-M2	←	←	←	←	←
ATSC TUNER MODULE P.W.B	SSD-2203A-M2	←	←	←	←	←
REMOTE CONTROL UNIT	RM-C18G-1H	←	←	←	←	←

EXPLODED VIEW PARTS LIST -1 [HD-52G787, HD-52G887, HD-56G787, HD-56G887]

⚠	Ref.No.	Part No.	Part Name	Description	Local
⚠	1	LC12260-001D-A	BACK COVER		HD-52G787,HD-52G887
⚠	1	LC12339-001D-A	BACK COVER		HD-56G787,HD-56G887
	2	LC21888-001B-A	FILTER COVER	(x2)	
	3	LC42331-001A-A	SPONGE	(x2)	
	4	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	5	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x10)	
	6	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x6)	
⚠	7	QAS0369-002	SPEAKER	SP01/SP02(x2)	
	8	WJJ0487-001A-E	E-SI C WIRE C-C	ANALOG SP-SPEAKER(L)	
	9	WJJ0487-002A-E	E-SI C WIRE C-C	ANALOG SP-SPEAKER(R)	
	10	QYSBSFG3008ZA	TAP SCREW	M3 x 8mm	
	11	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x12)	
	12	QYSBSFG4012ZA	TAP SCREW	M4 x 12mm(x8)	
	13	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x8)	
⚠	14	LC12261-002B-A	SPEAKER GRILL		HD-52G787
⚠	14	LC12261-001C-A	SPEAKER GRILL		HD-52G887
⚠	14	LC12311-002B-A	SPEAKER GRILL		HD-56G787
⚠	14	LC12311-001C-A	SPEAKER GRILL		HD-56G887
	15	WJJ0698-001A-E	E-SI C WIRE C-C	ANALOG F-FRONT LED CN07FL	
⚠	16	QQR0491-001	FERRITE CORE		
	17	LC32707-001A-C	JVC MARK		HD-52G787,HD-56G787
	17	LC32707-002A-C	JVC MARK		HD-52G887,HD-56G887
	18	LC21876-002A-A	INDICATE WINDOW		HD-52G787,HD-56G787
	18	LC21876-001A-A	INDICATE WINDOW		HD-52G887,HD-56G887
	19	LC33145-008A-0K	POWER KNOB ASSY		HD-52G787,HD-56G787
	19	LC33145-006A-0K	POWER KNOB ASSY		HD-52G887,HD-56G887
	20	LC33148-001B-A	LED LENS		
	21	QYNSS2000P	PUSH NUT	M2	
	22	LC21590-001C-A	CENTER COVER		
	23	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	24	LC12303-001B-A	SUPPORT HOLDER		
	25	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	26	LC40506-003A-A	TAPPING SCREW	(x2)	
	27	LC40226-005A-H	SPACER	(x2)	
	28	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
⚠	29	LC12262-002B-A	FRONT PANEL		HD-52G787
⚠	29	LC12262-006A-A	FRONT PANEL		HD-52G887
⚠	29	LC12338-002B-A	FRONT PANEL		HD-56G787
⚠	29	LC12338-015A-A	FRONT PANEL		HD-56G887
⚠	201	SRA0L111A-M2	FRONT LED PWB		

EXPLODED VIEW -1 [HD-52G787, HD-52G887, HD-56G787, HD-56G887]

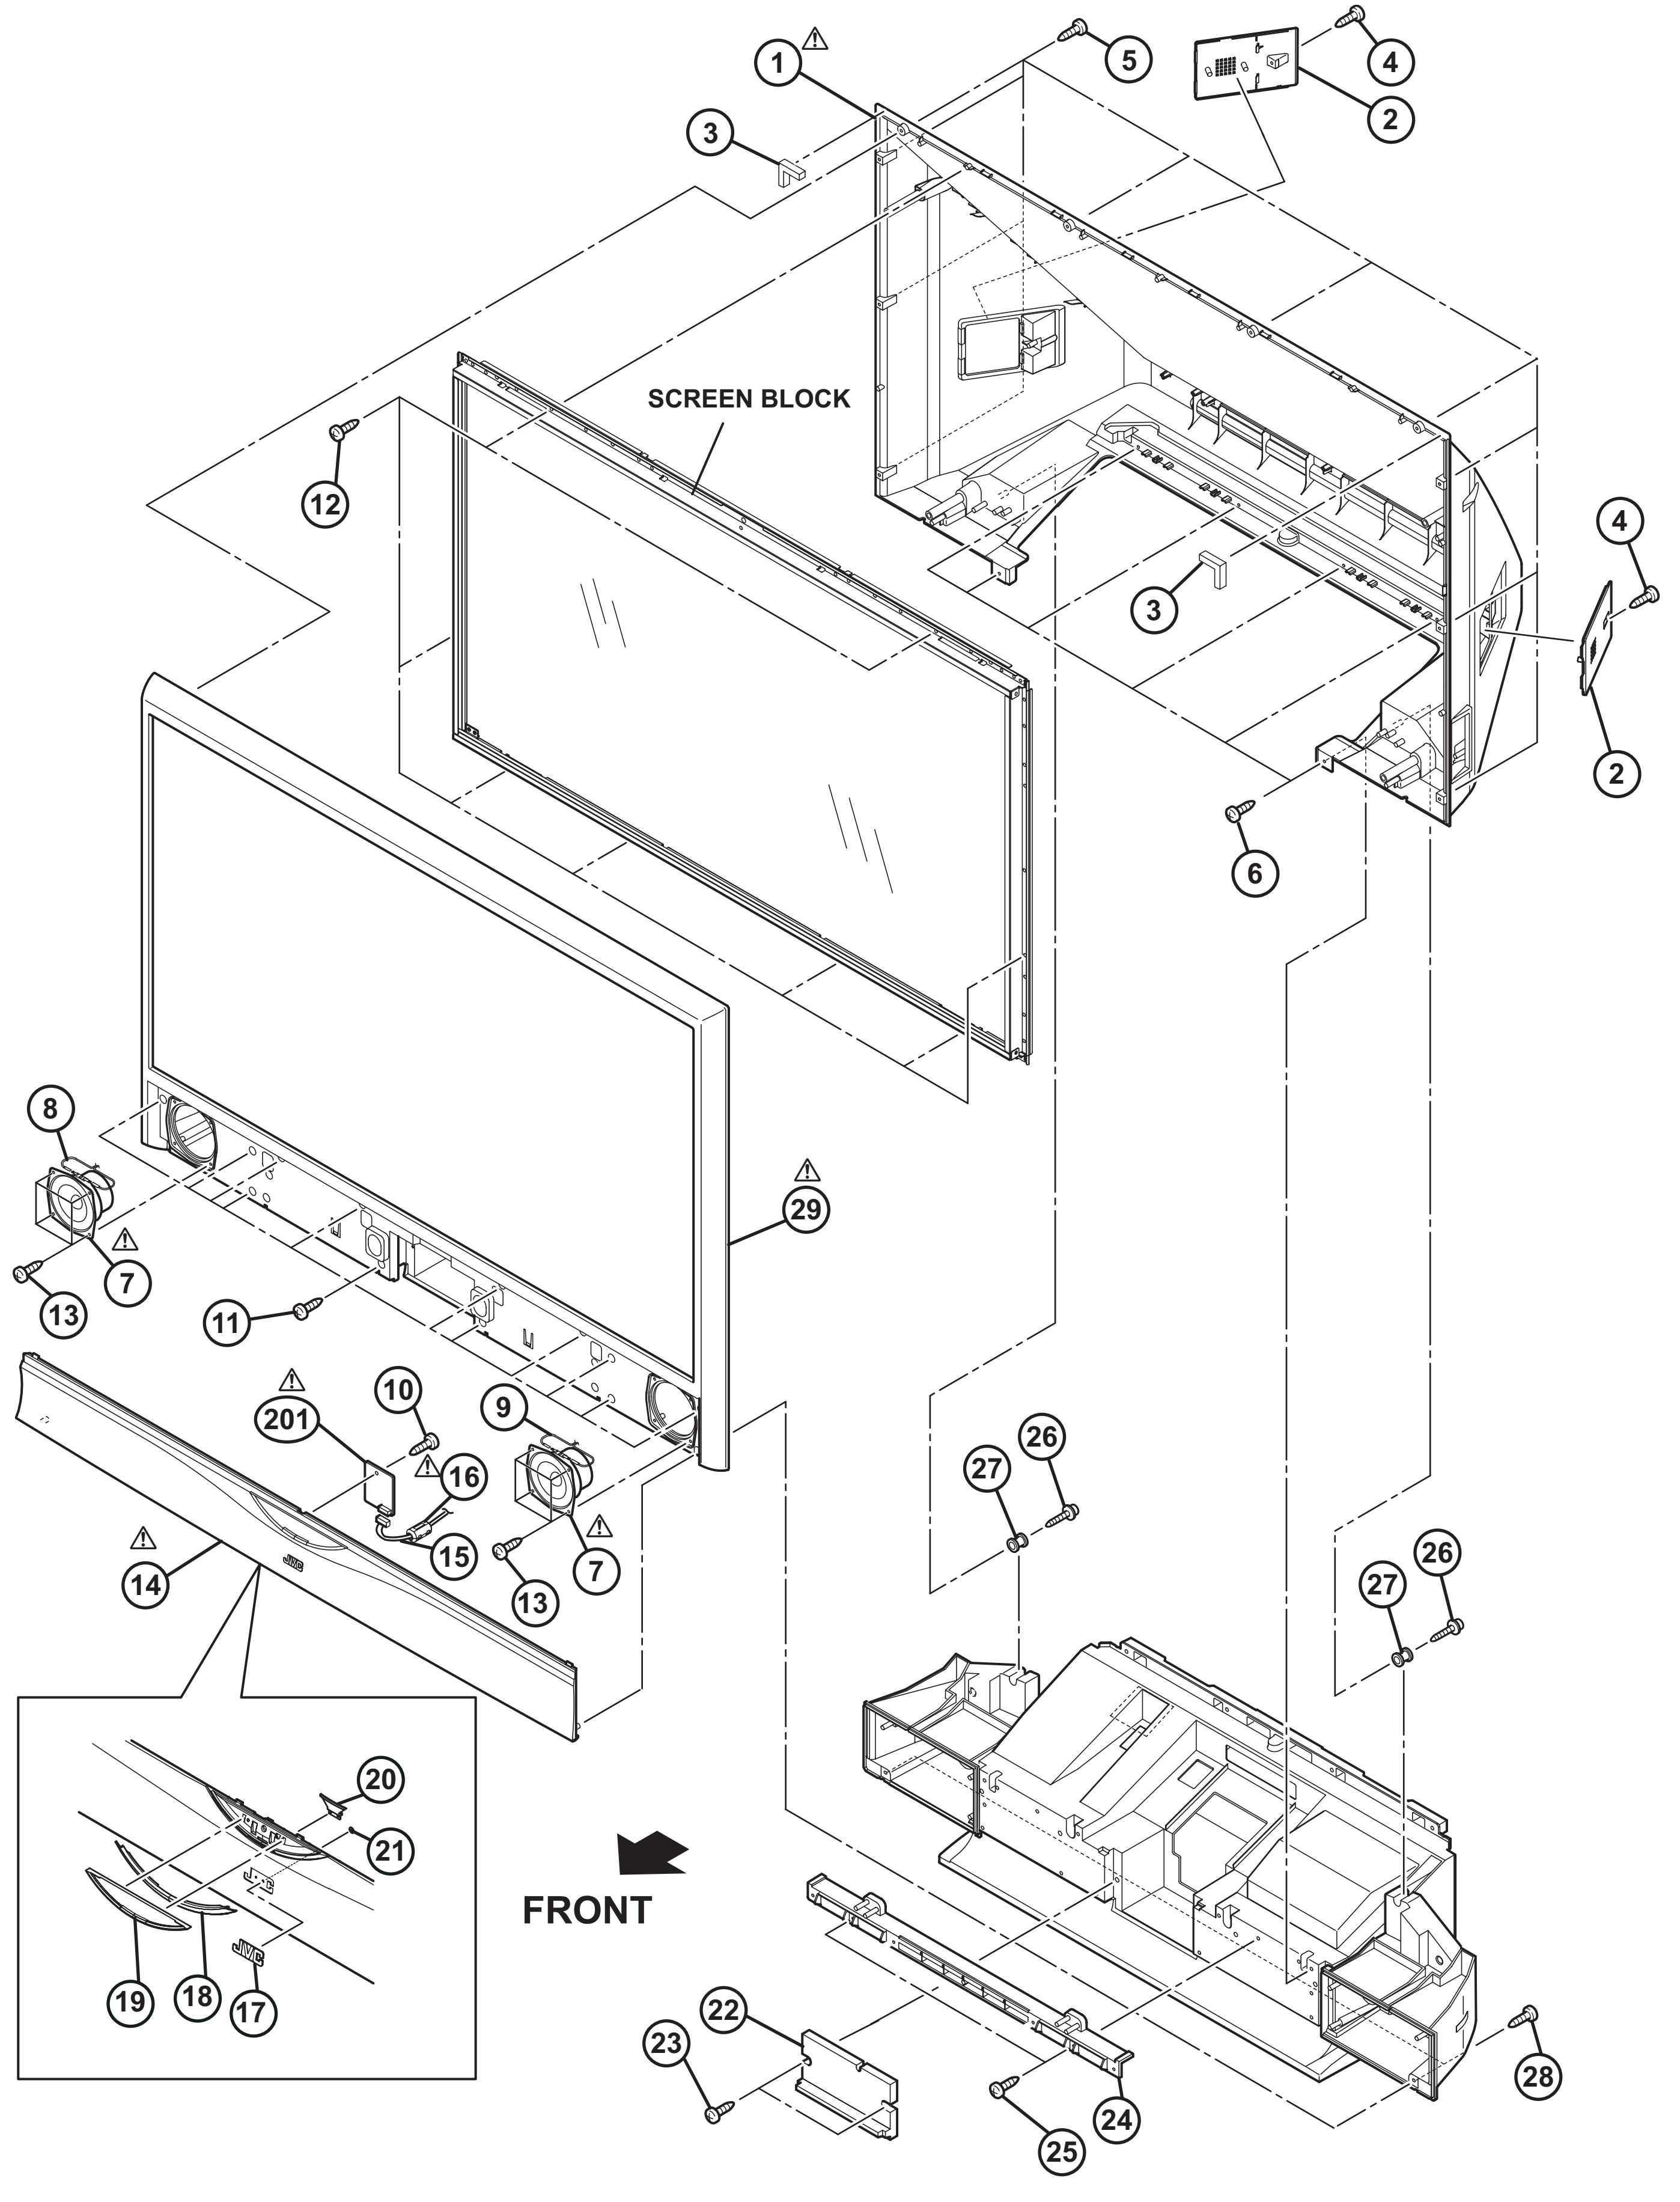
1
⚠
5
4
2
3
SCREEN BLOCK
12
4
3
2
6
8
29
⚠
7
⚠
13
11
201
⚠
10
16
⚠
9
15
7
⚠
13
14
⚠
27
26
27
26
20
21
FRONT
19
18
17
22
23
24
25
28

EXPLODED VIEW PARTS LIST -2 [HD-52G787, HD-52G887, HD-56G787, HD-56G887]

⚠	Ref.No.	Part No.	Part Name	Description	Local
	41	LC12362-002A-A	MIRROR HOLDER	TOP	HD-52G787,HD-52G887
	41	LC12370-002A-A	MIRROR HOLDER	TOP	HD-56G787,HD-56G887
	42	QYSBSFG4012ZA	TAP SCREW	M4 x 12mm(x4)	
	43	LC21931-002B-A	SPONGE SPACER	(x4)	HD-52G787,HD-52G887
	43	LC21931-002B-A	SPONGE SPACER	(x5)	HD-56G787,HD-56G887
	44	QYSBSFG4012ZA	TAP SCREW	M4 x 12mm(x6)	
	45	LC21538-001A-A	MIRROR HOLDER	LEFT	
	46	QYSBSFG4012ZA	TAP SCREW	M4 x 12mm(x3)	
	47	LC12371-001A-A	MIRROR HOLDER	BOTTOM	
⚠	48	LC33055-003A	GLASS MIRROR		HD-52G787,HD-52G887
⚠	48	LC33055-004A	GLASS MIRROR		HD-56G787,HD-56G887
	49	LC21538-002A-A	MIRROR HOLDER	RIGHT	
	50	LC33046-003A-A	SIDE CONTROL SHEET		
	51	LC21805-001A-A	SIDE CONTROL SHEET		
	52	QQR0491-001	FERRITE CORE		
	53	WJZ0201-001A-E	E-HARNESS ASSY	ANALOG S1-S CONTROL CN08S1	
	54	LC12305-002A-A	SPEAKER BOX	RIGHT	HD-52G787,HD-52G887
	54	LC12312-002A-A	SPEAKER BOX	RIGHT	HD-56G787,HD-56G887
	55	LC12305-001A-A	SPEAKER BOX	LEFT	HD-52G787,HD-52G887
	55	LC12312-001A-A	SPEAKER BOX	LEFT	HD-56G787,HD-56G887
	56	LC12306-002A-A	SPEAKER BOX COVER	RIGHT	HD-52G787,HD-52G887
	57	LC12306-001A-A	SPEAKER BOX COVER	LEFT	HD-52G787,HD-52G887
⚠	58	52SC-006A-M2	SCREEN ASSY		HD-52G787,HD-52G887
⚠	58	56ILASC06AM2	SCREEN ASSY		HD-56G787,HD-56G887
	59	QYSBSG4008ZA	TAP SCREW	M4 x 8mm(x20)	
⚠	60	LC12263-001G-A	BODY		
	61	LC32447-067A-A	STICK SHEET		
⚠	202	SRA0L011A-M2	SIDE CONTROL PWB		

EXPLODED VIEW -2 [HD-52G787, HD-52G887, HD-56G787, HD-56G887]

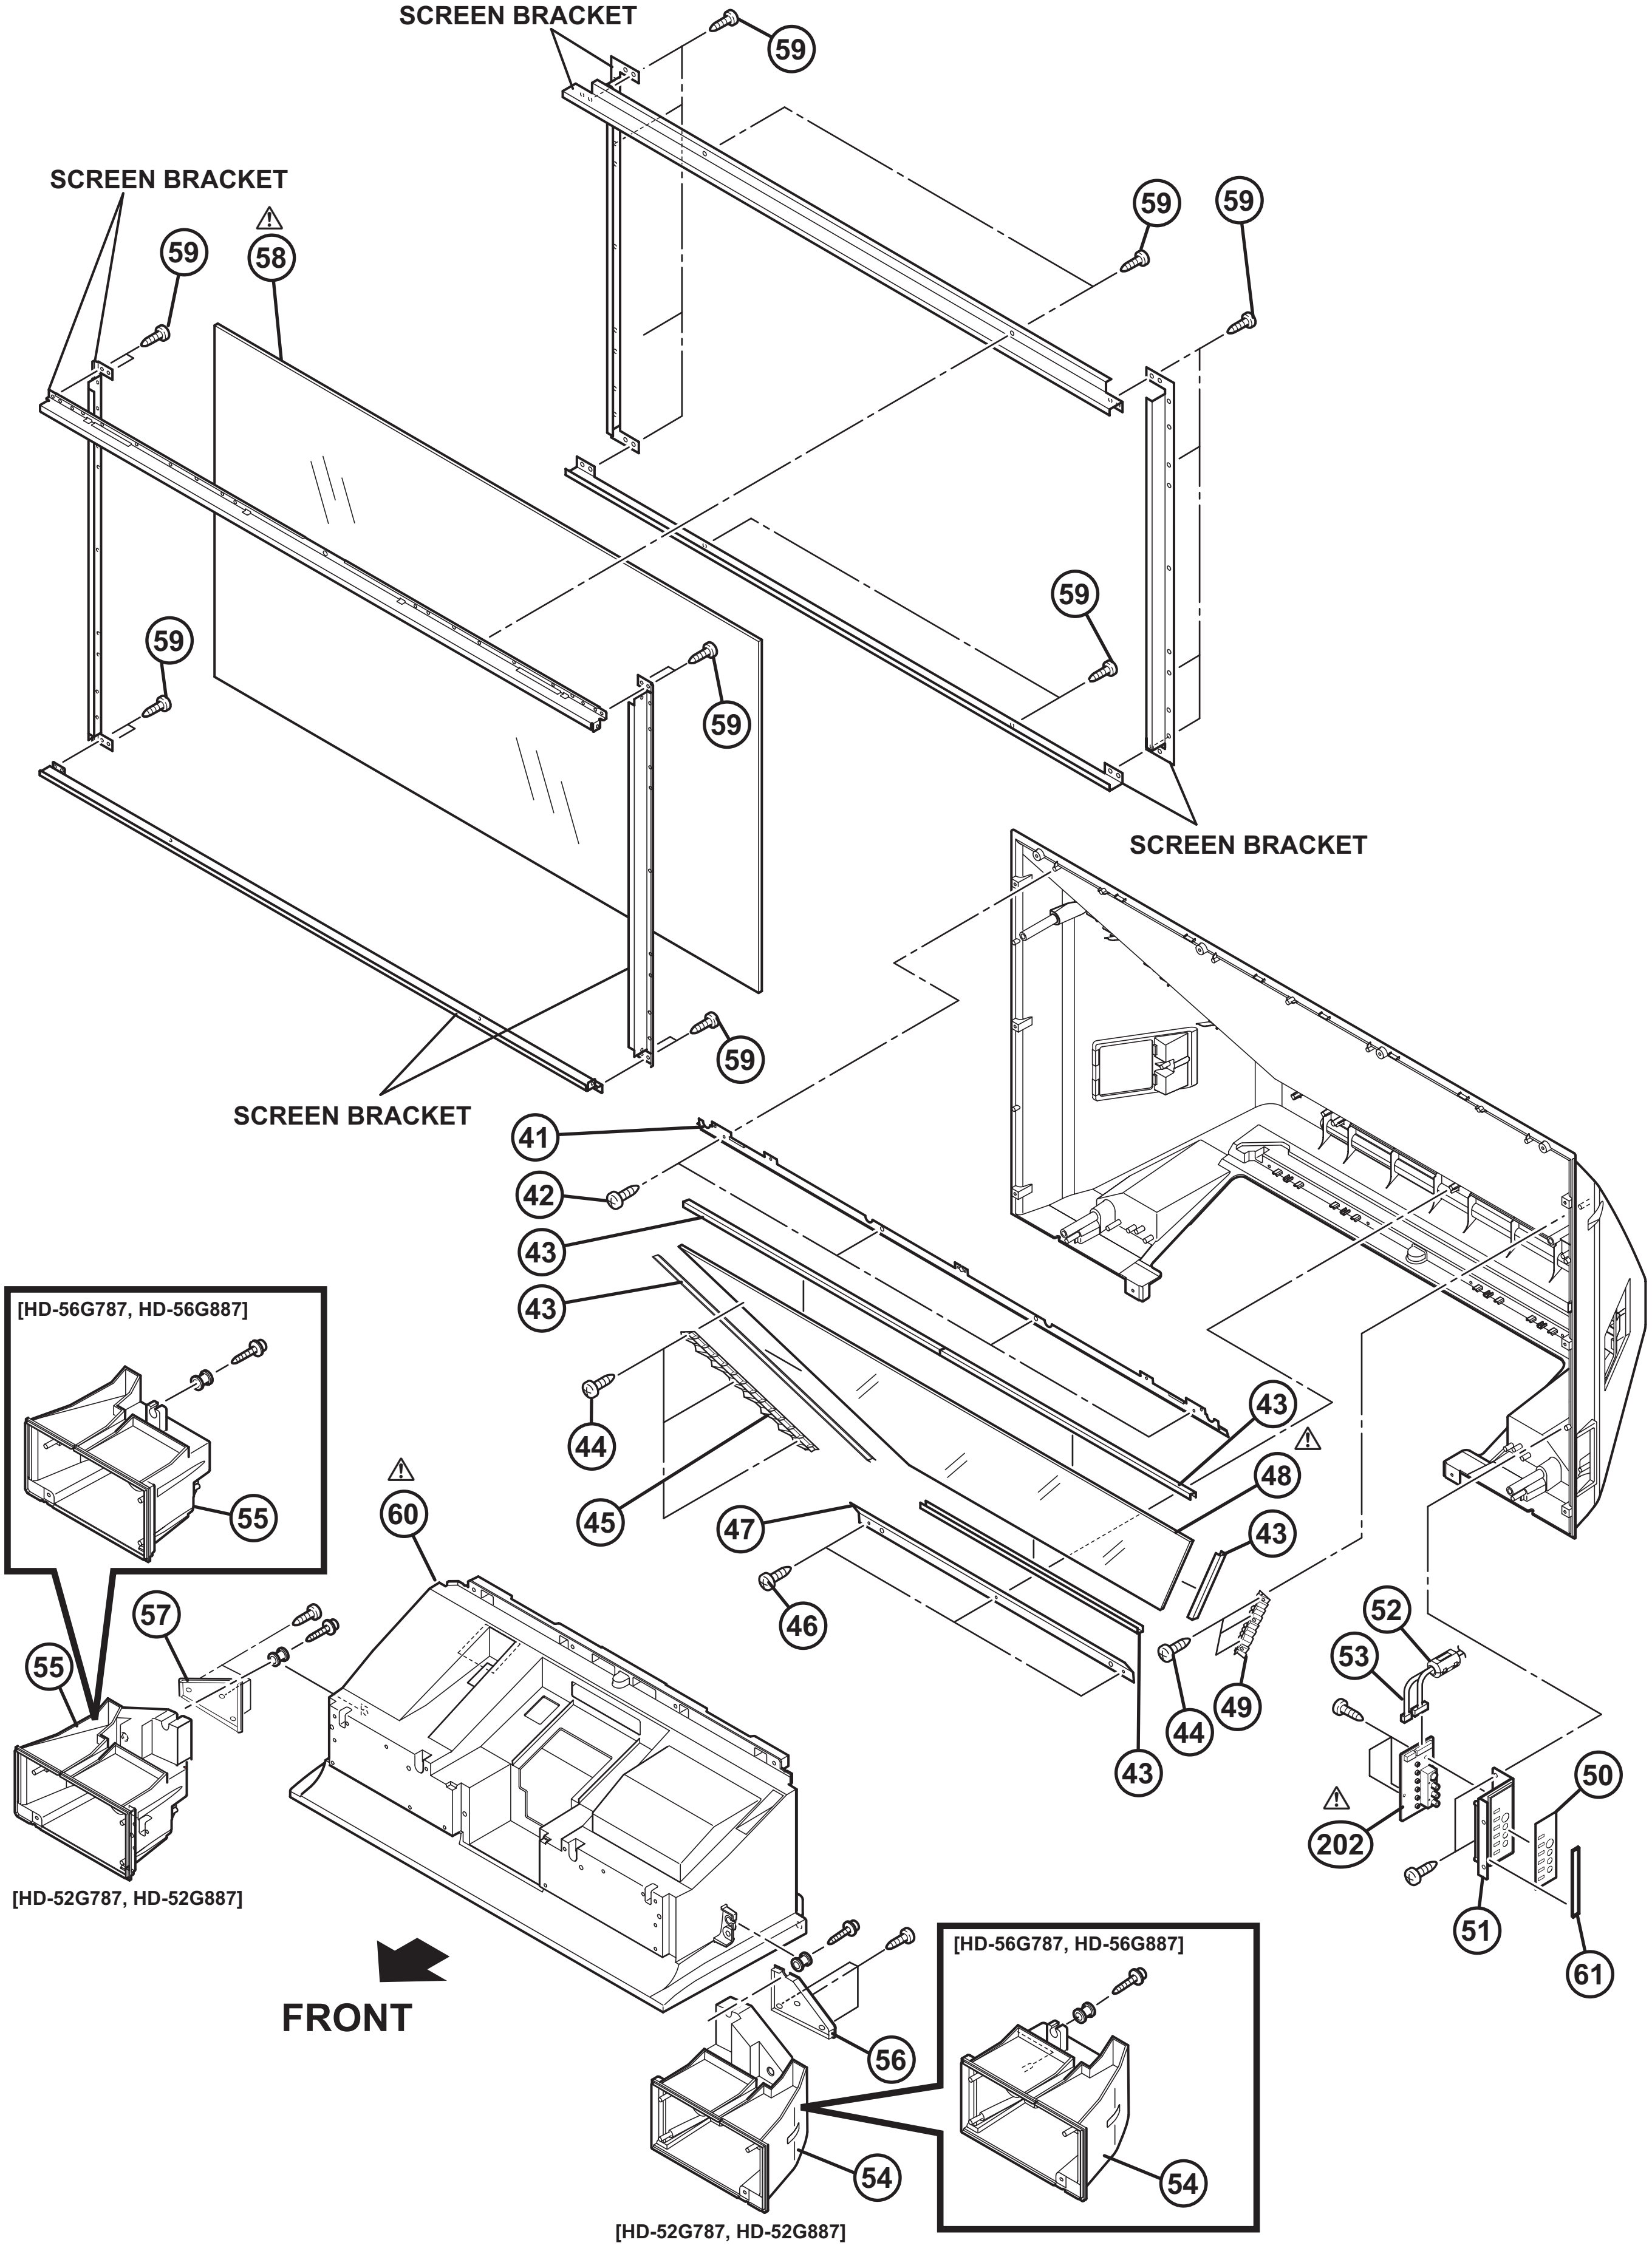
SCREEN BRACKET
59
SCREEN BRACKET
59
58
59
59
59
59
59
59
59
SCREEN BRACKET
SCREEN BRACKET
41
42
43
43
43
48
43
44
45
47
46
44
49
43
60
[HD-56G787, HD-56G887]
55
57
55
[HD-52G787, HD-52G887]
52
53
50
202
51
61
FRONT
[HD-56G787, HD-56G887]
56
54
54
[HD-52G787, HD-52G887]

EXPLODED VIEW PARTS LIST -3 [HD-61G787, HD-61G887]

⚠	Ref.No.	Part No.	Part Name	Description	Local
⚠	1	LC11916-001G-A	BACK COVER		
	2	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x10)	
	3	LC11950-001B-A	SPEAKER PLATE	LEFT	
	4	LC11950-002B-A	SPEAKER PLATE	RIGHT	
	5	QAS0369-002	SPEAKER	SP01/SP02(x2)	
	6	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x8)	
	7	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x8)	
	8	WJJ0487-001A-E	E-SI C WIRE C-C	ANALOG SP-SPEAKER(L)	
	9	WJJ0487-002A-E	E-SI C WIRE C-C	ANALOG SP-SPEAKER(R)	
	10	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	11	LC21590-001C-A	CENTER COVER		
	12	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	13	LC12677-002B-A	SPEAKER GRILL		HD-61G787
	13	LC12677-001B-A	SPEAKER GRILL		HD-61G887
	14	LC33145-008A-0K	KNOB ASSY		HD-61G787
	14	LC33145-006A-0K	KNOB ASSY		HD-61G887
	15	LC21876-002A-A	INDICATE WINDOW		HD-61G787
	15	LC21876-001A-A	INDICATE WINDOW		HD-61G887
	16	LC32707-001A-C	JVC MARK		HD-61G787
	16	LC32707-002A-C	JVC MARK		HD-61G887
	17	QYNSS2000P	PUSH NUT	M2	
	18	LC33148-001B-A	LED LENS		
	19	QYSBSFG3008ZA	TAP SCREW	M3 x 8mm	
	20	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x8)	
⚠	21	61SC-006A-M2	SCREEN ASSY		
	22	LC21611-001E-A	SCREEN HOLDER	(TOP/BOTTOM)(x2)	
	23	LC21610-001E-A	SCREEN HOLDER	(RIGHT/LEFT)(x2)	
	24	QYSBSF4016ZA	TAP SCREW	M4 x 16mm(x20)	
	25	QYSBSG4008ZA	TAP SCREW	M4 x 8mm(x4)	
⚠	26	WJJ0698-001A-E	E-SI C WIRE C-C	ANALOG F-FRONT LED CN07FL	
	27	QQR0491-001	FERRITE CORE		
	28	LC12420-006A-A	FRONT PANEL		HD-61G787
	28	LC12420-008A-A	FRONT PANEL		HD-61G887
⚠	201	SRA0L111A-M2	FRONT LED PWB		

EXPLODED VIEW -3 [HD-61G787, HD-61G887]

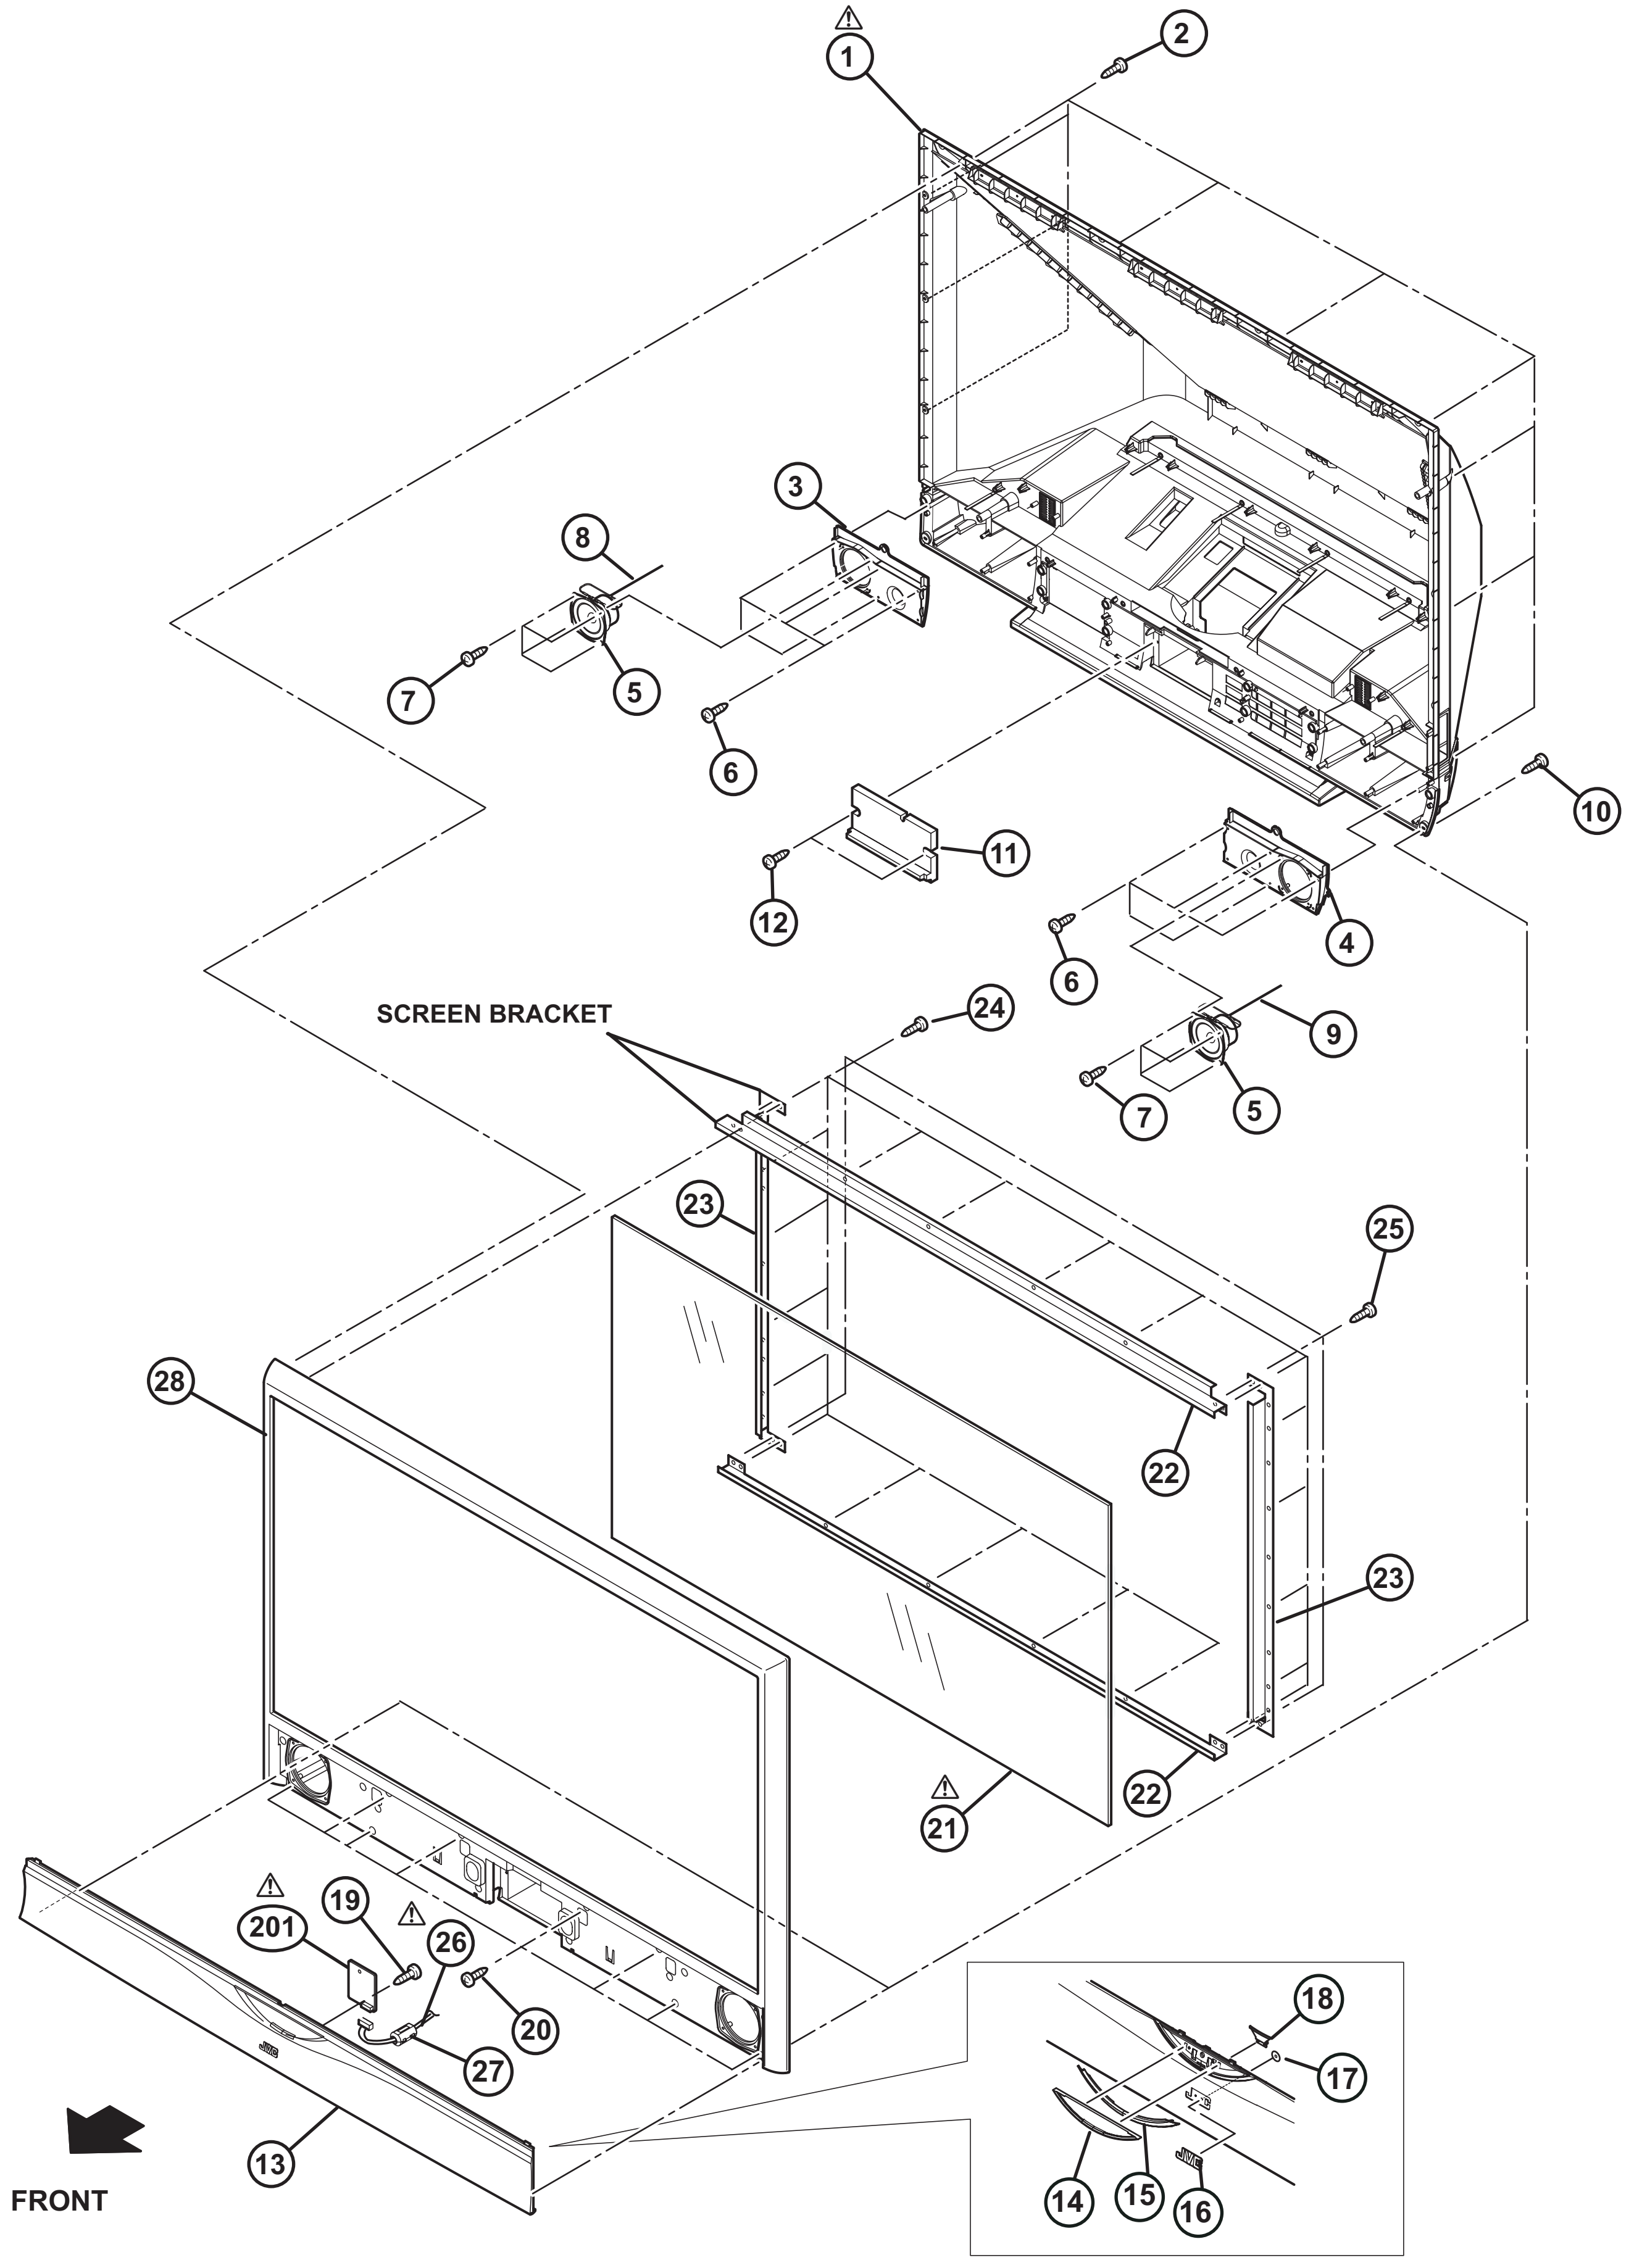

⚠
1
2
3
8
5
7
6
10
11
12
4
6
24
9
SCREEN BRACKET
7
5
23
25
28
22
23
⚠
21
22
⚠
201
19
⚠
26
20
27
13
FRONT
18
17
14
15
16

EXPLODED VIEW PARTS LIST - 4 [HD-61G787, HD-61G887]

⚠	Ref.No.	Part No.	Part Name	Description	Local
	41	LC12543-002C-0K	MIRROR HOLDER	TOP	
	42	LC21538-001A-A	MIRROR HOLDER	LEFT	
	43	LC21538-002A-A	MIRROR HOLDER	RIGHT	
	44	LC32447-055A-A	SPONGE SPACER	(x3)	
	45	LC32447-055A-A	SPONGE SPACER	(x2)	
⚠	46	LC33317-003A-A	GLASS MIRROR		
	47	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	48	LC33046-003A-A	SIDE CONTROL SHEET		
	49	LC21805-001A-A	SIDE CONTROL SHEET		
⚠	50	LC12263-001G-A	BODY		
	51	LC33533-001A	BACK COVER FILTER	(x2)	
	52	QQR0491-001	FERRITE CORE		
	53	WJZ0201-001A-E	E-HARNESS ASSY	ANALOG S2-SIDE CONTROL CN08S2	
⚠	202	SRA0L011A-M2	SIDE CONTROL PWB		

EXPLODED VIEW - 4 [HD-61G787, HD-61G887]

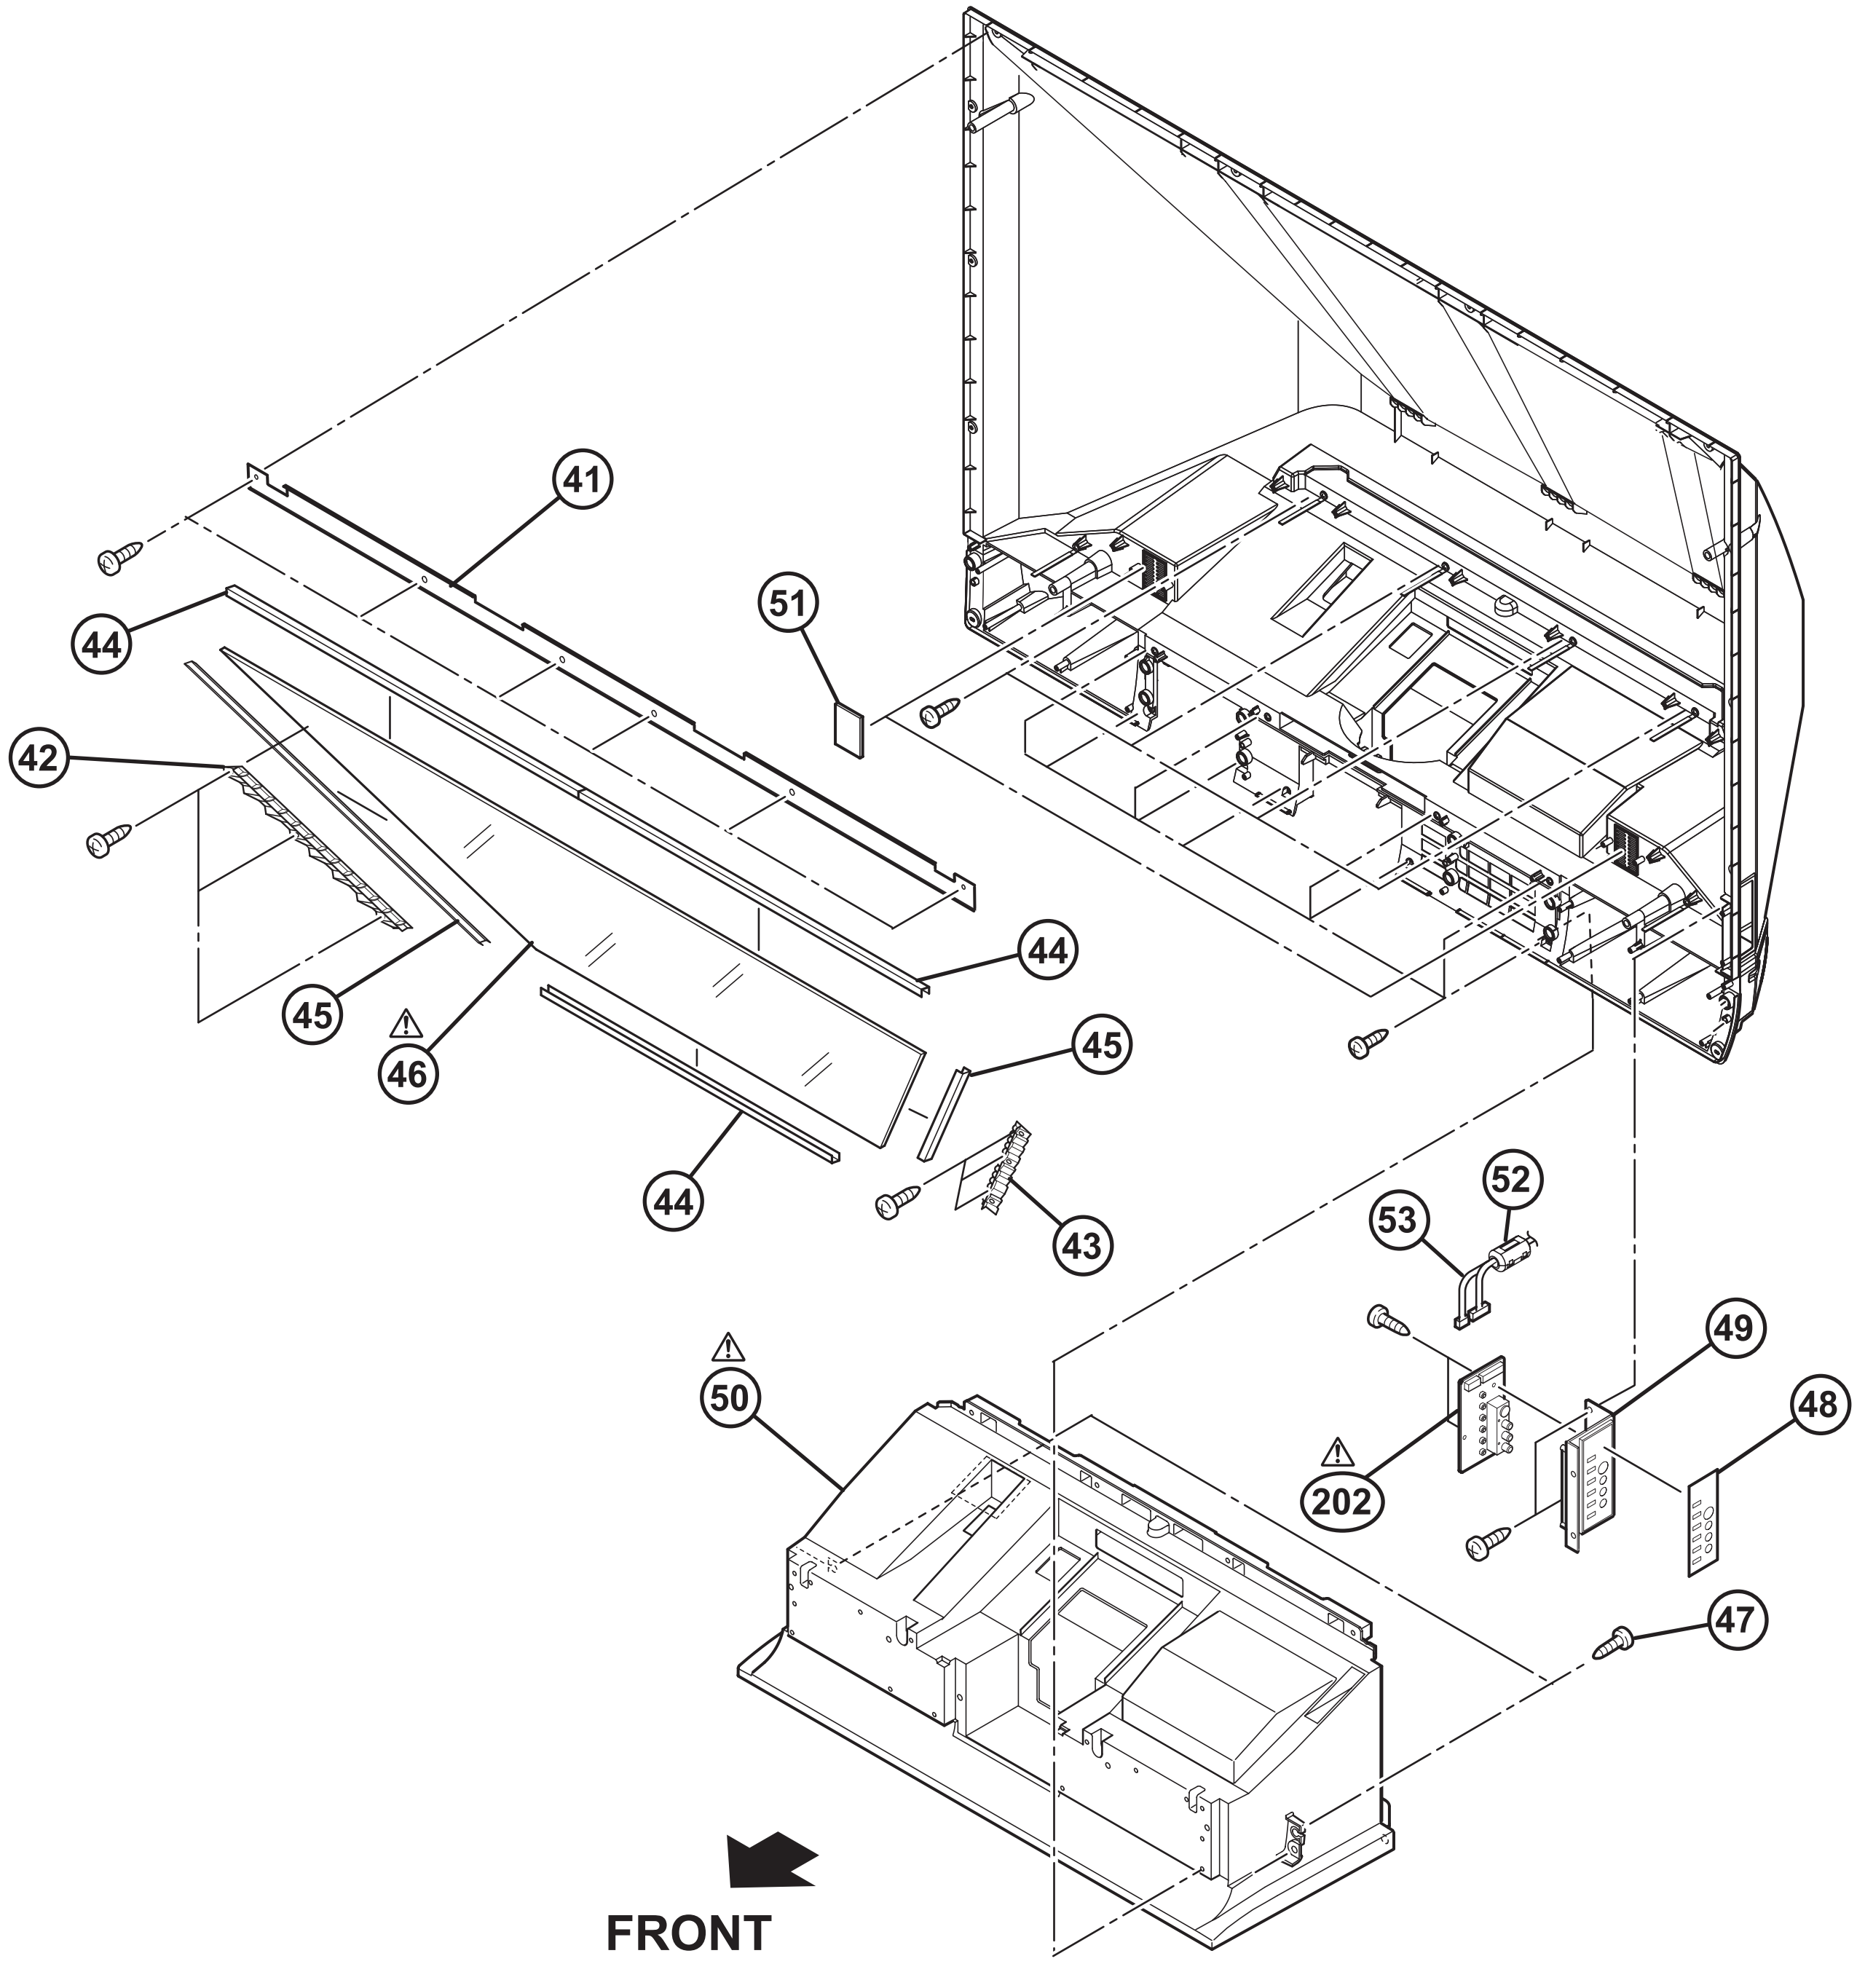

EXPLODED VIEW PARTS LIST -5

⚠	Ref.No.	Part No.	Part Name	Description	Local
	71	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x9)	
	72	QYSBSG4012ZA	TAP SCREW	M4 x 12mm(x5)	
	73	QYSBSFG4016MA	TAP SCREW	(x2)	HD-52G787,HD-52G887,HD-56G787,HD-56G887
	73	LC42456-001A	CANOE CLIP	(x2)	HD-61G787,HD-61G887
	74	LC22113-001B-A	TERMINAL BOARD		
	75	QYSBSF3012MA	TAP SCREW	M3 x 12mm(x7)	
	76	QYSBSG4012ZA	TAP SCREW	M4 x 12mm(x3)	HD-52G787,HD-52G887,HD-56G787,HD-56G887
	76	QYSBSG4008ZA	TAP SCREW	M4 x 8mm(x3)	HD-61G787,HD-61G887
⚠	77	LC12259-001C-A	BODY COVER		
	78	QNB0036-001	CONN ACCESSORY	(x2)	
	79	QYSBSG3008ZA	TAP SCREW	M3 x 8mm(x5)	
	80	CM46798-001	WASHER	(x3)	
	81	LC42119-001A	NUT		
⚠	82	QMPD290-200-JC	POWER CORD(US/CA)	2m BLACK	
⚠	83	LC20106-001D-A	POWER CORD CLAMP		
	84	QQR0918-001	CORE FILTER		
	85	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x2)	
	86	LC42077-001A-A	ASSY SCREW		
	87	LC33208-001A-A	WARNING SHEET		
⚠	88	LC12307-001B-A	LAMP COVER		
	90	LC42276-001A-A	INSERT NUT		
⚠	91	TS-CL110UAA	LAMP UNIT		
⚠	92	LC11943-001B-A	BODY BKT		
	93	QYSBSFG4016MA	TAP SCREW	M4 x 16mm(x4)	
	94	QYSBSGG3008ZA	TAP SCREW	M3 x 8mm(x7)	
	95	QUQK12-2514CH-E	FFC WIRE	TUNER CNT1 - ANALOG CNT1	
	96	QJJ015-031213-E	SIN CR C-C WIRE	TUNER CNT2 - ANALOG CNT2	
	97	WJX0035-001A-E	E-COAXIAL ASSY		
	98	WJJ0699-001A-E	E-SI C WIRE C-C	ATSC CN6001 - POWER CN9UP	
	99	WJZ0200-001A-E	E-HARNESS ASSY	ANALOG CN001-DIGITAL CN011	
	100	QJJ015-122012-E	SIN CR C-C WIRE	POWER CNA3-ANALOG A3	
	101	QJJ015-053010-E	SIN CR C-C WIRE	POWER CNA2-ANALOG A2	
	102	QJJ061-062211-E	SIN CR C-C WIRE	POWER CNA1-ANALOG A1	
	103	WJJ0485-003A-E	E-SI C WIRE C-C	SPEAKER - ANALOG CNSP	
⚠	104	QAR0404-001	COOLING FAN		
	105	QUQL05-4013AE-E	FFC WIRE	ANALOG CN012-DIGITAL CN012	
	106	QUQL05-5013AE-E	FFC WIRE	ANALOG CN011-DIGITAL CN011	
	107	WJW0043-001A-E	E-TWISTED ASSY	DIGITAL CN0LV2 - DRIVE CN3001	
	108	WJJ0700-001A-E	E-SI C WIRE C-C	ATSC - SD CARD CN1DT	
	109	WJJ0656-001A-E	E-SI C WIRE C-C	POWER CNDC-DIGITAL CN1DC	
	110	WJZ0218-001A-E	E-HARNESS ASSY	DIGITAL - ANALOG	
	111	QJJ015-034213-E	SIN CR C-C WIRE	ANALOG RE-REMOCON CN08RE	
	112	WJJ0652-003A-E	E-SI C WIRE C-C	POWER CNBL-LAMP BALLAST CN101	
	113	QJJ015-081013-E	SIN CR C-C WIRE	FAN CN8010 - DRIVE CN3010	
	114	QQR0490-001	NOISE FILTER	(x3)	
	115	QQR0491-001	FERRITE CORE	(x5)	
	116	QQR0490-001	NOISE FILTER		
⚠	117	QQR0491-001	FERRITE CORE	(x2)	
	118	QQR0491-001	FERRITE CORE	(x2)	HD-52G787,HD-52G887,HD-56G787,HD-56G887
	118	QQR0491-001	FERRITE CORE	(x2)	HD-61G787,HD-61G887
	119	QJJ015-099424-E	SIN CR C-C WIRE		
	120	LC42521-001A-A	COVER SHEET		
	121	LC21690-002A-A	LAMP DUCT BRACKET		
⚠	203	SRA-9011A-M2	POWER PWB		
⚠	204	SRA0R011A-M2	TUNER PWB		
⚠	205	SRA-1011A-M2	ANALOG PWB		
⚠	206	SSD-2203A-M2	ATSC TUNER MODULE PWB		
⚠	207	SRA-8511A-M2	SD CARD PWB		
⚠	208	SRA0D016A-M2	DIGITAL PWB		HD-52G787
⚠	208	SRA0D013A-M2	DIGITAL PWB		HD-52G887
⚠	208	SRA0D015A-M2	DIGITAL PWB		HD-56G787
⚠	208	SRA0D012A-M2	DIGITAL PWB		HD-56G887
⚠	208	SRA0D014A-M2	DIGITAL PWB		HD-61G787
⚠	208	SRA0D011A-M2	DIGITAL PWB		HD-61G887
⚠	209	SRA-8401A-M2	FAN PWB		

EXPLODED VIEW -5

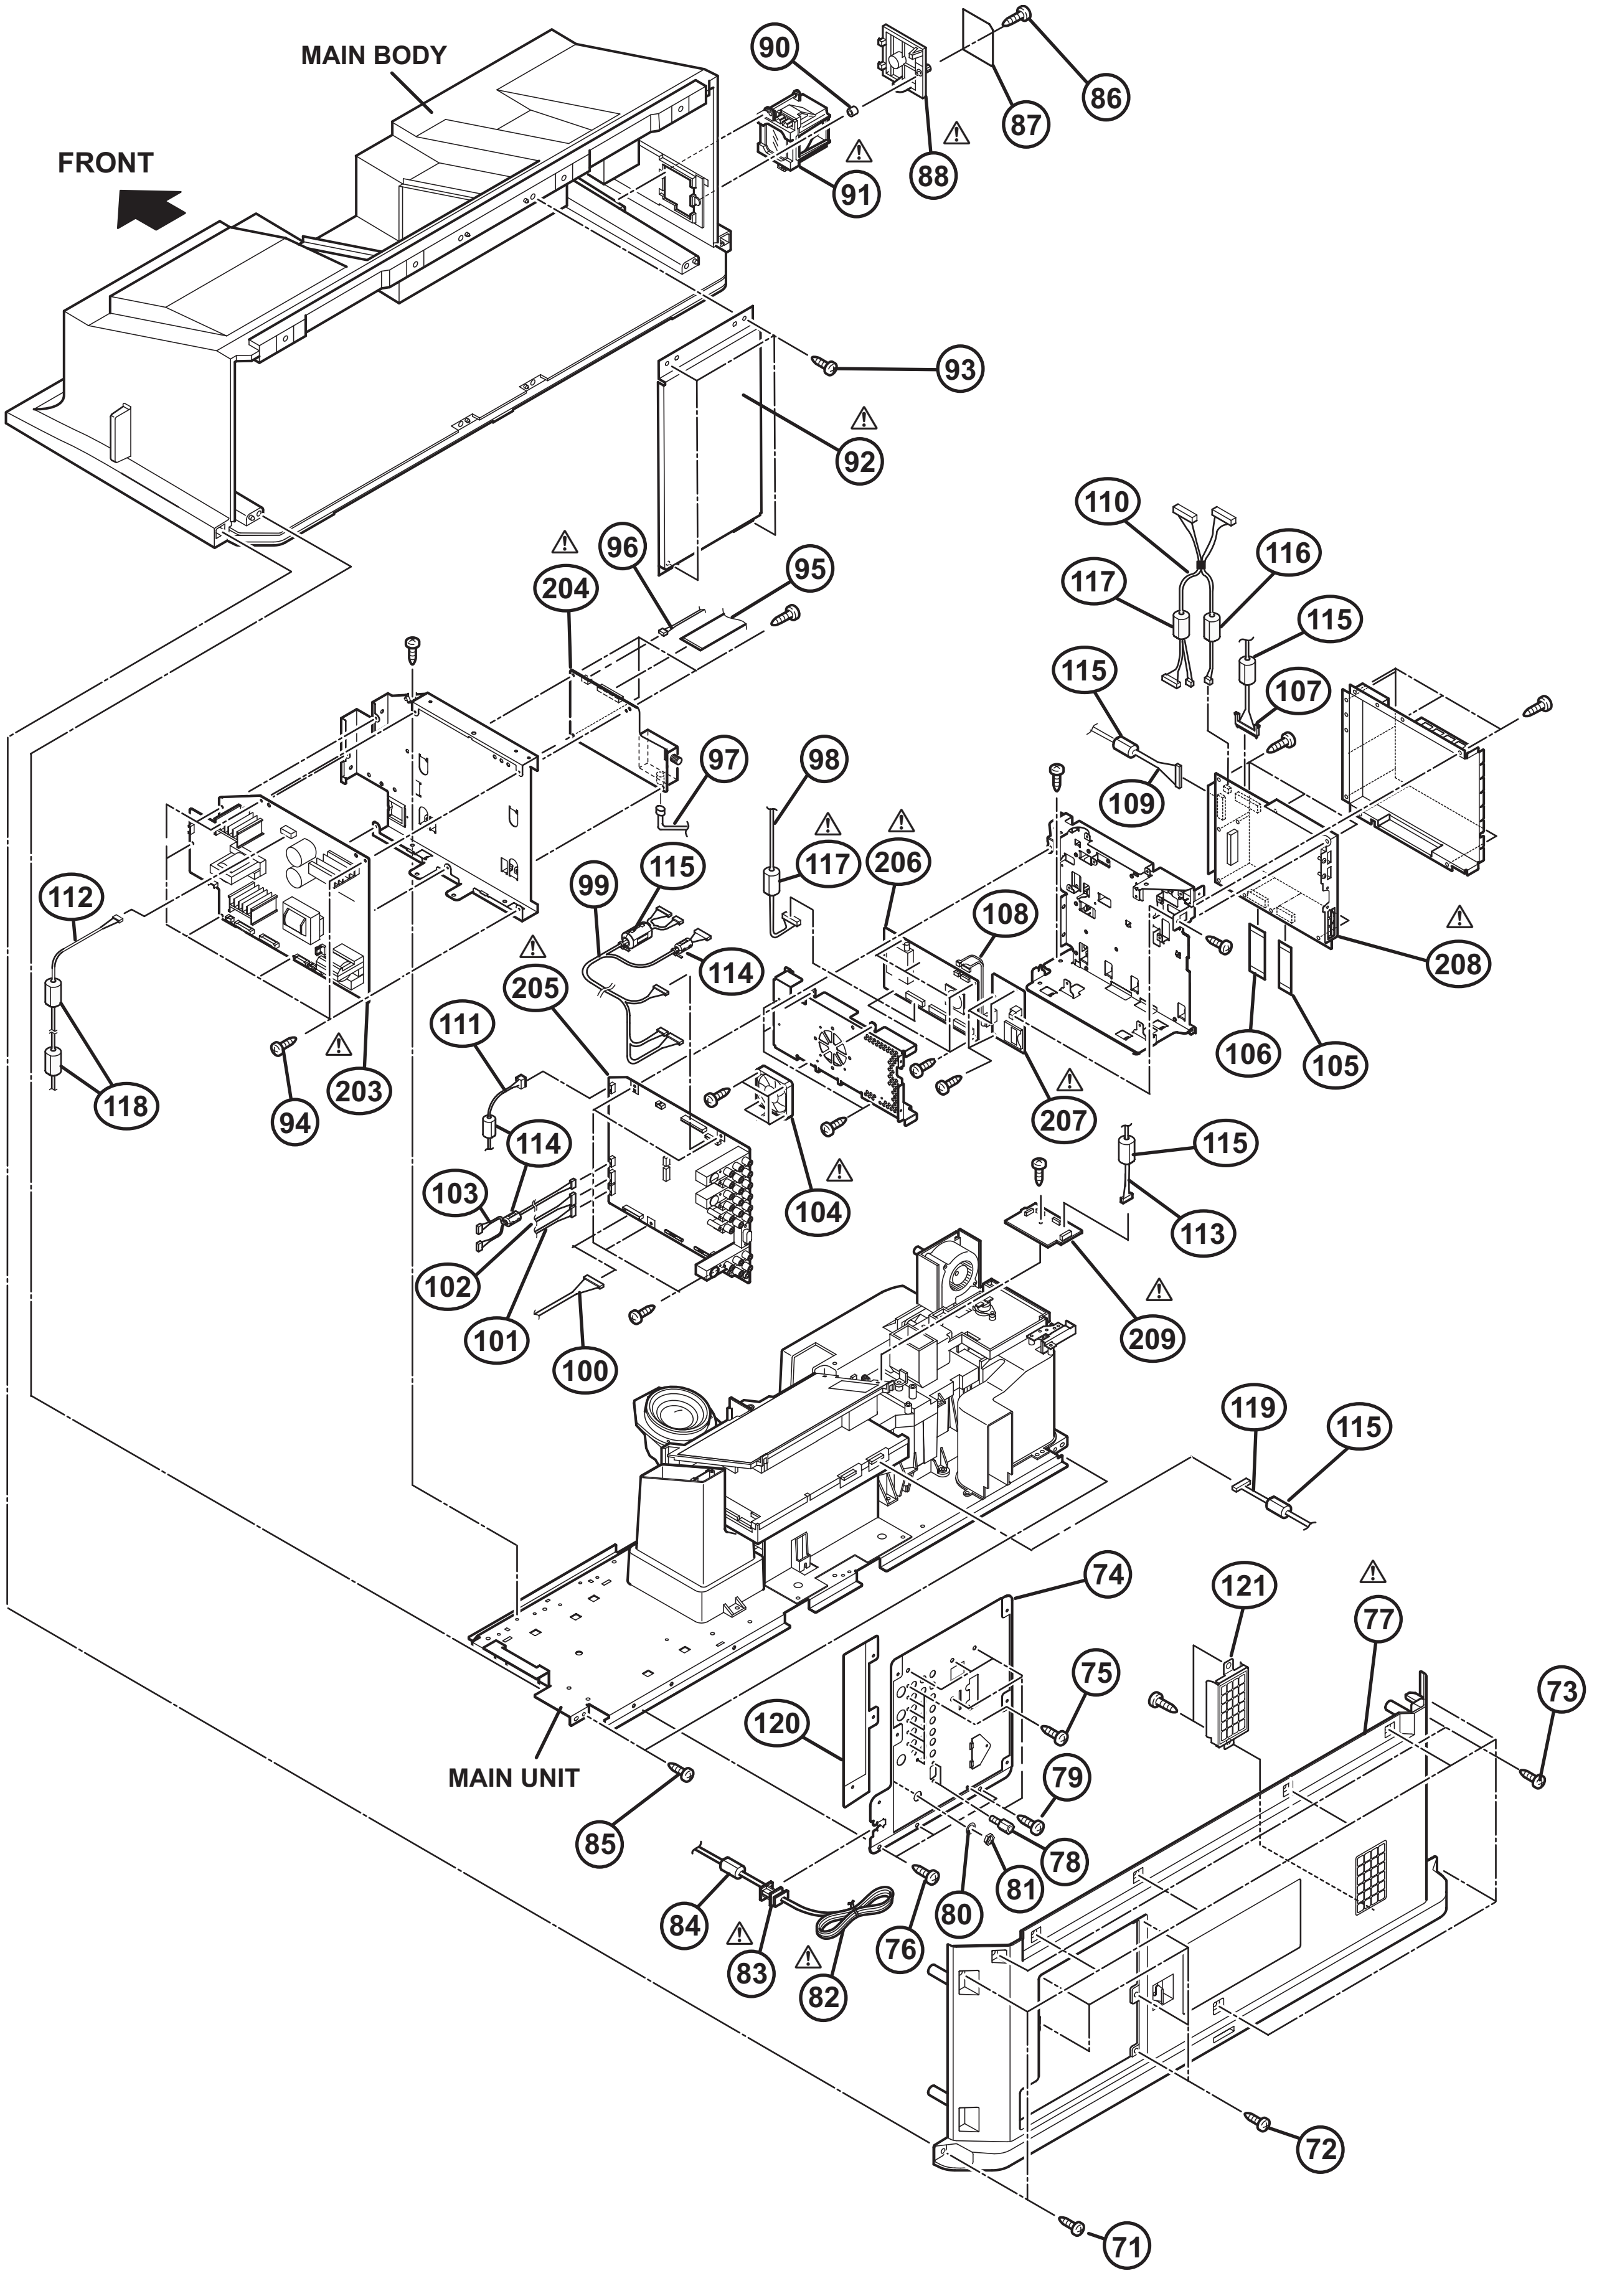

MAIN BODY
FRONT
90
86
87
88
91
93
92
110
116
117
115
96
95
204
115
107
97
98
109
117
206
115
99
112
114
108
208
205
111
94
203
118
106
105
207
114
115
103
104
113
102
101
100
209
119
115
74
121
77
75
73
120
79
MAIN UNIT
78
85
81
80
84
76
83
82
72
71

EXPLODED VIEW PARTS LIST -6

⚠	Ref.No.	Part No.	Part Name	Description	Local
⚠	131	LC12369-001C-A	UNIT BASE		
	132	LC42034-001A-A	WELL NUT	(x2)	
⚠	133	QAR0368-002	COOLING FAN		
	134	LC12355-001B-A	SIROCCO CASE T		
	135	QJJ015-041004-E	SIN CR C-C WIRE	TEMP CN2007 - DRIVE CN3007	
	136	LC12352-001B-A	HOLDER FAN		
⚠	137	QAR0367-001	COOLING FAN		
	138	QYSBSFG4035MA	TAP SCREW	M4 x 35mm(x2)	
	139	LC42034-001A-A	WELL NUT	(x2)	
⚠	140	QAR0354-002	COOLING FAN		
	141	QYSPSPD4040MA	SCREW	M4 x 40mm(x2)	
⚠	142	LC12225-001A-A	DUCT PCS		
⚠	143	QMR0014-001	TH PROTECTOR		
	144	LC12354-001B-A	BALLAST COVER		
	145	LC12353-001B-A	BALLAST HOLDER		
⚠	146	QAL0765-001	POWER UNIT ASSY		
	147	WJJ0664-001A-E	E-SI C WIRE C-C	POWER UNIT - POWER CN9BL	
	148	WJJ0659-001A-E	E-SI C WIRE C-C	IRIS CN5016 - OPTICAL BLOCK	
	149	QJJ058-083413-E	SIN CR C-C WIRE	IRIS CN5015 - DRIVE CN3015	
	150	WJJ0708-001B-E	E-HARNESS ASSY	LAMP COVER CN0806 - DRIVE CN3006	
	151	QQR0490-001	NOISE FILTER	(x3)	
	152	TS-COP9A-SAA	OPTICAL/DRIVE ASSY		
	153	LC12230-001B	PJ UNIT		
⚠	210	SRA0L211A-M2	LAMP COVER PWB		
⚠	211	SRA-3003A-M2	DRIVE PWB		
⚠	212	SRA-8302A-M2	IRIS PWB		
⚠	213	SRA-8202A-M2	TEMP PWB		
⚠	214	SRA-8011A-M2	REMOCON PWB		

EXPLODED VIEW -6

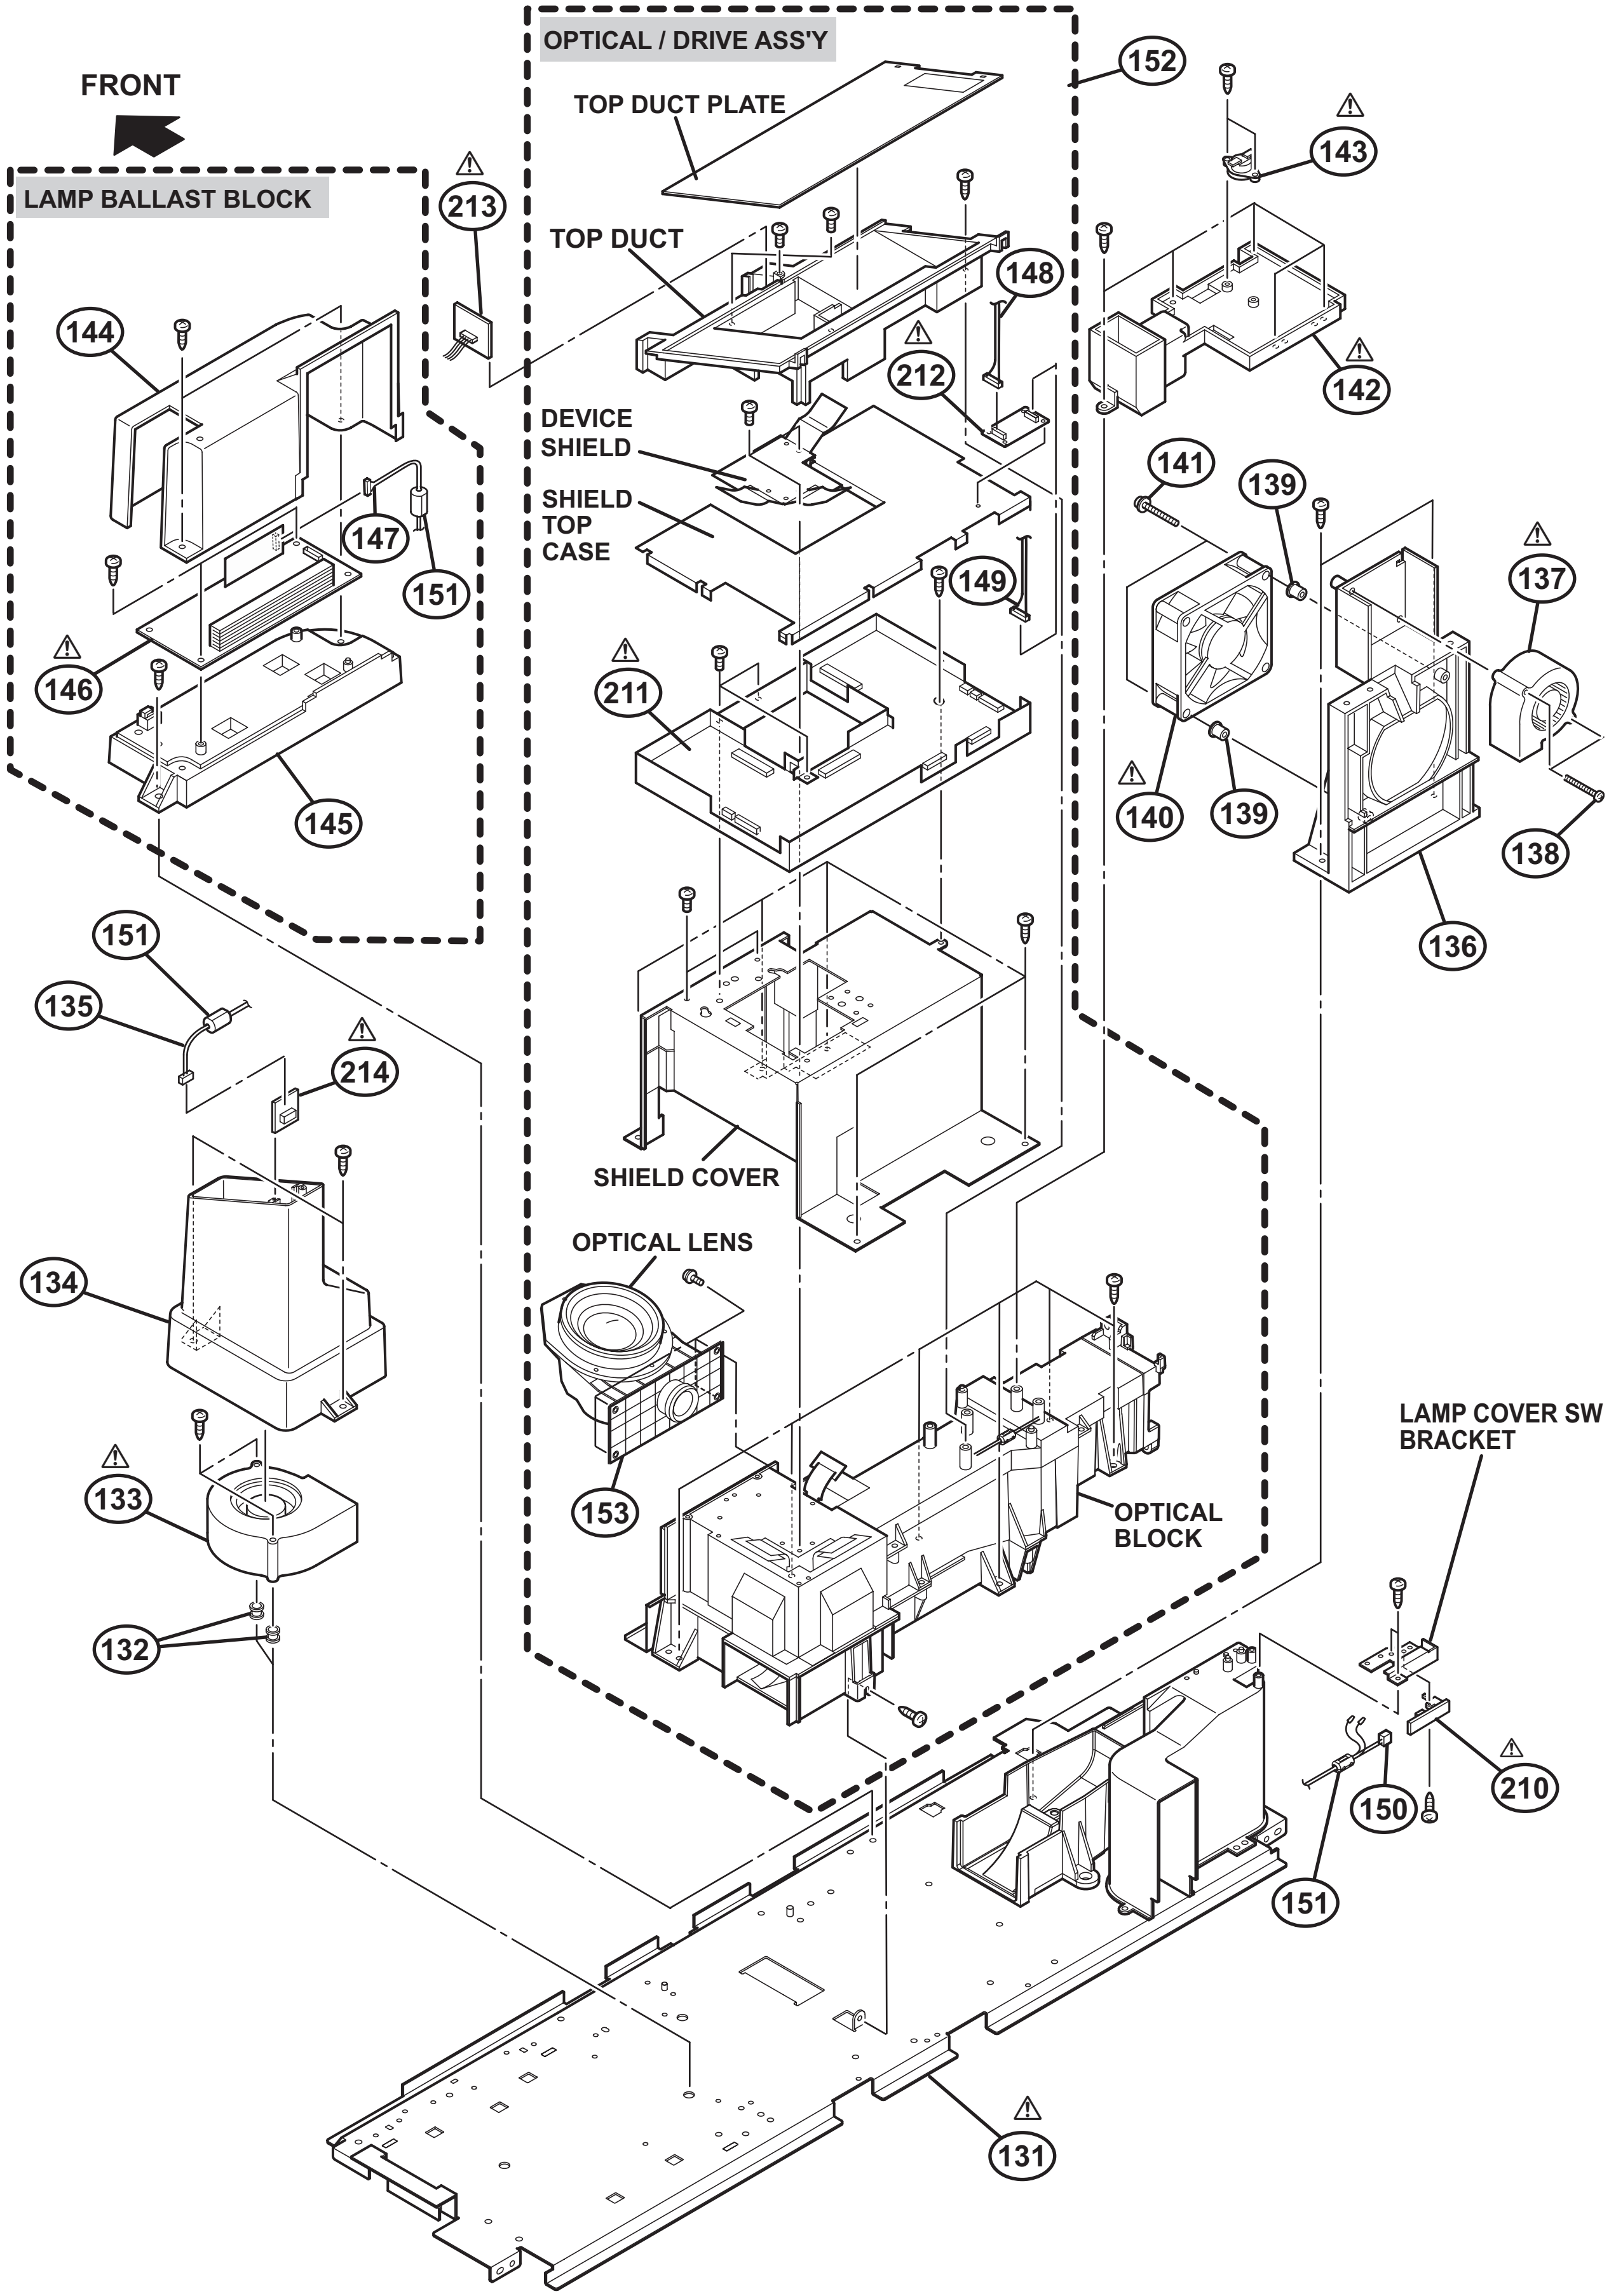
OPTICAL / DRIVE ASS'Y
FRONT
LAMP BALLAST BLOCK
TOP DUCT PLATE
TOP DUCT
DEVICE SHIELD
SHIELD TOP CASE
SHIELD COVER
OPTICAL LENS
OPTICAL BLOCK
LAMP COVER SW BRACKET
131
132
133
134
135
136
137
138
139
139
140
141
142
143
144
145
146
147
148
149
150
151
151
151
152
153
210
211
212
213
214

PRINTED WIRING BOARD PARTS LIST [HD-52G787]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC101	R2S11004FT	IC		
IC102	R2S11003FT	IC		
IC381	M62320FP-X	IC		
IC601	NJW1182FP1	IC		
IC602	PQ20WZ11-X	IC		
IC604	MX3000CS-X	IC		
IC605	TDA8928ST/N1	IC		
IC606	M62320FP-X	IC		
IC607	LM393DR-X	IC		
IC608	MM3143DN-X	IC		
IC610	RC4558D-X	IC		
IC902	MM1663DT-X	IC		
Q106	SSM3K17FU-X	MOS FET		
Q107	SSM3K17FU-X	MOS FET		
Q108	2SC3928A/QR/-X	TRANSISTOR		
Q109	2SA1022/BC/-X	TRANSISTOR		
Q110	2SA1022/BC/-X	TRANSISTOR		
Q111	2SA1022/BC/-X	TRANSISTOR		
Q112	2SA1022/BC/-X	TRANSISTOR		
Q113	2SC3928A/QR/-X	TRANSISTOR		
Q451	UN2226-X	DIGI TRANSISTOR		
Q452	UN2226-X	DIGI TRANSISTOR		
Q453	UN2110-X	DIGI TRANSISTOR		
Q605	UN2212-X	DIGI TRANSISTOR		
Q606	UN2112-X	DIGI TRANSISTOR		
Q607	2SC3928A/QR/-X	TRANSISTOR		
Q614	2SA1530A/QR/-X	TRANSISTOR		
Q615	2SA1530A/QR/-X	TRANSISTOR		
Q616	2SC3928A/QR/-X	TRANSISTOR		
Q617	2SC3928A/QR/-X	TRANSISTOR		
Q901	2SC5881/QR/-X	POW TRANSISTOR		
Q902	2SC5881/QR/-X	POW TRANSISTOR		
D105	1SS355W-X	DIODE		
D110	1SS355W-X	DIODE		
D121	MA8056/M/-X	Z DIODE		
D122	MA8056/M/-X	Z DIODE		
D123	MA8056/M/-X	Z DIODE		
D124	MA8056/M/-X	Z DIODE		
D125	MA8056/M/-X	Z DIODE		
D126	MA8056/M/-X	Z DIODE		
D131	MA8100/M/-X	Z DIODE		
D132	MA8100/M/-X	Z DIODE		
D133	MA8100/M/-X	Z DIODE		
D134	MA8100/M/-X	Z DIODE		
D135	MA8100/M/-X	Z DIODE		
D136	MA8100/M/-X	Z DIODE		
D401	UDZW10B-X	Z DIODE		
D402	UDZW10B-X	Z DIODE		
D403	UDZW10B-X	Z DIODE		
D404	UDZW10B-X	Z DIODE		
D405	UDZW10B-X	Z DIODE		
D406	UDZW10B-X	Z DIODE		
D407	UDZW10B-X	Z DIODE		
D408	UDZW10B-X	Z DIODE		
D409	UDZW10B-X	Z DIODE		
D410	UDZW10B-X	Z DIODE		
D411	UDZW10B-X	Z DIODE		
D412	UDZW10B-X	Z DIODE		
D413	UDZW10B-X	Z DIODE		
D414	UDZW10B-X	Z DIODE		
D415	UDZW10B-X	Z DIODE		
D416	UDZW10B-X	Z DIODE		
D417	UDZW10B-X	Z DIODE		
D418	UDZW10B-X	Z DIODE		
D419	UDZW10B-X	Z DIODE		
D420	UDZW10B-X	Z DIODE		
D421	UDZW10B-X	Z DIODE		
D423	UDZW10B-X	Z DIODE		
D424	UDZW10B-X	Z DIODE		
D451	UDZW10B-X	Z DIODE		
D452	UDZW10B-X	Z DIODE		
D461	UDZW10B-X	Z DIODE		
D462	UDZW10B-X	Z DIODE		
D463	UDZW10B-X	Z DIODE		
D464	UDZW10B-X	Z DIODE		
D465	UDZW10B-X	Z DIODE		
D466	UDZW10B-X	Z DIODE		
D491	UDZW3.3B-X	Z DIODE		
D492	S9648	PHOTO CONDUCTOR		
D601	1SS355W-X	DIODE		
D605	1SS355W-X	DIODE		
D606	1SS355W-X	DIODE		
D607	1SS355W-X	DIODE		
D608	1SS355W-X	DIODE		
D610	UDZW20B-X	Z DIODE		
D611	UDZW20B-X	Z DIODE		
D612	UDZW20B-X	Z DIODE		
D613	UDZW20B-X	Z DIODE		
D615	1SS355W-X	DIODE		
D616	UDZW3.3B-X	Z DIODE		
D618	1SS355W-X	DIODE		
D619	UDZW6.2B-X	Z DIODE		
D903	PTZ11B-X	Z DIODE		
D904	PTZ6.8B-X	Z DIODE		
C102	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C106	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C107	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C108	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C110	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C115	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C116	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C117	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C118	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C119	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C120	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C121	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C122	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C124	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C125	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C126	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C127	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C128	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C129	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C130	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C131	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C132	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C133	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C134	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C136	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C137	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C138	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C140	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C141	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C142	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C143	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C156	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C157	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C158	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C159	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C160	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C161	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C162	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C163	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C164	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C165	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C167	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C168	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C169	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C170	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C171	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C172	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C173	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C174	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
C175	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C176	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C177	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C178	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C179	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C180	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C181	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C182	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C183	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C184	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C185	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C187	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C189	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C194	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C195	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C196	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C197	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C198	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C199	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C200	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C201	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C207	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C208	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C211	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C212	NDC31HJ-820X	C CAPACITOR	82pF 50V J	
C221	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C222	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C223	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C224	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C225	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C226	NDC31HJ-181X	C CAPACITOR	180pF 50V J	
C227	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C228	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C229	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C240	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C241	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C242	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C291	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C306	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C307	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C381	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C382	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C383	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C401	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C402	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C403	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C404	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C405	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C406	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C407	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C408	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C409	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C410	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C411	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C412	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C413	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C414	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C416	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C417	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C418	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C419	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C422	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C423	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C451	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C452	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C453	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C461	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C462	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C463	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C464	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C465	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C466	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C468	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C469	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C491	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C492	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C493	NEHL1CM-107X	E CAPACITOR	100uF 16V M	
C494	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C601	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C602	NEHL1EM-336X	E CAPACITOR	33uF 25V M	
C603	NEHL1EM-336X	E CAPACITOR	33uF 25V M	
C604	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C605	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C606	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C607	QETM1EM-477	E CAPACITOR	470uF 25V M	
C616	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C617	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C623	NCB21CK-184X	C CAPACITOR	0.18uF 16V K	
C624	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C625	NCB31HK-183X	C CAPACITOR	0.018uF 50V K	
C628	NCB31HK-123X	C CAPACITOR	0.012uF 50V K	
C629	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C630	NCB21CK-184X	C CAPACITOR	0.18uF 16V K	
C632	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C633	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C634	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C635	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C636	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C638	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C639	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C643	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C644	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	
C645	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	
C647	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C648	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C649	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C650	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C651	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C653	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C654	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C655	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C656	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	
C659	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C660	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C662	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C663	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C664	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C665	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C666	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C667	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C668	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C669	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C670	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C671	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C672	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C675	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C676	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C677	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C678	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C679	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C680	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C683	NCB31HK-332X	C CAPACITOR	3300pF 50V K	
C684	NCB31HK-332X	C CAPACITOR	3300pF 50V K	
C685	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C686	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C689	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C690	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C691	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C692	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C693	NCB11EK-105X	C CAPACITOR	1uF 25V K	
C694	NCB11EK-105X	C CAPACITOR	1uF 25V K	
C697	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C698	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C699	QETM1HM-226	E CAPACITOR	22uF 50V M	
C700	QETM1HM-226	E CAPACITOR	22uF 50V M	
C701	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C702	QETM1EM-477	E CAPACITOR	470uF 25V M	
C704	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C705	QETM1EM-477	E CAPACITOR	470uF 25V M	
C707	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C708	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C709	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C711	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C712	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C713	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C716	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C717	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C719	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C720	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C721	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C722	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C723	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C724	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C726	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C727	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C728	QETM1EM-477	E CAPACITOR	470uF 25V M	
C729	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M	
C730	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C731	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C732	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C733	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C734	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M	
C735	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C736	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C737	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C738	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C739	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M	
C740	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C741	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C742	NEHL1HM-105X	E CAPACITOR	1uF 50V M	
C743	NEHL1HM-105X	E CAPACITOR	1uF 50V M	
C744	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C745	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C904	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C905	NEHM1CM-476X	E CAPACITOR	47uF 16V M	
C911	NEX51CM-335X	E CAPACITOR	3.3uF 16V M	
C912	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C913	NEX51CM-335X	E CAPACITOR	3.3uF 16V M	
C914	NEX50JM-156X	E CAPACITOR	15uF 6.3V M	
C915	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C916	NEX50JM-156X	E CAPACITOR	15uF 6.3V M	
R126	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R136	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R137	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R140	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R141	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R142	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R143	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R144	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R145	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R146	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R147	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R148	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R149	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R150	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R151	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R152	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R153	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R154	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R157	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R158	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R159	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R160	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R161	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R164	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R165	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R166	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R167	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R168	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R169	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R174	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R180	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R181	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R183	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R184	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R189	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R205	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R206	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R207	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R210	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R219	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R220	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R223	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R224	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R225	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R228	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R234	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R243	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R245	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R246	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R247	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R248	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R249	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R253	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R255	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R257	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R259	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R260	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R261	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R262	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R263	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R264	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R265	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R266	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R267	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R282	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R283	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R286	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R299	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R316	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R317	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R318	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R319	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R324	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R325	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R382	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R384	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R385	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R387	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R388	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R389	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R390	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R391	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R393	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R394	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R395	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R402	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R403	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R404	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R405	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R407	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R408	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R409	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R410	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R411	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R412	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R413	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R414	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R415	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R416	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R417	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R418	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R419	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R420	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R422	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R423	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R451	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R452	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R453	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R454	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R455	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R456	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R457	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R458	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R461	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R462	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R463	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R464	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R465	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R466	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R467	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R468	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R469	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R470	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R471	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R474	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R475	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R476	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R491	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R584	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R585	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R588	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R589	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R590	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R591	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R593	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R594	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R597	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R598	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R599	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R601	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R602	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R603	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R605	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R606	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R607	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R608	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R620	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R628	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R634	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R635	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R636	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R638	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R641	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R642	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
R644	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R645	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R647	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R649	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	
R650	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R651	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R652	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R653	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R661	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R662	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R663	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R666	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R668	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R671	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R672	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R673	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R674	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R675	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R676	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R677	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R678	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R679	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R680	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R681	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R682	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R683	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R684	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R685	QRJ149J-102	UNF C RESISTOR	1kΩ 1/4W J	
R687	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R694	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R695	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R696	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R700	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R701	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R704	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R705	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R706	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R710	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R711	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R712	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R713	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R718	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R719	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R720	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R722	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R723	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R724	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R725	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R726	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R727	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R728	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R729	QRK129J-5R6	UNF C RESISTOR	5.6Ω 1/2W J	
R730	QRK129J-5R6	UNF C RESISTOR	5.6Ω 1/2W J	
R731	QRK129J-220	UNF C RESISTOR	22Ω 1/2W J	
R732	QRK129J-220	UNF C RESISTOR	22Ω 1/2W J	
R733	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R735	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R736	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R737	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R738	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R739	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R740	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R741	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R742	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R743	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R744	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R751	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R771	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R772	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R773	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R774	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
R775	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R776	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R777	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
R778	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R781	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R782	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R791	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R792	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R793	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R794	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R795	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R905	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	
R907	NRS12BJ-471W	MG RESISTOR	470Ω 1/2W J	
R908	NRS12BJ-471W	MG RESISTOR	470Ω 1/2W J	
R917	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R931	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R932	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R937	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R938	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R945	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R946	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R951	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
R952	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
R953	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
R954	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R957	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R958	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R967	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R968	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R969	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R971	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J	
R972	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J	
R973	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R974	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R975	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R976	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L101	NQL79GM-100X	COIL	10uH M	
L601	QQR0621-002Z	FERRITE BEADS		
L602	QQR0621-002Z	FERRITE BEADS		
L605	NQLC8CM-560X	COIL	56uH M	
L606	NQLC8CM-560X	COIL	56uH M	
L901	NQL52EM-220X	COIL	22uH M	
L902	NQL52EM-220X	COIL	22uH M	
L903	NQL52EM-220X	COIL	22uH M	
L904	NQL52EM-220X	COIL	22uH M	
CN011	QGF0508C2-50W	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508C2-40W	CONNECTOR	FFC/FPC (1-40)	
CN1T1	QGF1201C2-25	CONNECTOR	FFC/FPC (1-25)	
J401	QNZ0825-001	AV JACK	INPUT-1(S/V/L/R)	
J402	QNN0349-002	PIN JACK	INPUT-1(COMPONENT)	
J403	QNN0764-001	PIN JACK	INPUT-2(V/L/R)	
J404	QNN0349-002	PIN JACK	INPUT-2(COMPONENT)	
J405	QNZ0825-001	AV JACK	INPUT-3(S/V/L/R)	
J406	QNN0766-001	PIN JACK	CENTER CHANNEL-IN	
J409	QNN0766-001	PIN JACK	AUDIO-OUT	
J410	QNZ0561-001	D CONNECTOR	PC-IN	
K601	NQR0499-002X	FERRITE BEADS		
K602	NQR0499-002X	FERRITE BEADS		
K603	NQR0499-002X	FERRITE BEADS		
K604	NQR0499-002X	FERRITE BEADS		
K605	NQR0499-002X	FERRITE BEADS		
X601	NAX0857-001X	C RESONATOR	25.000MHz	

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC3101	ASI5100	IC(DILA DRIVER)		
IC3102	K4S161622H-UC60	IC		
IC3103	K4S161622H-UC60	IC		
IC3104	K4S161622H-UC60	IC		
IC3105	K4S161622H-UC60	IC		
IC3161	RC4558D-X	IC		
IC3162	RC4558D-X	IC		
IC3163	RC4558D-X	IC		
IC3201	ASI5100	IC(DILA DRIVER)		
IC3202	K4S161622H-UC60	IC		
IC3203	K4S161622H-UC60	IC		
IC3204	K4S161622H-UC60	IC		
IC3205	K4S161622H-UC60	IC		
IC3206	SN74LVC1G125V-X	IC		
IC3261	RC4558D-X	IC		
IC3262	RC4558D-X	IC		
IC3263	RC4558D-X	IC		
IC3301	ASI5100	IC(DILA DRIVER)		
IC3302	K4S161622H-UC60	IC		
IC3303	K4S161622H-UC60	IC		
IC3304	K4S161622H-UC60	IC		
IC3305	K4S161622H-UC60	IC		
IC3361	RC4558D-X	IC		
IC3362	RC4558D-X	IC		
IC3363	RC4558D-X	IC		
IC3701	AT89C51RD2RLTUM	IC		
IC3705	SN74LVC1G66V-X	IC		
IC3706	SN74LVC1G66V-X	IC		

⚠Ref No.	Part No.	Part Name	Description	Local
IC3707	SN74LVC1G66V-X	IC		
IC3708	SN74LVC1G66V-X	IC		
IC3709	SN74AHCT1G08V-X	IC		
IC3710	SN74LVC1G66V-X	IC		
IC3711	SN74LVC1G66V-X	IC		
IC3743	CD74HC4053PW-X	IC		
IC3746	SN74LVC541APW-X	IC		
IC3801	JCC5066	IC		
IC3803	K4S643232H-UC60	IC		
IC3892	R1170H251B-X	IC		
IC3901	SI-8011NVS-X	IC		
IC3902	PQ1CY1032Z-W	IC		
IC3903	LM2941S-W	IC		
IC3905	BA50BC0FP-X	IC		
IC3906	PQ20WZ11-X	IC		
Q3702	UN2211-X	TRANSISTOR		
Q3706	2SK1374-X	MOS FET		
Q3707	2SK1374-X	MOS FET		
Q3901	UPA2751GR-X	POWER MOS FET		
Q3902	UN2211-X	TRANSISTOR		
Q3903	UN2211-X	TRANSISTOR		
Q3904	2SC3928A/QR/-X	TRANSISTOR		
Q3905	UN2211-X	TRANSISTOR		
Q3906	UN2211-X	TRANSISTOR		
Q3907	IMD14-W	TRANSISTOR		
Q3908	CPH3116-X	CHIP TRANSISTOR		
D3161	MA8056/M/-X	Z DIODE		
D3261	MA8056/M/-X	Z DIODE		
D3361	MA8056/M/-X	Z DIODE		
D3701	STZ6.8N-X	Z DIODE		
D3702	STZ6.8N-X	Z DIODE		
D3703	STZ6.8N-X	Z DIODE		
D3704	STZ6.8N-X	Z DIODE		
D3705	STZ6.8N-X	Z DIODE		
D3706	STZ6.8N-X	Z DIODE		
D3707	STZ6.8N-X	Z DIODE		
D3708	STZ6.8N-X	Z DIODE		
D3741	STZ6.8N-X	Z DIODE		
D3742	STZ6.8N-X	Z DIODE		
D3901	MA111-X	SI DIODE		
D3902	EC30HA03L-X	SB DIODE		
D3903	PTZ3.9B-X	Z DIODE		
D3931	EC30HA03L-X	SB DIODE		
D3932	EC30HA03L-X	SB DIODE		
D3933	PTZ6.8B-X	Z DIODE		
D3935	MA8043/L/-X	Z DIODE		
D3936	MA8043/L/-X	Z DIODE		
D3937	MA111-X	SI DIODE		
C3008	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3101	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3104	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3105	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3106	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3107	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3108	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3109	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3110	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3111	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3112	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3113	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3114	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3121	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3122	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3123	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3124	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3125	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3126	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3127	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3128	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3129	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3130	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3131	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3132	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3141	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3142	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3143	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3144	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3145	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3146	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3147	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3148	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3149	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3150	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3151	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3152	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3162	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3164	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3165	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3166	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3167	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3168	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3169	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3170	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3171	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3172	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3191	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3192	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3193	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3195	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3196	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3197	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3198	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3199	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3201	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3202	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C3203	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C3204	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3205	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3206	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3207	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3208	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3209	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3210	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3211	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3212	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3213	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3214	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3215	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3221	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3222	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3223	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3224	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3225	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3226	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3227	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3228	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3229	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3230	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3231	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3232	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3241	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3242	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3243	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3244	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3245	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3246	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3247	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3248	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3249	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3250	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3251	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3252	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3262	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3264	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3265	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3266	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3267	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3268	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3269	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3270	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3271	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3272	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3291	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3292	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3293	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3295	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3296	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3297	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3298	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3299	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3301	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3306	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3309	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3311	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3312	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3313	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3314	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3322	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3323	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3325	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	

⚠Ref No.	Part No.	Part Name	Description	Local
C3326	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3327	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3328	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3330	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3331	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3332	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3341	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3342	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3343	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3344	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3345	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3346	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3347	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3349	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3351	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3352	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3362	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3364	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3365	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3366	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3367	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3368	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3369	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3370	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3371	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3372	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3391	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3392	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3393	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3395	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3396	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3397	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3398	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3399	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3701	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3702	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3703	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3704	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3706	NDC31HJ-3R0X	C CAPACITOR	3pF 50V J	
C3707	NDC31HJ-3R0X	C CAPACITOR	3pF 50V J	
C3708	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3709	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3710	NDC31HJ-471X	C CAPACITOR	470pF 50V J	
C3711	NDC31HJ-471X	C CAPACITOR	470pF 50V J	
C3712	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C3713	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C3715	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3716	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3717	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3718	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3719	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3720	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3721	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3722	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3723	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3724	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3741	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3742	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3743	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3746	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3747	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C3748	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C3749	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3751	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3801	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3802	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3803	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3804	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3805	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3806	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3807	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3808	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3809	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3810	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3811	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3812	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3813	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3814	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3815	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3816	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3817	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3818	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3820	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3821	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3823	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3824	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3826	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	

⚠Ref No.	Part No.	Part Name	Description	Local
C3827	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3833	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3834	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3838	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3839	NBE50JM-107X	TA E CAPACITOR	100uF 6.3V M	
C3840	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3841	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3842	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3861	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3862	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3863	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3864	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3865	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3866	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3867	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3868	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3869	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3870	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3871	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3872	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3873	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3874	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3891	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3892	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3901	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3902	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3903	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3904	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C3905	NDC31HJ-470X	C CAPACITOR	47pF 50V J	
C3906	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C3907	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3908	NCB31HK-272X	C CAPACITOR	2700pF 50V K	
C3909	NCB11AK-475X	C CAPACITOR	4.7uF 10V K	
C3910	NCB11AK-475X	C CAPACITOR	4.7uF 10V K	
C3911	NBZ0010-396X	SP E CAPACITOR	39uF 16V M	
C3912	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C3913	NEHM0JM-476X	E CAPACITOR	47uF 6.3V M	
C3931	NBZ0010-396X	SP E CAPACITOR	39uF 16V M	
C3932	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C3933	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C3934	NELA1AM-157X	E CAPACITOR	150uF 10V M	
C3936	NEHM1CM-476X	E CAPACITOR	47uF 16V M	
C3941	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3942	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C3951	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3952	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3953	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3954	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3958	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3959	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3960	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3961	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3965	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3966	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3967	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3968	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3969	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3970	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3971	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3972	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3973	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3974	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3975	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
R3006	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3021	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3046	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
R3047	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
R3048	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
R3102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3103	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3104	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3105	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3106	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3107	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3114	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3115	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3116	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3117	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3118	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3119	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3121	NQR0271-001X	EMI FILTEROR		
R3122	NQR0271-001X	EMI FILTEROR		

⚠Ref No.	Part No.	Part Name	Description	Local
R3123	NQR0271-001X	EMI FILTEROR		
R3124	NQR0271-001X	EMI FILTEROR		
R3125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3126	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3129	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3130	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3131	NQR0271-001X	EMI FILTEROR		
R3132	NQR0271-001X	EMI FILTEROR		
R3133	NQR0271-001X	EMI FILTEROR		
R3134	NQR0271-001X	EMI FILTEROR		
R3135	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3137	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3143	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3144	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3145	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3146	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3147	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3151	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3152	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3153	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3154	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3161	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3162	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3166	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3167	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3168	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3169	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3170	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3171	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3181	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R3184	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3185	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3186	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3187	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3188	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3189	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3190	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3192	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3196	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3197	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3198	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3199	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3201	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R3202	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3203	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3204	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3205	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3206	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3207	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3210	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3211	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3213	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3218	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3219	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3221	NQR0271-001X	EMI FILTEROR		
R3222	NQR0271-001X	EMI FILTEROR		
R3223	NQR0271-001X	EMI FILTEROR		
R3224	NQR0271-001X	EMI FILTEROR		
R3225	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3226	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3227	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3228	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3230	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3231	NQR0271-001X	EMI FILTEROR		
R3232	NQR0271-001X	EMI FILTEROR		
R3233	NQR0271-001X	EMI FILTEROR		
R3234	NQR0271-001X	EMI FILTEROR		
R3237	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3242	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3243	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3244	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3245	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3246	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3247	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3251	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3252	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3253	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3254	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3255	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3256	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3257	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3261	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3262	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3263	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3265	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3266	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3267	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3268	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3269	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3270	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3271	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3281	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R3284	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3285	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3286	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3287	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3288	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3289	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3290	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3291	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3292	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3299	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3302	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3303	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3305	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3306	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3307	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3311	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3312	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3313	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3314	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3315	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3316	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3317	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3318	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3319	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3321	NQR0271-001X	EMI FILTEROR		
R3322	NQR0271-001X	EMI FILTEROR		
R3323	NQR0271-001X	EMI FILTEROR		
R3324	NQR0271-001X	EMI FILTEROR		
R3325	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3326	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3327	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3328	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3329	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3330	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3331	NQR0271-001X	EMI FILTEROR		
R3332	NQR0271-001X	EMI FILTEROR		
R3333	NQR0271-001X	EMI FILTEROR		
R3334	NQR0271-001X	EMI FILTEROR		
R3335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3341	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3342	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3343	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3344	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3345	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3346	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3347	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3353	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3354	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3362	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3363	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3366	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3367	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3368	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3369	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3370	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3371	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3381	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R3384	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3385	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3386	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3387	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3388	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3389	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3390	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3391	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R3392	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3396	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3397	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3398	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3399	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3602	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3605	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3606	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3607	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3608	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3611	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3612	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3613	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3616	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3617	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3621	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3701	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3704	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3705	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4	
R3706	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R3707	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4	
R3708	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3709	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4	
R3711	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3712	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3713	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3714	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3715	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3716	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3717	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3719	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3723	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3724	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3725	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3726	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3727	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3728	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3733	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3736	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3737	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3738	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3739	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3741	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3742	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3743	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3744	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3745	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3746	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3747	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3748	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3749	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3750	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3751	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3752	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3756	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3757	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3758	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3759	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3762	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3763	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3764	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3765	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3768	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3769	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3771	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3772	NRSA63J-121X	MG RESISTOR	120Ω 1/16W J	
R3773	NRSA63J-121X	MG RESISTOR	120Ω 1/16W J	
R3774	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	
R3775	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3776	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3783	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3794	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3795	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3796	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3801	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3802	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3803	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3804	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	

⚠Ref No.	Part No.	Part Name	Description	Local
R3805	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3806	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3807	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3808	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4	
R3809	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4	
R3810	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4	
R3811	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4	
R3812	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4	
R3813	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3814	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3815	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3816	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3817	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3818	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3819	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3820	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3821	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3822	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3823	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3824	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3825	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3826	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3827	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3832	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3835	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3836	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3839	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3840	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3841	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3846	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3849	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3865	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3866	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3867	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3869	NRSA63D-203X	MG RESISTOR	20kΩ 1/16W D	
R3872	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3874	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3875	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3876	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3877	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3878	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R3879	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R3883	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3884	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3885	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3888	NRSA63D-203X	MG RESISTOR	20kΩ 1/16W D	
R3889	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R3890	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3895	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3896	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3898	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3901	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3902	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R3903	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R3904	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R3905	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R3906	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R3908	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3909	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3910	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R3911	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J	
R3912	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3913	NRZ0075-R005X	MP RESISTOR	0.005Ω 1W J	
R3917	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R3918	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3931	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3932	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3933	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	
R3934	NRSA63D-822X	MG RESISTOR	8.2kΩ 1/16W D	
R3935	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	
R3939	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3951	NRSA63D-561X	MG RESISTOR	560Ω 1/16W D	
R3952	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	
R3953	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3954	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3960	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3968	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3969	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3970	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3971	NRSA63D-471X	MG RESISTOR	470Ω 1/16W D	
R3972	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R3977	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3978	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3979	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3981	NRS12BJ-102W	MG RESISTOR	1kΩ 1/2W J	
R3982	NRS12BJ-102W	MG RESISTOR	1kΩ 1/2W J	
R3983	NRS12BJ-471W	MG RESISTOR	470Ω 1/2W J	
R3990	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R3991	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3992	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R3993	NRS12BJ-1R0W	MG RESISTOR	1Ω 1/2W J	
R3995	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3996	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3997	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3998	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
L3701	NQL092K-2R2X	COIL	2.2uH K	
L3901	NQLB3EN-100X	COIL	10uH N	
L3902	NQL52EN-4R7X	COIL	4.7uH N	
L3931	NQL63EM-101X	COIL	100uH M	
L3932	NQL52EN-4R7X	COIL	4.7uH N	
CN3002	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
CN3003	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
CN3004	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
EF3004	NQR0504-001X	EMI FILTER		
EF3005	NQR0504-001X	EMI FILTER		
EF3006	NQR0504-001X	EMI FILTER		
EF3007	NQR0470-001X	EMI FILTER	22pF 50V	
EF3008	NQR0470-001X	EMI FILTER	22pF 50V	
EF3701	NQR0416-002X	EMI FILTER	84pF 16V M	
EF3702	NQR0470-003X	EMI FILTER	100pF 50V	
EF3703	NQR0470-003X	EMI FILTER	100pF 50V	
EF3704	NQR0470-001X	EMI FILTER	22pF 50V	
EF3705	NQR0470-001X	EMI FILTER	22pF 50V	
EF3706	NQR0470-001X	EMI FILTER	22pF 50V	
EF3707	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3708	NQR0416-002X	EMI FILTER	84pF 16V M	
EF3709	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3710	NQR0470-001X	EMI FILTER	22pF 50V	
EF3711	NQR0470-001X	EMI FILTER	22pF 50V	
EF3712	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3713	NQR0416-002X	EMI FILTER	84pF 16V M	
EF3901	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3903	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3904	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3905	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3906	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3907	NQR0483-005X	EMI FILTER	100uF 25V Z	
EF3909	NQR0470-007X	EMI FILTER	2200pF 50V	
EF3910	NQR0470-007X	EMI FILTER	2200pF 50V	
EF3911	NQR0470-007X	EMI FILTER	2200pF 50V	
K3001	NQR0499-001X	FERRITE BEADS		
K3191	NQR0499-001X	FERRITE BEADS		
K3192	NQR0499-001X	FERRITE BEADS		
K3193	NQR0499-001X	FERRITE BEADS		
K3194	NQR0499-001X	FERRITE BEADS		
K3195	NQR0499-001X	FERRITE BEADS		
K3196	NQR0499-001X	FERRITE BEADS		
K3291	NQR0499-001X	FERRITE BEADS		
K3292	NQR0499-001X	FERRITE BEADS		
K3293	NQR0499-001X	FERRITE BEADS		
K3294	NQR0499-001X	FERRITE BEADS		
K3295	NQR0499-001X	FERRITE BEADS		
K3296	NQR0499-001X	FERRITE BEADS		
K3391	NQR0499-001X	FERRITE BEADS		
K3392	NQR0499-001X	FERRITE BEADS		
K3393	NQR0499-001X	FERRITE BEADS		
K3394	NQR0499-001X	FERRITE BEADS		
K3395	NQR0499-001X	FERRITE BEADS		
K3396	NQR0499-001X	FERRITE BEADS		
K3701	NQR0499-001X	FERRITE BEADS		
K3861	NQR0499-001X	FERRITE BEADS		
K3891	NQR0499-001X	FERRITE BEADS		
K3893	NQR0499-001X	FERRITE BEADS		
K3894	NQR0499-001X	FERRITE BEADS		
X3201	NAX0673-001X	CRYSTAL	14.318180MHz	
X3701	NAX0781-001X	CRYSTAL	40.000MHz	

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC0821	KSM-2013SY22EL	IR DETECT UNIT		
D0821	UDZW6.8B-X	Z DIODE		
C0821	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C0822	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
R0821	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R0822	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0823	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC2001	LM75BIM-5-X	IC		
D2001	STZ6.8N-X	Z DIODE		
C2002	NCB21CK-105X	C CAPACITOR	1uF 16V K	
R2001	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R2002	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R2003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
K2001	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC5001	NJM4556AM-XE	IC		
IC5002	NJM2904M-W	IC		
IC5003	PQ20WZ11-X	IC		
IC5005	PCF8591T/2-X	IC(DIGITAL)		
IC5006	24LC256-I/SNG-X	IC		
Q5001	2SC3928A/QR/-X	TRANSISTOR		
D5001	STZ6.8N-X	Z DIODE		
D5002	STZ6.8N-X	Z DIODE		
D5003	STZ6.8N-X	Z DIODE		
C5001	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C5002	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C5003	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C5004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C5005	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C5006	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C5007	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C5008	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C5013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C5014	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C5015	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C5016	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C5017	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
R5001	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R5002	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R5003	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R5004	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R5005	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R5006	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R5007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5008	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R5009	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R5010	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R5011	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R5012	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R5013	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R5014	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R5015	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5016	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R5017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5019	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R5020	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R5021	NRSA63J-202X	MG RESISTOR	2kΩ 1/16W J	
R5022	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5027	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R5035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5038	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5039	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5045	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5046	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R5047	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R5048	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5049	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R5050	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R5051	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R5052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5053	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R5055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5060	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5064	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5065	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5066	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R5067	NRSA63J-301X	MG RESISTOR	300Ω 1/16W J	
R5068	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R5070	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R5071	NRSA63J-204X	MG RESISTOR	200kΩ 1/16W J	
R5072	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R5073	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R5074	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC8001	LM2941S-W	IC		
IC8002	PQ20WZ11-X	IC		
IC8003	PQ20WZ11-X	IC		
IC8005	SN74HC32NS-X	IC (DIGITAL)		
Q8001	2SC3928A/QR/-X	TRANSISTOR		
Q8004	2SC3928A/QR/-X	TRANSISTOR		
Q8005	2SC3928A/QR/-X	TRANSISTOR		
D8001	STZ6.8N-X	Z DIODE		
D8002	STZ6.8N-X	Z DIODE		
D8003	STZ6.8N-X	Z DIODE		
C8001	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C8002	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C8003	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C8004	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C8005	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C8008	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C8009	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C8010	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C8011	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C8018	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C8019	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C8020	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C8021	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C8031	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
R8001	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8002	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8003	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R8004	NRSA63D-681X	MG RESISTOR	680Ω 1/16W D	
R8005	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	
R8006	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R8014	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	
R8015	NRSA63D-681X	MG RESISTOR	680Ω 1/16W D	
R8016	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R8024	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R8025	NRSA63D-681X	MG RESISTOR	680Ω 1/16W D	
R8026	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R8031	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8032	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8033	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8034	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8035	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8036	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8041	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4	
R8042	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4	

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC1001	AU9331C23-MAS-X	IC		
Q1001	2SA1576A/QRS/-X	TRANSISTOR		
C1001	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C1002	NDC31HJ-270X	C CAPACITOR	27pF 50V J	
C1003	NDC31HJ-270X	C CAPACITOR	27pF 50V J	
C1004	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C1005	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C1006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C1007	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C1008	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1009	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1010	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1011	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C1012	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1014	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1015	NEHL0GM-227X	E CAPACITOR	220uF 4V M	
C1016	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1206	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
R1001	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R1003	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R1004	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R1005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1006	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R1007	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1008	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R1009	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1010	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1014	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R1015	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1111	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1001	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4	
RA1002	NRZ0040-473X	NET RESISTOR	47kΩ 1/16W J x4	
L1001	NQR0603-002X	EMI FILTER		
J1201	GP1FAV31TK0F	OPT TRANSMITTER		
JK1001	NNZ0058-001X	SD CARD CONNECTOR		
K1001	NQR0499-002X	FERRITE BEADS		
K1002	NQR0499-002X	FERRITE BEADS		
LC1001	NQR0483-007X	EMI FILTER		
X1001	NAX0812-001X	CRYSTAL	12.000MHz	

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC9101	BA50BC0FP-X	IC		
IC9301	BAJ5CC0FP-X	IC		
IC9501	STR-W6754-F5	SW IC		
IC9701	PQ120RDA1SZ	IC		
IC9721	PQ15RW11	IC		
IC9741	PQ1CG2032FZ	IC		
IC9761	PQ1CG2032FZ	IC		
IC9762	SI-3011ZF-F3	IC		
Q9021	2SC3928A/QR/-X	TRANSISTOR		
Q9281	2SC3928A/QR/-X	TRANSISTOR		
Q9282	2SC3928A/QR/-X	TRANSISTOR		
Q9283	2SC3928A/QR/-X	TRANSISTOR		
Q9284	2SC3928A/QR/-X	TRANSISTOR		
Q9821	2SC3928A/QR/-X	TRANSISTOR		
Q9831	2SC3928A/QR/-X	TRANSISTOR		
Q9841	2SC3928A/QR/-X	TRANSISTOR		
Q9842	2SC3928A/QR/-X	TRANSISTOR		
Q9851	2SA1530A/QR/-X	TRANSISTOR		
Q9852	UN2213-X	DIGI TRANSISTOR		
Q9853	UN2213-X	DIGI TRANSISTOR		
Q9861	2SC3928A/QR/-X	TRANSISTOR		
D9021	1SS355-X	DIODE		
D9101	1N4003SG-T2	SI DIODE		
D9102	1N4003SG-T2	SI DIODE		
D9103	1N4003SG-T2	SI DIODE		
D9104	1N4003SG-T2	SI DIODE		
D9106	1N4003SG-T2	SI DIODE		
⚠D9201	GBJ6JU	BRIDGE DIODE		
D9281	MA111-X	SI DIODE		
D9282	UDZS4.7B-X	Z DIODE		
D9283	UDZS2.4B-X	Z DIODE		
D9301	SK14-GA-X	SB DIODE		

⚠Ref No.	Part No.	Part Name	Description	Local
D9501	SARS01-T2	FR DIODE		
D9502	SARS01-T2	FR DIODE		
D9503	FR105SGT-T2	SI DIODE		
D9504	FR105SGT-T2	SI DIODE		
D9505	MTZJ33B-T2	Z DIODE		
D9506	FR105SGT-T2	SI DIODE		
D9507	1SS355-X	DIODE		
D9510	1SS355-X	DIODE		
D9512	FR105SGT-T2	SI DIODE		
D9514	MTZJ13B-T2	Z DIODE		
D9551	HER202G-FL	SI DIODE		
D9552	HER202G-FL	SI DIODE		
D9553	FCH20A10	SB DIODE		
D9554	FR105SGT-T2	SI DIODE		
D9555	MTZJ15B-T2	Z DIODE		
D9556	MTZJ16C-T2	Z DIODE		
D9557	FR105SGT-T2	SI DIODE		
D9601	UTCTL431-T	IC		
D9701	SK14-GA-X	SB DIODE		
D9702	1SS355-X	DIODE		
D9721	SK14-GA-X	SB DIODE		
D9741	FSQ05A04	SB DIODE		
D9743	MTZJ6.8B-T2	Z DIODE		
D9762	FSQ05A04	SB DIODE		
D9763	MTZJ3.9B-T2	Z DIODE		
D9801	1SS355-X	DIODE		
D9821	1SS355-X	DIODE		
D9831	1SS355-X	DIODE		
D9832	UDZS5.6B-X	Z DIODE	1.5kΩ 1/10W J	
D9841	1SS355-X	DIODE		
D9842	1SS355-X	DIODE		
D9851	UDZS5.1B-X	Z DIODE		
D9852	1SS355-X	DIODE		
D9861	1SS355-X	DIODE		
D9862	1SS355-X	DIODE		
⚠C9001	QFZ9072-105	MM CAPACITOR	1uF AC250V K	
⚠C9002	QFZ9072-224	MM CAPACITOR	0.22uF AC250V K	
⚠C9011	QCZ9079-102	C CAPACITOR	1000pF AC250V M	
⚠C9013	QCZ9079-102	C CAPACITOR	1000pF AC250V M	
C9101	QEHR1CM-108Z	E CAPACITOR	1000uF 16V M	
C9103	QEHR1CM-108Z	E CAPACITOR	1000uF 16V M	
C9104	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
⚠C9192	QCZ9079-102	C CAPACITOR	1000pF AC250V M	
⚠C9193	QCZ9079-222	C CAPACITOR	2200pF AC250V M	
⚠C9201	QCZ9078-222	C CAPACITOR	2200pF AC250V M	
⚠C9202	QCZ9078-222	C CAPACITOR	2200pF AC250V M	
⚠C9203	QCZ9078-222	C CAPACITOR	2200pF AC250V M	
⚠C9204	QCZ9078-222	C CAPACITOR	2200pF AC250V M	
C9205	QEZ0569-827	E CAPACITOR	820uF 200V M	
C9206	QEZ0569-827	E CAPACITOR	820uF 200V M	
C9219	QCZ0122-471	C CAPACITOR	470pF 2kV K	
C9281	QEHR1HM-226Z	E CAPACITOR	22uF 50V M	
C9282	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9301	QEHR1EM-107Z	E CAPACITOR	100uF 25V M	
C9302	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C9303	NCF11EZ-105X	C CAPACITOR	1uF 25V Z	
C9501	QFP32JK-332	PP CAPACITOR	3300pF 630V K	
C9503	NCB31HK-332X	C CAPACITOR	3300pF 50V K	
C9504	QEHR1VM-476Z	E CAPACITOR	47uF 35V M	
C9505	NCB31HK-152X	C CAPACITOR	1500pF 50V K	
C9506	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	
C9507	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9508	QCZ0340-471	C CAPACITOR	470pF 2kV K	
C9511	QEHR1HM-107Z	E CAPACITOR	100uF 50V M	
C9512	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9555	QECQ1EM-188	E CAPACITOR	1800uF 25V M	
C9556	QECQ1EM-188	E CAPACITOR	1800uF 25V M	
C9559	QEHR2AM-106Z	E CAPACITOR	10uF 100V M	
C9560	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	
C9562	QEHR1EM-477Z	E CAPACITOR	470uF 25V M	
C9563	QEHQ1VM-108	E CAPACITOR	1000uF 35V M	
C9564	QEHQ1VM-108	E CAPACITOR	1000uF 35V M	
C9568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9569	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9570	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9571	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9572	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9603	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9701	QEHR1HM-106Z	E CAPACITOR	10uF 50V M	
C9702	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
C9721	QEHR1EM-107Z	E CAPACITOR	100uF 25V M	
C9723	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
C9741	QEHR1EM-108Z	E CAPACITOR	1000uF 25V M	
C9742	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9743	QECR1AM-128Z	E CAPACITOR	1200uF 10V M	
C9761	QEHR1EM-108Z	E CAPACITOR	1000uF 25V M	
C9762	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9763	QECR1AM-128Z	E CAPACITOR	1200uF 10V M	
C9768	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	

⚠Ref No.	Part No.	Part Name	Description	Local
C9770	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9771	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9772	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9773	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9774	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9777	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	
C9778	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
C9779	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
C9801	QEHR1HM-106Z	E CAPACITOR	10uF 50V M	
C9831	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9851	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	
C9852	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9876	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9877	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9878	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9879	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9880	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9881	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9882	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9883	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9884	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9895	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
⚠R9001	QRZ9046-105Z	C RESISTOR	1MΩ 1/2W K	
R9021	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9022	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9112	QRE121J-330Y	C RESISTOR	33Ω 1/2W J	
R9113	QRE121J-330Y	C RESISTOR	33Ω 1/2W J	
⚠R9191	QRZ9046-685Z	C RESISTOR	6.8MΩ 1/2W K	
⚠R9202	QRF154K-1R0	UNF WW RESISTOR	1Ω 15W K	
R9204	QRE121J-124Y	C RESISTOR	120kΩ 1/2W J	
R9205	QRE121J-124Y	C RESISTOR	120kΩ 1/2W J	
R9282	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9283	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9284	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9285	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R9286	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R9287	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R9288	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R9289	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9290	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9291	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9292	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9301	NRS12BJ-122W	MG RESISTOR	1.2kΩ 1/2W J	
R9501	QRL039J-104	OMF RESISTOR	100kΩ 3W J	
R9502	QRL039J-333	OMF RESISTOR	33kΩ 3W J	
R9503	QRE121J-394Y	C RESISTOR	390kΩ 1/2W J	
R9504	QRE121J-394Y	C RESISTOR	390kΩ 1/2W J	
R9505	QRL039J-220	OMF RESISTOR	22Ω 3W J	
⚠R9506	QRZ9017-470	FUSI RESISTOR	47Ω 1/4W J	
R9507	NRS12BJ-100W	MG RESISTOR	10Ω 1/2W J	
R9508	NRS12BJ-122W	MG RESISTOR	1.2kΩ 1/2W J	
R9510	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9511	QRK126J-101X	UNF C RESISTOR	100Ω 1/2W J	
R9512	QRX01GJ-R39	MF RESISTOR	0.39Ω 1W J	
R9513	QRX01GJ-5R6	MF RESISTOR	5.6Ω 1W J	
R9514	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
⚠R9515	QRZ9009-4R7	FUSI RESISTOR	4.7Ω 1/2W J	
R9516	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R9556	QRG01GJ-152	OMF RESISTOR	1.5kΩ 1W J	
R9557	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	
R9563	QRT039J-R47	MF RESISTOR	0.47Ω 3W J	
R9566	QRT039J-R47	MF RESISTOR	0.47Ω 3W J	
R9567	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9601	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9602	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9605	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R9606	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	
R9607	NRSA63D-272X	MG RESISTOR	2.7kΩ 1/16W D	
R9701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9721	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R9722	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
R9723	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	
R9741	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D	
R9742	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9743	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9744	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D	
R9771	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	
R9772	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	
R9773	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D	
R9775	NRS12BJ-331W	MG RESISTOR	330Ω 1/2W J	
R9776	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9789	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D	
R9790	NRSA63D-113X	MG RESISTOR	11kΩ 1/16W D	
R9801	QRG01GJ-470	OMF RESISTOR	47Ω 1W J	
R9802	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9821	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
R9822	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R9823	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9831	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R9832	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R9833	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9834	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
R9841	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R9842	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R9844	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9845	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R9846	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R9847	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9851	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9852	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9853	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R9854	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R9855	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9861	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9862	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9863	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R9864	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R9865	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9866	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9873	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9877	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9878	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9898	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9899	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9551	QQL26AM-3R3Z	CHOKE COIL	3.3uH M	
L9552	QQL26AM-3R3Z	CHOKE COIL	3.3uH M	
L9741	QQR1401-001	CHOKE COIL		
L9761	QQR1401-001	CHOKE COIL		
⚠T9101	QQT0520-001	POWER TRANSF		
⚠T9501	QQS0352-001	SW TRANSF		
⚠CP9211	QMFZ043-5R0Z-J1	FUSE	5A AC250V	
⚠CP9554	ICP-N50-T	IC PROTECTOR	2.0A	
⚠CP9555	ICP-N50-T	IC PROTECTOR	2.0A	
⚠CP9556	ICP-N70-T	IC PROTECTOR	2.5A	
⚠CP9557	ICP-N70-T	IC PROTECTOR	2.5A	
⚠F9001	QMF5AD2-6R3-J1	FUSE	6.3A AC250V	
K9501	QQR1139-001	FERRITE BEADS		
K9502	QQR0621-002Z	FERRITE BEADS		
K9551	QQR0621-002Z	FERRITE BEADS		
K9552	QQR0621-002Z	FERRITE BEADS		
⚠LF9001	QQR1542-001	LINE FILTER		
⚠LF9002	QQR1466-001	LINE FILTER		
⚠LF9003	QQR1467-001	LINE FILTER		
⚠PC9501	PS2581AL1/QW/	PHOTO COUPLER		
⚠RY9021	QSK0162-001	RELAY		
⚠VA9001	QAF0060-621	VARISTOR	620V	

DIGITAL P.W. BOARD ASS'Y (SRA0D016A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD54	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-52G787	IC	(SERVICE)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9301	NQR0470-003X	EMI FILTER	100pF 50V	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
D0843	UDZW10B-X	Z DIODE		
D0844	UDZW10B-X	Z DIODE		
D0845	UDZW10B-X	Z DIODE		
D0846	UDZW10B-X	Z DIODE		
C0841	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0842	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C0843	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0844	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C0845	NCB21CK-105X	C CAPACITOR	1uF 16V K	
R0842	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0843	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0844	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0845	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R0846	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R0847	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0849	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0851	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0852	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R0853	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0854	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
J0841	QNN0787-001	PIN JACK	INPUT-4(S/V/L/R)	
S0851	QSW0619-003Z	PUSH SWITCH	VOL+	
S0852	QSW0619-003Z	PUSH SWITCH	VOL-	
S0853	QSW0619-003Z	PUSH SWITCH	MENU	
S0854	QSW0619-003Z	PUSH SWITCH	CH+	
S0855	QSW0619-003Z	PUSH SWITCH	CH-	
S0856	QSW0619-003Z	PUSH SWITCH	INPUT	

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
Q0701	2SC3928A/QR/-X	TRANSISTOR		
Q0702	2SC3928A/QR/-X	TRANSISTOR		
Q0704	2SC3928A/QR/-X	TRANSISTOR		
Q0705	2SC3928A/QR/-X	TRANSISTOR		
Q0706	2SC3928A/QR/-X	TRANSISTOR		
Q0707	2SC3928A/QR/-X	TRANSISTOR		
D0701	SELU5E20C-T	LED	POWER	
D0703	MA8068-X	Z DIODE		
D0704	MA8068-X	Z DIODE		
D0705	LE22440	LED	LAMP	
D0706	MA8068-X	Z DIODE		
D0707	MA8068-X	Z DIODE		
C0701	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C0702	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C0703	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C0704	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C0705	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C0706	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
R0706	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0708	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0709	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0710	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R0711	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R0712	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0713	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0714	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0715	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0716	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
S0701	QSW0619-003Z	PUSH SWITCH	POWER	

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
C0861	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
CN08G3	QUB130-32EMZ4-E	SIN TWIST WIRE		
S0861	QSW1064-001	DETECT SWITCH	LAMP COVER SW	

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC001	PQ050RDA1SZ	IC		
IC061	CXA2205Q-X	IC		
Q004	2SA1530A/QR/-X	TRANSISTOR		
Q005	2SC3928A/QR/-X	TRANSISTOR		
Q006	2SA1530A/QR/-X	TRANSISTOR		
C001	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C002	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C006	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C007	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C010	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C013	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C014	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C015	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C016	NDC31HJ-560X	C CAPACITOR	56pF 50V J	
C017	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C062	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C063	NCB31HK-562X	C CAPACITOR	5600pF 50V K	
C064	NCB31HK-123X	C CAPACITOR	0.012uF 50V K	
C065	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C066	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C067	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C068	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C069	QETN1CM-476Z	E CAPACITOR	47uF 16V M	
C070	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C071	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C072	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C073	NCB31HK-272X	C CAPACITOR	2700pF 50V K	
C074	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	
C075	NCB11AK-335X	C CAPACITOR	3.3uF 10V K	
C076	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C077	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C078	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C079	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C080	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C081	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C082	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C083	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C084	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C085	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C086	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C087	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C088	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C089	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C090	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C091	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C092	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C093	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C094	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
R001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R003	QRT029J-6R8	MF RESISTOR	6.8Ω 2W J	
R004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R005	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R006	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R007	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R008	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R013	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R028	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R029	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R030	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R061	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R062	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R063	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R064	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R065	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R066	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R067	NRSA63D-683X	MG RESISTOR	68kΩ 1/16W D	
R068	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R069	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R070	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R071	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	
R072	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R076	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R077	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L002	NQL79GM-100X	COIL	10uH M	
L004	NQL953J-120X	COIL	12uH J	
CN0T1	QGF1201C2-25	CONNECTOR	FFC/FPC (1-25)	
⚠TU001	QAU0467-001	TUNER		

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
MD001	SSD-2203A-M2	ATSC TUNER MODULE PWB		

PRINTED WIRING BOARD PARTS LIST [HD-52G887]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

REFER TO PARTS LIST IN PAGE 3-18 FOR THIS P.W. BOARD.

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (SRA0D013A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD54	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-52G787	IC	(SERVICE)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

REFER TO PARTS LIST IN PAGE 3-30 FOR THIS P.W. BOARD.

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [HD-56G787]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

REFER TO PARTS LIST IN PAGE 3-18 FOR THIS P.W. BOARD.

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (SRA0D015A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD53	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-56G787	IC	(SERVICE)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		

⚠Ref No.	Part No.	Part Name	Description	Local
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9301	NQR0470-003X	EMI FILTER	100pF 50V	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

REFER TO PARTS LIST IN PAGE 3-30 FOR THIS P.W. BOARD.

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [HD-56G887]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

REFER TO PARTS LIST IN PAGE 3-18 FOR THIS P.W. BOARD.

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (SRA0D012A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD53	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-56G787	IC	(SERVICE)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9301	NQR0470-003X	EMI FILTER	100pF 50V	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

REFER TO PARTS LIST IN PAGE 3-30 FOR THIS P.W. BOARD.

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [HD-61G787]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

REFER TO PARTS LIST IN PAGE 3-18 FOR THIS P.W. BOARD.

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (SRA0D014A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD52	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-61G787	IC	(SERVEIC)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7514	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7028	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

REFER TO PARTS LIST IN PAGE 3-30 FOR THIS P.W. BOARD.

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [HD-61G887]

ANALOG P.W. BOARD ASS'Y (SRA-1011A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

DRIVE P.W. BOARD ASS'Y (SRA-3003A-M2)

REFER TO PARTS LIST IN PAGE 3-18 FOR THIS P.W. BOARD.

REMOCON P.W. BOARD ASS'Y (SRA-8011A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

TEMP P.W. BOARD ASS'Y (SRA-8202A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

IRIS P.W. BOARD ASS'Y (SRA-8302A-M2)

REFER TO PARTS LIST IN PAGE 3-23 FOR THIS P.W. BOARD.

FAN P.W. BOARD ASS'Y (SRA-8401A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

SD CARD P.W. BOARD ASS'Y (SRA-8511A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRA-9011A-M2)

REFER TO PARTS LIST IN PAGE 3-24 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (SRA0D011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC6001	JCC5060	IC		
IC6002	SN74LVC1G08V-X	IC		
IC6101	EDD1232AAFA-6B	IC		
IC6102	LP2996MR-X	IC		
IC6250	UPC5702GS-027-X	IC		
IC6251	R1170H331B-X	IC		
IC6401	ISL98001CQZ-140	IC		
IC6402	R1170H331B-X	IC		
IC6502	THC63LVDM83C-W	IC		
IC6724	S-80928CLNB-G-W	IC		
IC7033	CD74HC4094PW-X	IC		
IC7036	ADC081S021CIS-X	IC		
IC7201	39VF800A7IEKD52	IC(MICRO C ROM)		
IC7203	HY57V161610ETP7	IC		
IC7204	S-80928CLNB-G-W	IC		
IC7205	SN74LV00APW-X	IC		
IC7206	74LVC1G17GW-X	IC		
IC7601	M306V7MG-152FP	IC(MCU)		
IC7602	ATF16-61G787	IC	(SERVEIC)	
IC7603	SN74AHCT1G08V-X	IC		
IC7604	SN74LVC1G04V-X	IC		
IC7605	MM1673XN-X	IC		
IC7606	MM1673XN-X	IC		
IC9001	MP2263DN-C053-X	IC		
IC9101	MM1662FT-X	IC		
IC9201	MP2263DN-C053-X	IC		
IC9301	MM1701CH-X	IC		
Q6201	2SA1530A/QR/-X	TRANSISTOR		
Q6202	2SA1530A/QR/-X	TRANSISTOR		
Q6203	2SA1022/BC/-X	TRANSISTOR		
Q6204	2SA1022/BC/-X	TRANSISTOR		
Q6205	2SA1022/BC/-X	TRANSISTOR		
Q6206	2SA1022/BC/-X	TRANSISTOR		
Q6211	2SC3837K/NP/-X	TRANSISTOR		
Q6212	2SC3837K/NP/-X	TRANSISTOR		
Q6213	2SC3837K/NP/-X	TRANSISTOR		
Q6214	2SC3837K/NP/-X	TRANSISTOR		
Q6250	2SC3928A/QR/-X	TRANSISTOR		
Q6251	2SC3928A/QR/-X	TRANSISTOR		
Q7032	UN2113-X	TRANSISTOR		
Q7033	UN2113-X	TRANSISTOR		
Q7034	UN2113-X	TRANSISTOR		
Q7035	UN2113-X	TRANSISTOR		
Q7201	2SC3928A/QR/-X	TRANSISTOR		
Q7501	UN2213-X	DIGI TRANSISTOR		
Q9501	UN2213-X	DIGI TRANSISTOR		
Q9502	2SC3928A/QR/-X	TRANSISTOR		
Q9503	2SC3928A/QR/-X	TRANSISTOR		
D7201	RB501V-40-X	SB DIODE		
D7501	1SS355W-X	DIODE		
D7502	1SS355W-X	DIODE		
D7601	1SS355W-X	DIODE		
D9001	EC30HA03L-X	SB DIODE		
D9002	EC30HA03L-X	SB DIODE		
D9003	PTZ3.9B-X	Z DIODE		
D9201	EC30HA03L-X	SB DIODE		
D9202	EC30HA03L-X	SB DIODE		
D9203	PTZ3.9B-X	Z DIODE		
D9204	1SS355W-X	DIODE		
D9501	1SS355W-X	DIODE		
D9502	1SS355W-X	DIODE		
C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6103	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6109	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	
C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	
C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M	
C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	
C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6218	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6294	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6295	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6298	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6413	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6415	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6420	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6434	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6435	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6571	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C6573	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6627	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6628	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6629	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6630	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6631	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6632	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6633	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6634	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6635	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6636	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6637	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6641	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6643	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6657	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6659	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6660	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6661	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6669	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6670	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C6677	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6678	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6679	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6680	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6681	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6682	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6683	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6684	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6685	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6686	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6687	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6688	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6689	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6690	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6691	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6692	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6693	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6694	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6695	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6696	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6697	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6698	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6699	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C6724	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C6901	NBZ0007-107X	SP E CAPACITOR	100uF 4V M	
C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7034	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C7216	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

⚠Ref No.	Part No.	Part Name	Description	Local
C7501	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7504	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7505	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7506	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7507	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7508	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7510	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7514	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7515	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7516	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7517	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7605	NCB31HK-221X	C CAPACITOR	220pF 50V K	
C7606	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7607	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7609	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C7610	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C7611	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C7612	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7618	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7619	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C7621	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C7631	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C7633	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9002	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9005	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9010	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C9202	NCJ41EK-106X-U	C CAPACITOR	10mF 25V K	
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9205	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	
C9208	NCJ41CK-226X-U	C CAPACITOR	22mF 16V K	
C9211	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C9301	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9313	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9314	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J	
R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R6273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6281	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6572	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6573	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6592	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6597	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7040	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7041	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7042	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7092	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7093	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7172	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7184	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7207	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7240	NQR0199-003X	FERRITE BEADS		
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7370	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7504	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7605	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7606	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7607	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R7608	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7610	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7612	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7614	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7615	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7616	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7618	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7620	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7622	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7623	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7624	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7625	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7626	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7627	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7628	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R7631	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7632	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7634	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R7635	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7659	NRSA63J-560X	MG RESISTOR	56Ω 1/16W J	
R8781	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

⚠Ref No.	Part No.	Part Name	Description	Local
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9306	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6008	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6011	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6102	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6105	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4	
RA6107	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6108	NRZ0080-220X	NET RESISTOR	22Ω 1/16W J	
RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6110	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6113	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4	
RA6115	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6116	NRZ0080-470X	NET RESISTOR	47Ω 1/16W J	
RA6401	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6402	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6403	NRZ0080-330X	NET RESISTOR	33Ω 1/16W J	
RA6533	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6534	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6542	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6543	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA6545	NRZ0033-0R0W	NET RESISTOR	0Ω	
RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 1/16W J	
RA7202	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7203	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7204	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7205	NRZ0080-473X	NET RESISTOR	47kΩ	
RA7503	NQR0271-001X	EMI FILTEROR		
RA7601	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7602	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7603	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7605	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
RA7606	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4	
L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6102	NQL79GM-220X	COIL	22uH M	
L6103	NQL79GM-220X	COIL	22uH M	
L6115	NQR0499-001X	FERRITE BEADS		
L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L6265	NQR0499-001X	FERRITE BEADS		
L6266	NQR0499-001X	FERRITE BEADS		
L6402	NQL79GM-100X	COIL	10uH M	
L6403	NQL79GM-100X	COIL	10uH M	
L6404	NQL79GM-100X	COIL	10uH M	
L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6523	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4	
L6531	NQR0199-007X	FERRITE BEADS		
L6701	NQR0413-003X	FERRITE BEADS		
L6911	NQR0499-001X	FERRITE BEADS		
L6912	NQR0499-001X	FERRITE BEADS		
L6922	NQL79GM-220X	COIL	22uH M	
L6923	NQL79GM-220X	COIL	22uH M	
L6924	NQL79GM-220X	COIL	22uH M	
L6925	NQL79GM-220X	COIL	22uH M	
L6931	NQR0499-001X	FERRITE BEADS		
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L9001	NQLC8CM-150X	COIL	15uH M	
L9201	NQLC8CM-150X	COIL	15uH M	
CLIP1	NNZ0155-001X	SHIELD CLIP		
CLIP2	NNZ0155-001X	SHIELD CLIP		
CN011	QGF0508F4-50X	CONNECTOR	FFC/FPC (1-50)	
CN012	QGF0508F4-40X	CONNECTOR	FFC/FPC (1-40)	
J8501	NNZ0117-001	CONNECTOR	DIGITAL-IN-2	
J8502	NNZ0117-001	CONNECTOR	DIGITAL-IN-1	
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6261	NQR0489-002X	FERRITE BEADS		
K6263	NQR0489-002X	FERRITE BEADS		
K6264	NQR0489-002X	FERRITE BEADS		
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6267	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6268	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6272	NQR0499-001X	FERRITE BEADS		
K6401	NQR0499-001X	FERRITE BEADS		
K6402	NQR0499-001X	FERRITE BEADS		
K6403	NQR0499-001X	FERRITE BEADS		
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K6921	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7201	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K7202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7501	NQR0413-002X	FERRITE BEADS		
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
LC7505	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9303	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9305	NQR0483-005X	EMI FILTER	100uF 25V Z	
LC9307	NQR0483-005X	EMI FILTER	100uF 25V Z	
X6250	NAX0580-001X	CXO	27.0000MHz	
X7001	NAX0669-001X	C RESONATOR	6.000MHz	
X7601	NAX0613-001X	C RESONATOR	16.000MHz	

SIDE CONTROL P.W. BOARD ASS'Y (SRA0L011A-M2)

REFER TO PARTS LIST IN PAGE 3-30 FOR THIS P.W. BOARD.

FRONT LED P.W. BOARD ASS'Y (SRA0L111A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

LAMP COVER P.W. BOARD ASS'Y (SRA0L211A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

TUNER P.W. BOARD ASS'Y (SRA0R011A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

ATSC TUNER MODULE P.W. BOARD ASS'Y (SSD-2203A-M2)

REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.

REMOTE CONTROL UNIT PARTS LIST (RM-C18G-1H)

⚠	Ref.No.	Part No.	Part Name	Description	Local
		UR77EC1403A	BATTERY COVER		

PACKING

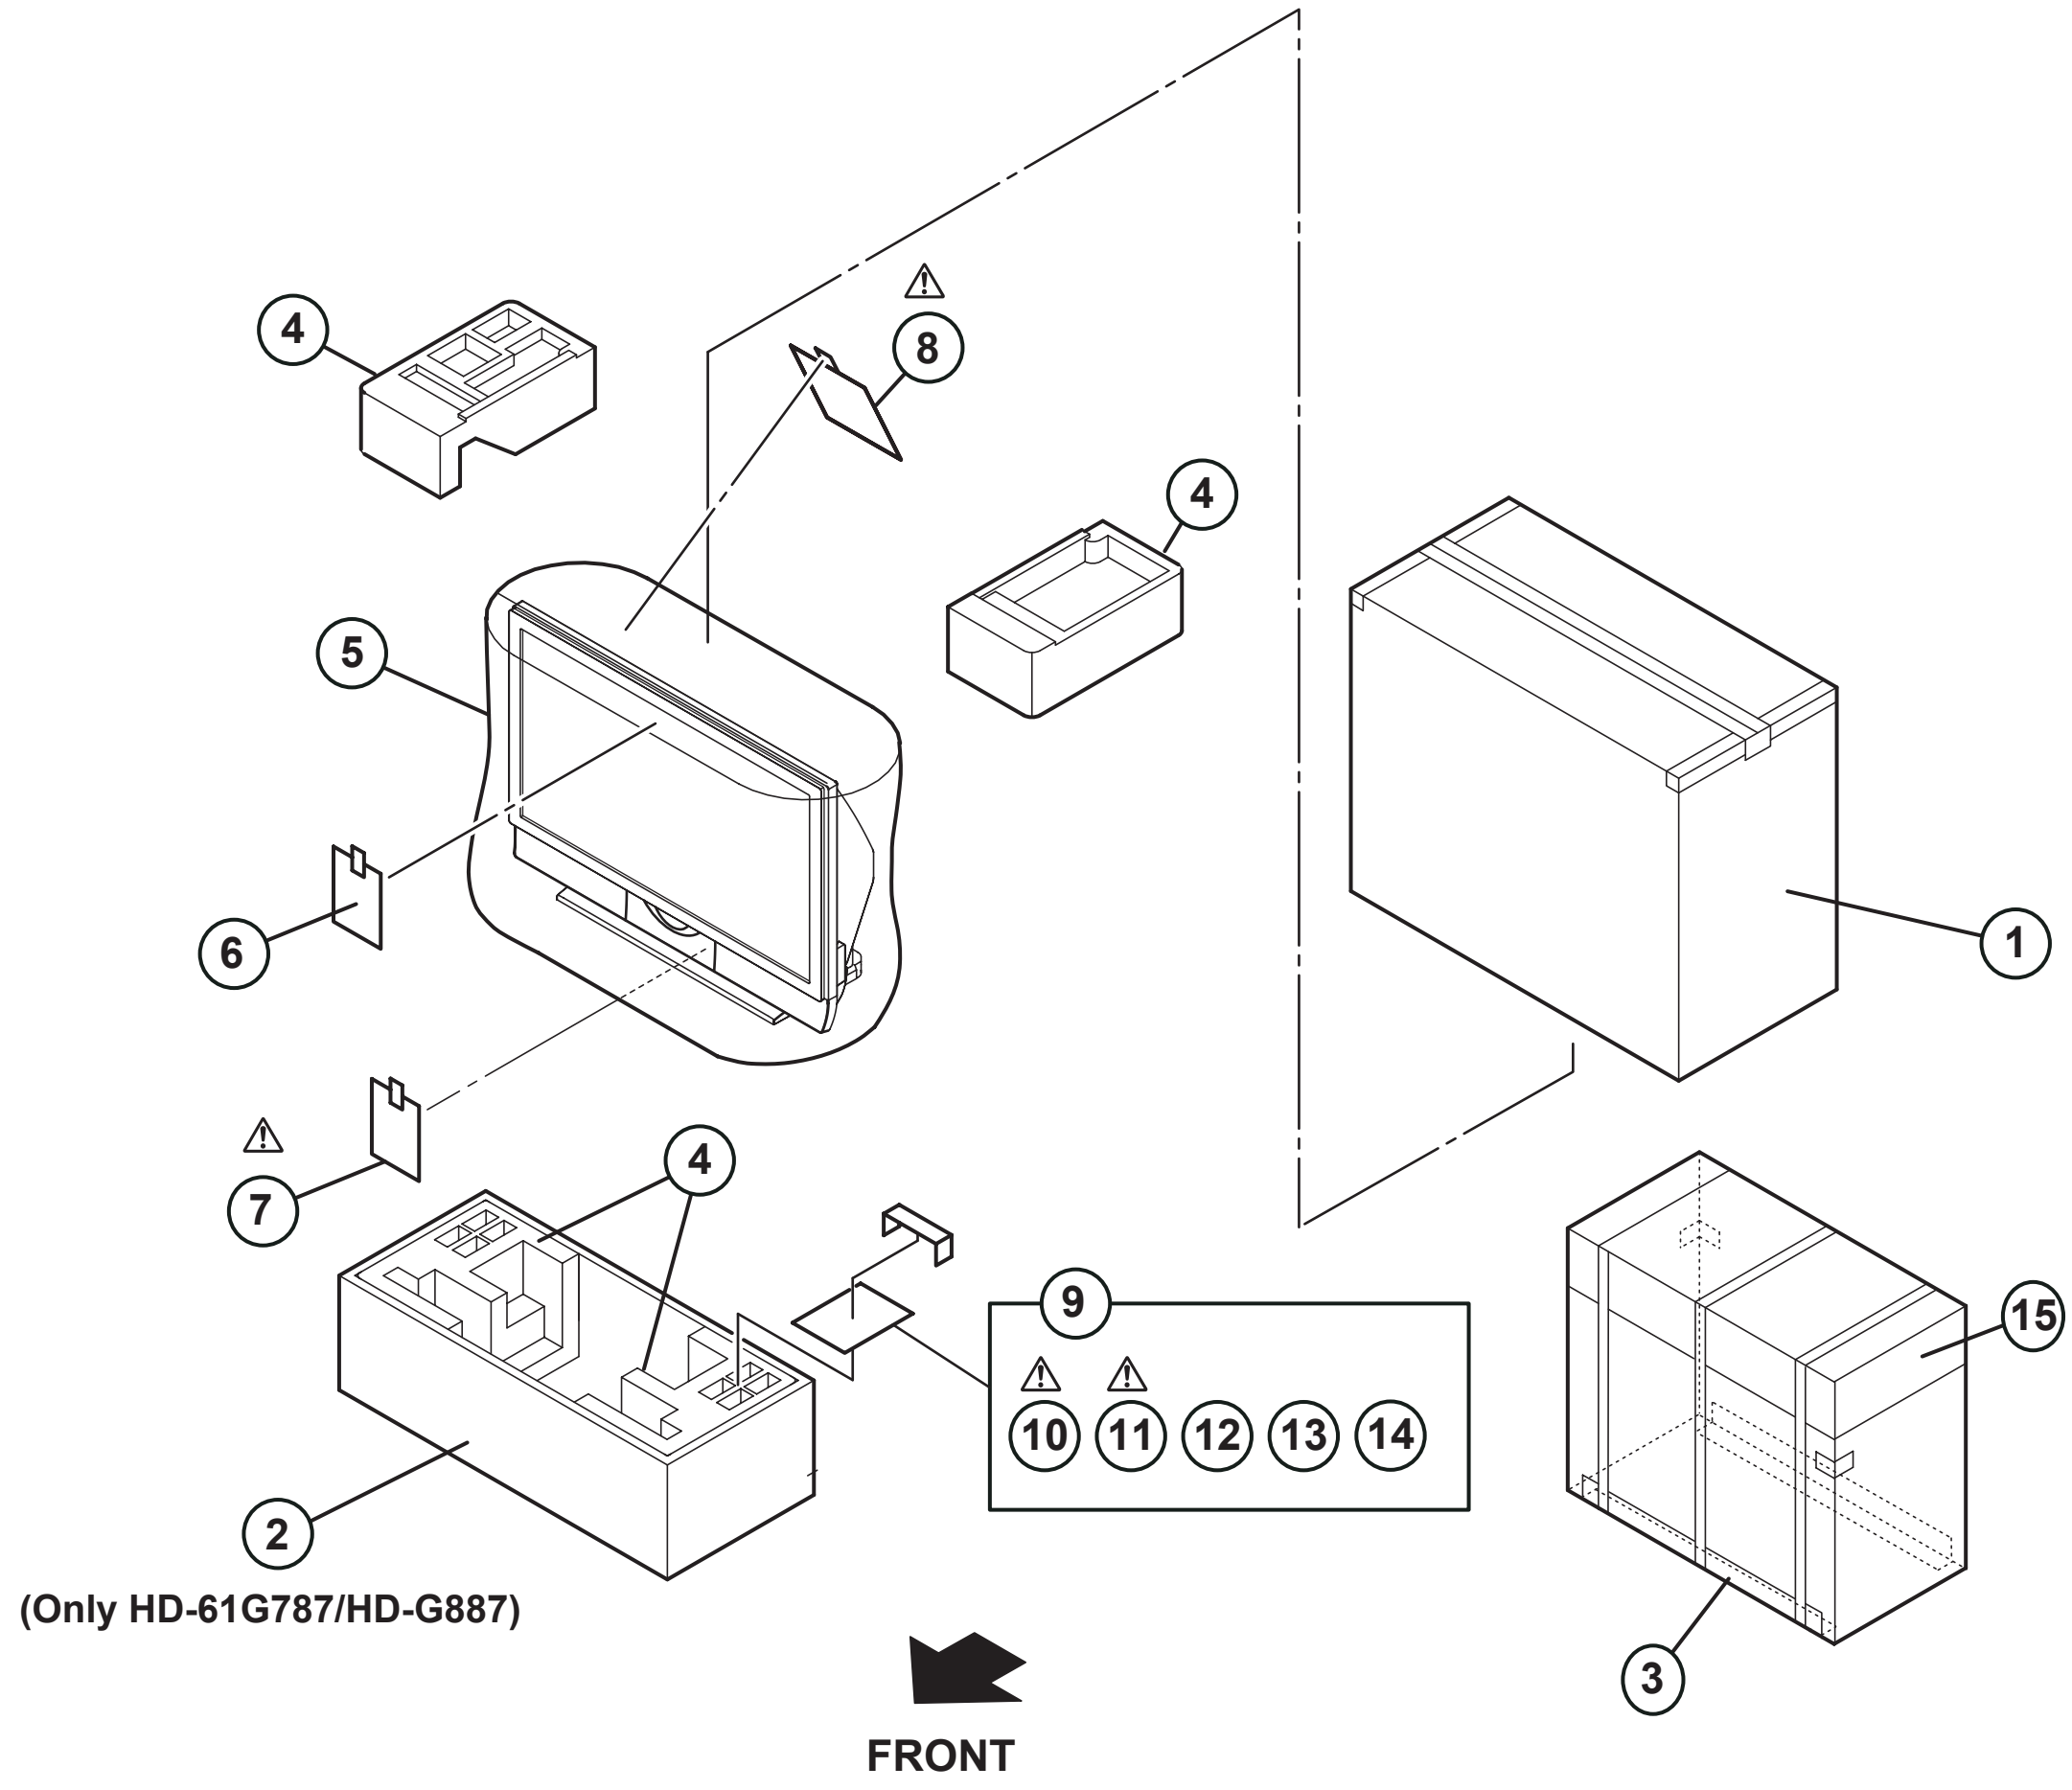

PACKING PARTS LIST

⚠	Ref.No.	Part No.	Part Name	Description	Local
	1	LC12022-001E-A	PACKING CASE	Inc TOP/BOTTOM CASE (x2)	HD-52G787,HD-52G887
	1	LC12425-001A-A	PACKING CASE	Inc TOP/BOTTOM CASE (x2)	HD-56G787,HD-56G887
	1	LC12022-002E-A	PACKING CASE		HD-61G787,HD-61G887
	2	LC12023-002B-A	BOTTOM CASE		HD-61G787,HD-61G887
	3	LC42486-002A-A	PAD	(x2)	HD-56G787,HD-56G887
	4	LC12429-001B-A	CUSHION ASSY	4pcs in 1set	HD-52G787,HD-52G887
	4	LC12427-001B-A	CUSHION ASSY	4pcs in 1set	HD-56G787,HD-56G887
	4	LC12615-001A-A	CUSHION ASSY	4pcs in 1set	HD-61G787,HD-61G887
	5	LC22040-001A-A	POLY BAG		
	6	LCT1910-001A-A	INST BOOK	English	HD-52G787,HD-52G887,HD-56G787,HD-56G887
	6	LCT1711-001A-A	INST SHEET		HD-61G787,HD-61G887
⚠	7	LCT1728-001B-A	INST SHEET		
⚠	8	LCT1721-001A-A	INST SHEET		
	9	QPA02503505	POLY BAG	25cm x 35cm	
⚠	10	LCT2063-001A-A	INST BOOK	English	
⚠	11	LCT2064-001A-A	INST BOOK	French	
	12	------------	BATTERY	AA TYPE (x2)	
	13	RM-C18G-1H	REMOCON UNIT		
	14	BT-51034-2Q	REGIST. CARD		
	15	LC12031-001B-A	TOP CASE		HD-52G787,HD-52G887
	15	LC12031-002B-A	TOP CASE		HD-61G787,HD-61G887